M217

Python/GMP/Rust controlled order benchmarks

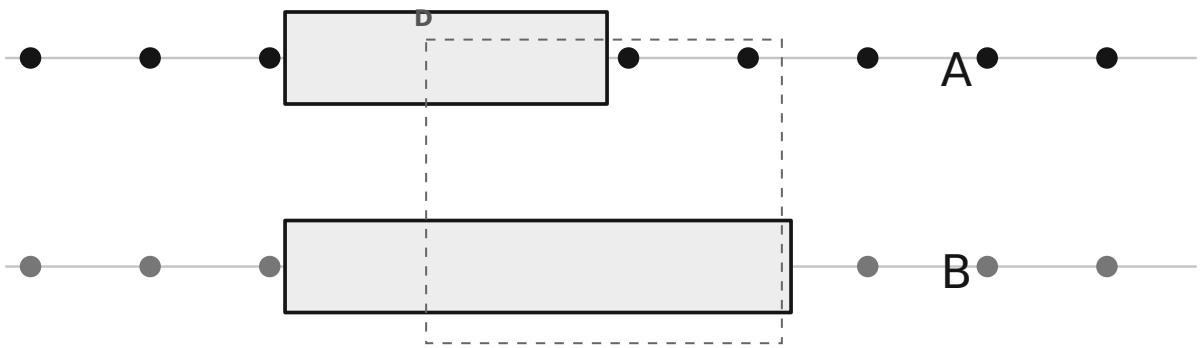

01 same modulus and base

02 Python / GMP / Rust

03 order and time checks

D / OPERATION DETAIL

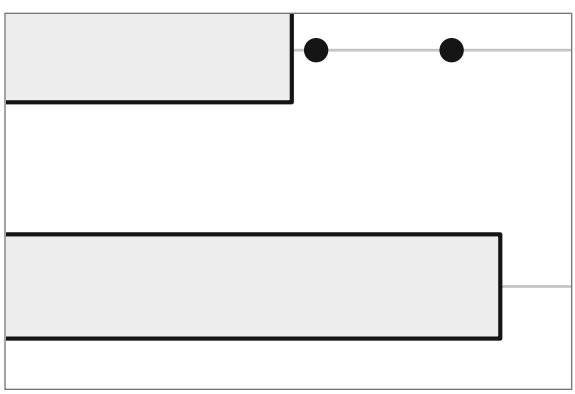

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Hold modulus, base and repetition schedule fixed while replacing the order-finding arithmetic backend.

READ THE THREE STAGES

01 same modulus and base

02 Python / GMP / Rust

03 order and time checks

WHAT WAS ACTUALLY DONE

The saved matrix records per-backend times and verifies identical orders. This isolates local implementation constants; differences across operand sizes are not a clean universal scaling-law estimate.

ORIGINAL FINDING / EXECUTED RECORD

Shared modulus/base backend matrix records finite speedups; source/runtime differences are pinned in historical manifests.