

Name	Salary	phone no
deepiks	5000	963258741
Shabbir Hussein	7000	123654789
uma	7000	523654789

UNIT 5

FRAMES

- To use frames on a page we use <frameset> tag instead of <body> tag. and it divides a webpage into multiple sections or frames, and each frame can contain different web pages.
- The task is to create frames using HTML. HTML is **HyperText Markup Language**, and it is the standard markup language for creating web pages. It describes the shape of a web page and includes a sequence of elements.
- HTML frames are used to divide your browser window into multiple sections where each section can load a separate HTML document. A collection of frames in the browser

window is known as a frameset. The window is divided into frames in a similar way the tables are organized: into rows and columns.

Attribute

Attribute	Value	Description
cols	Pixels %	It specifies the number and size of column spaces in the frameset
rows	Pixels %	It specifies the number and size of the rows spaces in the frameset

Syntax

< **frame** src = "URL" >

Example 1:

Create Vertical frames:

FRAME 1

<**html**>

<**body**>

<**h3h3**>

<**pp**>

</**body**>

</**html**>

FRAME 2:

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is secound frame</p>
  </body>
</html>
```


FRAME 3

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is third frame</p>
  </body>
</html>
```

FRAME 4:

```
<html>
  <head>
    <title>Frame tag</title>
  </head>
  <frameset cols="25%,50%,25%">
    <frame src="frame1.html" >
    <frame src="frame2.html">
    <frame src="frame3.html">
  </frameset>
</html>
```

OUTPUT:

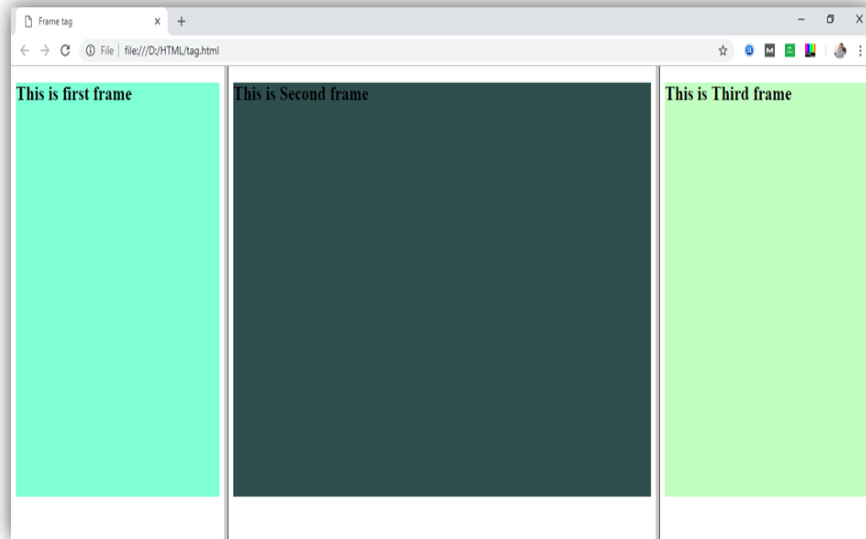

Example 2:

Create Horizontal frames:

FRAME 1

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is first frame</p>
  </body>
</html>
```

FRAME 2:

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is secound frame</p>
  </body>
</html>
```


FRAME 3

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is third frame</p>
  </body>
</html>
```

FRAME 4:

```
<html>
<head>
  <title>Frame tag</title>
</head>
<frameset rows="30%, 40%, 30%">
  <frame name="top" src="frame1.html" >
  <frame name="main" src="frame2.html">
  <frame name="bottom" src="frame3.html">
</frameset>
</html>
```

OUTPUT:

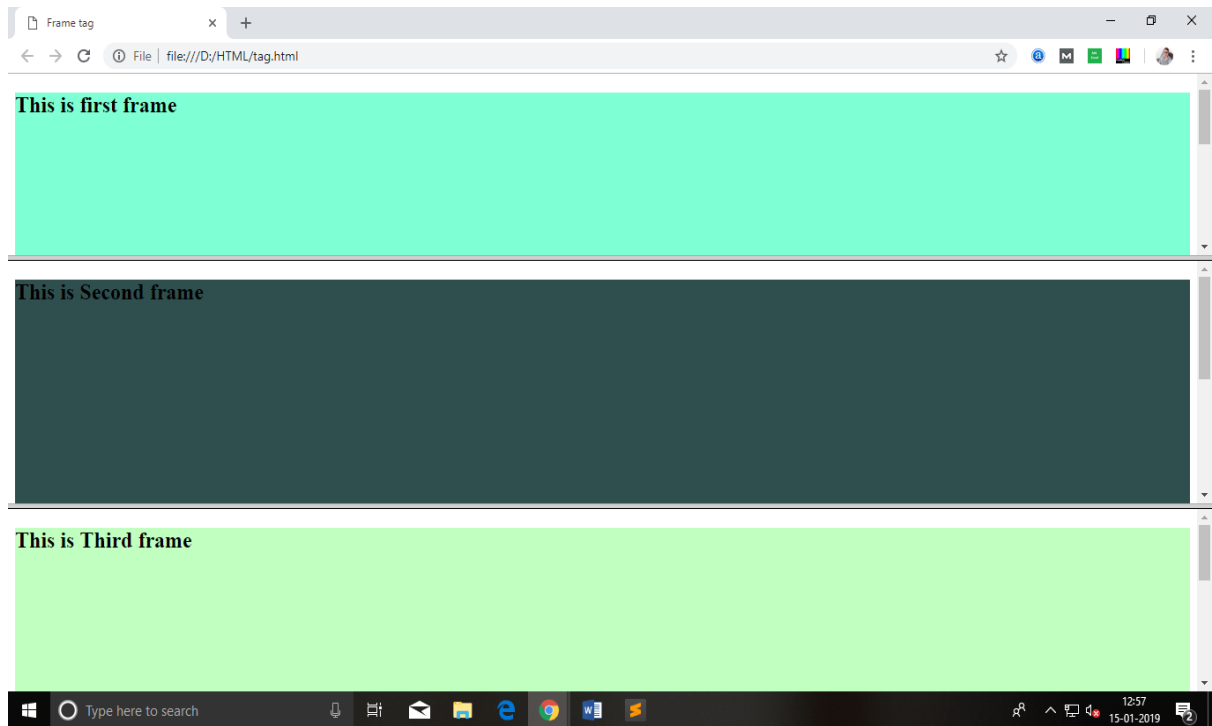

FRAME

The `<noframes>` tag contains an alternate text to be displayed in browsers which do not support frames (defined using `<frame>` tag). The tag can also contain a link to a non-frameset version of the web site. If the browser supports frames, the `<noframes>` tag will be ignored.

The `<noframes>` tag can contain all the HTML elements that can be used inside the `<body>` element of a normal HTML page. The `<noframes>` tag should be nested inside the `<frameset>` tag.

Syntax:

```
<noframes> Statement for the user </noframes>
```

EXAMPLE:

FRAME 1

```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is first frame</p>
  </body>
</html>
```

FRAME 2:


```
<html>
  <body>
    <h3>frame 1</h3>
    <p> this is secound frame</p>
  </body>
```

FRAME 3:

```
</html>
  <html>
    <head>
      <title>Frame tag</title>
    </head>
    <body>
      <frameset cols="50%,25%">
        <frame src="frame1.html" >
        <frame src="frame2.html">

      <noframes> The browser won't support the frame tag. </noframes>
    </frameset>
  </body>
</html>
```

OUTPUT:

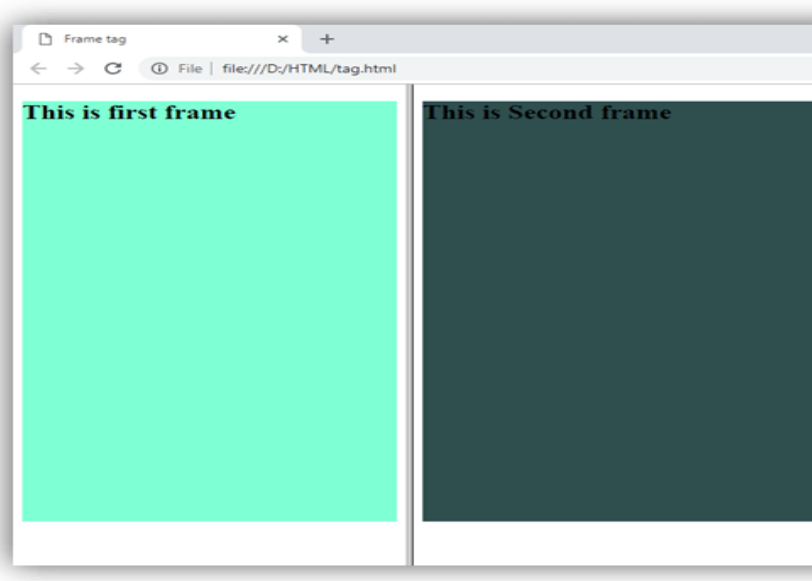

FORMS INPUT:

The `<input>` tag specifies an input field where the user can enter data.

The `<input>` element is the most important form element.

The `<input>` element can be displayed in several ways, depending on the type attribute.

The `<input>` tag in HTML is used to design interactive controls in web forms for accepting data from the user end.

The `<input>` tag is one of the most important elements used in all of HTML due to its sheer number of combinations of attributes and input types.

The `<input type="" ">` tag is an important element of a HTML `<form>` element. The "type" attribute inside the `<input>` tag can be of various types and is used to define information field such as `<input type="text">` provides a text box. The default type for the `<input>` tag is text.

Type	Description
<code><input type="text"></code>	Displays a single-line text input field
<code><input type="radio"></code>	Displays a radio button (for selecting one of many choices)
<code><input type="checkbox"></code>	Displays a checkbox (for selecting zero or more of many choices)
<code><input type="submit"></code>	Displays a submit button (for submitting the form)
<code><input type="button"></code>	Displays a clickable button

The `<label>` Element

Notice the use of the `<label>` element in the example above.

The `<label>` tag defines a label for many form elements.

The `<label>` element is useful for screen-reader users, because the screen-reader will read out loud the label when the user focuses on the input element.

The `<label>` element also helps users who have difficulty clicking on very small regions (such as radio buttons or checkboxes) - because when the user clicks the text within the `<label>` element, it toggles the radio button/checkbox.

Text Fields

The HTML textbox is an input control that allows the user to enter the a single-line input field for text input on the web page. The `<input type = "text">` is used to create a textbox.

EXAMPLE 1:

```
<html>

<body>

<h2>Text input fields</h2>

<form>

  <label for="fname">First name:</label><br>

  <input type="text" value="John"><br>

  <label for="lname">Last name:</label><br>

  <input type="text" value="Doe">

</form>

</body>

</html>
```

Text input fields

First name:

Last name:

EXAMPLE 2:

```
<html>

<form>

  First name: <br>

  <input type="text"  > <br>

  Last name:<br>

  <input type="text"  >

</form>

</html>
```

OUTPUT

First name:

Last name:

Radio Buttons

The `<input type="radio">` defines a radio button. Radio buttons are used when out of many options, just one option is required to be selected.

EXAMPLE

```
<html>

<body>

  <h2>Radio Buttons</h2>
```

```
<form>

<input type="radio" name="fav_language" > HTML<br>

<input type="radio" name="fav_language"> C<br>

<input type="radio" name="fav_language"> JAVA<br>

</form>

</body>

</html>
```

OUTPUT

Radio Buttons

☐ HTML
☒ C
☐ JAVA

Checkboxes

The **HTML** `<input type="checkbox">` is used to define a checkbox field. The checkbox is shown as a square box that is ticked when it is activated. It allows the user to select one or more option among all the limited choices.

Syntax:

```
<input type="checkbox">
```

EXAMPLE:

```
<html>

<body>

<h2>Checkboxes</h2>
```

```
<form >

  <input type="checkbox" > I have a bike<br>

  <input type="checkbox" > I have a car<br>

  <input type="checkbox" > I have a boat<br><br>

  <input type="submit" value="Submit">

</form>

</body>

</html>
```

Output:

Checkboxes

- ☐ I have a bike
- ☐ I have a car
- ☐ I have a boat

Submit

Submit Button

The `<input type="submit">` defines a button for submitting the form data to a form-handler.

The form-handler is typically a file on the server with a script for processing input data.

The form-handler is specified in the form's action attribute.

Example:

```
<html>
<body>
<h2>personal details form</h2>
<form >
NAME: <br>
  <input type="text"><br>
AGE: <br>
  <input type="text"><br>
MOBILE NUMBER: <br>
  <input type="text"><br>
COLLEGE NAME: <br>
  <input type="text"><br><br><br>
  <input type="submit" value="Submit">
</form>
</body>
</html>
```

Output:

personal details form

NAME:

AGE:

MOBILE NUMBER:

COLLEGE NAME:

Submit

TEXTAREA

The **HTML <textarea> tag** is used to define a multi-line text input control.

It can hold unlimited number of characters and the texts are displayed in a fixed-width font (usually courier).

The size of the HTML textarea is defined by <cols> and <rows> attribute, or it can also be defined through CSS height and width properties.

Attribute values:

- **cols**: It is used to tell the browser how many average-width characters should fit on a single line i.e the number of columns to display.
 - **form**: It is used to specify the one or more forms that the <Textarea> element belongs to.
 - **name**: It is used to specify the name of the <Textarea> element.
 - **rows**: It is used to specify the number of visible text lines for the control i.e. the number of rows to display.

Syntax:

```
<textarea>....</textarea>
```

PROGRAM 1:

```
<html>
```

```
<body>
```

```
<form >
```

```
  Name: <input type="text" >
```

```
  <input type="submit">
```


```
</form>
```

```
<br>
```

```
<textarea rows="9" cols="70" name="comment" >
```

Enter text here...

OUTPUT

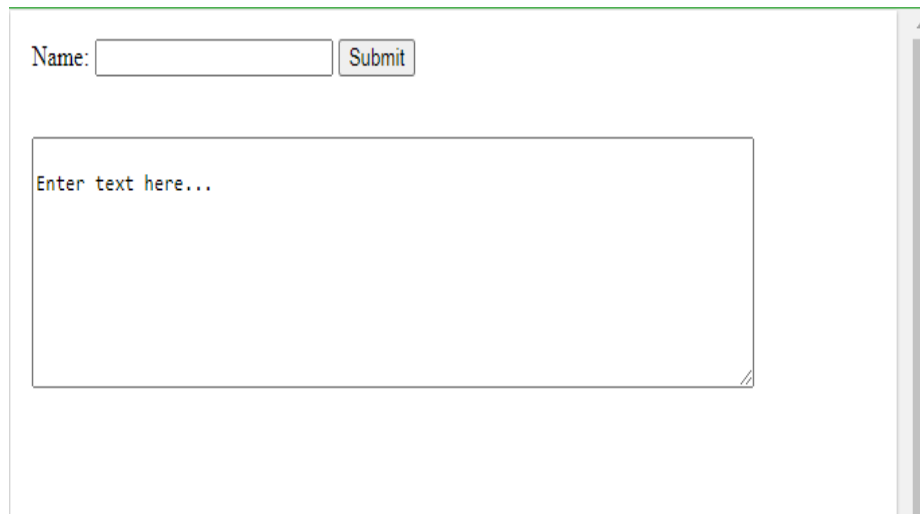

SELECT (OR) OPTION

You use the HTML select tag to create drop-down menus so that users can select the value they want.

The select tag normally goes within a form element, with the items to choose from coded within another tag, `<option>`.

The `<optgroup>` element can be used for grouping related options in a list.

Syntax

```
<select>
```

```
<option></option>
```

```
</select>
```


Example :

```
<html>

<body>

<h2>Language subject</h2>

<form >

    <label> Enter your name</label>

    <input type="text"><br><br>

    <label >Choose a langauge:</label>

    <select id="language" name=" language ">

        <option value="TAMIL">TAMIL</option>

        <option value="ARABIC">ARABIC</option>

        <option value="URDU">URDU</option>

        <option value="MALAYALAM">MALAYALAM</option>

    </select><br><br><br>


    <input type="submit">

</form>

</body>

</html>
```

OUTPUT:

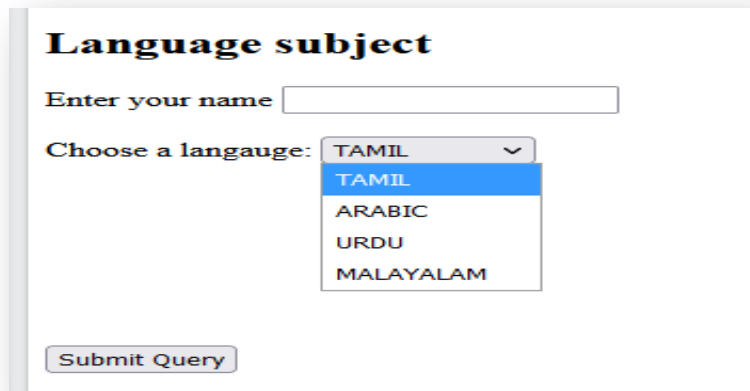


Language subject

Enter your name

Choose a language:

TAMIL
TAMIL
ARABIC
URDU
MALAYALAM

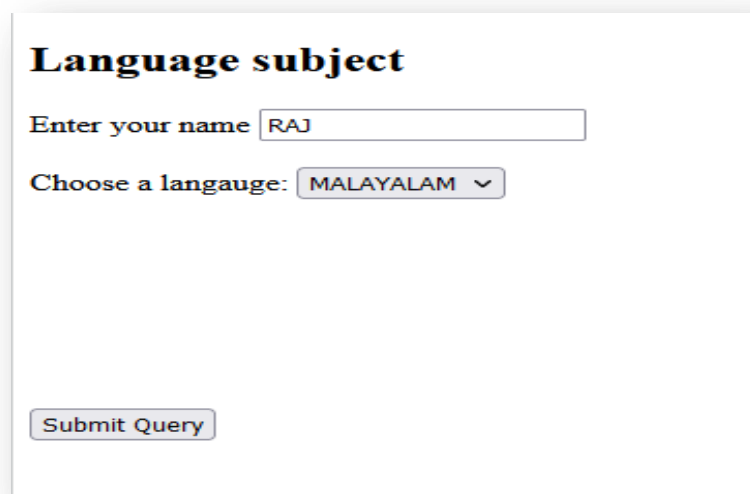

Language subject

Enter your name

Choose a language:

EXAMPLE 2:

```
<html>
```

```
<body>
```

```
<form >
```

```
    <label >Language</label>
```

```
    <select name="languages" id="lang">
```

```
<option value="javascript">JavaScript</option>

<option value="php">PHP</option>

<option value="java">Java</option>

<option value="golang">Golang</option>

<option value="python">Python</option>

<option value="c#">C#</option>

<option value="C++">C++</option>

<option value="erlang">HTML</option>


</select>

<input type="submit" value="Submit" />

</form>

</body>

</html>
```

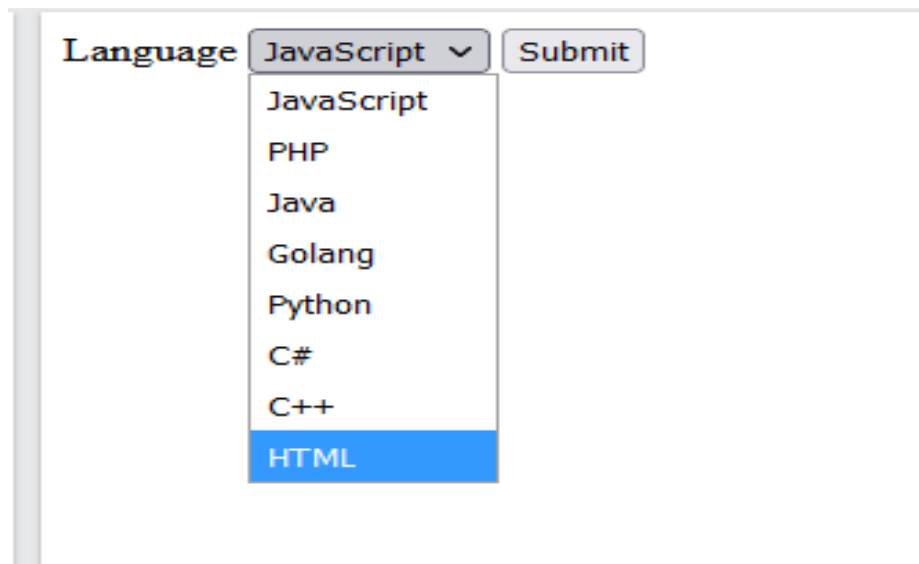

The screenshot shows a web form with a label "Language" in a serif font. To its right is a dropdown menu currently displaying "JavaScript" with a downward arrow. A list of options is visible below the dropdown: "JavaScript", "PHP", "Java", "Golang", "Python", "C#", "C++", and "HTML". The "HTML" option is highlighted with a blue background. To the right of the dropdown is a "Submit" button.

Language