

# Web API Design with Spring Boot Week 2 Coding Assignment

**Points possible:** 70

Category	Criteria	% of Grade
<b>Functionality</b>	Does the code work?	25
<b>Organization</b>	Is the code clean and organized? Proper use of white space, syntax, and consistency are utilized. Names and comments are concise and clear.	25
<b>Creativity</b>	Student solved the problems presented in the assignment using creativity and out of the box thinking.	25
<b>Completeness</b>	All requirements of the assignment are complete.	25

**Instructions:** In Eclipse, or an IDE of your choice, write the code that accomplishes the objectives listed below. Ensure that the code compiles and runs as directed. Take screenshots of the code and of the running program (make sure to get screenshots of all required functionality) and paste them in this document where instructed below. Create a new repository on GitHub for this week's assignments and push this document, with your Java project code, to the repository. Add the URL for this week's repository to this document where instructed and submit this document to your instructor when complete.

**Here's a friendly tip:** as you watch the videos, code along with the videos. This will help you with the homework. When a screenshot is required, look for the icon:  You will keep adding to this project throughout this part of the course. When it comes time for the final project, use this project as a starter.

**Project Resources:** <https://github.com/promineotech/Spring-Boot-Course-Student-Resources>

**Coding Steps:**

- 1) In the project you started last week, use Lombok to add an info-level logging statement in the controller implementation method that logs the parameters that were input to the method. Remember to add the `@Slf4j` annotation to the class.
- 2) Start the application (not an integration test). Use a browser to navigate to the application passing the parameters required for your selected operation. (A browser, used in this manner, sends an HTTP GET request to the server.) Produce a screenshot showing the browser navigation bar and the log statement that is in the IDE console showing that the controller method was reached (as in the video). 
- 3) With the application still running, use the browser to navigate to the OpenAPI documentation. Use the OpenAPI documentation to send a GET request to the server with a valid model and trim level. (You can get the model and trim from the provided `data.sql` file.) Produce a screenshot showing the `curl` command, the request URL, and the response headers. 
- 4) Run the integration test and show that the test status is green. Produce a screenshot of the test class and the status bar. 
- 5) Add a method to the test to return a list of expected `Jeep` (`model`) objects based on the model and trim level you selected. You can get the expected list of Jeeps from the file `src/test/resources/ flyway/migrations/V1.1_Jeep_Data.sql`. So, for example, using the model Wrangler and trim level "Sport", the query should return two rows:

	Row 1	Row 2
<b>Model ID</b>	WRANGLER	WRANGLER
<b>Trim Level</b>	Sport	Sport
<b>Num Doors</b>	2	4
<b>Wheel Size</b>	17	17
<b>Base Price</b>	\$28,475.00	\$31,975.00

The method should be named `buildExpected()`, and it should return a `List` of `Jeep`. The video put this method into a support superclass but you can include it in the main test class if you want.

- 6) Write an `AssertJ` assertion in the test to assert that the actual list of jeeps returned by the server is the same as the expected list. Run the test. Produce a screenshot showing...
  - The test with the assertion.
  - The JUnit status bar (should be red).

- c) The method returning the expected list of Jeeps. 
- 7) Add a service layer in your application as shown in the videos:
- Add a package named `com.promineotech.jeep.service`.
  - In the new package, create an interface named `JeepSalesService`.
  - In the same package (service), create a class named `DefaultJeepSalesService` that implements the `JeepSalesService` interface. Add the class-level annotation, `@Service`.
  - Inject the service interface into `DefaultJeepSalesController` using the `@Autowired` annotation. The instance variable should be `private`, and the variable should be named `jeepSalesService`.
  - Define the `fetchJeeps` method in the interface. Implement the method in the service class. Call the method from the controller (make sure the controller returns the list of Jeeps returned by the service method). The method signature looks like this:
- ```
List<Jeep> fetchJeeps(JavaModel model, String trim);
```
- Add a Lombok info-level log statement in the service implementation showing that the service was called. Print the parameters passed to the method. Let the method return `null` for now.
  - Run the test again. Produce a screenshot showing the service class implementation, the log line in the console, and the red status bar. 
- 8) Add the database dependencies described in the video to the POM file (MySQL driver and Spring Boot Starter JDBC). To find them, navigate to <https://mvnrepository.com/>. Search for `mysql-connector-j` and `spring-boot-starter-jdbc`. In the POM file you don't need version numbers for either dependency because the version is included in the Spring Boot Starter Parent.
- 9) Create `application.yaml` in `src/main/resources`. Add the `spring.datasource.url`, `spring.datasource.username`, and `spring.datasource.password` properties to `application.yaml`. The url should be the same as shown in the video (`jdbc:mysql://localhost:3306/jeep`). The password and username should match your setup. If you created the database under your root user, the username is "root", and the password is the root user password. If you created a "jeep" user or other user, use the correct username and password.

Be careful with the indentation! YAML allows hierarchical configuration but it reads the hierarchy based on the indentation level. The keyword "spring" MUST start in the first column. It should look similar to this when done:

```
spring:
  datasource:
    username: username
    password: password
    url: jdbc:mysql://localhost:3306/jeep
```

- 10) Start the application (the real application, not the test). Produce a screenshot that shows application.yaml and the console showing that the application has started with no errors.




- 11) Add the H2 database as dependency. Search for the dependency in the Maven repository like you did above. Search for "h2" and pick the latest version. Again, you don't need the version number, but the scope should be set to "test".

- 12) Create application-test.yaml in src/test/resources. Add the setting spring.datasource.url that points to the H2 database. It should look like this:


spring:

```
datasource:
```

You do not need to set the username and password because the in-memory H2 database does not require them.




## Screenshots of Code:

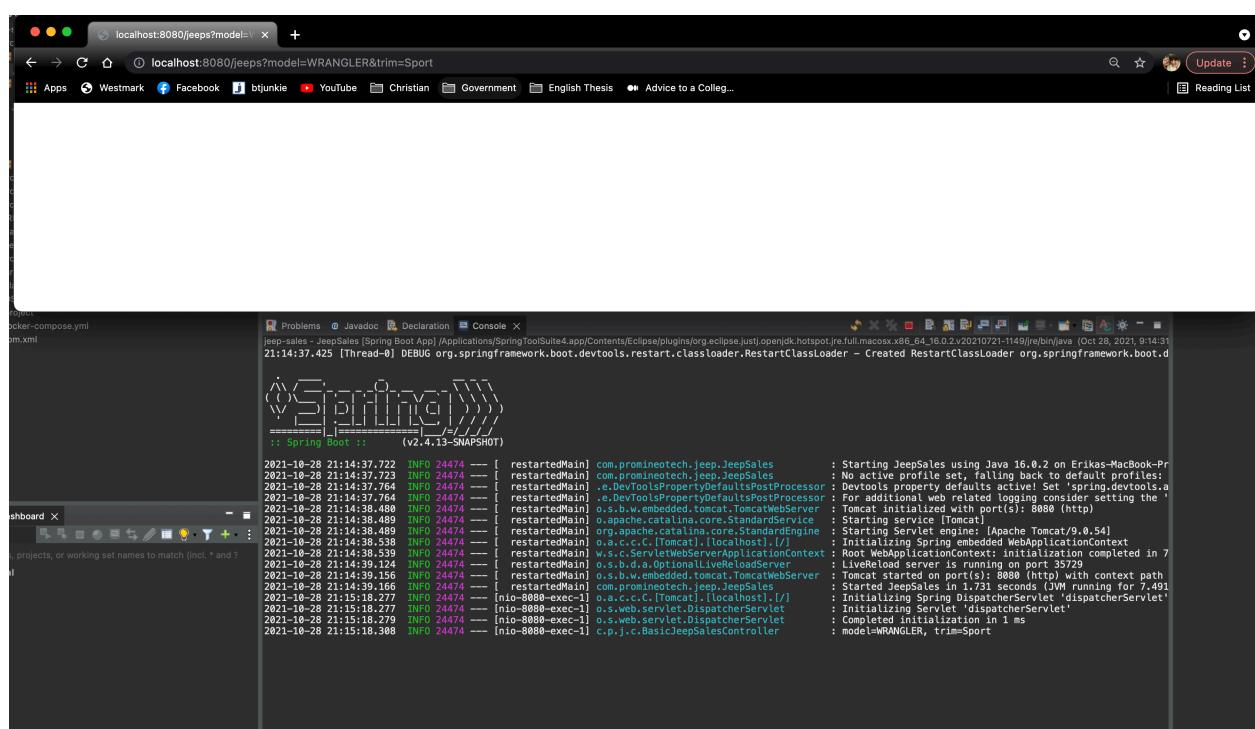

## Screenshots of Running Application:

URL to GitHub Repository: <https://github.com/esdibella/springboot-2.git>

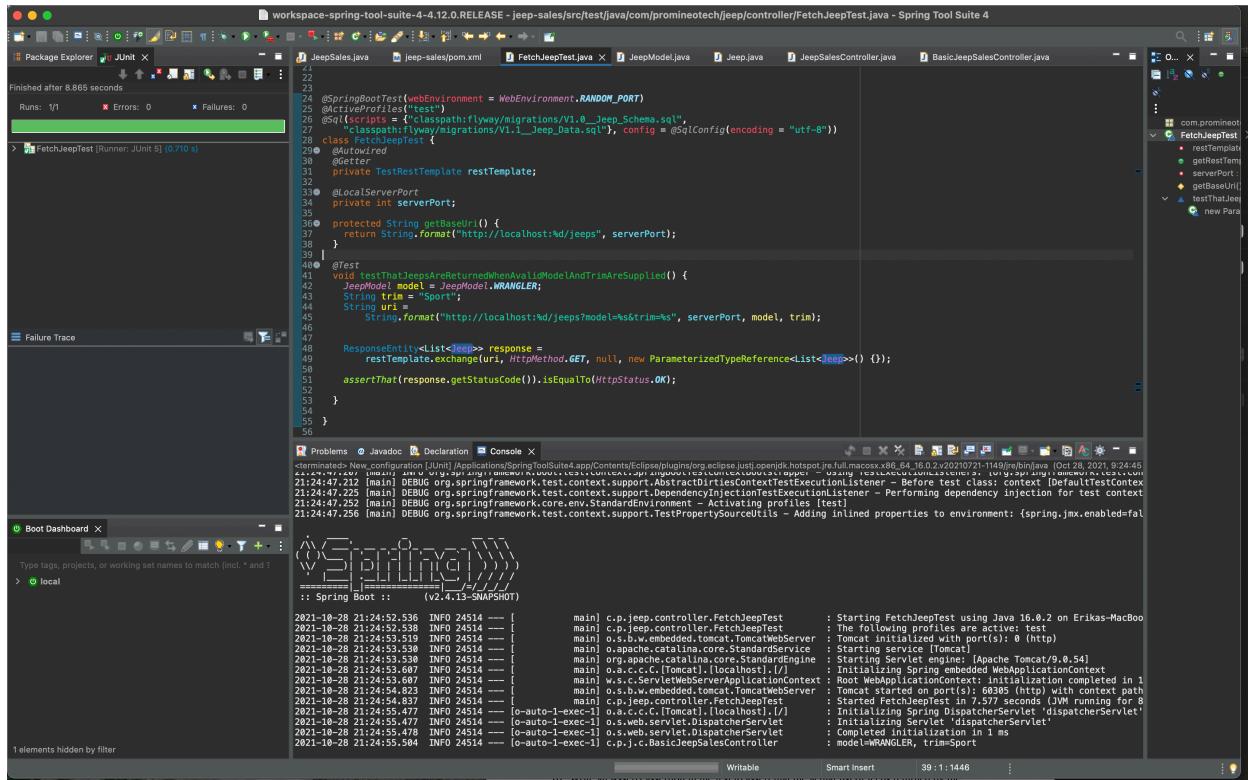

```

22
23
24 @SpringBootTest(webEnvironment = WebEnvironment.RANDOM_PORT)
25 @ActiveProfiles("test")
26 @Sql({scripts = {"classpath:flyway/migrations/V1_0_Jeep_Schema.sql"}, config = @sqlConfig(encoding = "utf-8")})
27
28 class FetchJeepTest {
29     @Test
30     @TestRestTemplate
31     @Getter
32     @LocalServerPort
33     private TestRestTemplate restTemplate;
34     private int serverPort;
35
36     protected String getBaseUrl() {
37         return String.format("http://localhost:%d/jeeps", serverPort);
38     }
39
40     @Test
41     void testThatJeepsAreReturnedWhenValidModelAndTrimAreSupplied() {
42         JeepModel model = JeepModel.WRANGLER;
43         String trim = "Sport";
44         String url = String.format("http://localhost:%d/jeeps?model=%s&trim=%s", serverPort, model, trim);
45
46         ResponseEntity<List<Jeep>> response =
47             restTemplate.exchange(url, HttpMethod.GET, null, new ParameterizedTypeReference<List<Jeep>>() {});
48
49         assertEquals(response.getStatusCode(), HttpStatus.OK);
50     }
51
52 }
53
54
55 }
56

```

Failure Trace

Problems Javadoc Declaration Console

Boot Dashboard


Type tags, projects, or working set names to match (incl. \* and ?)

local

Spring Boot (v2.4.13-SNAPSHOT)

2021-10-28 21:24:52.456 INFO 24514 --- [ main] c.p.jeep.controller.FetchJeepTest : Starting FetchJeepTest using Java 16.0.2 on Erikas-MacBook-Pro
2021-10-28 21:24:52.538 INFO 24514 --- [ main] c.p.jeep.controller.FetchJeepTest : The following profiles are active: test
2021-10-28 21:24:53.539 INFO 24514 --- [ main] o.s.d.w.embedded.tomcat.TomcatWebServer : Tomcat initialized with port(s): 0 (http)
2021-10-28 21:24:53.539 INFO 24514 --- [ main] o.apache.catalina.core.StandardService : Starting service [Tomcat]
2021-10-28 21:24:53.609 INFO 24514 --- [ main] org.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache Tomcat/9.0.54]
2021-10-28 21:24:53.609 INFO 24514 --- [ main] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Embedded WebApplicationContext
2021-10-28 21:24:53.667 INFO 24514 --- [ main] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: initialization completed in 1 ms
2021-10-28 21:24:54.823 INFO 24514 --- [ main] o.s.d.w.embedded.tomcat.TomcatWebServer : Tomcat started on port(s): 60385 (http) with context path ''
2021-10-28 21:24:55.477 INFO 24514 --- [ main] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2021-10-28 21:24:55.477 INFO 24514 --- [ main] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2021-10-28 21:24:55.478 INFO 24514 --- [ main] o.s.web.servlet.DispatcherServlet : Completed initialization in 1 ms
2021-10-28 21:24:55.504 INFO 24514 --- [ main] c.p.jeep.controller.FetchJeepTest : model=WRANGLER, trim=Sport

1 elements hidden by filter

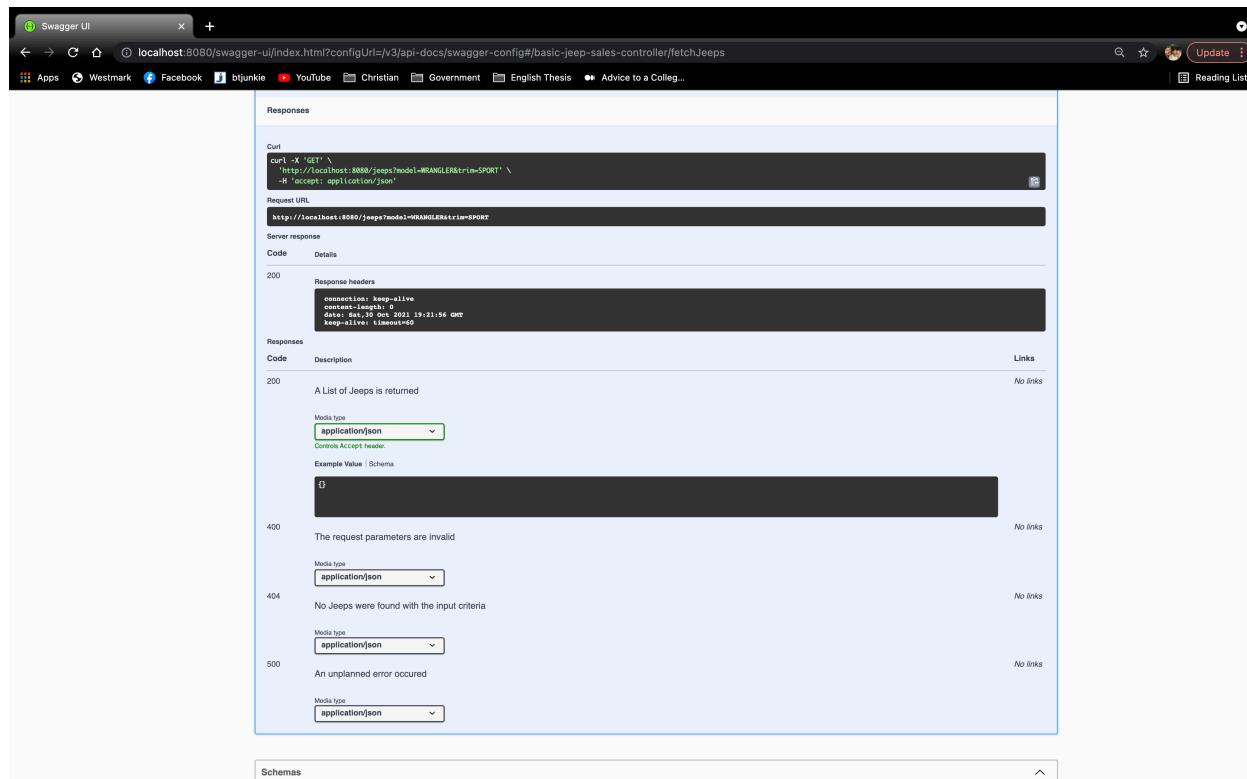

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:8080/jeeps?model=WRANGLER&trim=SPORT' \
  -H 'accept: application/json'
```

Request URL

http://localhost:8080/jeeps?model=WRANGLER&trim=SPORT

Server response

Code Details

200 Response headers

```
connection: keep-alive
content-type: application/json
date: Sat, 30 Oct 2021 19:21:56 GMT
keep-alive: timeout=60
```

Responses

Code Description Links

200 A List of Jeeps is returned

Media type application/json

Example Value Schema

400 The request parameters are invalid

Media type application/json

404 No Jeeps were found with the input criteria

Media type application/json

500 An unplanned error occurred

Media type application/json

Schemas



workspace-spring-tool-suite-4-4.12.0.RELEASE - jeep-sales/src/main/resources/application.yaml - Spring Tool Suite 4

```

1spring:
2  datasource:
3    url: jdbc:mysql://localhost:3306/jeep
4    password: jeep
5    username: jeep
6  logging:
7    level:
8      root: warn
9      [com.promineotech]: debug
10
11

```

Problems Javadoc Declaration Console

jeep-sales [jeepSales [Spring Boot App] Applications/SpringToolSuite4.app/Contents/Eclipse/plugins/org.eclipse.justopenedk.hotspot.re.full.macosx.x64\_64\_16.0.2.v20210721-1149/re/bin/java (Oct 30, 2021, 3:10:26 P 15:10:33,493 [Thread-0] DEBUG org.springframework.boot.devtools.restart.classloader.RestartClassLoader - Created RestartClassLoader org.springframework.boot.dev

Spring Boot :: (v2.4.13-SNAPSHOT)

```

: Starting JeepSales using Java 16.0.2 on Eriks-MacBook-Pro.
: Running with Spring Boot v2.4.13-SNAPSHOT, Spring v5.3.12
: No active profile set, falling back to default profiles: de
: Started JeepSales in 2.74 seconds (JVM running for 8.478)

```

1 elements hidden by filter

workspace-spring-tool-suite-4-4.12.0.RELEASE - jeep-sales/src/test/resources/application-test.yaml - Spring Tool Suite 4

```

1spring:
2  datasource:
3    url: jdbc:h2:mem:jeep
4    password: jeep
5    username: jeep
6  logging:
7    level:
8      root: warn
9      [com.promineotech]: debug
9

```

Problems Javadoc Declaration Console

jeep-sales [jeepSales [Spring Boot App] Applications/SpringToolSuite4.app/Contents/Eclipse/plugins/org.eclipse.justopenedk.hotspot.re.full.macosx.x64\_64\_16.0.2.v20210721-1149/re/bin/java (Oct 30, 2 15:10:33,493 [Thread-0] DEBUG org.springframework.boot.devtools.restart.classloader.RestartClassLoader - Created RestartClassLoader org.springframework.boot.dev

Spring Boot :: (v2.4.13-SNAPSHOT)

```

: Starting JeepSales using Java 16.0.2 on Eriks-MacBook-Pro.
: Running with Spring Boot v2.4.13-SNAPSHOT, Spring V5.3.12
: No active profile set, falling back to default profiles: de
: Started JeepSales in 2.74 seconds (JVM running for 8.478)

```

1 elements hidden by filter