
Continuation Recovery: Evidence Schemas


How accepted contracts, test runs, coordinator state, checkpoints, reviews, and integration evidence refer to one another—and where the current checkout breaks that chain.

1. Behavior: evidence lifecycle and recovery

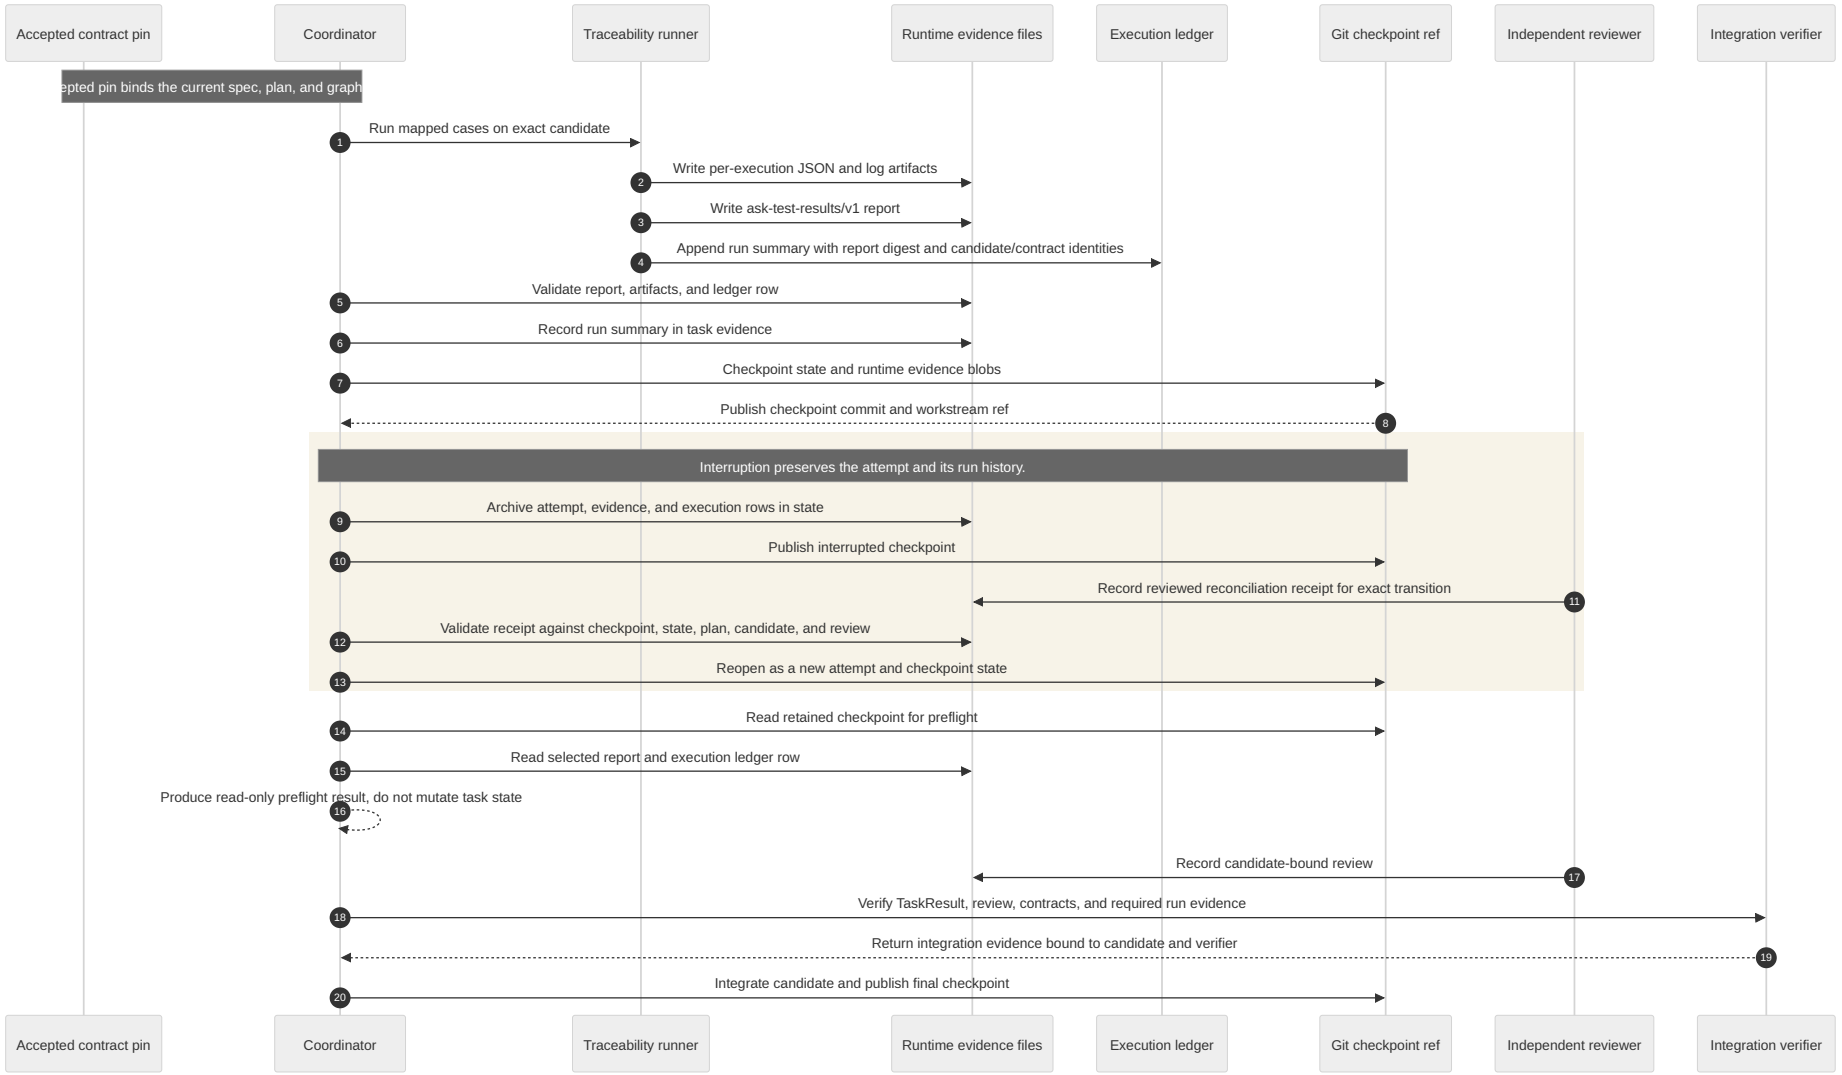

> **Key distinction:** the checkpoint receipt records the checkpoint SHA and summary facts. It does not contain the checkpoint manifest, state snapshot, or evidence blobs. Recovery needs the checkpoint commit and its expected ref.


2. Current checkout: missing links

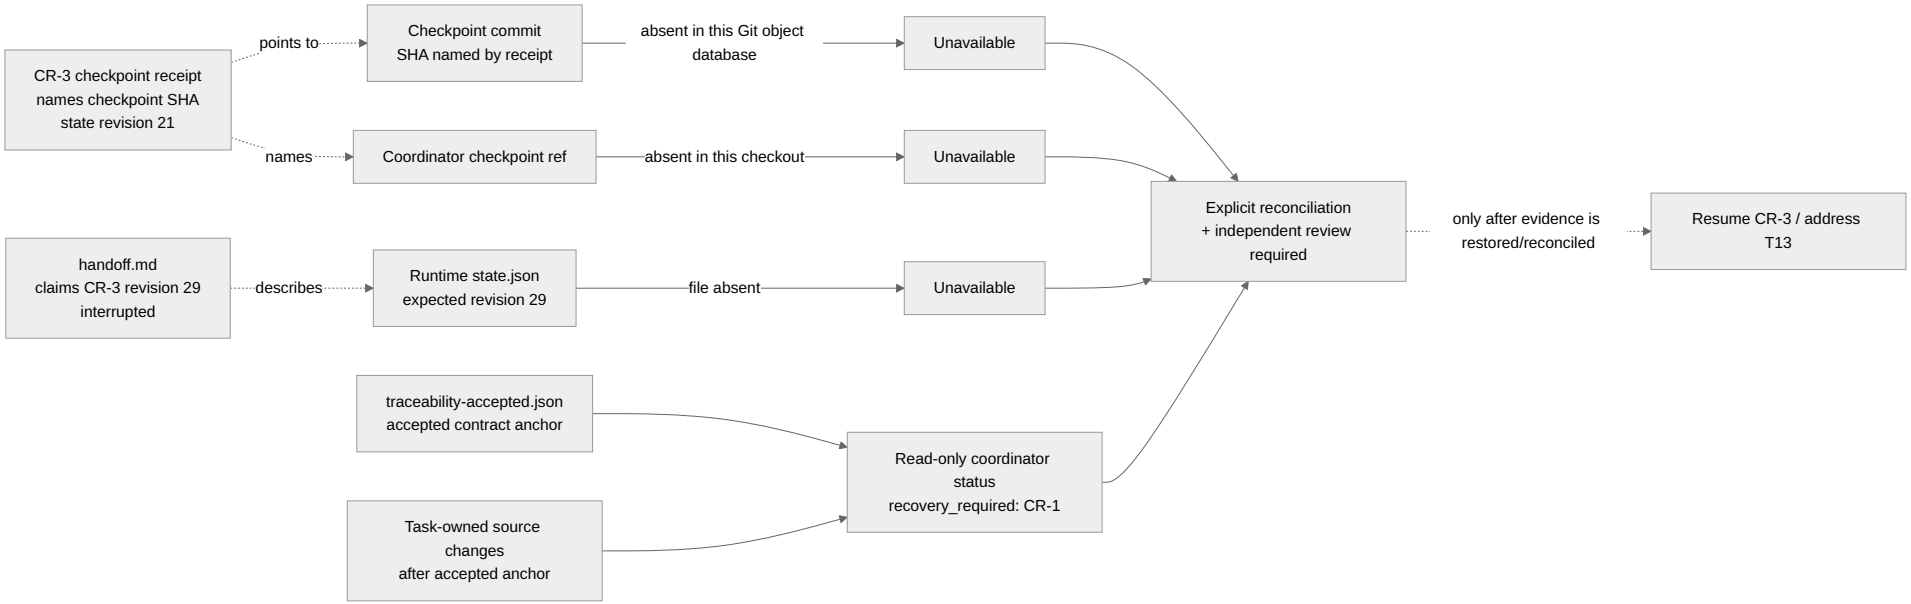

> The handoff and receipts preserve useful identities, but they cannot substitute for the missing checkpoint object and coordinator state. The current status is derived from the checkout's available state and accepted anchor.

3. JSON structure (nested objects vs. linked files)

This chart summarizes the principal fields and nesting in the implementation's runtime records. Solid arrows show objects stored inside a JSON document; dashed arrows show identities that link separate files or Git objects.

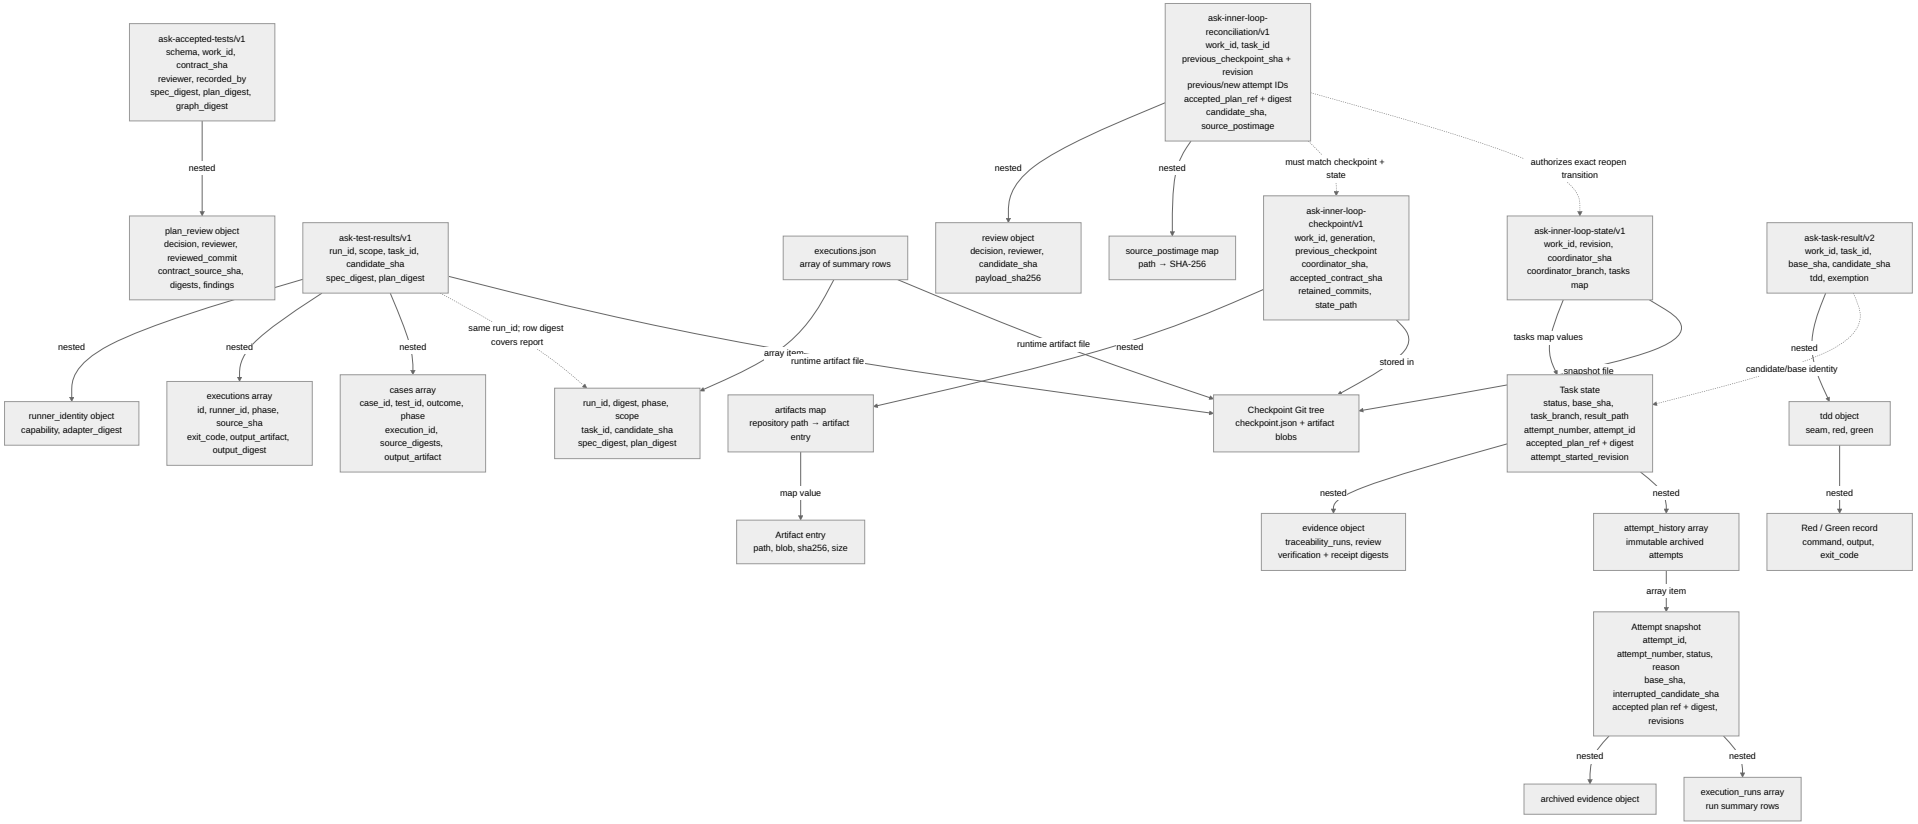

> **Interpretation:** these are schema-shaped summaries, not a substitute for the validators. For example, `attempt_history` is nested in coordinator state, while the reconciliation receipt is a separate JSON file; the checkpoint manifest is stored inside a Git commit whose tree carries the state and runtime artifact bytes.

Schemas and paths are based on the current repository implementation and CR-3 evidence files. Mermaid is loaded from jsDelivr, so an internet connection is needed when opening this HTML file.