

Exercises: CRUD Operations

1. Create the Database

Create a MongoDB database with the name "**Articles**" and populate it using the following JSON:


Sample code usage

```
{
  "articles": [
    {
      "author": "Bill Gates",
      "date": "27-01-2020",
      "name": "Top 5 programming languages in 2020",
      "rating": "5"
    },
    {
      "author": "Svetlin Nakov",
      "date": "02-05-2020",
      "name": "How to write bug-free code",
      "rating": "10"
    },
    {
      "author": "Nikolay Kostov",
      "date": "08-07-2020",
      "name": "Set up your very own web server!",
      "rating": "20"
    },
    {
      "author": "Elon Musk",
      "date": "17-04-2020",
      "name": "The future of space travel",
      "rating": "50"
    },
    {
      "author": "Alen Paunov",
      "date": "10-07-2020",
      "name": "How to manage effectively",
      "rating": "50"
    }
  ]
}
```

Create a **Console Application** (.NET Core) and **connect it to your MongoDB database**. To do that, first **install the NuGet package MongoDB.Driver**.

2. Read


Print on the console the names of all articles in the database.

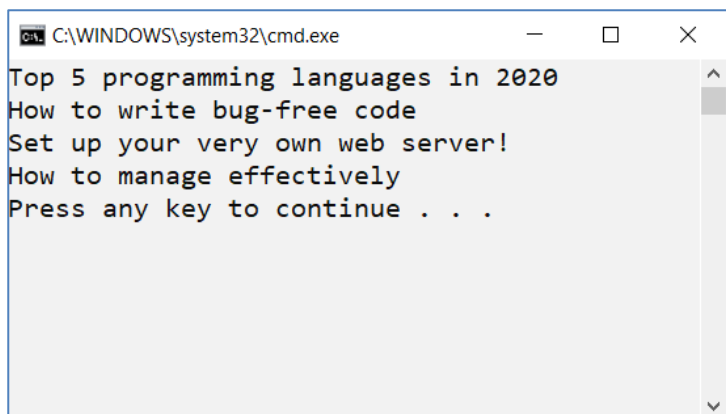

```
C:\WINDOWS\system32\cmd.exe
Top 5 programming languages in 2020
How to write bug-free code
Set up your very own web server!
How to manage effectively
Press any key to continue . . .
```

3. Create a new article

Add a new article with author "**Steve Jobs**", date "**05-05-2005**", name "**The story of Apple**", rating "**60**".

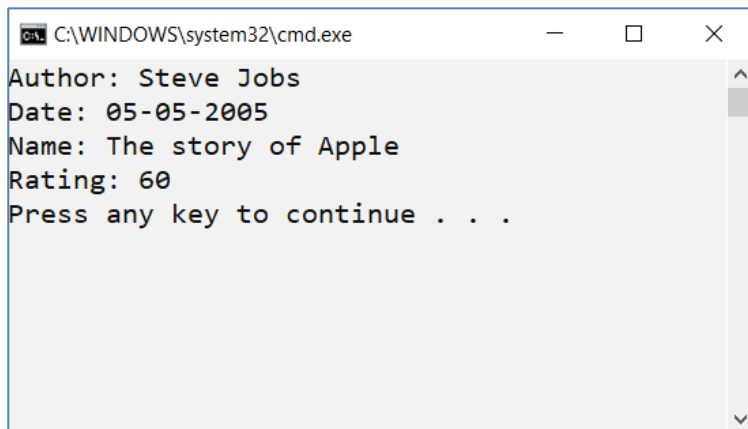


```
C:\WINDOWS\system32\cmd.exe
Author: Steve Jobs
Date: 05-05-2005
Name: The story of Apple
Rating: 60
Press any key to continue . . .
```

4. Update

Add 10 points to the rating of all articles.

5. Delete

Delete all articles with rating **less than or equal to 50**. Print the names of the remaining articles on the Console.

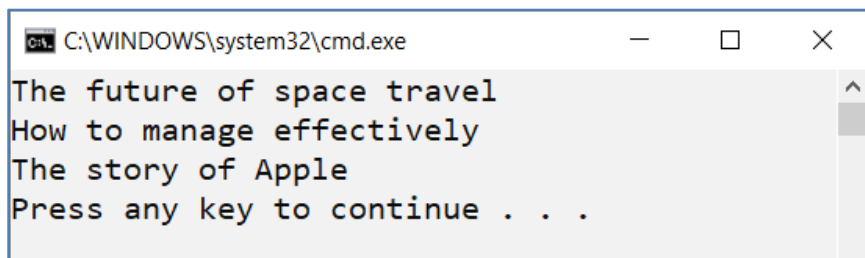

```
C:\WINDOWS\system32\cmd.exe
The future of space travel
How to manage effectively
The story of Apple
Press any key to continue . . .
```