PlainSign

The button says “Free Mint.”

The request can grant access to an entire NFT collection.


Mohamed Adib · Sri Venkateswara College of Engineering

Before the wallet opens

Who gets access?
What can they move?

Reject stops the request


Standard wallet error 4001

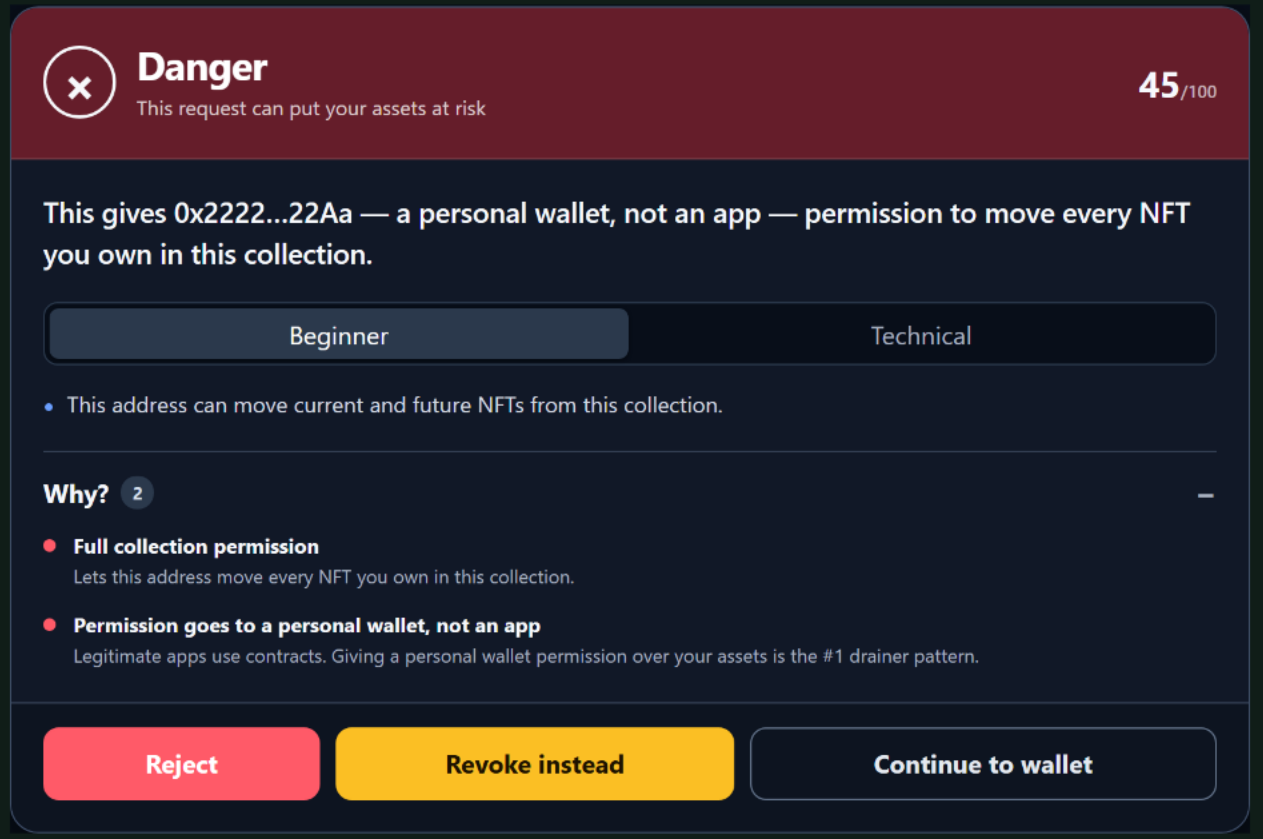


Controlled sample · simulated metadata

Signatures can grant permission too

Permit2: unlimited permission

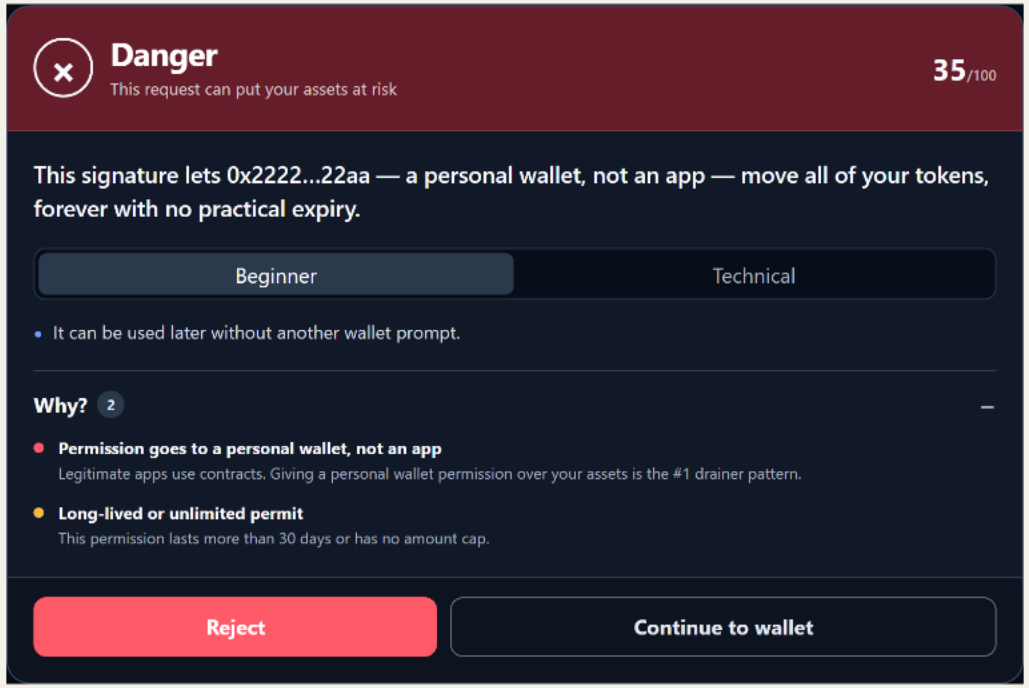

Sign in: a login message

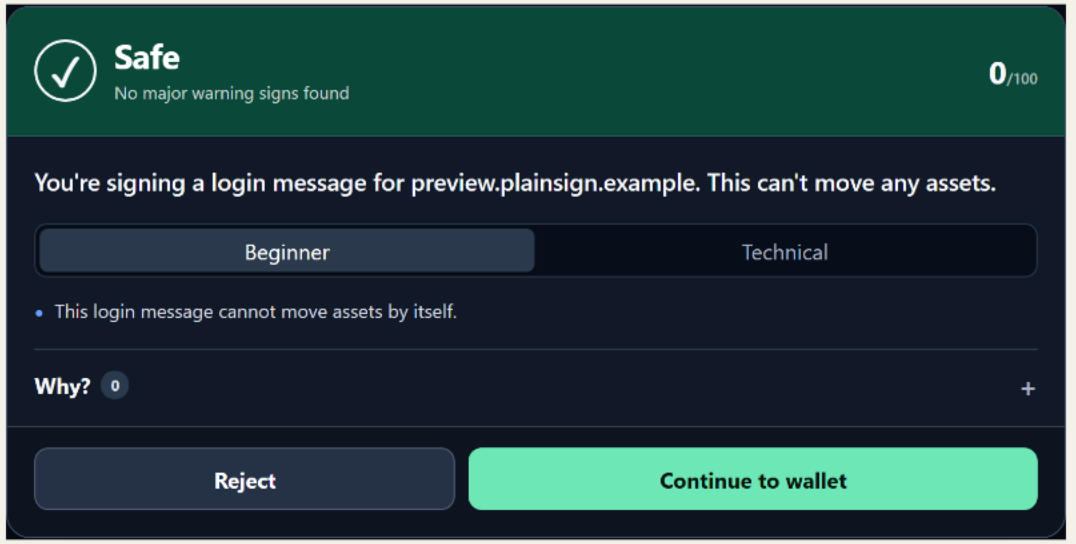

Controlled samples. Metadata is simulated. Safe is a heuristic, not a guarantee.

Open rules, visible reasons

Decode Read the transaction or signature

Enrich Check relevant public chain information

Decide Show the rules behind the verdict

AI rewording is disabled in the public build

The event work

September prototype

Provider interception
Decoding and risk rules
Revoke and community feed

October additions

Ethereum mainnet metadata
Warnings during RPC outages
Walkthrough without a wallet

Earlier work is disclosed. Mainnet validation used public reads.

Free for users.
An SDK for teams.

Open source extension

Individuals can inspect the rules and try the warning layer.

Proposed paid integration

Maintained rules, policy controls and integration support.

Demand and pricing are not yet validated

The next proof is user understanding

Observe five people using the demo

Can they explain the permission?
Which warnings confuse them?
How long does the decision take?

Then seek two wallet or dApp design partners

Planned experiments, not current traction

PlainSign

Understand the permission.
Then decide.

Try the sample requests without a wallet

adib-cyber007.github.io/plainsign/review.html

Mohamed Adib · Solo entrant

Sri Venkateswara College of Engineering