

FAP Database - How to read this ERD

Football Analytics Platform - 39 tables - 9 modules - generated from src/fap/db/engine.py

example_table	
PK	<u>id</u>
FK1	parent_id
	name
	document

- Header bar = table name
- PK = primary key (underlined) - unique row id
- FK1 / FK2 = foreign key - points to another table's id
- other rows = data columns



one (|) many (crow's foot)

Relationship line: one parent row -> many child rows (1-to-many).

Most cross-module links (dataset_id, image_id, file_id, player_id) are 'soft' id references
resolved in code - not hard foreign keys - so an active dataset can change without breaking history.

1 - Core & Workspace

authentication + the container hierarchy everything hangs off



2 - Import, Providers & Data

the Data Manager (datasets) + the club tree (org_nodes)

datasets	
PK	<u>id</u>
	workspace_id
	project_id
	node_id
	provider_id
	content_hash
	season / competition
	document

org_nodes	
PK	<u>id</u>
FK1	parent_id
	kind
	name
	document



presets	
PK	<u>id</u>
	kind
	scope
	document

audit_log	
PK	<u>id</u>
	actor
	action
	target_type
	target_id

mapping_templates	
PK	<u>id</u>
	provider_id
	signature
	mapping

custom_providers	
PK	<u>id</u>
	name
	base_provider_id
	signature

datasets is referenced by many modules via soft dataset_id (see last page).

3 - Reports

the versioned report engine reused by every reporting surface

reports	
PK	<u>id</u>
	workspace_id
	project_id
	dataset_id
	title
	status
	version
	document

report_versions	
PK	<u>id</u>
FK1	report_id
	version
	note

report_images	
PK	<u>id</u>
	workspace_id
	filename
	mime
	size_bytes

report_drafts	
PK	<u>user_id</u>
PK	<u>draft_key</u>
	document

4 - Identity & Administration

capability roles, user directory, scoped grants, invitations, sessions

role_definitions	
PK	<u>slug</u>
	name
	capabilities
	superuser
	rank

platform_users	
PK	<u>email</u>
	role_slug
	org / club / team_id
	status
	provider_id

permission_grants	
PK	<u>id</u>
	email
	scope_kind
	scope_id
	capabilities
	effect


invitations	
PK	<u>id</u>
	email
	role_slug
	status
	token

user_sessions	
PK	<u>id</u>
	email
	provider_id
	status
	revoked

Links here are soft: role_slug -> role_definitions, scope_id -> org_nodes (grants inherit down the tree).

5 - Scouting

recruitment player DB; players is the hub, detail tables cascade from it

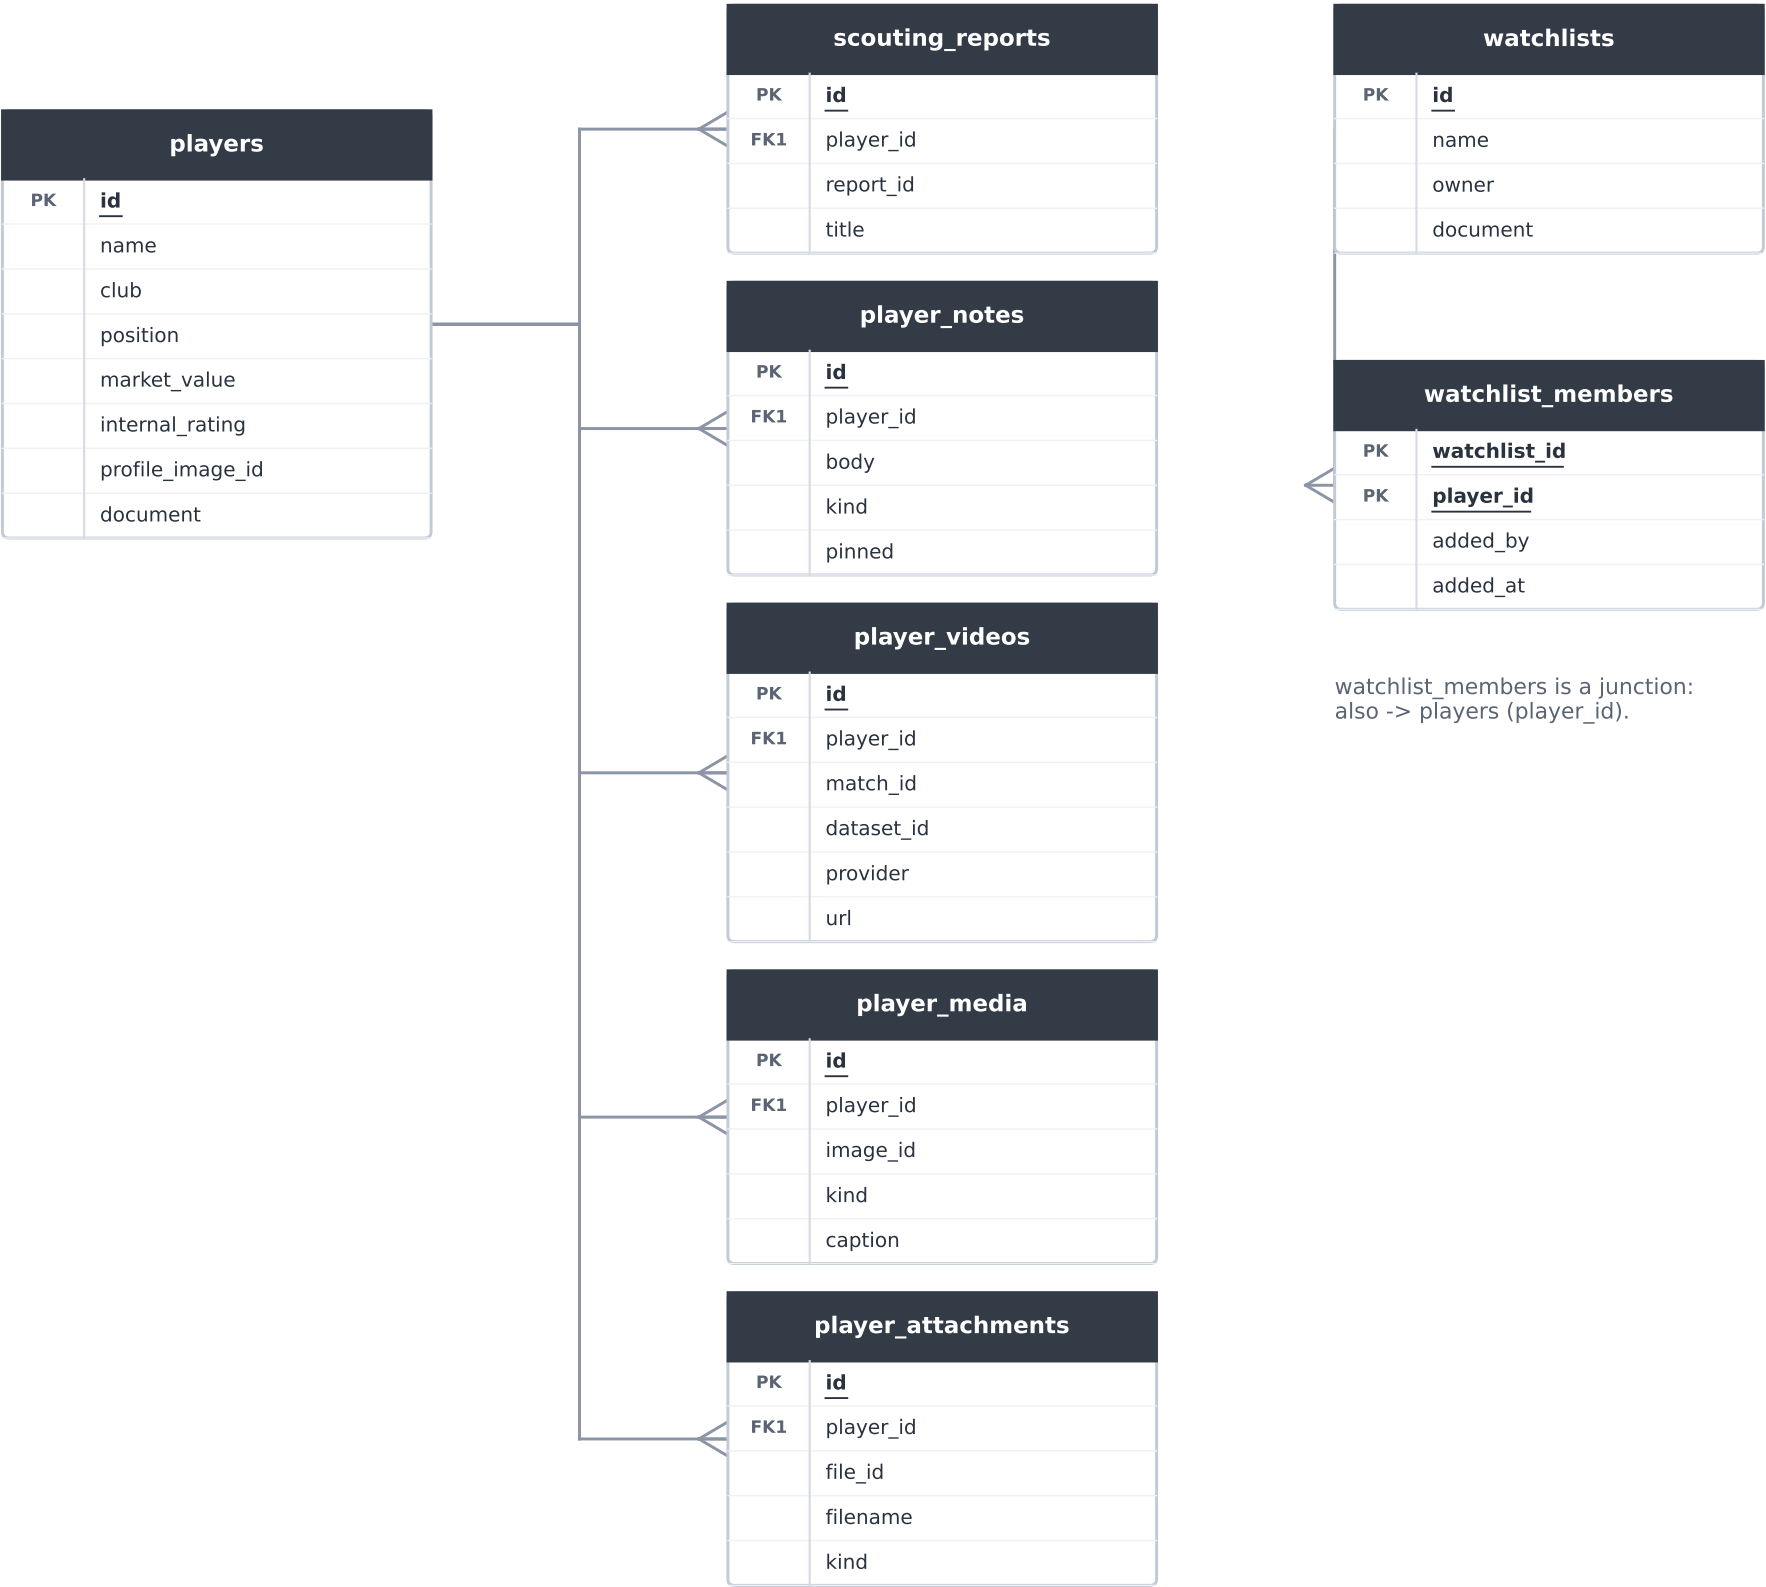


6 - Set Pieces

provider-agnostic set-piece store; each delivery owns positions + contacts




7 - First-Team Players

the club's own squad; hub owns 9 detail tables (ft_ prefix avoids scouting clash)

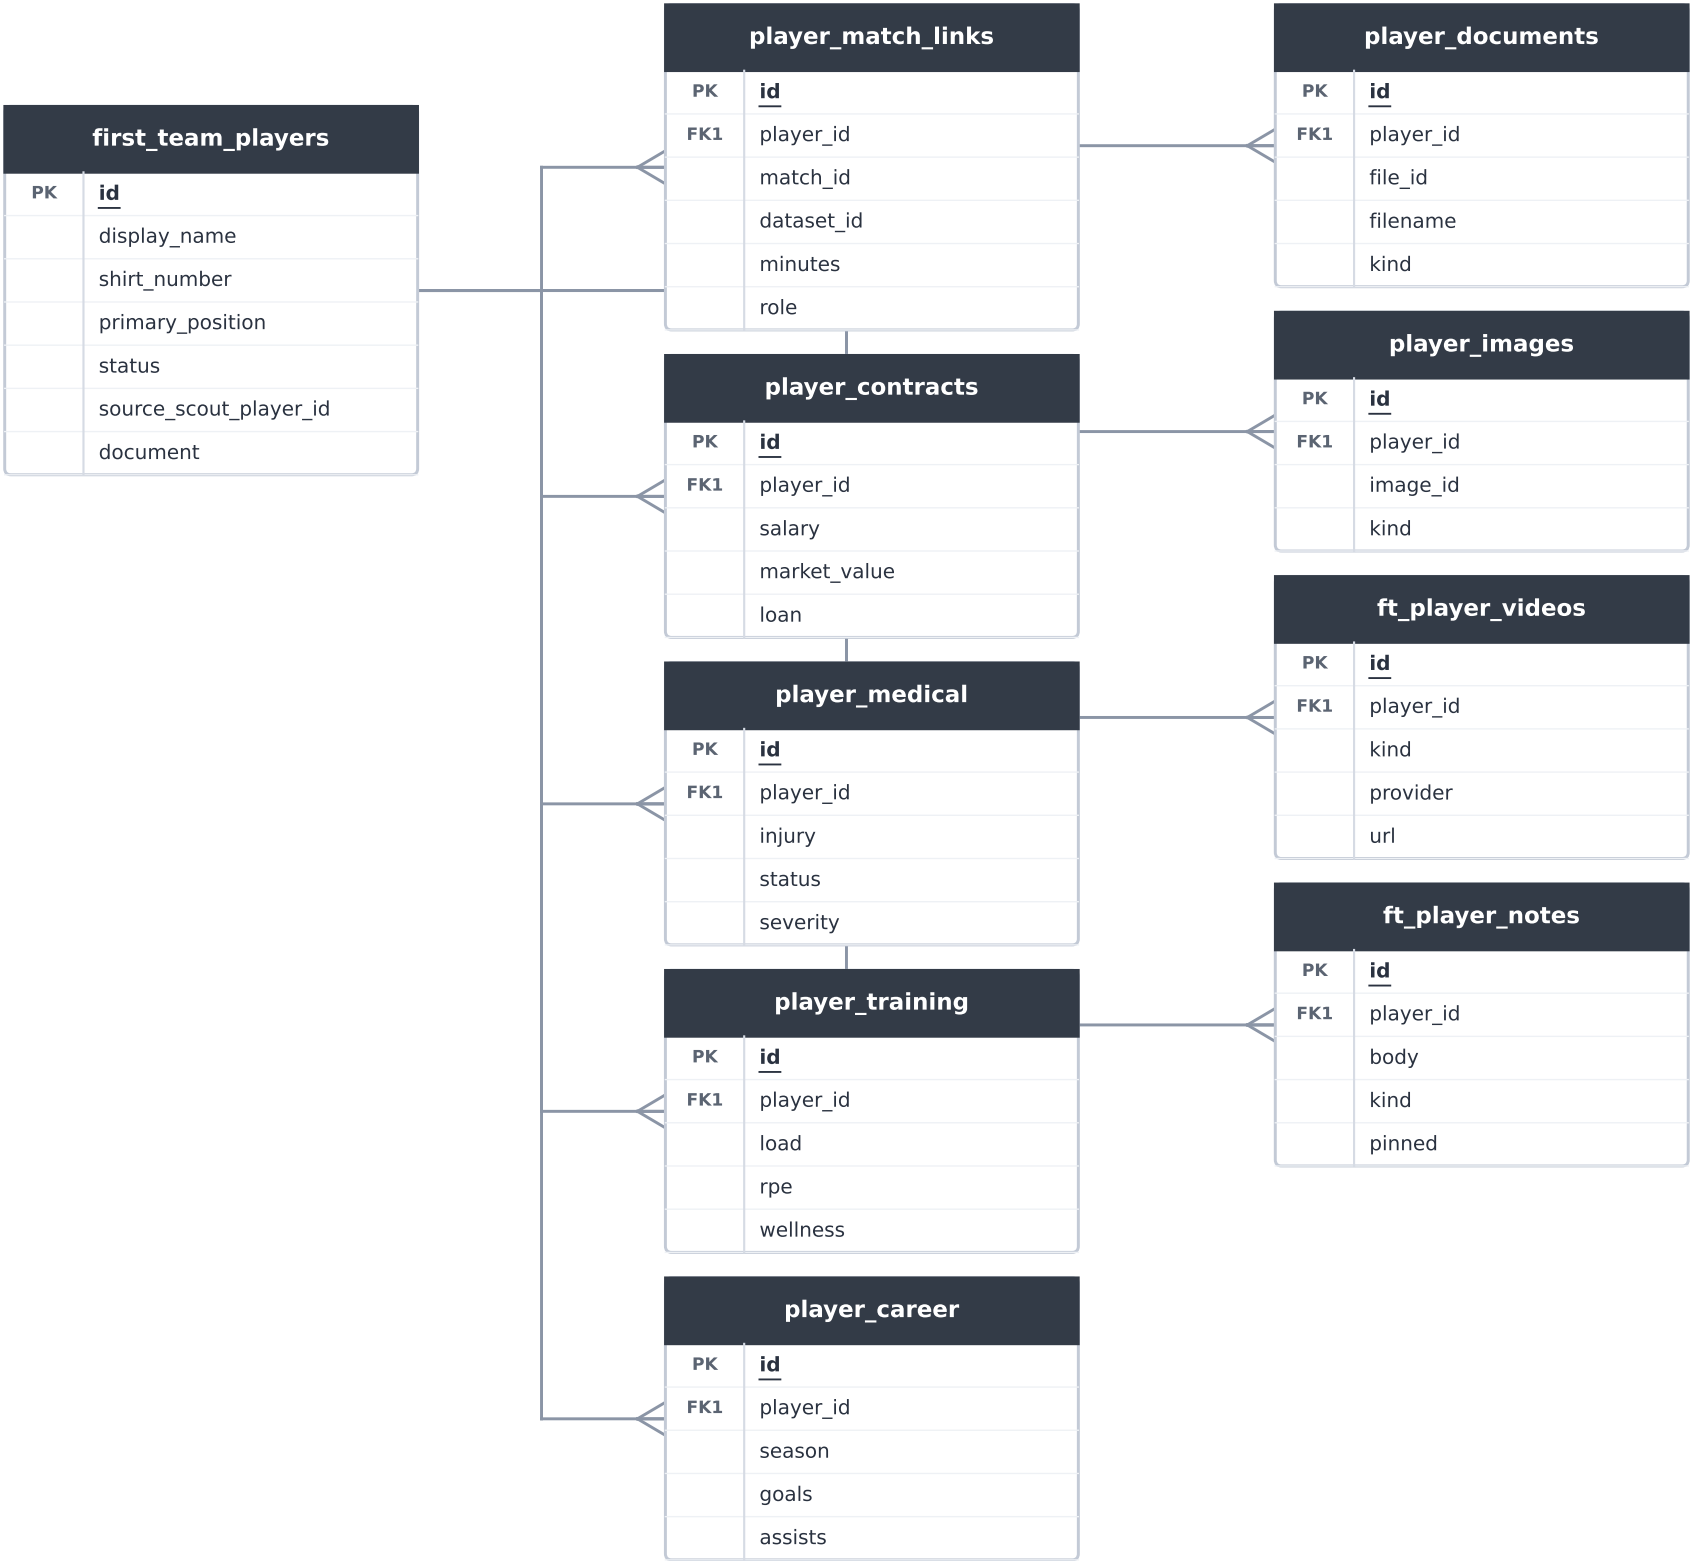

8 - Teams

first-class squads (club & academy) that group players + fixtures + media

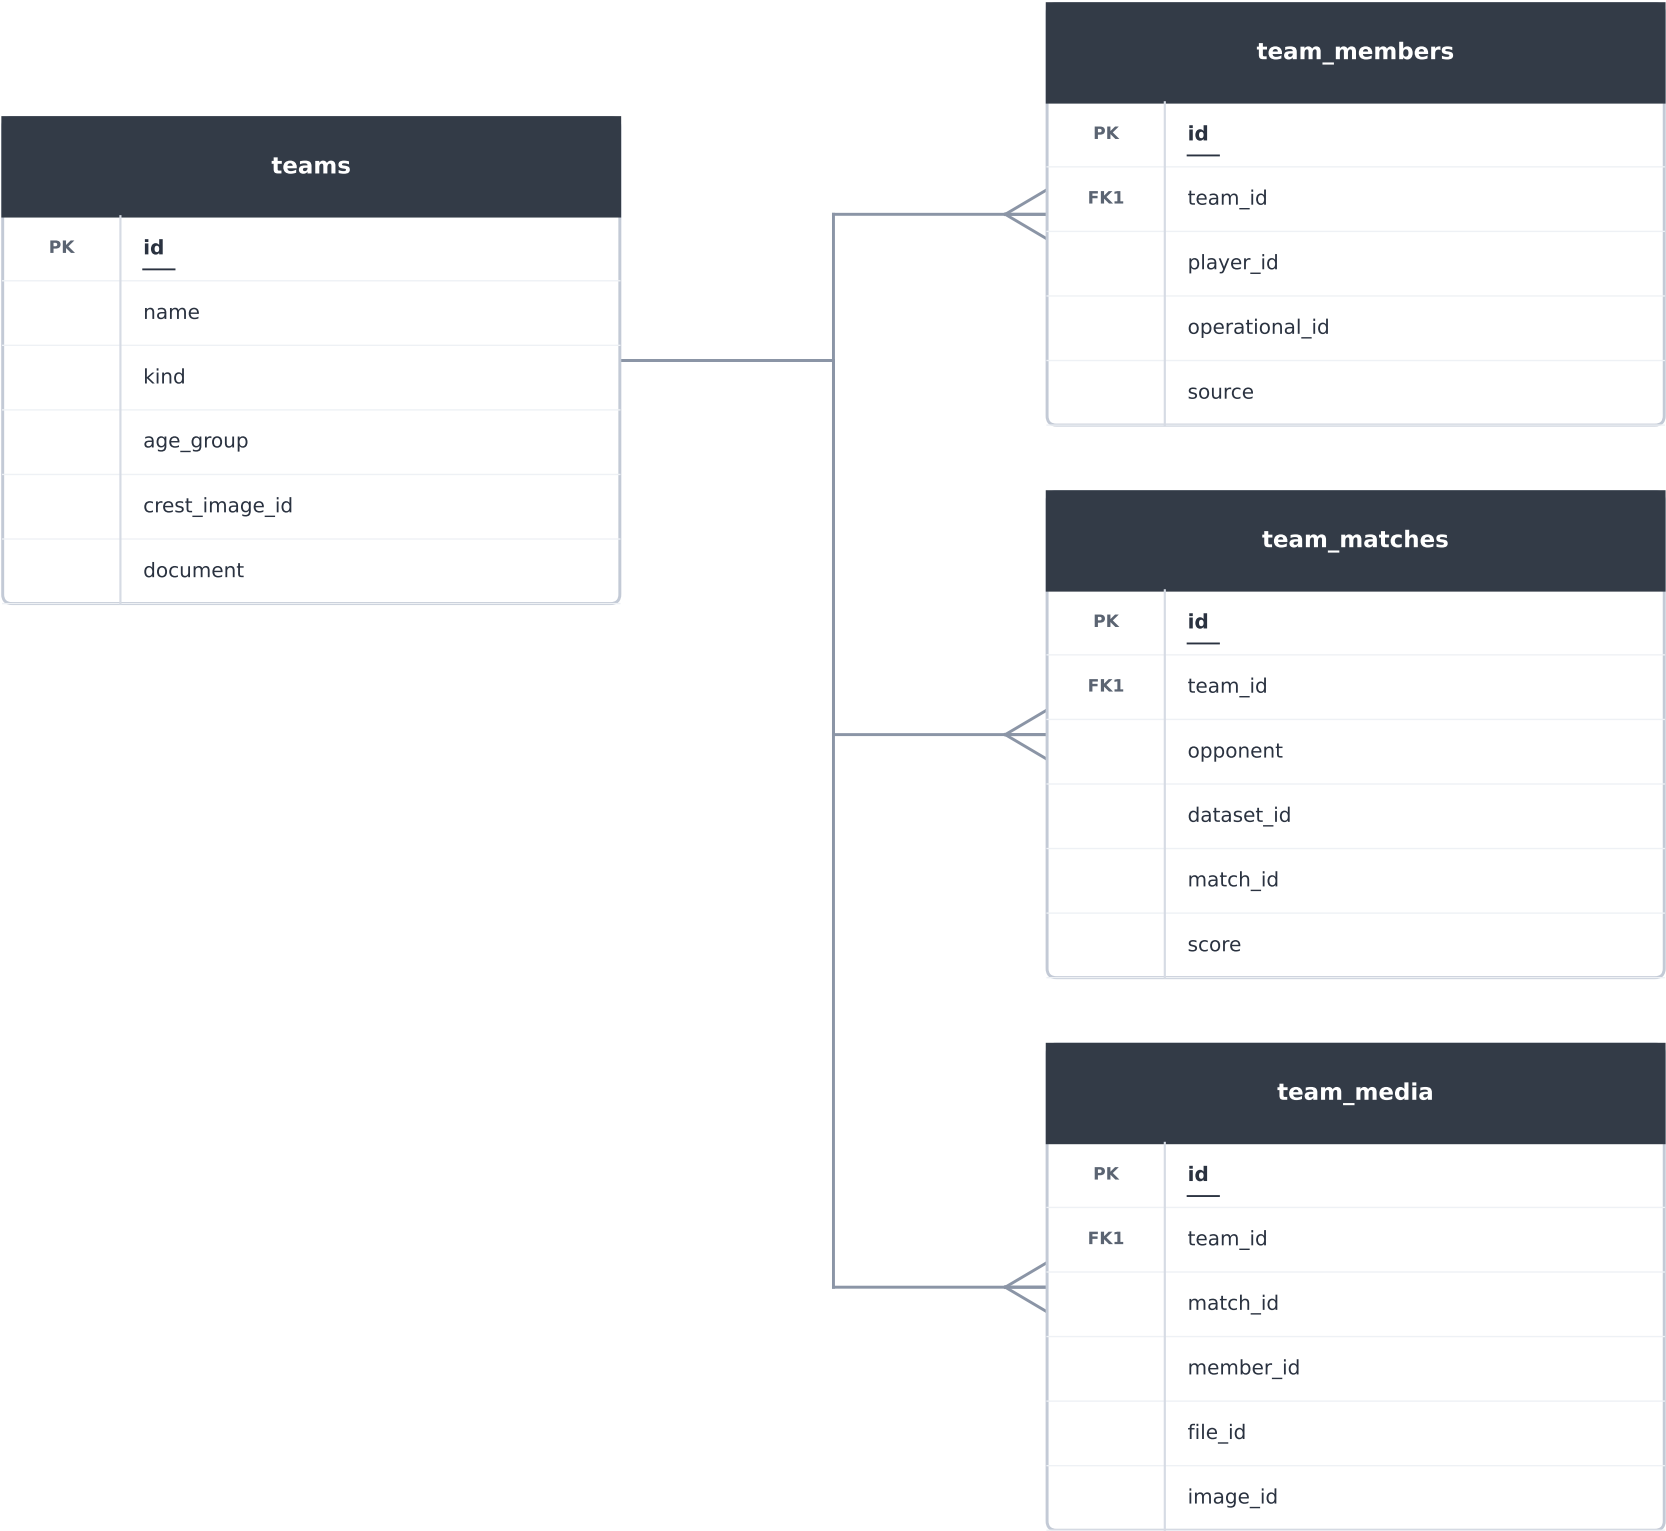

9 - Cross-module links (soft references)

Not enforced foreign keys - id strings resolved in code, so they survive an active-dataset switch.

FROM	CARRIED BY	TO	WHY SOFT
scouting_reports	report_id	-> reports	reuses the versioned report engine
first_team_players	source_scout_player_id	-> players	promotion never mutates the scouting record
team_members	player_id + source	-> players / first_team_players	one roster row, two possible origins
set_pieces	taker_id	-> players	taker may be an unscouted opponent
player_match_links / team_matches	dataset_id + match_id	-> datasets	stats stay in the dataset
player_videos	dataset_id, match_id	-> datasets	evidence pinned for click-to-see
teams	document.datasets[]	-> datasets	opposition data linked active-independently
media & images everywhere	image_id / file_id	-> ImageStorage / FileStorage	binary bytes live outside the DB
platform_users / grants	role_slug / scope_id	-> role_definitions / org_nodes	grants inherit down the org tree