

# Las Vegas Board Game

Jose Luis Mazariegos Ballesteros and Moises Moscoso Valenzuela

**Abstract** In this project we create an intelligent system to determine what is the best heuristic to win at Las Vegas Board Game.

## 1 Introduction

We want to program an intelligent system able to play the game with different heuristics. With the information of the winners we will determine what is the best strategy in order to win at Las Vegas Board Game.

The system should consider all the rules of the game and the different heuristics that we program.

### *1.1 Rules of the game*

The game consists in 5 players trying to collect as much money as possible from the casinos.

Set for each round:

- The banknotes are placed in each casino until they have at least 50,000.
- Each player will have 8 dices of one color.

---

Jose Luis Mazariegos Ballesteros  
Instituto Tecnológico y de Estudios Superiores de Monterrey, Guadalajara, Mexico, e-mail: estapepe@gmail.com

Moises Moscoso Valenzuela  
Instituto Tecnológico y de Estudios Superiores de Monterrey, Guadalajara, Mexico, e-mail: moncho\_894@hotmail.com

In your turn roll all your dices and select a set of dice with a single number. Put that set in the corresponding casino. When you run out of dice, pass your turn.

On each casino the player with the most dice receives the highest banknote. In case there are more banknotes, the second place receives the next high banknote and so on.

The game continues for 4 rounds and the winner is the player with the most money. In case of a tie, the winner is the player with the most banknotes.

## 2 Hypothesis

We believe that executing a fair amount of simulations of a game match will give us enough data. The data will determine if there is an statistically significant bias in the amount of times each match is win by a player using a particular heuristic. This will tell us if the use of that particular heuristic is translated in a better chance to win.

## 3 Methodology

We modeled each component of the game as an object, using the Python programming language. Included in this objects there's a configurable Player. Each player is configured once at the beginning of the match, and remains with the same configuration until the match ends and the game evaluates the outcome to determine a winner.

In our experiments, the game and players remain in the same configuration during each replica of the experiment. Each replica of the experiment consists of one match, each experiment consists of a given number of replicas, the result of each match consist of the evaluation of the last state at which the game is at the moment that all of the players run out of dice. The discrete unit which changes the state of the game is the turn, at each turn only one player changes the state of the game, a round consists of exactly one turn for each player taken in the same order in every round, a match consists of as many rounds as needed for the all the players to be left with no dice. If a player has run out of dice when its turn comes, the state of the game after its turn will be the same as before its turn. The result of the experiment is a set of tuples, one for each replica. Each tuple contains data taken from the evaluation the game executes at the end of every match and is composed as follows:

$$y = \{x_1, x_2, \dots, x_n\} \quad (1)$$

Where  $x_i$  is the amount of game money the player  $i$  is assigned in the final evaluation. For the purpose of analyzing the data, these values were normalized as follows:

$$y' = \frac{y}{|y|} \quad (2)$$

In our experiments there are 5 players with each using a different heuristic.

We determined that, once every other element of the game is set and initialized, the fundamental operation that determines the outcome of a match is the player's decision at each turn to relinquish one subset of dice from the set of all the dice it possesses, this set is partitioned in subsets that have dice with the same top face for the current turn (the player rolls the dice once each turn). Hence our heuristics are nothing but a way for the player to choose which subset of dice to relinquish each turn.

### 3.1 Heuristics

- Alpha    This heuristic will choose the set of dices with the highest amount of dices.
- Bravo    This one will choose the casino with the highest banknote in order to get at least one high prize.
- Charlie    It will choose the casino with the most banknotes, so it will make sure to receive something.
- Delta    It will try to outnumber an opponent in a casino
- Echo    It will try to match an opponent so that neither of them will win the prize.

## 4 Results

We analyzed the results of 1000 replicas of the mentioned experiment (1 match with 5 players, each using a different heuristic). By looking at figure 1, we can observe certain characteristics of the behavior of each heuristic.

Overall, none of the heuristics achieved a mean above 0.5, that alone means that none of those would give one a particular advantage over a random play if the game was simplified to coin toss. On the contrary, the chances of winning using these heuristics alone would overall give the player less than a 50% chance of winning.

However, comparatively, some performed better than others. Particularly Alpha, has an advantage over Charlie and Delta, which performed poorly, as its worst case performance is comparable to Charlie and Delta's mean performance.

We can also observe that Bravo has the highest mean but an slightly higher standard deviation compared to Alpha, which puts both heuristics apart from the rest, but not one of them necessarily superior to the other.

Echo has a surprisingly higher performance than expected because it tries not to surpass its opponents but to match them which makes us believe that its slightly superior behavior compared to Delta and Charlie is due to the fact that the opportunity to match an opponent does not come often and it ends up playing randomly instead.

Lastly we can observe that Delta turns out to be a safe strategy to play because its results do not vary too much and tends to almost secure at least one small prize.

## 5 Conclusion

With 1000 replicas of the experiment, we couldn't determine with precision which of the heuristics was the best one since all of them won almost the same amount of time. Bravo had a slightly an advantage over the others, but is so small that we think that with more replicas, another one could had won.

## References

References may be *cited* in the text either by number (preferred) or by author/year.<sup>1</sup> The reference list should ideally be *sorted* in alphabetical order – even if reference numbers are used for the their citation in the text. If there are several works by the same author, the following order should be used:

1. all works by the author alone, ordered chronologically by year of publication
2. all works by the author with a coauthor, ordered alphabetically by coauthor
3. all works by the author with several coauthors, ordered chronologically by year of publication.

The *styling* of references<sup>2</sup> depends on the subject of your book:

- The *two* recommended styles for references in books on *mathematical, physical, statistical and computer sciences* are depicted in [1, 2, 3, 4, 5] and [6, 7, 8, 9, 10].
- Examples of the most commonly used reference style in books on *Psychology, Social Sciences* are [11, 12, 13, 14, 15].
- Examples for references in books on *Humanities, Linguistics, Philosophy* are [16, 17, 18, 19, 20].
- Examples of the basic Springer style used in publications on a wide range of subjects such as *Computer Science, Economics, Engineering, Geosciences, Life Sciences, Medicine, Biomedicine* are [21, 22, 24, 23, 25].

1. Broy, M.: Software engineering — from auxiliary to key technologies. In: Broy, M., Dener, E. (eds.) *Software Pioneers*, pp. 10-13. Springer, Heidelberg (2002)
2. Dod, J.: Effective substances. In: *The Dictionary of Substances and Their Effects*. Royal Society of Chemistry (1999) Available via DIALOG.  
<http://www.rsc.org/dose/title> of subordinate document. Cited 15 Jan 1999

<sup>1</sup> Make sure that all references from the list are cited in the text. Those not cited should be moved to a separate *Further Reading* section or chapter.


<sup>2</sup> Always use the standard abbreviation of a journal's name according to the ISSN *List of Title Word Abbreviations*, see <http://www.issn.org/en/node/344>

3. Geddes, K.O., Czapor, S.R., Labahn, G.: Algorithms for Computer Algebra. Kluwer, Boston (1992)
4. Hamburger, C.: Quasimonotonicity, regularity and duality for nonlinear systems of partial differential equations. *Ann. Mat. Pura. Appl.* **169**, 321–354 (1995)
5. Slifka, M.K., Whitton, J.L.: Clinical implications of dysregulated cytokine production. *J. Mol. Med.* (2000) doi: 10.1007/s001090000086
6. J. Dod, in *The Dictionary of Substances and Their Effects*, Royal Society of Chemistry. (Available via DIALOG, 1999), [http://www.rsc.org/dose/title of subordinate document](http://www.rsc.org/dose/title%20of%20subordinate%20document). Cited 15 Jan 1999
7. H. Ibach, H. Lüth, *Solid-State Physics*, 2nd edn. (Springer, New York, 1996), pp. 45-56
8. S. Preuss, A. Demchuk Jr., M. Stuke, *Appl. Phys. A* **61**
9. M.K. Slifka, J.L. Whitton, *J. Mol. Med.*, doi: 10.1007/s001090000086
10. S.E. Smith, in *Neuromuscular Junction*, ed. by E. Zaimis. Handbook of Experimental Pharmacology, vol 42 (Springer, Heidelberg, 1976), p. 593
11. Calfee, R. C., & Valencia, R. R. (1991). *APA guide to preparing manuscripts for journal publication*. Washington, DC: American Psychological Association.
12. Dod, J. (1999). Effective substances. In: The dictionary of substances and their effects. Royal Society of Chemistry. Available via DIALOG. [http://www.rsc.org/dose/Effective substances](http://www.rsc.org/dose/Effective%20substances). Cited 15 Jan 1999.
13. Harris, M., Karper, E., Stacks, G., Hoffman, D., DeNiro, R., Cruz, P., et al. (2001). Writing labs and the Hollywood connection. *J Film Writing*, 44(3), 213–245.
14. O’Neil, J. M., & Egan, J. (1992). Men’s and women’s gender role journeys: Metaphor for healing, transition, and transformation. In B. R. Wainrig (Ed.), *Gender issues across the life cycle* (pp. 107–123). New York: Springer.
15. Kreger, M., Brindis, C.D., Manuel, D.M., Sassoubre, L. (2007). Lessons learned in systems change initiatives: benchmarks and indicators. *American Journal of Community Psychology*, doi: 10.1007/s10464-007-9108-14.
16. Alber John, Daniel C. O’Connell, and Sabine Kowal. 2002. Personal perspective in TV interviews. *Pragmatics* 12:257–271
17. Cameron, Deborah. 1997. Theoretical debates in feminist linguistics: Questions of sex and gender. In *Gender and discourse*, ed. Ruth Wodak, 99–119. London: Sage Publications.
18. Cameron, Deborah. 1985. *Feminism and linguistic theory*. New York: St. Martin’s Press.
19. Dod, Jake. 1999. Effective substances. In: The dictionary of substances and their effects. Royal Society of Chemistry. Available via DIALOG. [http://www.rsc.org/dose/title of subordinate document](http://www.rsc.org/dose/title%20of%20subordinate%20document). Cited 15 Jan 1999
20. Suleiman, Camelia, Daniel C. OConnell, and Sabine Kowal. 2002. ‘If you and I, if we, in this later day, lose that sacred fire...’: Perspective in political interviews. *Journal of Psycholinguistic Research*. doi: 10.1023/A:1015592129296.
21. Brown B, Aaron M (2001) The politics of nature. In: Smith J (ed) The rise of modern genomics, 3rd edn. Wiley, New York
22. Dod J (1999) Effective Substances. In: The dictionary of substances and their effects. Royal Society of Chemistry. Available via DIALOG. [http://www.rsc.org/dose/title of subordinate document](http://www.rsc.org/dose/title%20of%20subordinate%20document). Cited 15 Jan 1999
23. Slifka MK, Whitton JL (2000) Clinical implications of dysregulated cytokine production. *J Mol Med*, doi: 10.1007/s001090000086
24. Smith J, Jones M Jr, Houghton L et al (1999) Future of health insurance. *N Engl J Med* 341:325–329
25. South J, Blass B (2001) The future of modern genomics. Blackwell, London

	alpha	bravo	charlie	delta	echo
mean	0.47684	0.48430	0.30820	0.30456	0.36812
s.d.	0.20826	0.22116	0.20073	0.16914	0.23205
min.	0	0	0	0.029161	0
median	0.47680	0.50278	0.28807	0.36864	0.35799
max.	0.93646	0.98590	0.91273	0.80498	0.91733
total	476.84	484.30	308.20	304.56	368.12
count	1000	1000	1000	1000	1000

Computed by Wolfram|Alpha

**Fig. 1** Statistics: We can observe the characteristics of the 5 heuristics, none of them achieve a mean above 0.5

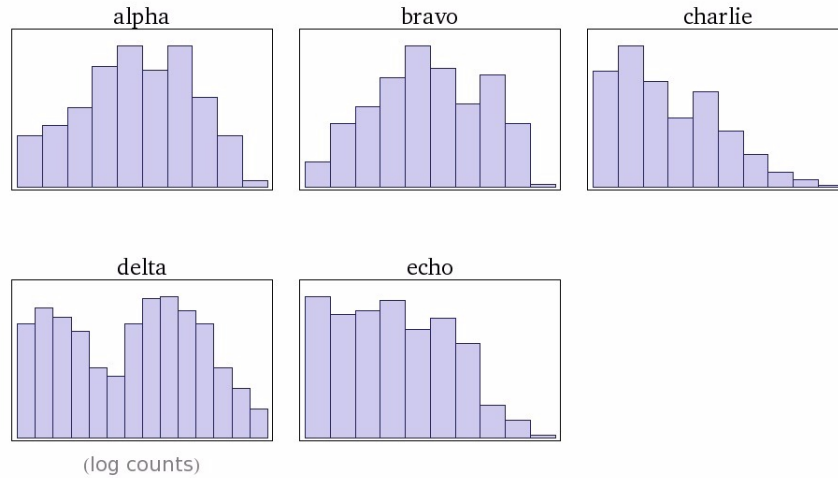

Computed by Wolfram|Alpha

**Fig. 2** Histogram: We can observe the variation that each heuristic had over the replicas of the experiment.