Configuração para o XAMPP

MySQL

Edite o arquivo C:\xampp\mysql\bin\my.ini (altere os valores para no mínimo como na imagem, depois salve e feche o arquivo) (reinicie o computador)

```
C:\xampp\mysql\bin\my.ini - Notepad++
 Arquivo Editar Localizar Visualizar Formatar Linguagem Configurações Ferramentas Macro Executar Plugins Janela ?
  [3 dd | 1 mm | 
 🔚 my.ini 🔣
     13
                   # In this file, you can use all long options that a program supports.
     14
                    # If you want to know which options a program supports, run the program
                     # with the "--help" option.
     15
     16
     17
                     # The following options will be passed to all MySQL clients
     18 [client]
     19
                      # password
                                                                     = your password
     20
                   port=3306
                      socket="C:/xampp/mysql/mysql.sock"
     21
     22
     23
     24
                      # Here follows entries for some specific programs
     25
     26
                      # The MySQL server
                   _default-character-set=utf8mb4
     27
     28
                [mysqld]
                      port=3306
                       socket="C:/xampp/mysql/mysql.sock"
     30
                     basedir="C:/xampp/mysql"
     31
                     tmpdir="C:/xampp/tmp"
     32
     33
                       datadir="C:/xampp/mysql/data"
                       pid file="mysql.pid"
     34
     35
     36
     37
                       max allowed packet=100M
     38
                       sort buffer size=2048K
     39
                       net buffer length=100K
     40
                       read buffer size=1024K
     41
                       read rnd buffer size=2048K
     42
                       myisam sort buffer size=100M
                       wait timeout = 28800
     43
     44
     45
     46
                       log_error="mysql_error.log"
     47
```

PHP

430


...........

Edite o arquivo C:\xampp\php\php.ini (altere os valores como na imagem, salve e feche o arquivo) (reinicie o computador)


```
C:\xampp\php\php.ini - Notepad++
Arquivo Editar Localizar Visualizar Formatar Linguagem Configurações Ferramentas Macro Executar Plugir
php.ini
397
       ; https://php.net/expose-php
398
       expose php=On
399
400
       ;;;;;;;;;;;;;;;;;;;;;;
401
       ; Resource Limits ;
402
       403
404
       ; Maximum execution time of each script, in seconds
405
       ; https://php.net/max-execution-time
406
       ; Note: This directive is hardcoded to 0 for the CLI SAPI
407
       max execution time=0
408
409
                   ount of time each script may spend parsing request data. It's a good
410
       ; idea to limit this time on productions servers in order to eliminate unexpectedly
411
       ; long running scripts.
412
       ; Note: This directive is hardcoded to -1 for the CLI SAPI
413
       ; Default Value: -1 (Unlimited)
414
       ; Development Value: 60 (60 seconds)
415
       ; Production Value: 60 (60 seconds)
416
       ; https://php.net/max-input-time
417
       max input time=60
418
419
       ; Maximum input variable nesting level
420
       ; https://php.net/max-input-nesting-level
421
       ;max_input_nesting_level = 64
422
423
       ; How many GET/POST/COOKIE input variables may be accepted
424
       ;max input vars = 1000
425
426
       ; Maximum amount of memory a script may consume
427
       ; https://php.net/memory-limit
       memory limit=-1
428
429
```

Configuração para o Wampserver

MySQL Usando o Menu do Wampserver procure e abra o arquivo "my.ini" conforme a imagem

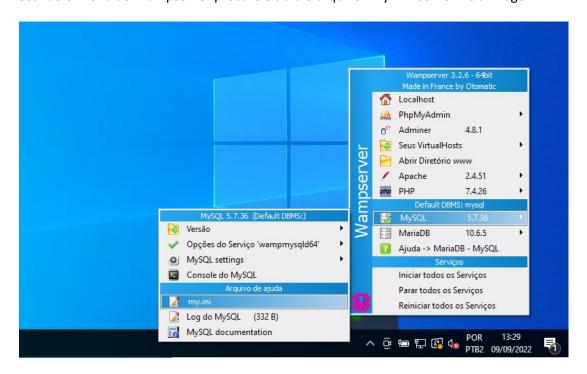


Altere as duas linhas indicadas na imagem, salve e feche o arquivo, depois reinicie o computador

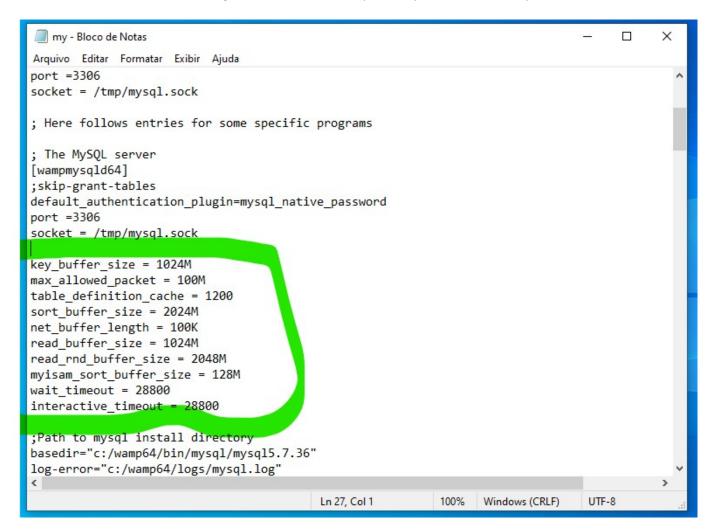

PHP

Usando o Menu do Wampserver procure e abra o arquivo "php.ini" conforme a imagem

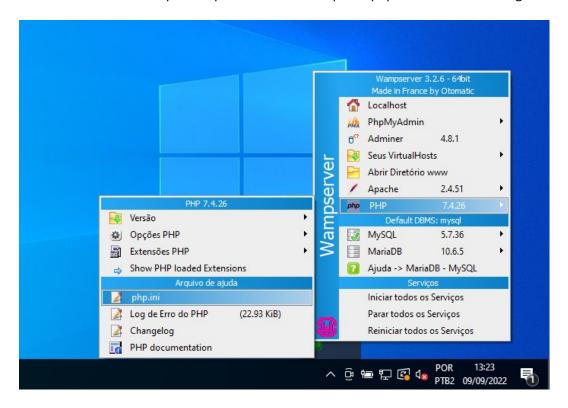

Altere as duas linhas indicadas na imagem, salve e feche o arquivo, depois reinicie o computador

```
*php - Bloco de Notas
                                                                                      Arquivo Editar Formatar Exibir Ajuda
; http://php.net/max-execution-time
; Note: This directive is hardcoded to 0 for the CLI SAPI
max execution time = 0
; Maximum amount of time each script may spend parsing request data. It's a good
; idea to limit this time on productions servers in order to eliminate unexpectedly
; long running scripts.
; Note: This directive is hardcoded to -1 for the CLI SAPI
; Default Value: -1 (Unlimited)
; Development Value: 60 (60 seconds)
; Production Value: 60 (60 seconds)
; http://php.net/max-input-time
max_input_time = 60
; Maximum input variable nesting level
; http://php.net/max-input-nesting-level
;max_input_nesting_level = 64
; How many GET/POST/COOKIE input variables may be accepted
max_input_vars = 2500
; Maximum amount of memory a script may consume
; http://php.net/memory-limit
memory_limit = -1
```