

# Visualization Literacy Analysis

Derek Harter, Shulan Lu

10/19/2025

## Read in data files

```
#grab files from google drive (only have to do this once)
# source("getFromGoogleDrive.R")

#get the first 6? characters of each data file
#get unique values of these
# this is list of subject ids

raw_file_names <- list.files("../AccData")
first_six <- substr(raw_file_names, 1, 6)
sub_ids <- unique(first_six)

# fast_RT = data.frame(ParticipantId = character(),
#                       TrialName = character(),
#                       type = character(),
#                       time = numeric()
# )

all_data <- NULL

for (i in 1:length(sub_ids)){

  if (grepl("~$", sub_ids[i], fixed = T)){
    next
  }

  temp_file1 <- read_xlsx(paste0("../AccData/", sub_ids[i], "_1.xlsx")) %>%
    slice(1:17) %>%
    select(-starts_with("Order")) %>%
    rename(correct = 8)

  temp_file2 <- read_xlsx(paste0("../AccData/", sub_ids[i], "_2.xlsx")) %>%
    slice(1:17) %>%
    select(-starts_with("Order")) %>%
    rename(correct = 8)

  new_temp <- temp_file1 %>%
    bind_cols(temp_file2$correct) %>%
    rename(Correct_1 = correct, Correct_2 = "...9") %>%
    mutate(AnswerRT = TimeToBeginInput - TimeToReadQuestion)
```

```

all_data <- all_data %>%
  bind_rows(new_temp)
}

all_data <- all_data %>%
  rename(readRT = TimeToReadQuestion, totalRT = TimeToBeginInput)

#read in trialtype key (I created this from an early version of the previous paper)
trial_type_key <- read.csv("../trial_type_key.csv", stringsAsFactors = F)

all_data <- all_data %>%
  mutate(TrialType = trial_type_key$TrialType[match(TrialName, trial_type_key$TrialName)]) %>%
  mutate(TrialType = paste0("Type", TrialType))

```

## Basic checks

```

#how many participants per condition
all_data %>%
  group_by(ParticipantId, Condition) %>%
  summarize(ntrials = n()) %>%
  group_by(Condition) %>%
  summarize(nsubs = n()) %>%
  kable()

```

## `summarise()` has grouped output by 'ParticipantId'. You can override using the `.groups` argument.

| Condition         | nsubs |
|-------------------|-------|
| VR                | 50    |
| VR Monitor        | 39    |
| VR Monitor Stereo | 33    |

*#why is the balance so off?*

## Remove outliers based on RT

```

#removing on trial-by-trial basis

#remove answerRTs below 2000ms first
all_data_remove <- all_data %>%
  filter(AnswerRT >= 2000)
dim(all_data)[1]

```

```
## [1] 2074
```

```
dim(all_data_remove)[1]
```

```
## [1] 2067
```

```
#drops 7 trials
```

```
rt_data_summary <- all_data %>%  
  group_by(TrialName) %>%  
  summarize(meanAnswerRT = mean(AnswerRT, na.rm = T),  
            sdAnswerRT = sd(AnswerRT, na.rm = T),  
            UB = meanAnswerRT + 3*sdAnswerRT,  
            LB = meanAnswerRT - 3*sdAnswerRT)  
rt_data_summary
```

```
## # A tibble: 17 x 5  
##   TrialName      meanAnswerRT sdAnswerRT      UB      LB  
##   <chr>          <dbl>      <dbl>    <dbl>    <dbl>  
## 1 BarChartQ1      27611.    14762.   71897. -16675.  
## 2 BarChartQ2      16921.    13338.   56935. -23093.  
## 3 BarChartQ3      15609.     9948.  45452. -14235.  
## 4 BarChartQ4      10288.     8978.  37222. -16646.  
## 5 LineChartQ1      49185.   29505. 137699. -39329.  
## 6 LineChartQ2      40127.   31660. 135107. -54854.  
## 7 LineChartQ3      27190.   17504.  79701. -25322.  
## 8 LineChartQ4      14779.   16568.  64483. -34925.  
## 9 LineChartQ5      27877.   17250.  79628. -23874.  
## 10 ScatterplotQ1    32801.   24294. 105682. -40080.  
## 11 ScatterplotQ2    29636.   23980. 101576. -42304.  
## 12 ScatterplotQ3    45580.   33014. 144623. -53463.  
## 13 ScatterplotQ4    35987.   25402. 112194. -40219.  
## 14 ScatterplotQ5    59805.   42684. 187859. -68248.  
## 15 SurfacePlotQ1    56608.   36042. 164733. -51516.  
## 16 SurfacePlotQ2    65110.   50062. 215297. -85076.  
## 17 SurfacePlotQ3    48373.   37424. 160646. -63900.
```


```
all_data_no_outliers <- all_data_remove %>%  
  group_by(TrialName) %>%  
  filter(!(abs(AnswerRT - mean(AnswerRT)) > 3.0*sd(AnswerRT)))  
dim(all_data_no_outliers)[1]
```

```
## [1] 2020
```

```
#drops 47 more trials
```

```
all_data_no_outliers %>%  
  group_by(ParticipantId) %>%  
  summarize(ntrials = n()) %>%  
  with(hist(ntrials, breaks = 0:17))
```

## Histogram of ntrials

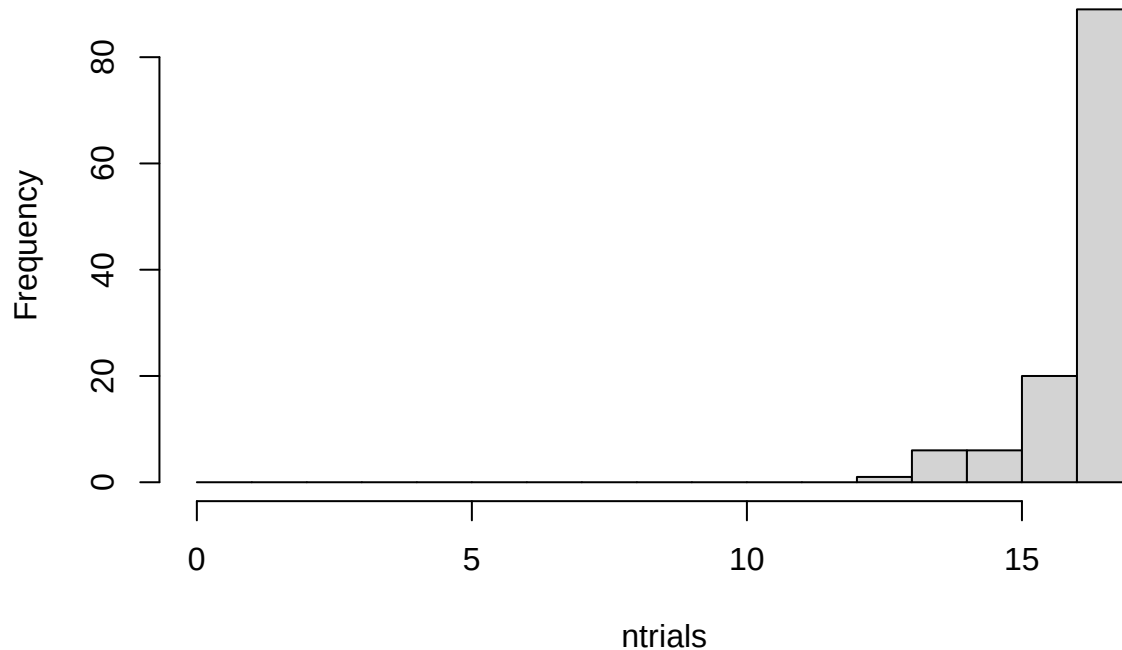

*##maybe consider replacing outliers with means instead of removing them?*


## Extract Only One Type of Chart

Create a dataframe from the data with no outliers that contains only XChartQ1 through XChartQ4 trials for the following analysis.

```
all_data_no_outliers <- all_data_no_outliers %>%  
  filter(grepl("BarChartQ[0-9]", TrialName))
```

```
all_data_no_outliers %>%  
  group_by(ParticipantId) %>%  
  summarize(ntrials = n()) %>%  
  with(hist(ntrials, breaks = 0:4))
```

## Histogram of ntrials

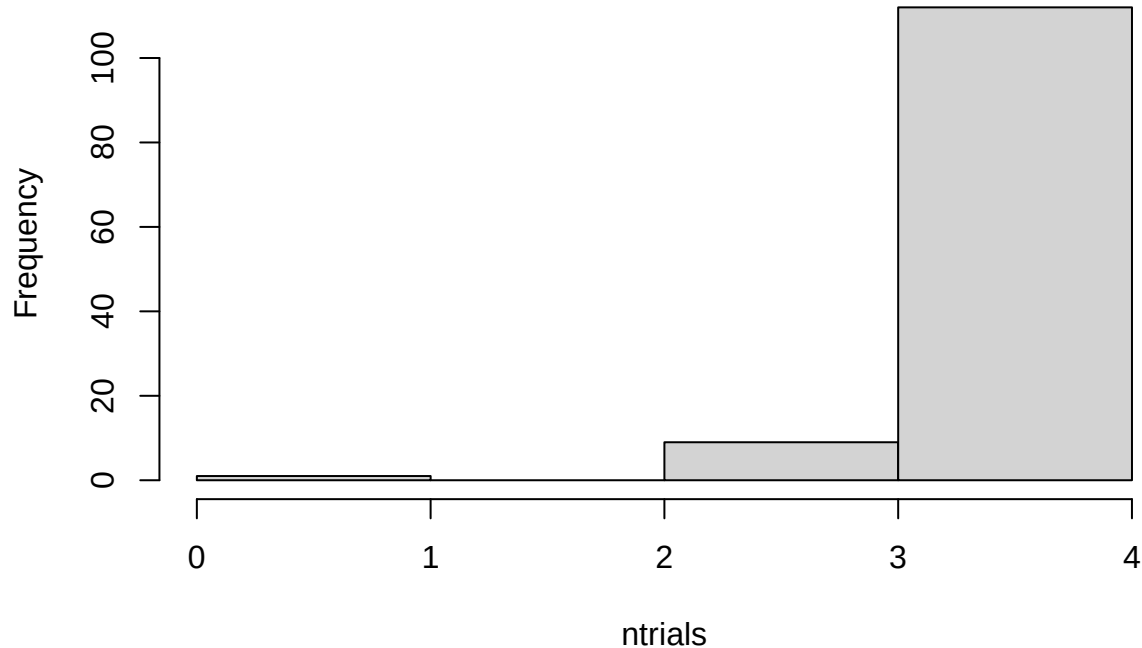

Compare RTs for conditions and question type (three types: identify, relate, predict)

```
#compare read times (should be no differences of condition)
#compare answer times (potentially a difference)
```

```
trial_type_means <- all_data_no_outliers %>%
  group_by(ParticipantId, Condition, TrialType) %>%
  summarize(mean_readRT = mean(readRT),
            mean_answerRT = mean(AnswerRT),
            n = n())
```

```
## `summarise()` has grouped output by 'ParticipantId', 'Condition'. You can override using
## the `.groups` argument.
```

```
# first, make .csv files in wide format to double check in statview
```

```
read_rt_type_wider <- trial_type_means %>%
  select(ParticipantId, Condition, TrialType, mean_readRT) %>%
  pivot_wider(names_from = TrialType, values_from = mean_readRT)
```

```
# fill in na values with mean for type1, type2 and type3 RT
```

```
# the following is supposed to work, but we get NaN from calculation of mean here, not sure why...
```

```
#read_rt_type_wider_clean <- read_rt_type_wider %>% mutate(across(Type1, ~replace_na(., mean(., na.rm=T))
```

```
read_rt_type_wider_clean <- read_rt_type_wider %>% replace_na(list(Type1 = mean(read_rt_type_wider$Type1, na.rm=T))
```

```
read_rt_type_wider_clean <- read_rt_type_wider_clean %>% replace_na(list(Type2 = mean(read_rt_type_wider$Type2, na.rm=T))
```

```

read_rt_type_wider_clean <- read_rt_type_wider_clean %>% replace_na(list(Type3 = mean(read_rt_type_wider_clean$Type3)))

answer_rt_type_wider <- trial_type_means %>%
  select(ParticipantId, Condition, TrialType, mean_answerRT) %>%
  pivot_wider(names_from = TrialType, values_from = mean_answerRT)
write.csv(read_rt_type_wider, file = "readtypeRTs.csv", row.names = F)
write.csv(answer_rt_type_wider, file = "answertypeRTs.csv", row.names = F)

# fill in na values with mean for type1, type2 and type3 RT
answer_rt_type_wider_clean <- answer_rt_type_wider %>% replace_na(list(Type1 = mean(answer_rt_type_wider_clean$Type1),
  Type2 = mean(answer_rt_type_wider_clean$Type2),
  Type3 = mean(answer_rt_type_wider_clean$Type3)))

#### READ RTs ####


#make some plots

#just condition main effect
readplot1 <- all_data_no_outliers %>%
  group_by(ParticipantId, Condition) %>%
  summarize(overallmean = mean(readRT)) %>%
  group_by(Condition) %>%
  summarize(overall_condition_mean = mean(overallmean),
    se = std.error(overallmean),
    n = n(),
    CI = qt(0.975,df=n-1)*se)

## `summarise()` has grouped output by 'ParticipantId'. You can override using the `.groups`
## argument.


ggplot(readplot1, aes(Condition,
  overall_condition_mean,
  group = 1,
  ymin = overall_condition_mean - CI,
  ymax = overall_condition_mean + CI)) +
  theme_classic() +
  geom_point(size = 4) +
  geom_errorbar(width = .15, linewidth = 0.85) +
  geom_line(linewidth = 0.85) +
  labs(y = "Reading RTs (ms)", title = "Read RTs")

```

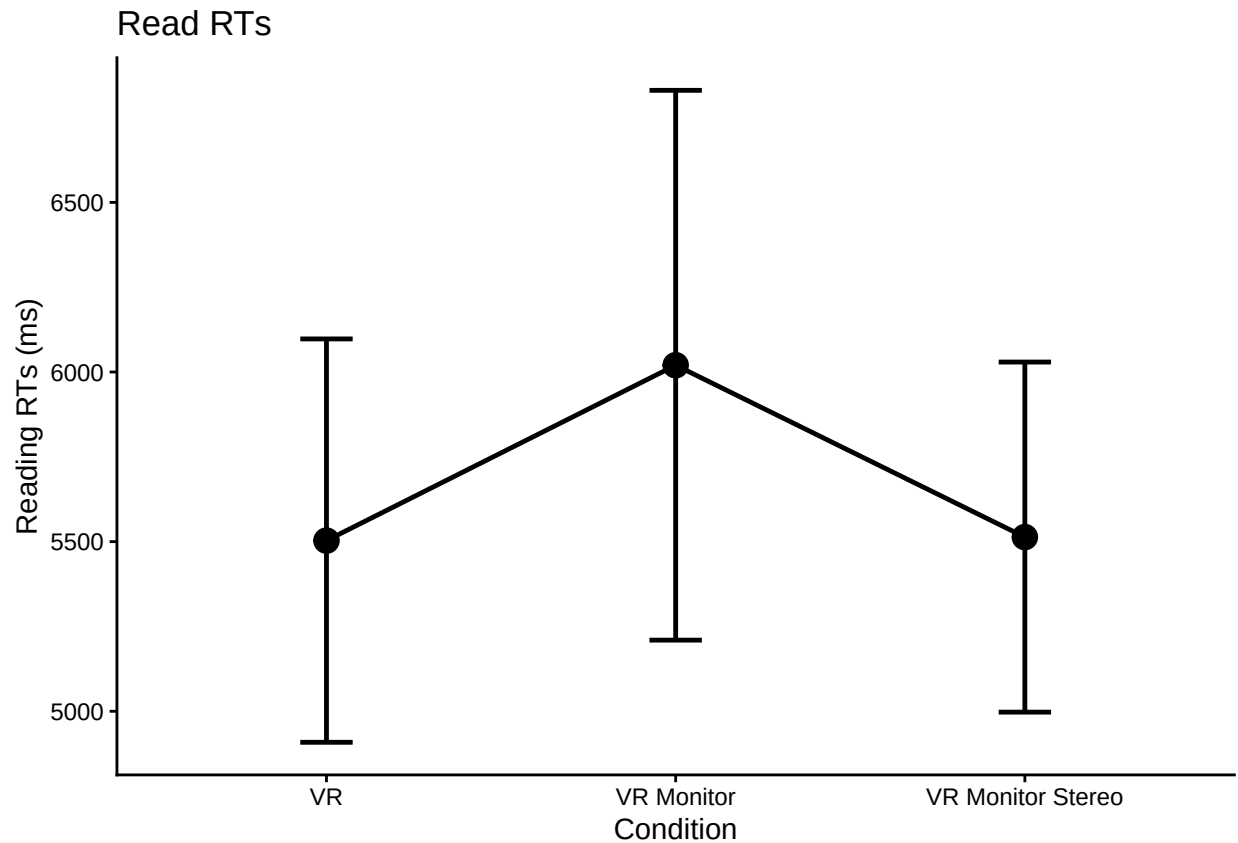

```
#make a little plot using wide format
superbPlot(read_rt_type_wider_clean,
  BSFactors = "Condition",
  WSFactors = "QuestionType(3)",
  variables = c("Type1", "Type2", "Type3"),
  statistic = "meanNArm",
  errorbar = "CI",
  gamma = 0.95,
  adjustments = list(
    purpose = "difference"
  ),
  plotLayout = "line",
  factorOrder = c("Condition", "QuestionType")
) +
theme_classic() +
  theme(axis.text.x = element_text(angle = 45, vjust = 1, hjust=1)) +
facet_wrap(vars(QuestionType)) +
labs(y = "Reading RTs (ms)", title = "Read RTs")
```

## superb::ADVICE: Some of the groups' variances are heterogeneous. Consider using purpose="tryon".

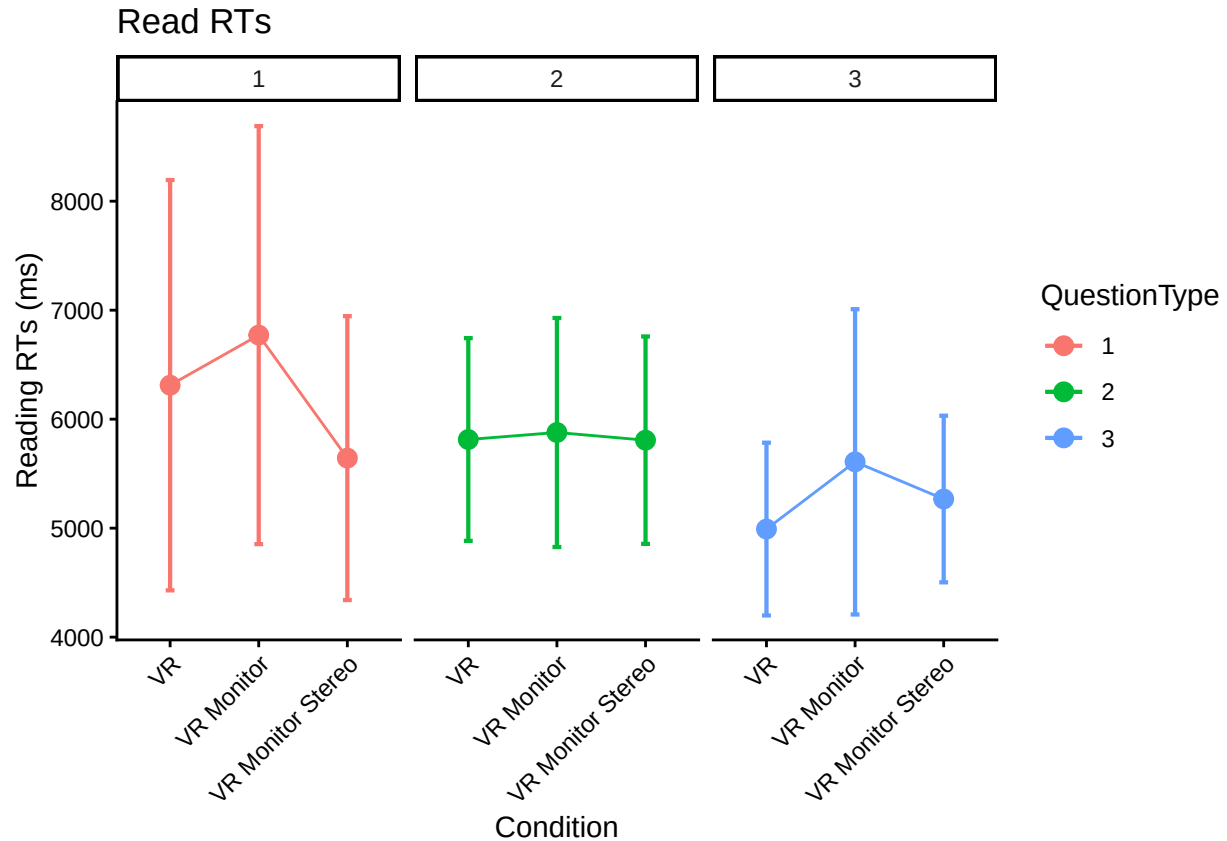

```
read_rt_type_anova <- aov_ez(id = "ParticipantId",
  dv = "mean_readRT",
  data = trial_type_means,
  within = "TrialType",
  between = "Condition",
  anova_table = list(es = "pes") #might want to double-check these
)
```

```
## Converting to factor: Condition
```

```
## Warning: Missing values for 4 ID(s), which were removed before analysis:
```

```
## AE2314, AE8118, A05595, UK0825
```

```
## Below the first few rows (in wide format) of the removed cases with missing data.
```

```
##      ParticipantId      Condition      Type1      Type2      Type3
## # 15      AE2314 VR Monitor Stereo 12935.647      NA 5702.350
## # 21      AE8118          VR          NA          NA 4155.710
## # 29      A05595          VR          NA 4143.728 4787.216
## # 115     UK0825          VR 6433.904          NA 6260.821
```

```
## Contrasts set to contr.sum for the following variables: Condition
```

```
kable(nice(read_rt_type_anova))
```

| Effect              | df           | MSE         | F      | pes  | p.value |
|---------------------|--------------|-------------|--------|------|---------|
| Condition           | 2, 115       | 14954765.78 | 0.65   | .011 | .523    |
| TrialType           | 1.59, 182.81 | 7507970.86  | 3.85 * | .032 | .032    |
| Condition:TrialType | 3.18, 182.81 | 7507970.86  | 0.91   | .016 | .440    |



```

#posthoc test for trial type
pairs(emmeans(read_rt_type_anova, "TrialType"), adjust = "Tukey")

## contrast      estimate SE df t.ratio p.value
## Type1 - Type2      321 335 115   0.961  0.6032
## Type1 - Type3      883 380 115   2.322  0.0568
## Type2 - Type3      561 233 115   2.405  0.0464
##
## Results are averaged over the levels of: Condition
## P value adjustment: tukey method for comparing a family of 3 estimates

#### ANSWER RTs ####


#make some plots

#just condition main effect
answerplot1 <- all_data_no_outliers %>%
  group_by(ParticipantId, Condition) %>%
  summarize(overallmean = mean(AnswerRT)) %>%
  group_by(Condition) %>%
  summarize(overall_condition_mean = mean(overallmean),
            se = std.error(overallmean),
            n = n(),
            CI = qt(0.975,df=n-1)*se)

## `summarise()` has grouped output by 'ParticipantId'. You can override using the `.groups`
## argument.


ggplot(answerplot1, aes(Condition,
                        overall_condition_mean,
                        group = 1,
                        ymin = overall_condition_mean - CI,
                        ymax = overall_condition_mean + CI)) +
  theme_classic() +
  geom_point(size = 4) +
  geom_errorbar(width = .15, linewidth = 0.85) +
  geom_line(linewidth = 0.85) +
  labs(y = "Answering RTs (ms)", title = "Answer RTs")

```

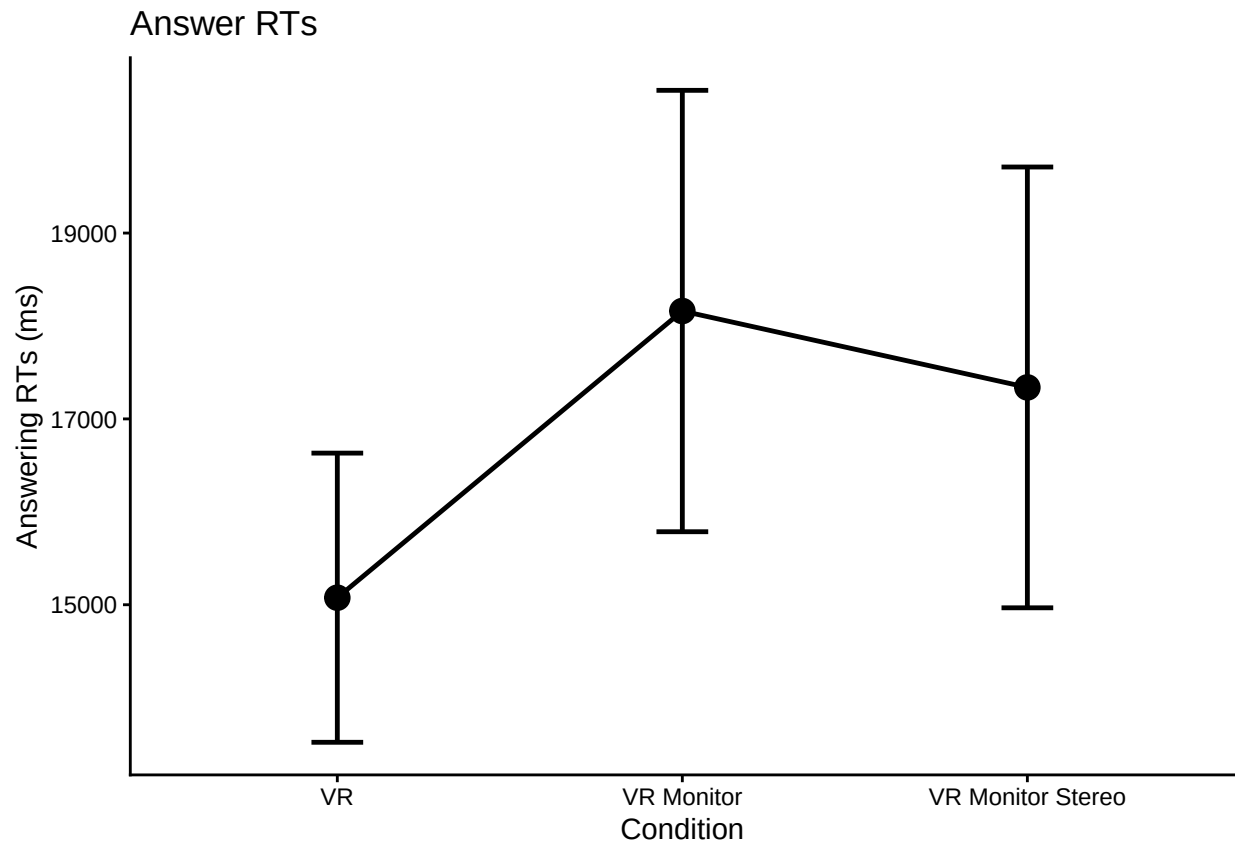

```
#make the little plot
superbPlot(answer_rt_type_wider_clean,
  BSFactors = "Condition",
  WSFactors = "QuestionType(3)",
  variables = c("Type1", "Type2", "Type3"),
  statistic = "meanNArm",
  errorbar = "CI",
  gamma = 0.95,
  adjustments = list(
    purpose = "difference"
  ),
  plotLayout = "line",
  factorOrder = c("Condition", "QuestionType")
) +
theme_classic() +
theme(axis.text.x = element_text(angle = 45, vjust = 1, hjust=1))+
facet_wrap(vars(QuestionType))+
labs(y = "Answering RTs (ms)", title = "Answer RTs")
```

## superb::ADVICE: Some of the groups' variances are heterogeneous. Consider using purpose="tryon".

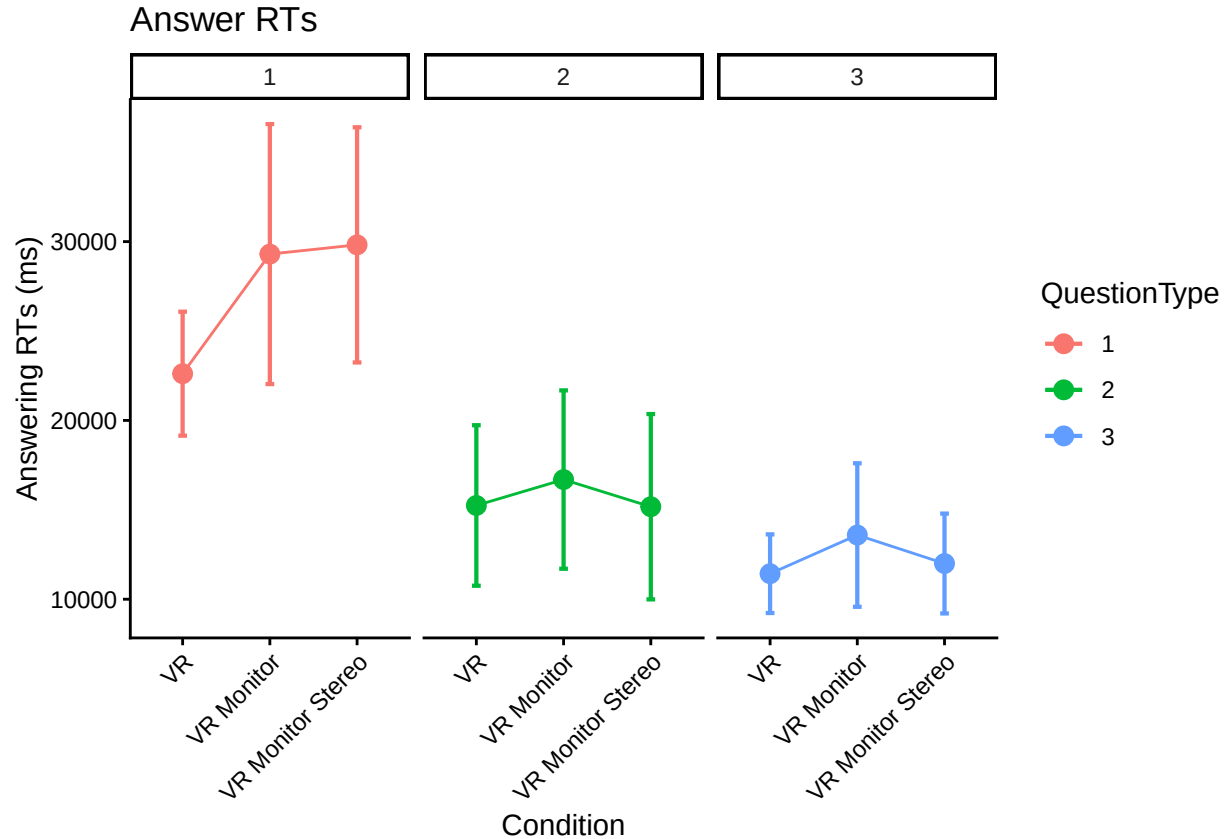

```
answer_rt_type_anova <- aov_ez(id = "ParticipantId",
  dv = "mean_answerRT",
  data = trial_type_means,
  within = "TrialType",
  between = "Condition",
  anova_table = list(es = "pes") #might want to double-check these
)
```

```
## Converting to factor: Condition
```

```
## Warning: Missing values for 4 ID(s), which were removed before analysis:
```

```
## AE2314, AE8118, A05595, UK0825
```

```
## Below the first few rows (in wide format) of the removed cases with missing data.
```

```
##      ParticipantId      Condition  Type1  Type2  Type3
## # 15      AE2314 VR Monitor Stereo 46196.14      NA 18580.581
## # 21      AE8118              VR      NA      NA 7572.992
## # 29      A05595              VR      NA 8702.036 19686.195
## # 115     UK0825              VR 18318.31      NA 25930.567
```

```
## Contrasts set to contr.sum for the following variables: Condition
```

```
kable(nice(answer_rt_type_anova))
```

| Effect              | df           | MSE          | F         | pes  | p.value |
|---------------------|--------------|--------------|-----------|------|---------|
| Condition           | 2, 115       | 152033920.55 | 2.82 +    | .047 | .064    |
| TrialType           | 1.75, 201.17 | 98920988.72  | 80.55 *** | .412 | <.001   |
| Condition:TrialType | 3.50, 201.17 | 98920988.72  | 1.84      | .031 | .131    |

```
#posthoc test for trial type
pairs(emmeans(answer_rt_type_anova, "TrialType"), adjust = "Tukey")

## contrast      estimate    SE df t.ratio p.value
## Type1 - Type2    11309 1400 115   8.061 <.0001
## Type1 - Type3    14911 1250 115  11.963 <.0001
## Type2 - Type3     3602  993 115   3.626 0.0012
##
## Results are averaged over the levels of: Condition
## P value adjustment: tukey method for comparing a family of 3 estimates

#Question Type 3 much faster than Type 1/Type 2 (this is answering times)

ref <- emmeans(answer_rt_type_anova, ~Condition|TrialType)

pairs(ref, adjust = "Tukey")
```

```
## TrialType = Type1:
## contrast      estimate    SE df t.ratio p.value
## VR - VR Monitor    -6771.54 2740 115  -2.473 0.0392
## VR - VR Monitor Stereo -6775.72 2900 115  -2.339 0.0545
## VR Monitor - VR Monitor Stereo   -4.18 3020 115  -0.001 1.0000
##
## TrialType = Type2:
## contrast      estimate    SE df t.ratio p.value
## VR - VR Monitor    -1328.55 2390 115  -0.556 0.8435
## VR - VR Monitor Stereo   205.90 2530 115   0.081 0.9963
## VR Monitor - VR Monitor Stereo  1534.45 2630 115   0.583 0.8293
##
## TrialType = Type3:
## contrast      estimate    SE df t.ratio p.value
## VR - VR Monitor    -2563.49 1430 115  -1.790 0.1773
## VR - VR Monitor Stereo   -765.10 1510 115  -0.505 0.8690
## VR Monitor - VR Monitor Stereo  1798.39 1580 115   1.141 0.4912
##
## P value adjustment: tukey method for comparing a family of 3 estimates
```

*#plot and interaction suggests that the conditions have different effects for different question types. posthoc tests indicate a difference between VR and VRMonitor for QType 1*

## Accuracy

```
# do interrater reliability: Fits each trial as independent with two raters
# That is, this ignores participants (complete pooling, which may be problematic)
# 1410 trials from N = 85 participants, not exactly 17 trials per participant
# b/c of excluded trials
irr::icc(select(ungroup(all_data_no_outliers), Correct_1, Correct_2))

## Single Score Intraclass Correlation
##
## Model: oneway
## Type : consistency
##
## Subjects = 476
## Raters = 2
```

```

##      ICC(1) = 0.91
##
## F-Test, H0: r0 = 0 ; H1: r0 > 0
## F(475,476) = 21.3 , p = 1.58e-184
##
## 95%-Confidence Interval for ICC Population Values:
## 0.893 < ICC < 0.924

head(all_data_no_outliers)

## # A tibble: 6 x 11
## # Groups:   TrialName [4]
##   ParticipantId Condition TrialNumber TrialName readRT totalRT UserInput Correct_1
##   <chr>          <chr>      <dbl> <chr>      <dbl>    <dbl> <chr>      <dbl>
## 1 AA0176        VR Monitor      11 BarChartQ1 4669.    21882. North in 2010      1
## 2 AA0176        VR Monitor      12 BarChartQ2 7003.    15783. Remians stable~ 1
## 3 AA0176        VR Monitor      13 BarChartQ3 6200.    10132. North neighbor~ 1
## 4 AA0176        VR Monitor      14 BarChartQ4 5015.    11504. West neighborh~ 1
## 5 AA0876        VR           9 BarChartQ1 3519.    32929. 2010 north      1
## 6 AA0876        VR          10 BarChartQ2 4759.    23479. stable      1
## # i 3 more variables: Correct_2 <dbl>, AnswerRT <dbl>, TrialType <chr>

# account for non-independence?
#Data has to be narrow
#https://cran.r-project.org/web/packages/cccrm/index.html
icc.dat.narrow <- all_data_no_outliers %>%
  pivot_longer(cols = c('Correct_1', 'Correct_2'))

colnames(icc.dat.narrow)[10] <- "Rater"
icc.dat.narrow$Rater <- as.factor(icc.dat.narrow$Rater)

#Longitudinal concordance for two raters
#By all 17 trials (by items)
# icc.rm.trial.name <- ccclon(icc.dat.narrow,
#                             "value", "ParticipantId", "TrialName", "Rater")
# icc.rm.trial.name
# summary(icc.rm.trial.name)

#By time using trial numbers (by time)
icc.rm.trial.number <- ccclon(icc.dat.narrow,
                             "value", "ParticipantId", "TrialNumber", "Rater" )

## Warning: `ccclon()` was deprecated in cccrm 3.0.0.
## i Please use `ccc_vc()` instead.
## Call `lifecycle::last_lifecycle_warnings()` to see where this warning was generated.

icc.rm.trial.number

## CCC estimated by variance components:
##      CCC    LL CI 95%    UL CI 95%      SE CCC
## 0.913965024 0.895570977 0.929240100 0.008544854

summary(icc.rm.trial.number)

##      Subjects Subjects-Method Subjects-Time      Method      Error
## 1.348428e-02 7.407619e-10 2.525883e-02 0.000000e+00 3.647035e-03
##

```

```
## CCC estimated by variance components
##      CCC    LL CI 95%    UL CI 95%      SE CCC
## 0.913965024 0.895570977 0.929240100 0.008544854
```

```
# A similar approach
#https://peerj.com/articles/9850/
# test.mod <-
# lcc(data = hue, subject = "Fruit", resp = "H_mean",
#      method = "Method", time = "Time", qf = 2, qr = 1)
# summary(test.mod)


# icc.dat.narrow$ParticipantId <- as.factor(icc.dat.narrow$ParticipantId)
# icc.dat.narrow$Rater <- as.factor(icc.dat.narrow$Rater)
#
#
# icc.rm.another <-
# lcc(data = icc.dat.narrow,
#      subject = "ParticipantId",
#      resp = "value",
#      method = "Rater",
#      time = "TrialNumber",
#      qf = 1, #polynomial trends (1 to 3)
#      qr = 0, #random effects (0 is random int only, default)
#      components = TRUE)
#
# #LCC = Longitudinal Concordance Correlation
# #LPC = Longitudinal Pearson Correlation
# #LA = Longitudinal Accuracy
# icc.rm.another
#
# #Model coefficients near 1 but only the the last one has a correctly
# #estimated model. Maybe because it's more or less flat over TrialNumber?
# lccPlot(icc.rm.another, type = "lpc")
# lccPlot(icc.rm.another, type = "lcc")
# lccPlot(icc.rm.another, type = "la")
```

```
all_data_no_outliers <- all_data_no_outliers %>%
  rowwise() %>%
  mutate(Correct_Avg = mean(c(Correct_1, Correct_2)))
```

```
#just condition main effect
accplot1 <- all_data_no_outliers %>%
  group_by(ParticipantId, Condition) %>%
  summarize(overallmean = mean(Correct_Avg)) %>%
  group_by(Condition) %>%
  summarize(overall_condition_mean = mean(overallmean),
            se = std.error(overallmean),
            n = n(),
            CI = qt(0.975,df=n-1)*se)
```

```
## `summarise()` has grouped output by 'ParticipantId'. You can override using the `.groups`
## argument.
```

```
ggplot(accplot1, aes(Condition,
                     overall_condition_mean,
                     group = 1,
                     ymin = overall_condition_mean - CI,
                     ymax = overall_condition_mean + CI)) +
  theme_classic() +
  geom_point(size = 4) +
  geom_errorbar(width = .15, linewidth = 0.85) +
  geom_line(linewidth = 0.85) +
  labs(y = "Accuracy", title = "Accuracy")
```

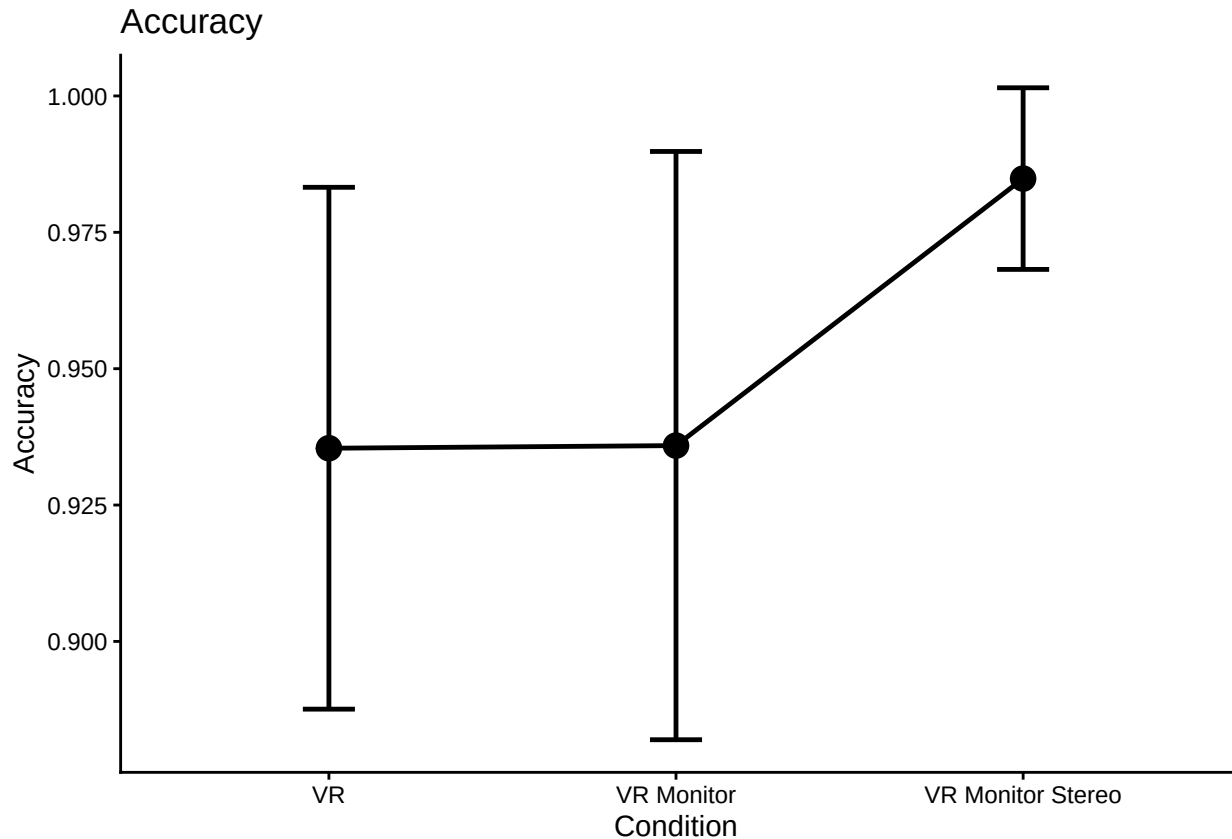

```
trial_type_mean_acc <- all_data_no_outliers %>%
  group_by(ParticipantId, Condition, TrialType) %>%
  summarize(mean_acc = mean(Correct_Avg),
            n = n())
```

## `summarise()` has grouped output by 'ParticipantId', 'Condition'. You can override using  
## the `.groups` argument.

```
acc_type_wider <- trial_type_mean_acc %>%
  select(ParticipantId, Condition, TrialType, mean_acc) %>%
  pivot_wider(names_from = TrialType, values_from = mean_acc)
write.csv(acc_type_wider, file = "typeacc.csv", row.names = F)
```

*# replace na with mean*

```
acc_type_wider_clean <- acc_type_wider %>% replace_na(list(Type1 = mean(acc_type_wider$Type1, na.rm=TRUE)
acc_type_wider_clean <- acc_type_wider_clean %>% replace_na(list(Type2 = mean(acc_type_wider$Type2, na.rm=TRUE)
```


```

acc_type_wider_clean <- acc_type_wider_clean %>% replace_na(list(Type3 = mean(acc_type_wider$Type3, na.rm = TRUE)))

#make the little plot
superbPlot(acc_type_wider_clean,
  BSFactors = "Condition",
  WSFactors = "QuestionType(3)",
  variables = c("Type1", "Type2", "Type3"),
  statistic = "meanNArm",
  errorbar = "CI",
  gamma = 0.95,
  adjustments = list(
    purpose = "difference"
  ),
  plotLayout = "line",
  factorOrder = c("Condition", "QuestionType")
) +
theme_classic() +
theme(axis.text.x = element_text(angle = 45, vjust = 1, hjust=1)) +
facet_wrap(vars(QuestionType)) +
labs(y = "Accuracy", title = "Accuracy")

```

## superb::ADVICE: Some of the groups' variances are heterogeneous. Consider using purpose="tryon".

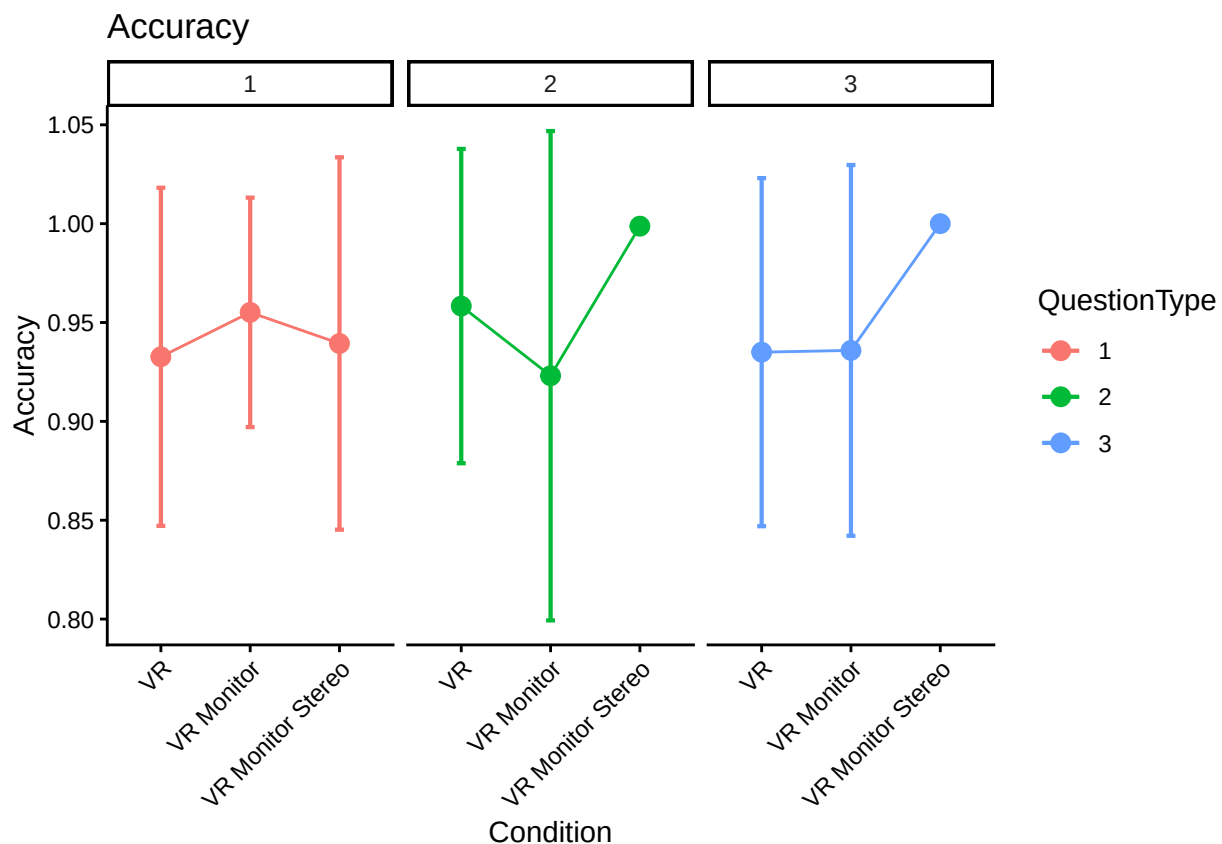

```

acc_type_anova <- aov_ez(id = "ParticipantId",
  dv = "mean_acc",
  data = trial_type_mean_acc,

```



```

        within = "TrialType",
        between = "Condition",
        anova_table = list(es = "pes") #might want to double-check these
    )

```

```
## Converting to factor: Condition
```

```
## Warning: Missing values for 4 ID(s), which were removed before analysis:
```

```
## AE2314, AE8118, A05595, UK0825
```

```
## Below the first few rows (in wide format) of the removed cases with missing data.
```

```
##      ParticipantId      Condition Type1 Type2 Type3
## # 15      AE2314 VR Monitor Stereo      1      NA      1
## # 21      AE8118              VR      NA      NA      1
## # 29      A05595              VR      NA      1      1
## # 115     UK0825              VR      1      NA      0
```

```
## Contrasts set to contr.sum for the following variables: Condition
```

```
kable(nice(acc_type_anova))
```

| Effect              | df           | MSE  | F    | pes  | p.value |
|---------------------|--------------|------|------|------|---------|
| Condition           | 2, 115       | 0.06 | 0.86 | .015 | .426    |
| TrialType           | 2.00, 229.78 | 0.02 | 0.71 | .006 | .493    |
| Condition:TrialType | 4.00, 229.78 | 0.02 | 1.07 | .018 | .371    |

```
#posthoc test for trial type
```

```
pairs(emmeans(acc_type_anova, "TrialType"), adjust = "Tukey")
```

```
## contrast      estimate      SE df t.ratio p.value
## Type1 - Type2 -0.0190 0.0198 115 -0.962 0.6025
## Type1 - Type3 -0.0215 0.0195 115 -1.104 0.5134
## Type2 - Type3 -0.0025 0.0200 115 -0.125 0.9914
##
```

```
## Results are averaged over the levels of: Condition
```

```
## P value adjustment: tukey method for comparing a family of 3 estimates
```

```
#Question Type 3 much faster than Type 1/Type 2 (this is answering times)
```

```
ref <- emmeans(acc_type_anova, ~Condition|TrialType)
```

```
pairs(ref, adjust = "Tukey")
```

```
## TrialType = Type1:
```

```
## contrast      estimate      SE df t.ratio p.value
## VR - VR Monitor -0.02428 0.0401 115 -0.605 0.8177
## VR - VR Monitor Stereo -0.00665 0.0425 115 -0.157 0.9866
## VR Monitor - VR Monitor Stereo 0.01763 0.0442 115 0.399 0.9161
##
```

```
## TrialType = Type2:
```

```
## contrast      estimate      SE df t.ratio p.value
## VR - VR Monitor 0.03437 0.0437 115 0.786 0.7122
## VR - VR Monitor Stereo -0.04255 0.0463 115 -0.920 0.6288
## VR Monitor - VR Monitor Stereo -0.07692 0.0481 115 -1.598 0.2506
##
```

```
## TrialType = Type3:
```

| ## contrast                       | estimate | SE     | df  | t.ratio | p.value |
|-----------------------------------|----------|--------|-----|---------|---------|
| ## VR - VR Monitor                | 0.01623  | 0.0352 | 115 | 0.461   | 0.8898  |
| ## VR - VR Monitor Stereo         | -0.04787 | 0.0373 | 115 | -1.284  | 0.4072  |
| ## VR Monitor - VR Monitor Stereo | -0.06410 | 0.0388 | 115 | -1.652  | 0.2284  |

##

## P value adjustment: tukey method for comparing a family of 3 estimates