CIFAR-10 DiT · confirmation learning curves

30,000 steps · seeds 43–45 · fixed validation noise/timestep seed 2027 · same 5,000-image split

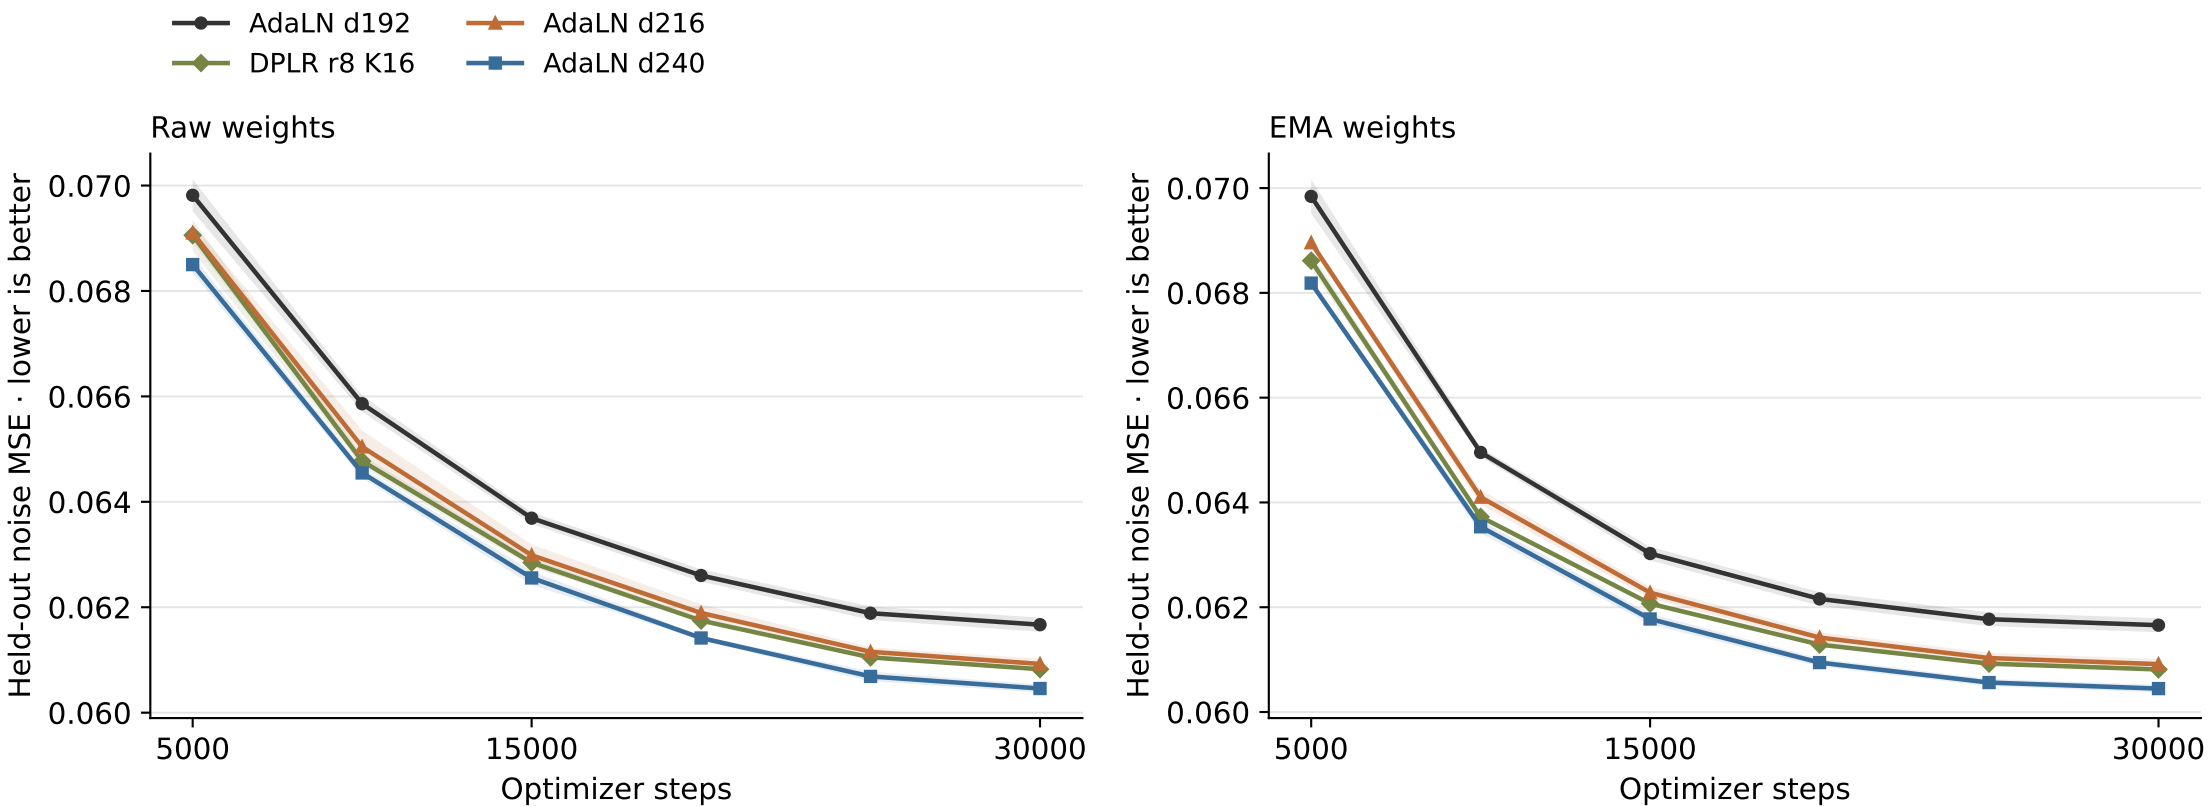

Lines show three-seed means, bands ±1 sample SD. Step 0 omitted: all initial zero-output noise losses are approximately 1.

LRs selected at 10k steps are transferred to 30k; longer-run optimal settings and sequence-conditioned attention remain untested.