Table of Contents

Introduction					•••••		2
Development Environment and Programming Tools							2
Development Environment							2
Programming Language							2
Markup languages							2
Framework and Library							2
System Requirement							3
Features				•••••	• • • • • • • • • • • • • • • • • • • •		3
Screenshots							4
Steps to create dynan	nic web	project in eclips	e				4
UI (User Interface)				•••••			7
Source code							10
Future Scope							16

ETHIO CLICKS

Introduction

The main objective of this mini-project is to design a dynamic and responsive website for a student information management system. This web application is full-fledged logic using new technologies in the market with maximum functionalities, efficiency, and optimal speed on a web.

Development Environment and Programming Tools

Development Environment

The development environment we used to develop the mini system are: -

- Eclipse IDE 2021-03: we prefer this IDE since It is the fastest Java IDE and This IDE will help us to create a good web application.
- **Apache Tomcat:** we prefer this server because it is open-source, and it's free to use. Easy to install and configure. Multiple applications can run at the same time without any issues.

Programming Language

- Java Programming language We will use Java Server Page (JSP) to implement our web Application.
- MySQL query language

MYSQL is one of the most popular query languages in the world. It has a greater advantage in speed, robustness, and flexible licensing policy over other backend database tools. Due to the above reason, we select MySQL to implement the database.

IIO CLICKS

Markup languages

HTML and CSS

we will use HTML (Hypertext markup language) to build the structure of our website and CSS to style our website.

Framework and Library

- Bootstrap
- mysql-connector-java-8.0.25

System Requirement

On client-side

- Operating System (Any)
- Web Browser (IE, Mozilla Firefox, Google Chrome, Safari, Opera ...)

On server-side

- Web Server (Apache Tomcat)
- MySQL

Features

- **⊃** Login
- Create an Account
- **⊃** Register Student.
- **○** Display List of Student.
- **⇒** Search Student
- **⊃** Logout






ETHIO CLICKS


Screenshots

Steps to create dynamic web project in eclipse


Step:1 Launch Eclipse IDE for Enterprise Java and Web Developers.

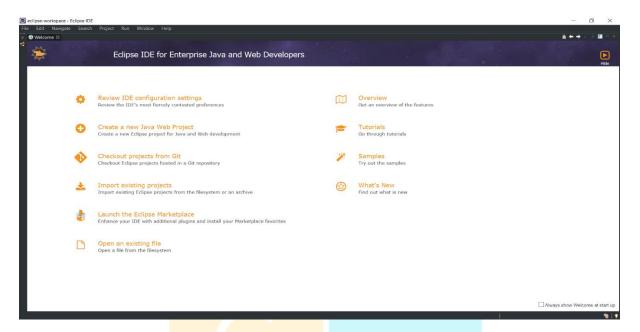

Step: 2 Open Dynamic Web Project, Click File > New > Dynamic Web Project as shown in the figure.

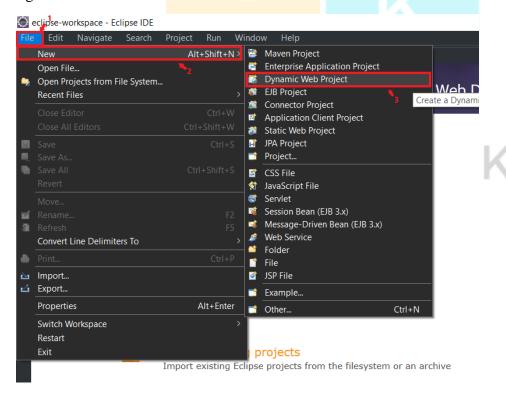


Step: 3 Name the project e.g. MyWebProject.

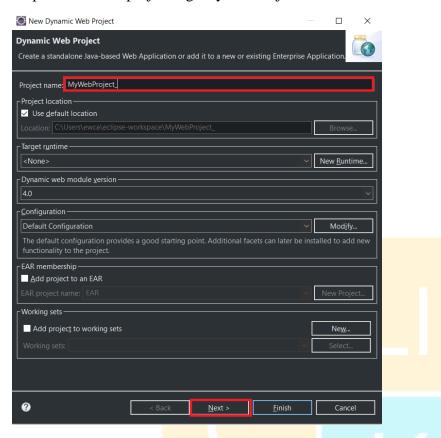


Then click "Next".


After that select "Generate web.xml deployment descriptor" and click "Finish".

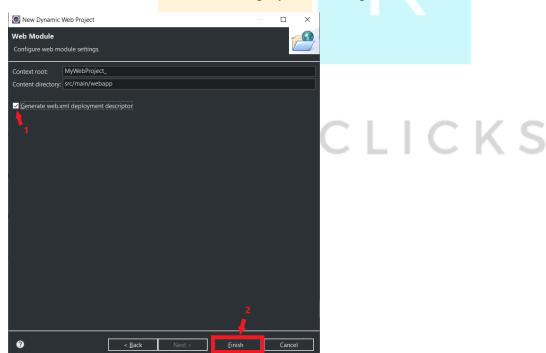

After that you will see something like this in the project explorer tab.



Right-click on your project e.g. MyWebProject and create a new JSP as shown in the figure.

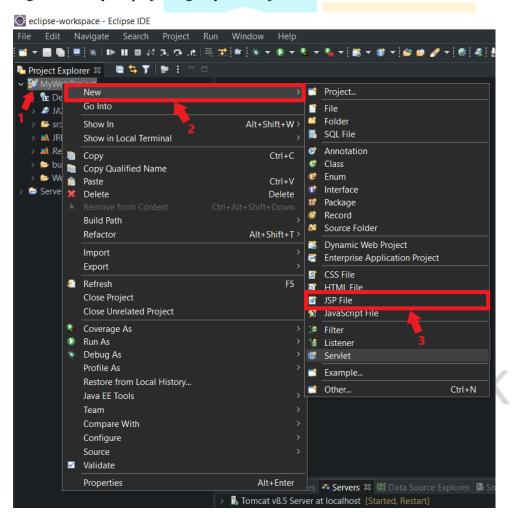

Give the name as "index.jsp" and select "Next". Select "Finish" on the next screen For more tutorial Click Here.

UI (User Interface)

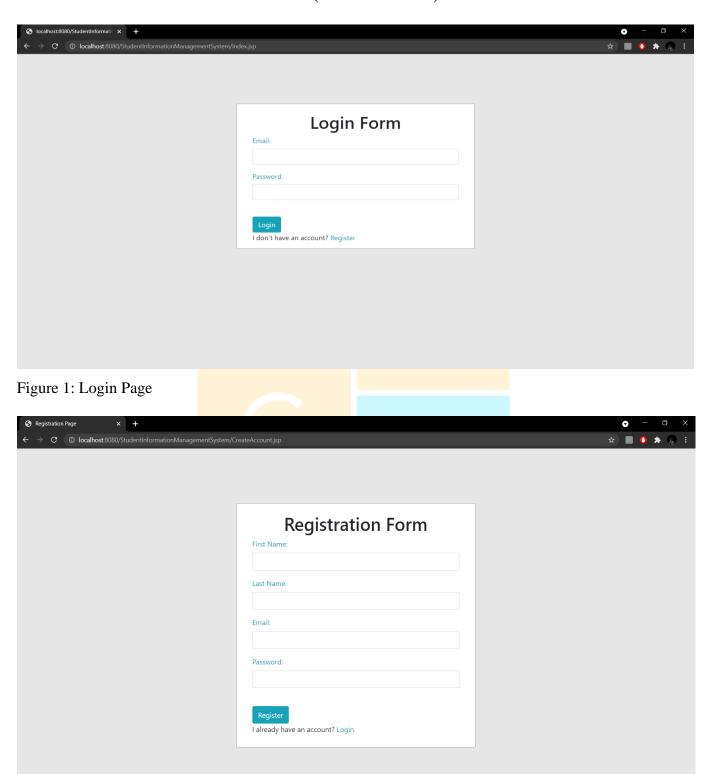


Figure 2: Registration Page



Figure 3: Error Page

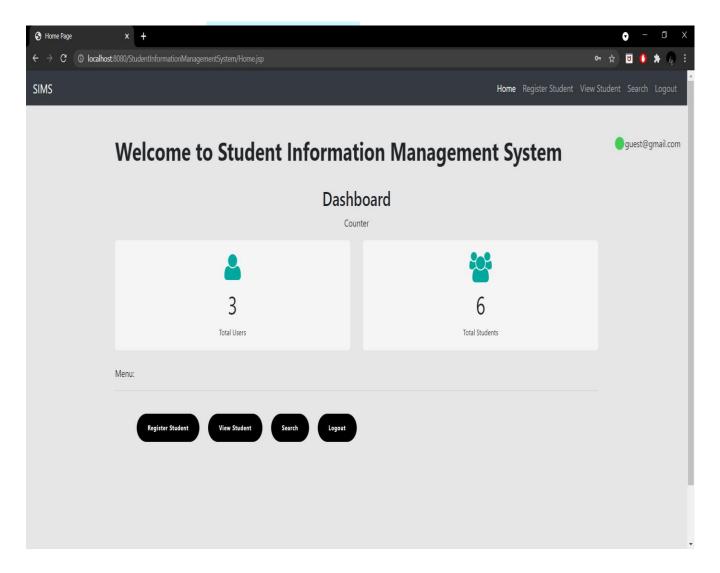


Figure 4: Home Page

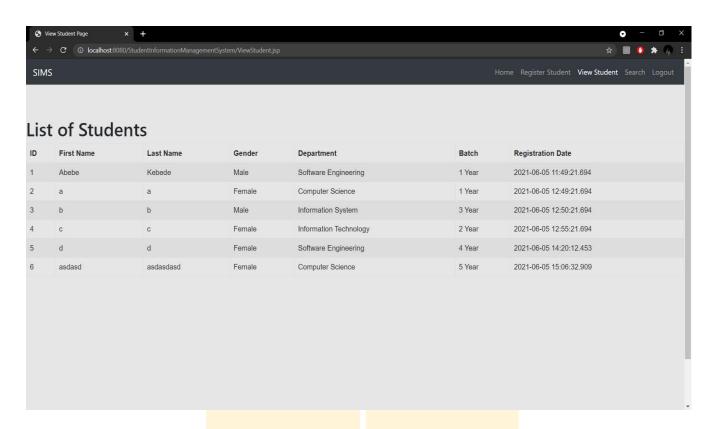


Figure 5: Display list of registered student.

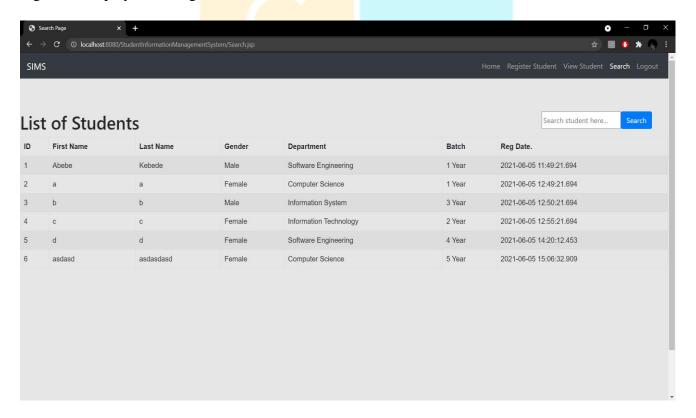


Figure 6: Search student page.

Source code

User Validation (LoginHandler.jsp)

```
<%@ page language="java" contentType="text/html; charset= UTF-8"</pre>
    pageEncoding="UTF-8"%>
<%@ page import="java.sql.*" %>
      String uname = request.getParameter("email");
      session.setAttribute("uname",uname);
      String pw = request.getParameter("pass");
    try{
         Class.forName("com.mysql.cj.jdbc.Driver");
         Connection con =
DriverManager.getConnection("jdbc:mysql://localhost/sims","root","");
PreparedStatement ps = con.prepareStatement("SELECT * FROM userinfo WHERE Email=? AND
Password=?");
         ps.setString(1, uname);
         ps.setString(2, pw);
         ResultSet rs = ps.executeQuery();
         if (rs.next())
         {
             response.sendRedirect("Home.jsp");
         }
         else
         {
             response.sendRedirect("LoginError.jsp");
       }catch (SQLException e)
       out.print(e.getMessage());
```

Create an account (Regiser.jsp)

```
<%@ page language="java" contentType="text/html; charset=UTF-8"</pre>
      pageEncoding="UTF-8"%>
<%@ page import="java.sql.*"%>
<%@ page import="java.util.Date"%>
Connection conn = null;
PreparedStatement ps = null;
userinfo user = new userinfo();
Date date = new Date();
Timestamp timeStamp = new Timestamp(date.getTime());
String fname = request.getParameter("fname");
```

```
user.setFirstName(fname);
    String lname = request.getParameter("lname");
    user.setLastName(lname);
    String email = request.getParameter("email");
    user.setEmail(email);
    session.setAttribute("uname",email);
    String pw = request.getParameter("password");
    user.setPassword(pw);
    try {
          Class.forName("com.mysql.cj.jdbc.Driver");
    conn = DriverManager.getConnection("jdbc:mysql://localhost/sims","root","");
    ps = conn.prepareStatement("INSERT INTO userinfo
            (FirstName ,LastName ,Email ,Password ,RegDate)"
          + "values(?,?,?,?)");
           ps.setString(1, user.getFirstName());
           ps.setString(2, user.getLastName());
           ps.setString(3, user.getEmail());
           ps.setString(4, user.getPassword());
          ps.setTimestamp(5, timeStamp);
           ps.executeUpdate();
           response.sendRedirect("Home.jsp");
    } catch (Exception e) {
          System.out.print(e.getMessage());
    }
Add Students into database (RegisterStudentHandler.java)
    <%@ page language="java" contentType="text/html; charset=UTF-8"</pre>
        pageEncoding="UTF-8"%>
    <%@ page import="java.sql.*"%>
    <%@ page import="java.util.Date"%>
    Connection conn = null;
    PreparedStatement ps = null;
    studentinfo student = new studentinfo();
    Date date = new Date();
    Timestamp timeStamp = new Timestamp(date.getTime());
    String fname = request.getParameter("firstname");
    student.setFirstname(fname);
    String lname = request.getParameter("lastname");
    student.setLastname(lname);
    String gender = request.getParameter("gender");
    student.setGender(gender);
    String dept = request.getParameter("department");
    student.setDepartment(dept);
    String batch = request.getParameter("batch");
    student.setBatch(batch);
    try {
        Class.forName("com.mysql.cj.jdbc.Driver");
```

```
conn = DriverManager.getConnection("jdbc:mysql://localhost/sims","root","");
        ps = conn.prepareStatement("INSERT INTO studentinfo (FirstName ,LastName ,Gender
    ,Department ,Batch ,RegDate)"
                + "values(?,?,?,?,?)");
        ps.setString(1, student.getFirstname());
        ps.setString(2, student.getLastname());
        ps.setString(3, student.getGender());
        ps.setString(4, student.getDepartment());
        ps.setString(5, student.getBatch());
        ps.setTimestamp(6, timeStamp);
        ps.executeUpdate();
        response.sendRedirect("ViewStudent.jsp");
    } catch (Exception e) {
    System.out.print(e.getMessage());
Display List of Student (ViewStudent.jsp)
    <%@ page language="java" contentType="text/html; charset=UTF-8"</pre>
          pageEncoding="UTF-8"%>
    <%@ page import="java.sql.*" %>
    <!DOCTYPE html>
    <html>
    <head>
    <meta charset="UTF-8">
    <title>View Student Page</title>
    k rel="stylesheet"
          href="https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css">
    <script
    src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
    src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js">
    </script>
    <script
    src="https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/js/bootstrap.min.js"></script>
    k href="css/Style.css" rel="stylesheet">
                                               CLICKS
    <style>
    table {
          font-family: arial, sans-serif;
          border-collapse: collapse;
          width: 100%;
    }
    td, th
          border: 1px solid #dddddd;
          text-align: left;
          padding: 8px;
    }
    tr:nth-child(even) {
          background-color: #dddddd;
```

```
</style>
   </head>
   <body>
   <!-- ====== Navbar ====== -->
   <nav class="navbar navbar-expand-md bq-dark navbar-dark">
   <a class="navbar-brand" href="#">SIMS</a>
   <button class="navbar-toggler" type="button" data-toggle="collapse"
   data-target="#collapsibleNavbar">
   <span class="navbar-toggler-icon"></span>
   </button>
   <div class="collapse navbar-collapse" id="collapsibleNavbar">
   class="navbar-nav ml-auto">
   class="nav-item">
   <a class="nav-link" href="Home.jsp">Home</a>
   class="nav-item">
   <a class="nav-link" href="RegisterStudent.jsp">Register Student</a>
   class="nav-item active">
   <a class="nav-link" href="ViewStudent.jsp">View Student</a>
   class="nav-item">
   <a class="nav-link" href="Search.jsp">Search</a>
   class="nav-item">
   <a class="nav-link" href="Logout.jsp">Logout</a>

</div>
   </nav><br><br><br>>
   <!-- ===== End <u>Navbar</u> ===== -->
   <div class="row" style="float:right">
   </div>
         <h1>List of Students</h1>
         ID
                     First Name
                     Last Name
                                          CLICKS
                     Gender
                     Department
                     Batch
                     Registration Date
               try{
   Class.forName("com.mysql.cj.jdbc.Driver");
Connection conn = DriverManager.getConnection("jdbc:mysql://localhost/sims", "root", "");
   String Query = "SELECT * FROM studentinfo";
               Statement stm = conn.createStatement();
               ResultSet rs = stm.executeQuery(Query);
               while (rs.next()) {
```

```
<%= rs.getString("Id") %>
                <%= rs.getString("FirstName") %>
                <%= rs.getString("LastName") %>
                <%= rs.getString("Gender") %>
                <%= rs.getString("Department") %>
                <%= rs.getString("Batch") %>
                <%= rs.getString("RegDate") %>
                }catch (Exception e) {
               out.print(e.getMessage());
           }
          <footer style="margin-top:50vh;">
            All Right Reserved.
          </footer>
    </body>
</html>
Search Student Page (Search.jsp)
    <%@ page language="java" contentType="text/html; charset=UTF-8"</pre>
         pageEncoding="UTF-8"%
    <%@ page import="java.sql.*" %>
    <!DOCTYPE html>
    <html>
    <head>
   <meta charset="UTF-8">
    <title>Search Page</title>
   k rel="stylesheet"
          href="https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css">
   <script
   src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
   src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.16.0/umd/popper.min.js">
   </script>
   <script
   src="https://maxcdn.bootstrapcdn.com/bootstrap/4.5.2/js/bootstrap.min.js"></script>
   k href="css/Style.css" rel="stylesheet">
   <style>
   table {
          font-family: arial, sans-serif;
          border-collapse: collapse;
          width: 100%;
   }
   td, th {
          border: 1px solid #dddddd;
          text-align: left;
          padding: 8px;
```

```
tr:nth-child(even) {
        background-color: #dddddd;
  }
  </style>
  </head>
  <body>
  <!-- ===== Navbar ===== -->
  <nav class="navbar navbar-expand-md bq-dark navbar-dark">
  <a class="navbar-brand" href="#">SIMS</a>
  <button class="navbar-toggler" type="button" data-toggle="collapse"
  data-target="#collapsibleNavbar">
  <span class="navbar-toggler-icon"></span>
  </button>
  <div class="collapse navbar-collapse" id="collapsibleNavbar">
  class="navbar-nav ml-auto">
  class="nav-item">
  <a class="nav-link" href="Home.jsp">Home</a>
  class="nav-item">
  <a class="nav-link"href="RegisterStudent.jsp">Register Student</a>
  <a class="nav-link" href="ViewStudent.jsp">View Student</a>
  <a class="nav-link" href="Search.jsp">Search</a>
  <a class="nav-link" href="Logout.jsp">Logout</a>
  </div>
  </nav><br><br><i-- ===== End Navbar ====== -->
  <form action="#" method="post">
  <div class="row" style="float:right margin-right:5vh ">
  <input type="text" name="searchTxt" id="search" placeholder="Search student</pre>
  here..."/>
  <button class="btn btn-primary" type="submit" name="search"
  id="submit">Search</button>
  </div>
        <h1>List of Students</h1>
                                        CLICKS
        ID
                    First Name
                    Last Name
                    Gender
                    Department
                    Batch
                    Reg Date 
              try{
             Class.forName("com.mysql.cj.jdbc.Driver");
Connection conn = DriverManager.getConnection("jdbc:mysq1://localhost/sims","root"," ");
              String Query = "SELECT * FROM studentinfo";
```

}

```
String lsearch = request.getParameter("searchTxt");
   if(lsearch!=null && !(lsearch.equals(""))){
       Query+=" WHERE CONCAT (FirstName, Department, Batch, RegDate) like'%"+lsearch+"%'";
   }
               Statement stm = conn.createStatement();
               ResultSet rs = stm.executeQuery(Query);
               while (rs.next()) {
               >
               <%= rs.getString("Id") %>
               <%= rs.getString("FirstName") %>
               <%= rs.getString("LastName") %>
               <%= rs.getString("Gender") %>
               <%= rs.getString("Department") %>
                <%= rs.getString("Batch") %>
               <%= rs.getString("RegDate") %>
                }catch (Exception e) {
              out.print(e.getMessage());
           }
   </form>
         <footer style="margin-top:50vh;">
           All Right Reserved.
         </footer>
   </body>
</html>
Logout Page (Logout.jsp)
   <%
        session.removeAttribute("uname");
        session.invalidate();
        response.sendRedirect("index.jsp");
```

- **⊃** Action (Edit & Delete)
- User validation using email and password recovery.

Future Scope

⊃ Improving Security (Password Encryption).