


Conceptual schema

Entity and attributes

- Potlucks
 - date
 - time_begin
 - time_end
 - title
 - organizer
 - location
- Subgroups
 - name
- Contributions
 - name
 - category
 - notes

Associations

- Potlucks (1) $\Rightarrow$ (N) Subgroups (1) $\Rightarrow$ (N) Meals

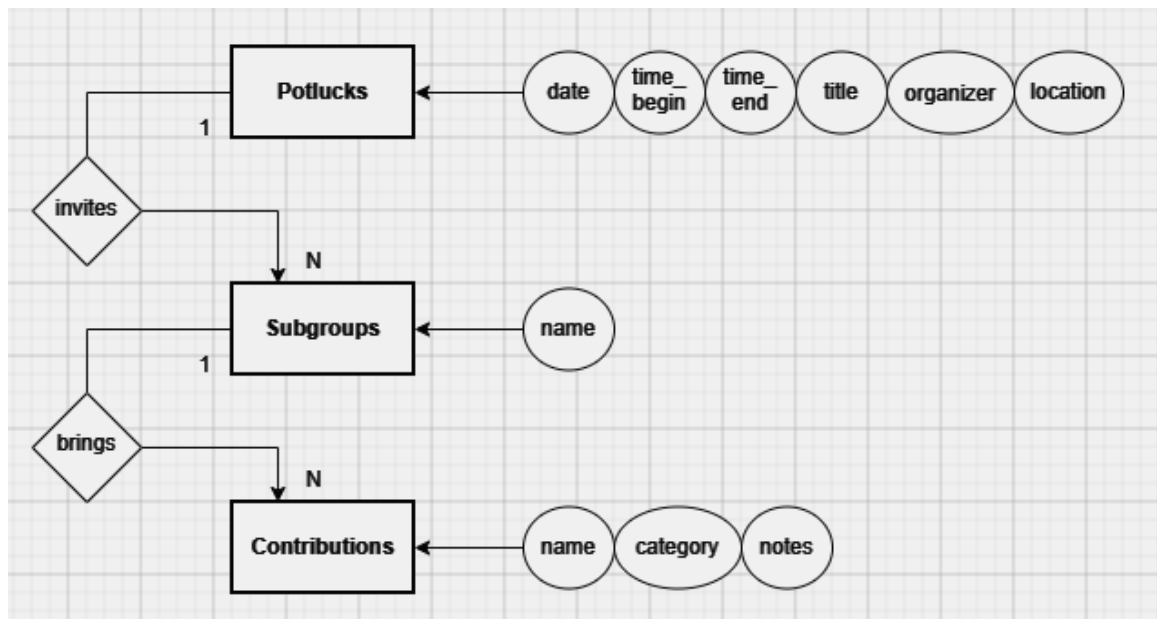


Logical schema

Potlucks		
id	INTEGER	PK
date	DATE	NOT NULL
time_begin	TIME	NOT NULL
time_end	TIME	
title	STRING	NOT NULL
organizer	STRING	NOT NULL
location	STRING	NOT NULL

Subgroups		
id	INTEGER	PK
name	STRING	NOT NULL
potluck_id	INTEGER	FK NOT NULL
REF: potluck_id ⇒ Potlucks (id)		

Contributions		
id	INTEGER	PK
name	STRING	NOT NULL
category	STRING	
notes	STRING	
subgroup_id	INTEGER	FK NOT NULL
REF: subgroup_id ⇒ Subgroups (id)		

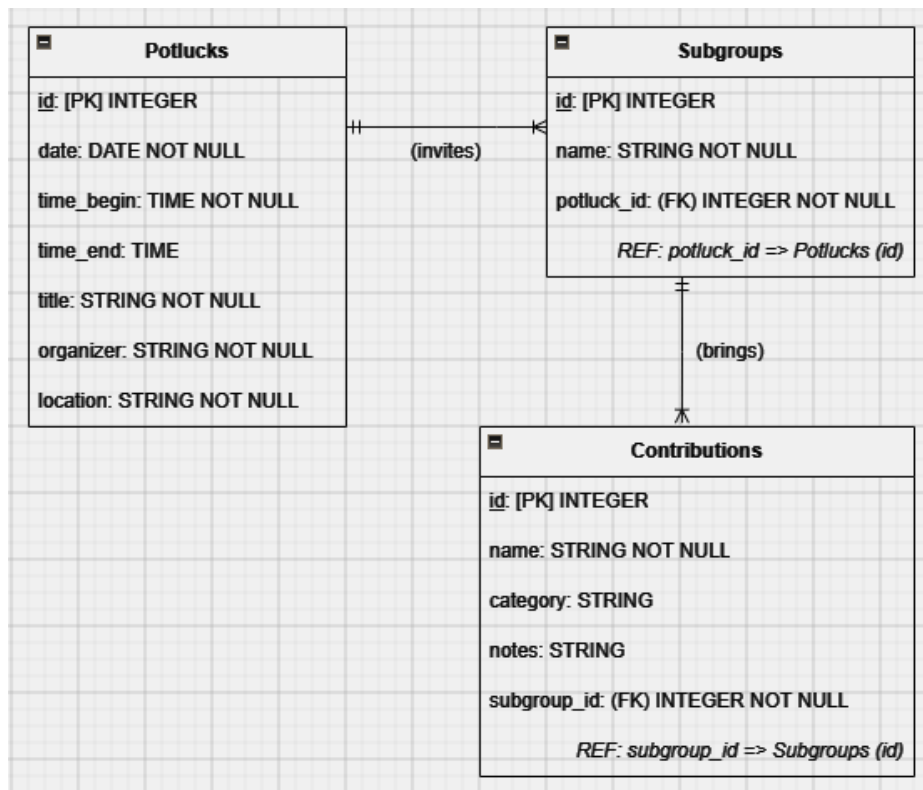

SQL DDL script

```
CREATE TABLE Potlucks (  
    id INT GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY,  
    event_date DATE NOT NULL,  
    time_begin TIME NOT NULL,  
    time_end TIME,  
    title VARCHAR(100) NOT NULL,  
    organizer VARCHAR(100) NOT NULL,  
    location VARCHAR(100) NOT NULL  
);  
  
CREATE TABLE Subgroups (  
    id INT GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY,  
    name VARCHAR(100) NOT NULL,  
    potluck_id INT NOT NULL REFERENCES Potlucks(id) ON DELETE CASCADE  
);  
  
CREATE TABLE Contributions (  
    id INT GENERATED BY DEFAULT AS IDENTITY PRIMARY KEY,  
    name VARCHAR(100) NOT NULL,  
    category VARCHAR(50),  
    notes VARCHAR(300),  
    subgroup_id INT NOT NULL REFERENCES Subgroups(id) ON DELETE CASCADE  
);
```