


Instuction

Be sure naa mo sulod sa inyo project and connected mo ug network

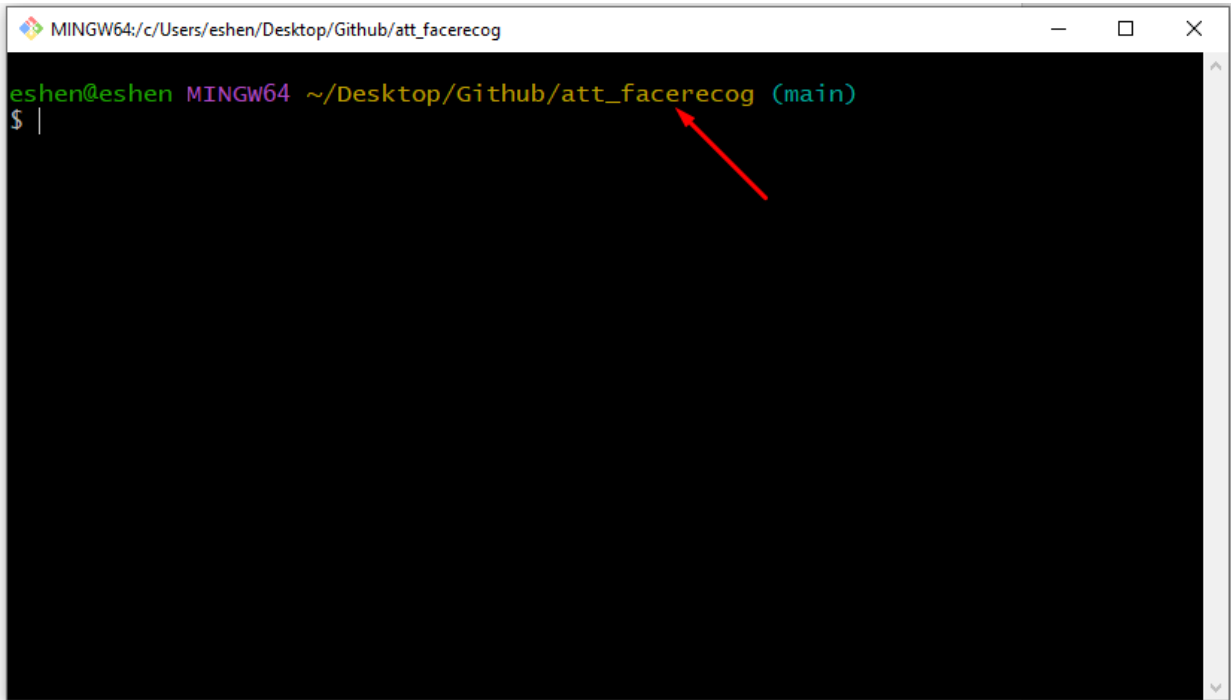


```
MINGW64:/c/Users/eshen/Desktop/Github/att_facerecog

eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)
$ |
```

A screenshot of a Windows terminal window titled "MINGW64:/c/Users/eshen/Desktop/Github/att_facerecog". The terminal shows the prompt "eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)" followed by a dollar sign and a vertical bar "\$ |". A red arrow points to the directory path in the prompt.

Type ipconfig, para makuha Ninyo unsa ip sa inyo machine if ever wala mo kablo sa ip address sa inyo machine

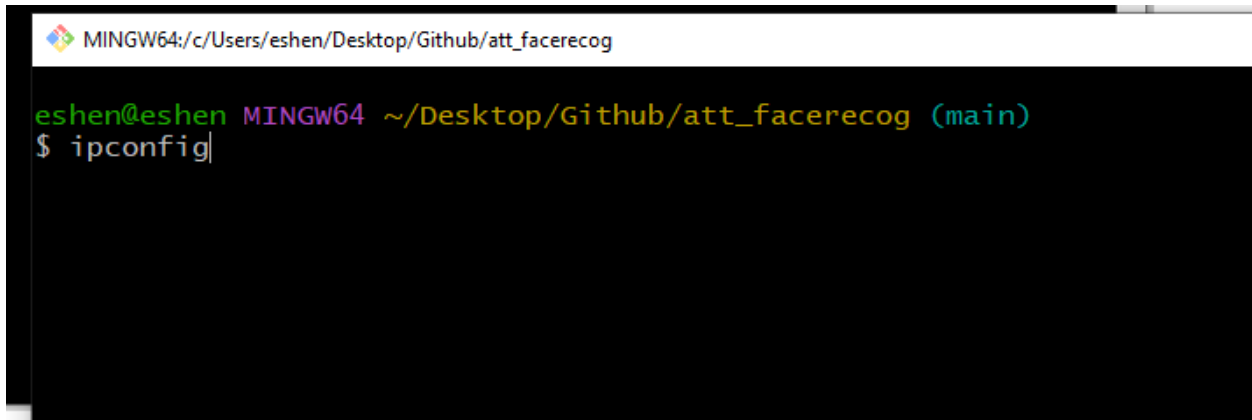

```
MINGW64:/c/Users/eshen/Desktop/Github/att_facerecog

eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)
$ ipconfig|
```

A screenshot of a Windows terminal window titled "MINGW64:/c/Users/eshen/Desktop/Github/att_facerecog". The terminal shows the prompt "eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)" followed by the command "ipconfig|" entered.

Look for ipv4, mao na ang ip address ninyo

```
MINGW64:/c:/Users/eshen/Desktop/Github/att_facerecog
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

Wireless LAN adapter Local Area Connection* 1:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

Wireless LAN adapter Wi-Fi:

Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . . : fe80::e3ab:a378:45a4:ca88%8
IPv4 Address. . . . . : 192.168.202.56
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.202.9

Ethernet adapter Bluetooth Network Connection:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :

eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)
```

Next run the server and use the ip

`$ php artisan serve --host <ipadd> --port <port>`

```
Connection-specific DNS Suffix . :
eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)
$ php artisan serve --host 192.168.202.56 --port 80
```

After hitting enter mao ni timaelhan nag run na ang server

```
Connection-specific DNS Suffix . :
eshen@eshen MINGW64 ~/Desktop/Github/att_facerecog (main)
$ php artisan serve --host 192.168.202.56 --port 80
Starting Laravel development server: http://192.168.202.56:80
[Thu Dec 8 04:56:19 2022] PHP 8.1.6 Development Server (http://192.168.202.56:80) started
```

Sa inyong mobile which is dapat same network, or connected sa inyo network, type the ip address sa web browser.

Note: Since dili sia live app or na up online, default nia is http which is dili e allow ang pag gamit sa cam, so need e set nato sa insecure origin sa setting sa chome,

*Sa web browser type chrome://flags then search **insecure origins treated as secure**, then enable, naa mutatak ana nga relaunch, relaunch lang, then balik visit sa insecure origin, e add ang ip address sa inyo server machine,*