연합디지털트윈 예측 매니저

- Home
- Notebooks
- Models
- Pipelines
- Runs
- Analysis
- Data Collection

ETRI

FDT-user (Developer)

Username

••••

Dashboard **Activity**

Available Dataset

DT512-Temp/Hum Started 2023/08/30, 02:05:31 PM	Crawling
DT312-Dust Started 2023/11/30, 02:05:31 PM	Crawling
DT102-CCTV Started 2023/11/30, 02:05:31 PM	Stop

< prev next >

Recent Services

- CCTV분석-성판악-DT512
  Created 2023/08/30, 02:05:31 PM
- 쾌적지수예측-용두암-DT143
  Created 2023/08/29, 11:30:11 AM

Recent Models

- 쾌적지수예측-v2
  Created 2023/08/21, 10:40:12 PM

Recent Pipelines

- 교통혼잡도-이미지-DT123
  Created 2023/08/25, 11:30:42 AM

연합디지털트윈 예측 매니저

- Home
- Notebooks
- Models
- Pipelines
- Runs
- Analysis
- Data Collection


ETRI


FDT-user (Developer)

Models

Create Modify Refresh

Name	Type	Service	Modified On
CCTV-Prediction-v3	Pytorch	Transportation	2023/08/29, 12:31:10 AM
Wheather-Temp-v2	Tensorflow	Whearther	2023/08/14, 09:30:00 AM
Traffic-v3	Pytorch	Parking Area	2023/08/02, 08:02:10 AM
CCTV-Prediction-v2	Pytorch	Transportation	2023/07/23, 09:30:14 PM
Human-Detection-v2	Tensorflow	Anywhere	2023/07/19, 10:20:01 AM

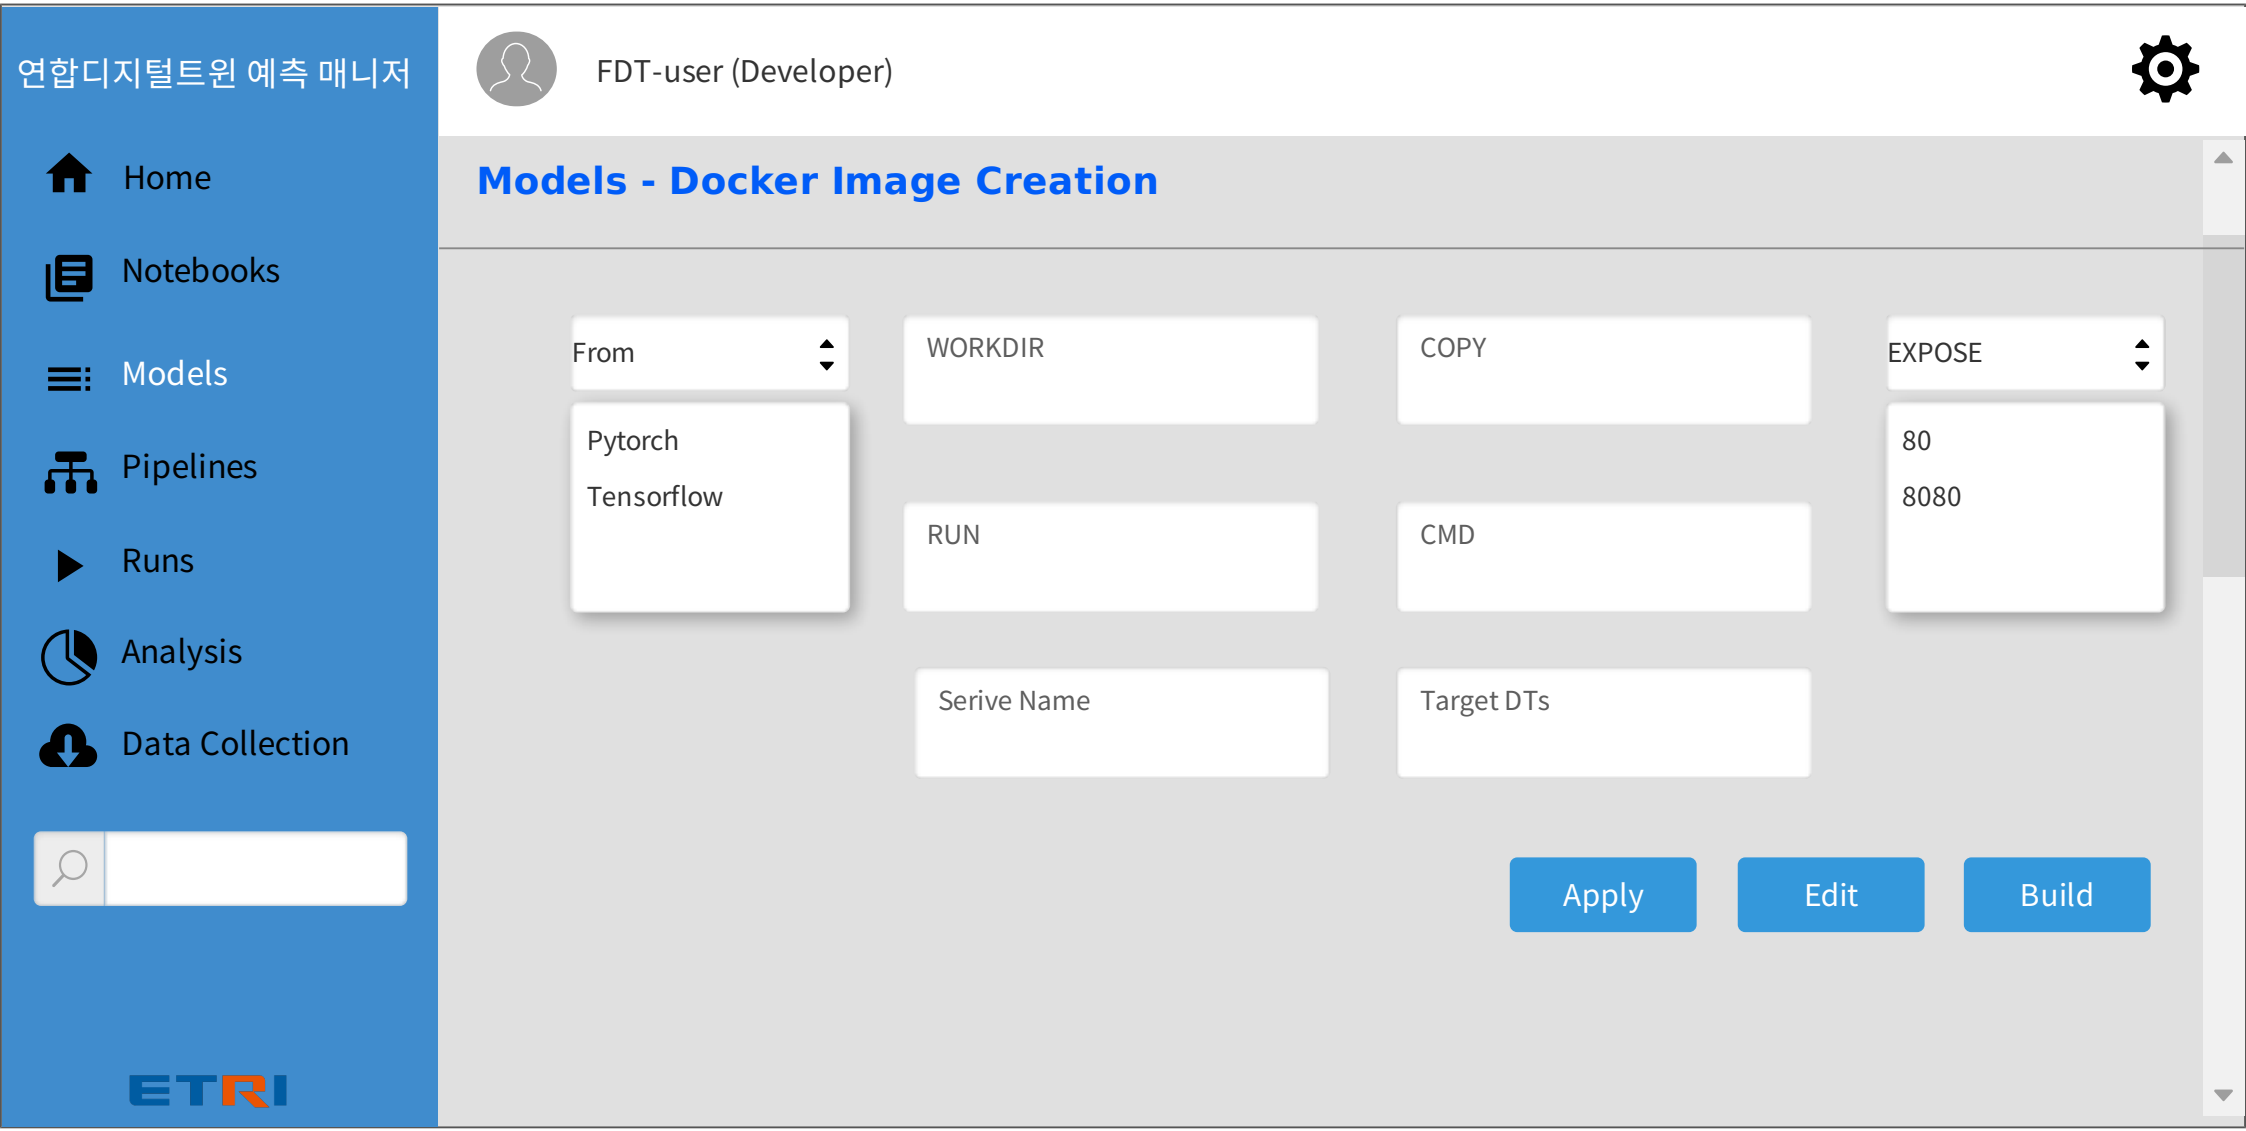
연합디지털트윈 예측 매니저
Home
Notebooks
Models
Pipelines
Runs
Analysis
Data Collection
ETRI
FDT-user (Developer)
Models - Docker Image Creation
From
Pytorch
Tensorflow
WORKDIR
COPY
EXPOSE
80
8080
RUN
CMD
Serive Name
Target DTs
Apply
Edit
Build

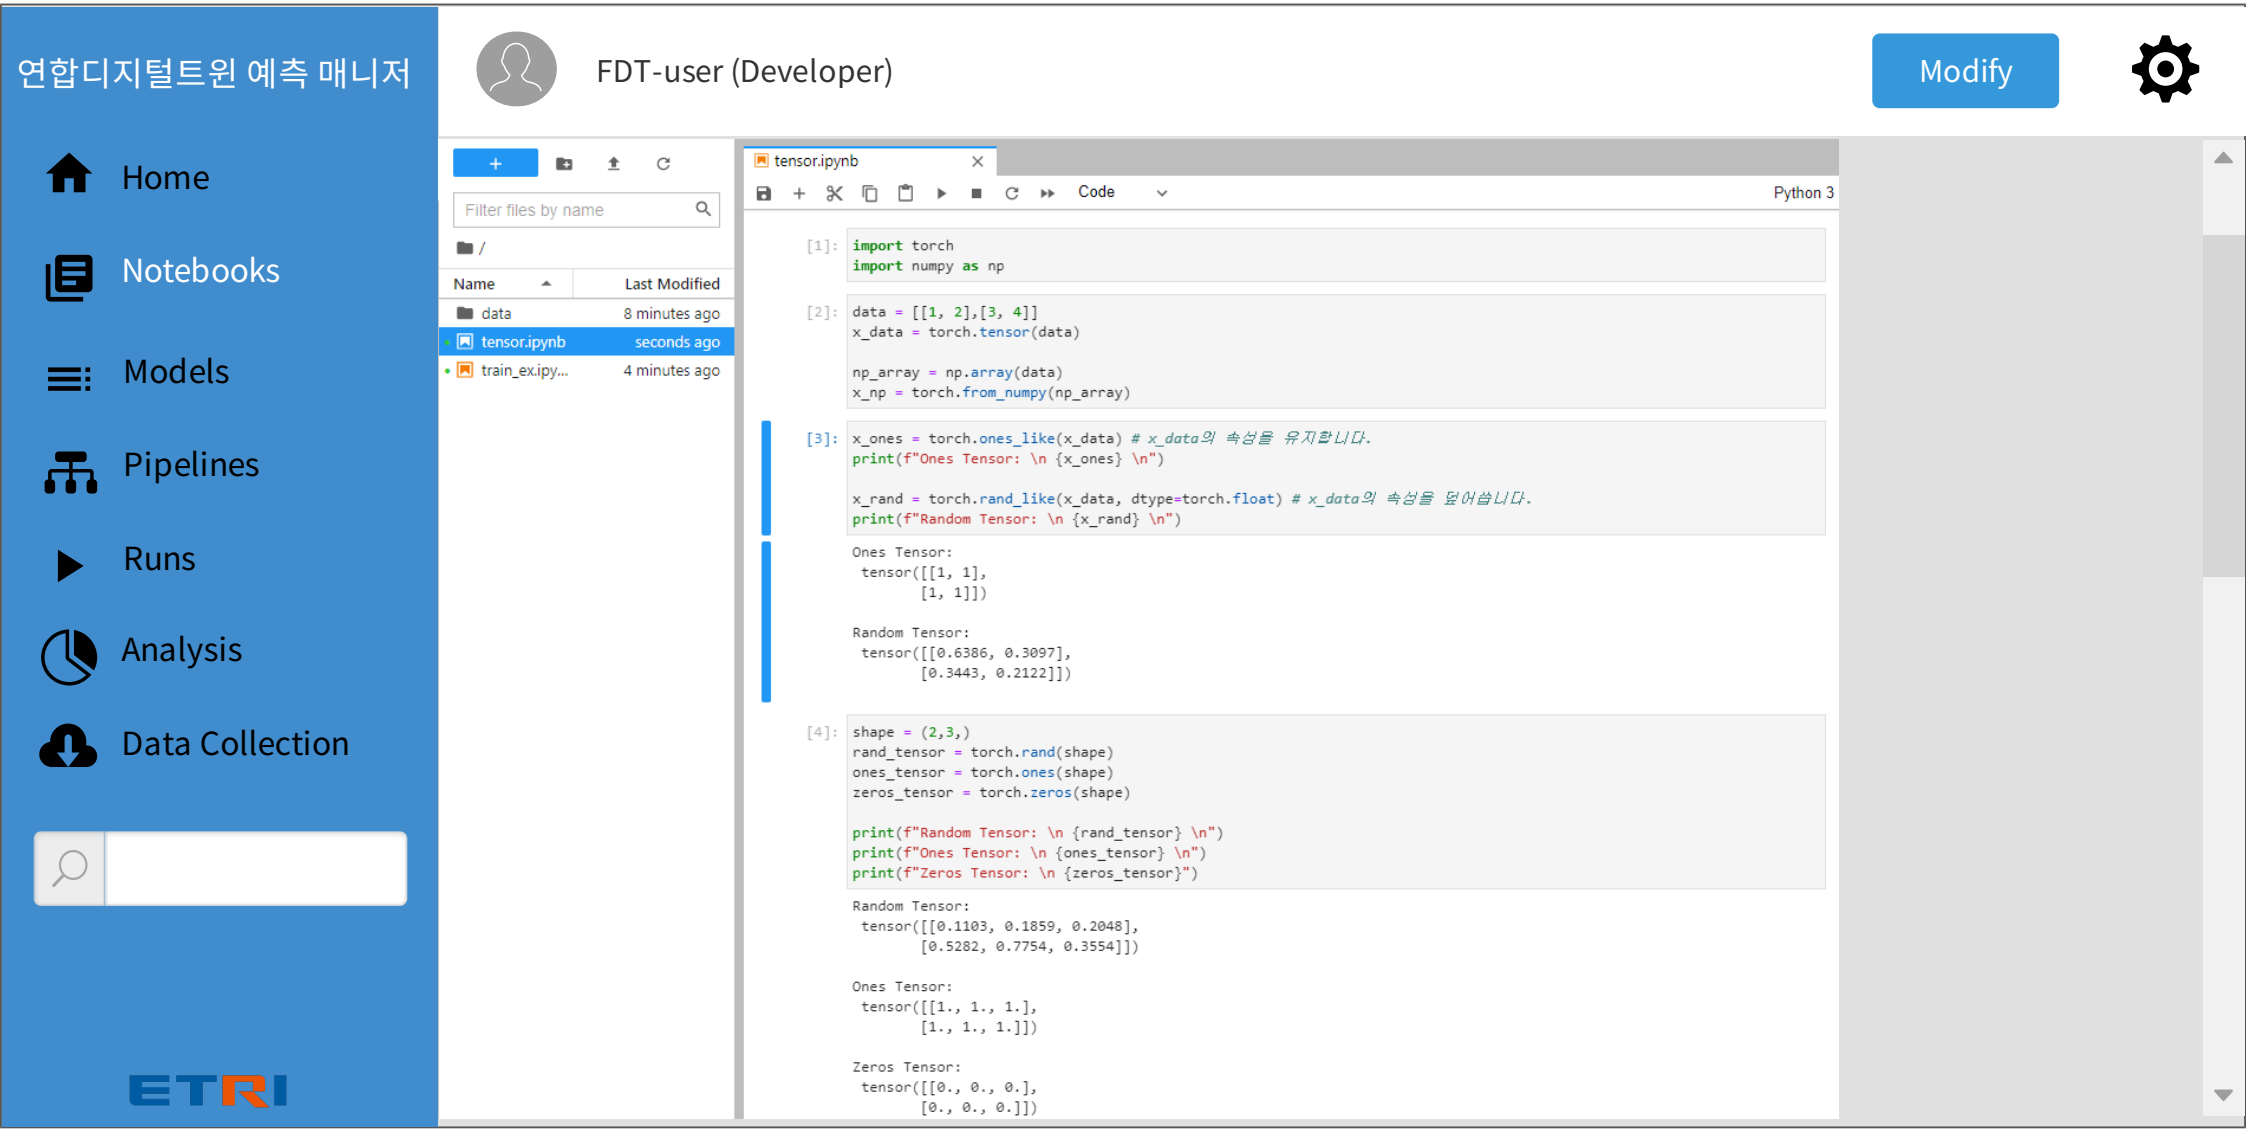

연합디지털트윈 예측 매니저
Home
Notebooks
Models
Pipelines
Runs
Analysis
Data Collection
ETRI
FDT-user (Developer)
Modify
Filter files by name
/
Name
Last Modified
data
8 minutes ago
tensor.ipynb
seconds ago
train_ex.ipy...
4 minutes ago
tensor.ipynb
Code
Python 3
[1]:
import torch
import numpy as np
[2]:
data = [[1, 2],[3, 4]]
x_data = torch.tensor(data)
np_array = np.array(data)
x_np = torch.from_numpy(np_array)
[3]:
x_ones = torch.ones_like(x_data) # x_data의 속성을 유지합니다.
print(f"Ones Tensor: \n {x_ones} \n")
x_rand = torch.rand_like(x_data, dtype=torch.float) # x_data의 속성을 덮어씁니다.
print(f"Random Tensor: \n {x_rand} \n")
Ones Tensor:
tensor([[1, 1],
[1, 1]])
Random Tensor:
tensor([[0.6386, 0.3097],
[0.3443, 0.2122]])
[4]:
shape = (2,3,)
rand_tensor = torch.rand(shape)
ones_tensor = torch.ones(shape)
zeros_tensor = torch.zeros(shape)
print(f"Random Tensor: \n {rand_tensor} \n")
print(f"Ones Tensor: \n {ones_tensor} \n")
print(f"Zeros Tensor: \n {zeros_tensor}")
Random Tensor:
tensor([[0.1103, 0.1859, 0.2048],
[0.5282, 0.7754, 0.3554]])
Ones Tensor:
tensor([[1., 1., 1.],
[1., 1., 1.]])
Zeros Tensor:
tensor([[0., 0., 0.],
[0., 0., 0.]])

연합디지털트윈 예측 매니저

- Home
- Notebooks
- Models
- Pipelines
- Runs
- Analysis
- Data Collection

FDT-user (Developer)

Graph **Run output** **Config.**

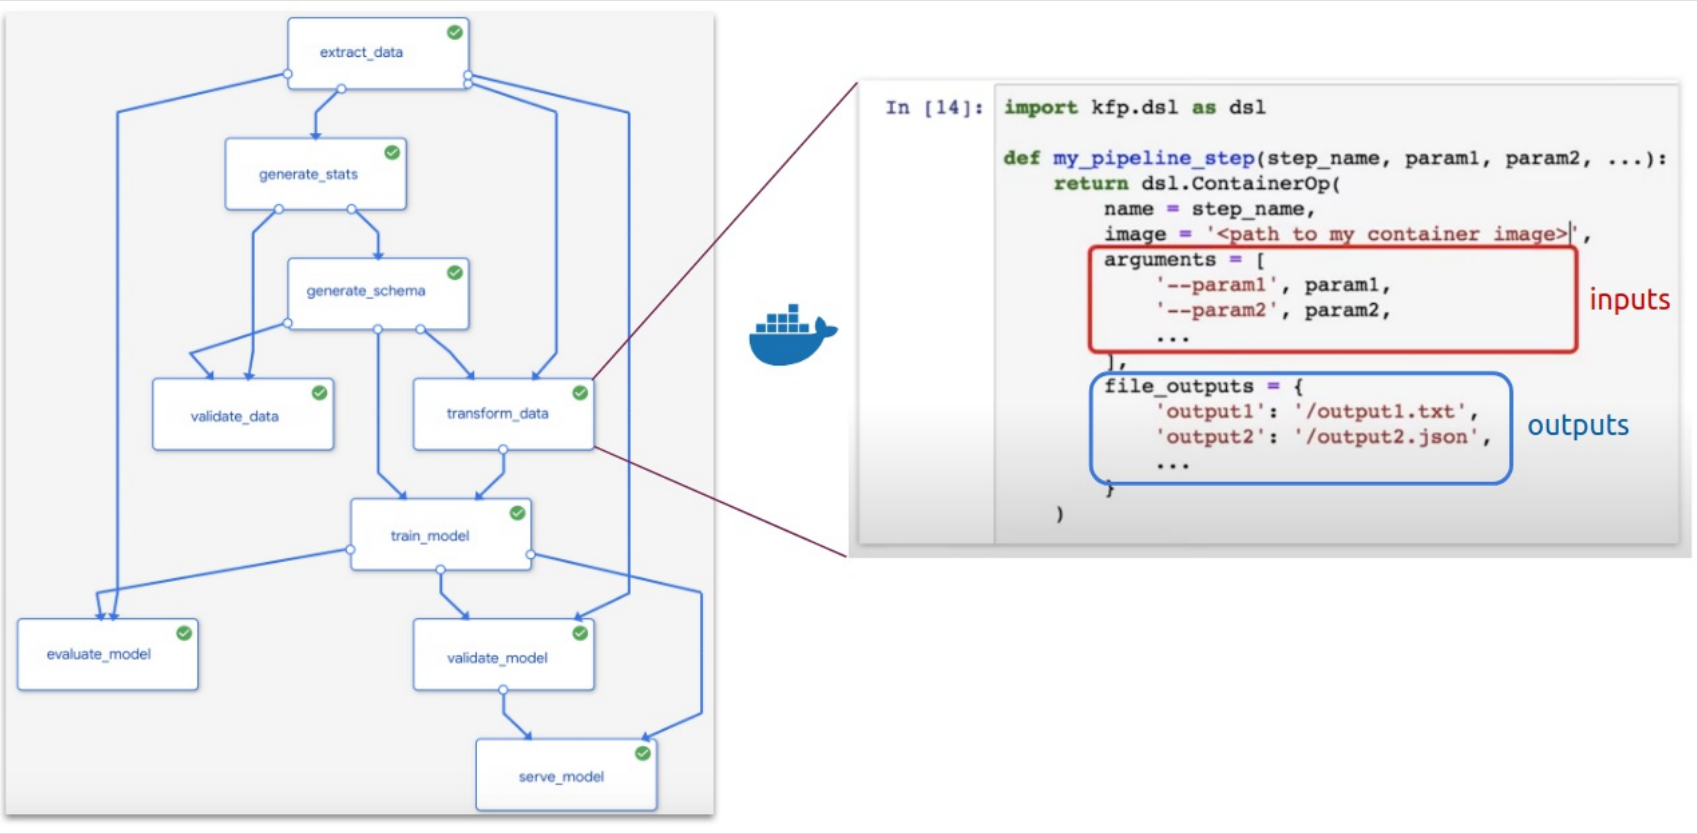


연합디지털트윈 예측 매니저

- Home
- Notebooks
- Models
- Pipelines
- Runs
- Analysis
- Data Collection

FDT-user (Developer)

Graph Run outp Config.

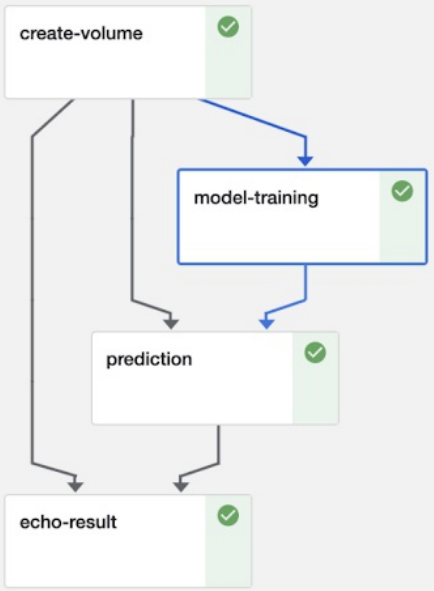

mnist-pipeline-4l9f6-771465083

Artifacts Input/Output Volumes Manifest Logs

```
_________________________________________________________________
dropout (Dropout)            (None, 512)               0
_________________________________________________________________
dense_1 (Dense)              (None, 10)                5130
=================================================================
Total params: 407,050
Trainable params: 407,050
Non-trainable params: 0
_________________________________________________________________
None
Train on 60000 samples
Epoch 1/10
   32/60000 [..............................] - ETA: 6:37 - loss: 2.4625 - accuracy: 0.0938
Epoch 2/10
   32/60000 [..............................] - ETA: 3s - loss: 0.3463 - accuracy: 0.8750
Epoch 3/10
   32/60000 [..............................] - ETA: 3s - loss: 0.4677 - accuracy: 0.8438
Epoch 4/10
   32/60000 [..............................] - ETA: 3s - loss: 0.3979 - accuracy: 0.8125
Epoch 5/10
   32/60000 [..............................] - ETA: 3s - loss: 0.1486 - accuracy: 0.9688
Epoch 6/10
   32/60000 [..............................] - ETA: 3s - loss: 0.3367 - accuracy: 0.8438
Epoch 7/10
   32/60000 [..............................] - ETA: 3s - loss: 0.1289 - accuracy: 1.0000
Epoch 8/10
   32/60000 [..............................] - ETA: 3s - loss: 0.4910 - accuracy: 0.8125
Epoch 9/10
   32/60000 [..............................] - ETA: 3s - loss: 0.4991 - accuracy: 0.8438
Epoch 10/10
```

연합디지털트윈 예측 매니저

- Home
- Notebooks
- Models
- Pipelines
- Runs
- Analysis
- Data Collection

FDT-user (Developer)

Analysis

Serivice Name


Artifacts Input/Output Logs

Table

ACTION	NONE	0.6619887948036194	0.337758362932434
ACTION	NONE	0.7651925683021545	0.23457849025726318
ACTION	NONE	0.5775803923606873	0.42215919494628906
ACTION	NONE	0.5368742346763611	0.46290817856788635
ACTION	NONE	0.633851945400238	0.36588987708091736
ACTION	NONE	0.5704599022865295	0.42924779653549194
ACTION	NONE	0.6158318519592285	0.38390201330184937
ACTION	NONE	0.6496037244796753	0.3501048982143402
ACTION	NONE	0.7724648118019104	0.22728440165519714
ACTION	NONE	0.60211580991745	0.3976353406906128


Artifacts Input/Output Logs


Confusion matrix



Artifacts Input/Output Logs

ROC Curve

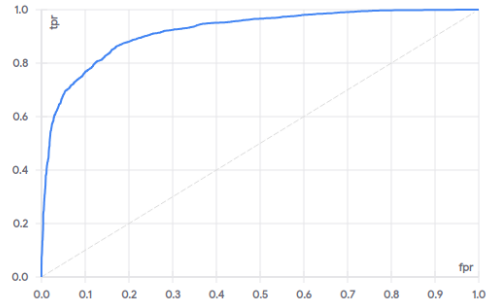

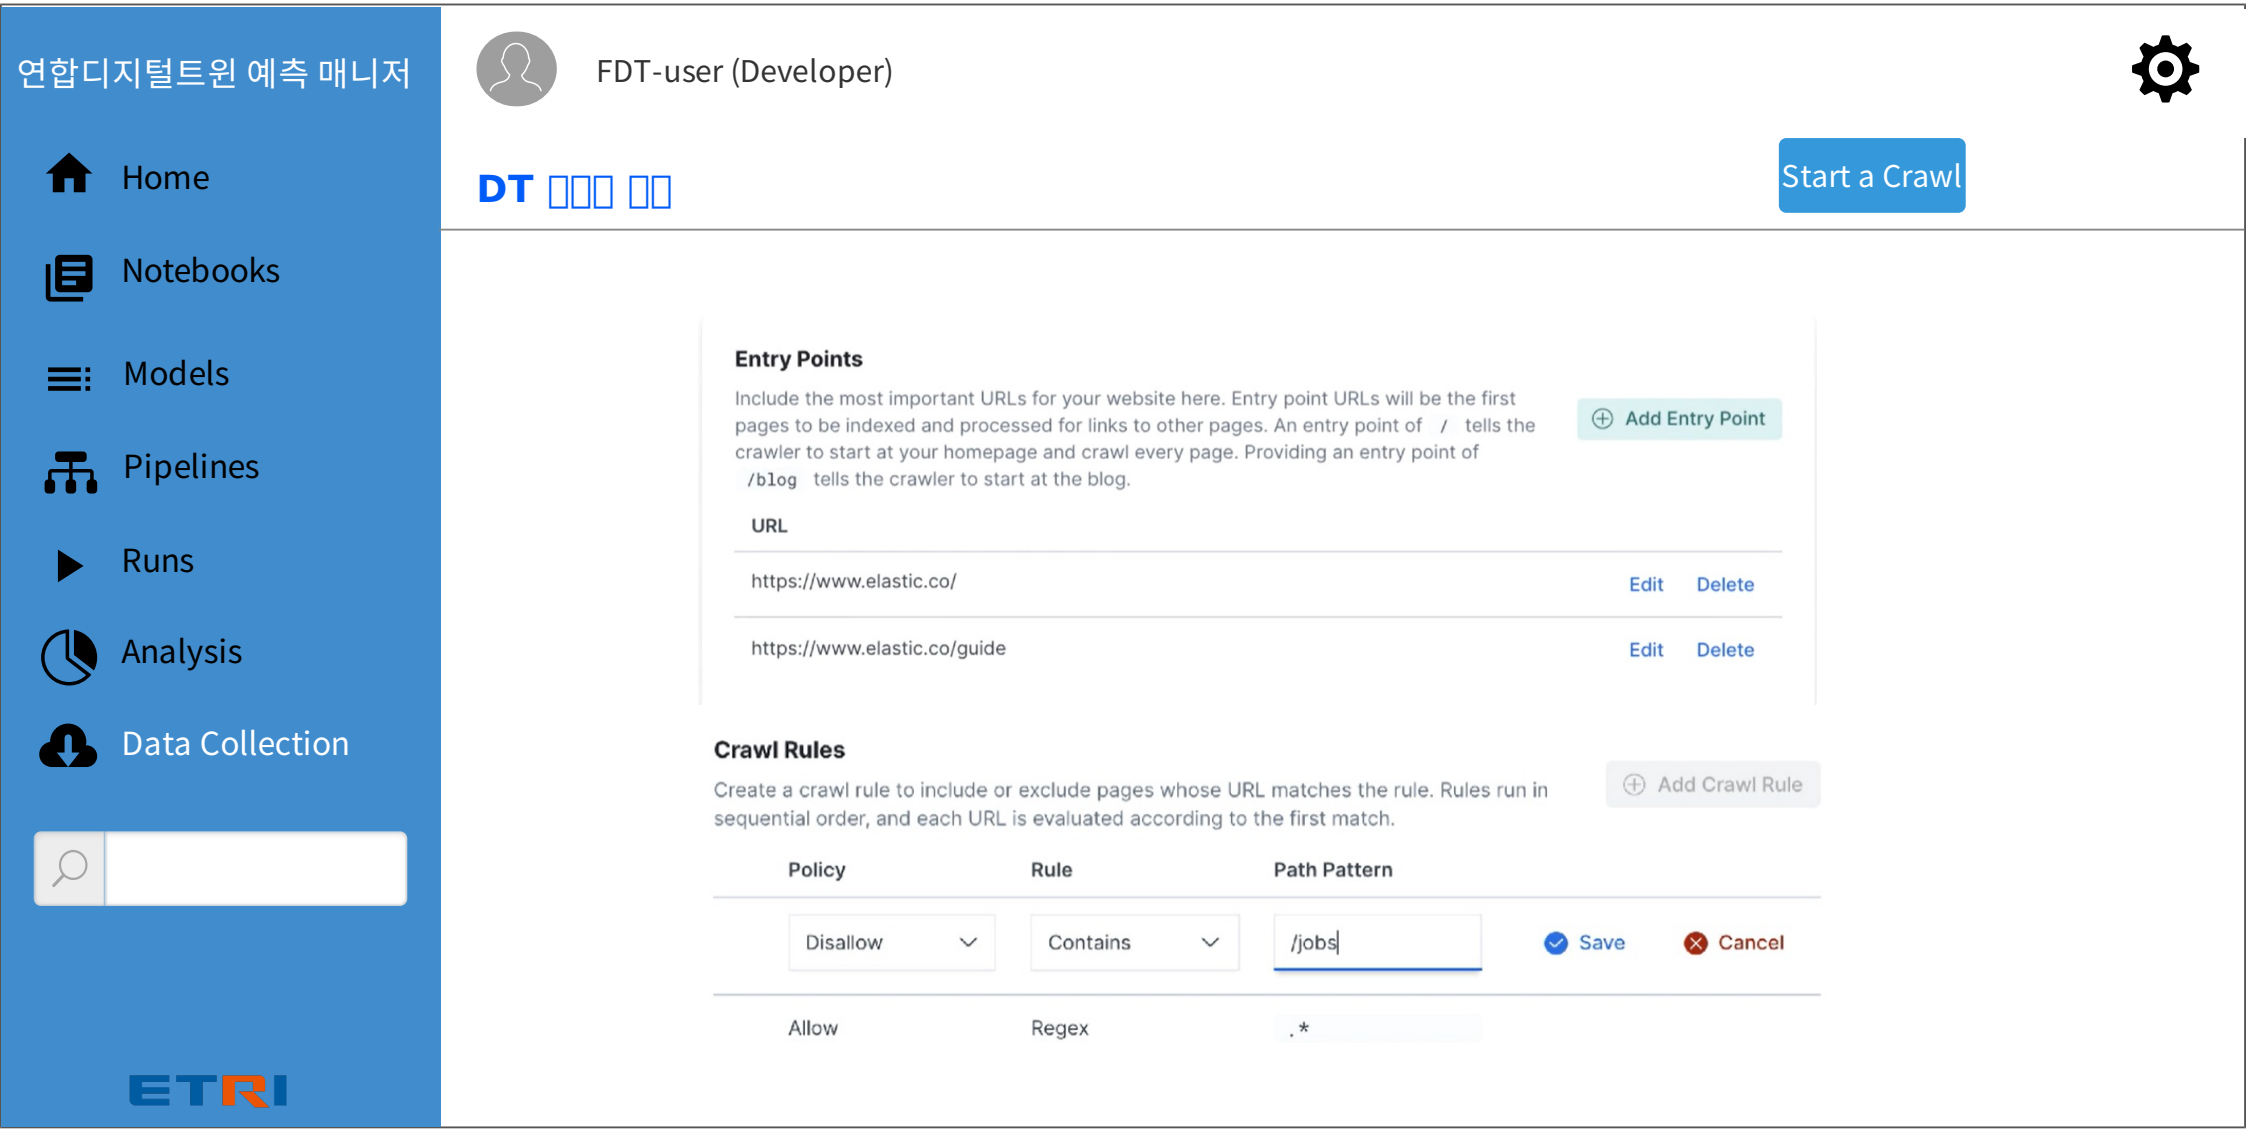
연합디지털트윈 예측 매니저
Home
Notebooks
Models
Pipelines
Runs
Analysis
Data Collection
ETRI
FDT-user (Developer)
DT □□□ □□
Start a Crawl
Entry Points
Include the most important URLs for your website here. Entry point URLs will be the first pages to be indexed and processed for links to other pages. An entry point of / tells the crawler to start at your homepage and crawl every page. Providing an entry point of /blog tells the crawler to start at the blog.
Add Entry Point
URL
https://www.elastic.co/
Edit
Delete
https://www.elastic.co/guide
Edit
Delete
Crawl Rules
Create a crawl rule to include or exclude pages whose URL matches the rule. Rules run in sequential order, and each URL is evaluated according to the first match.
Add Crawl Rule
Policy
Rule
Path Pattern
Disallow
Contains
/jobs
Save
Cancel
Allow
Regex
.*