


1 - Fizzbuzz


Write a test list for a program that takes an integer as an argument and prints the number to stdout. However, if the number is a multiple of three, the program should print “Fizz” instead of the number and if it's a multiple of five it should print “Buzz”. If the number is a multiple of both three and five, it should print “Fizzbuzz”.

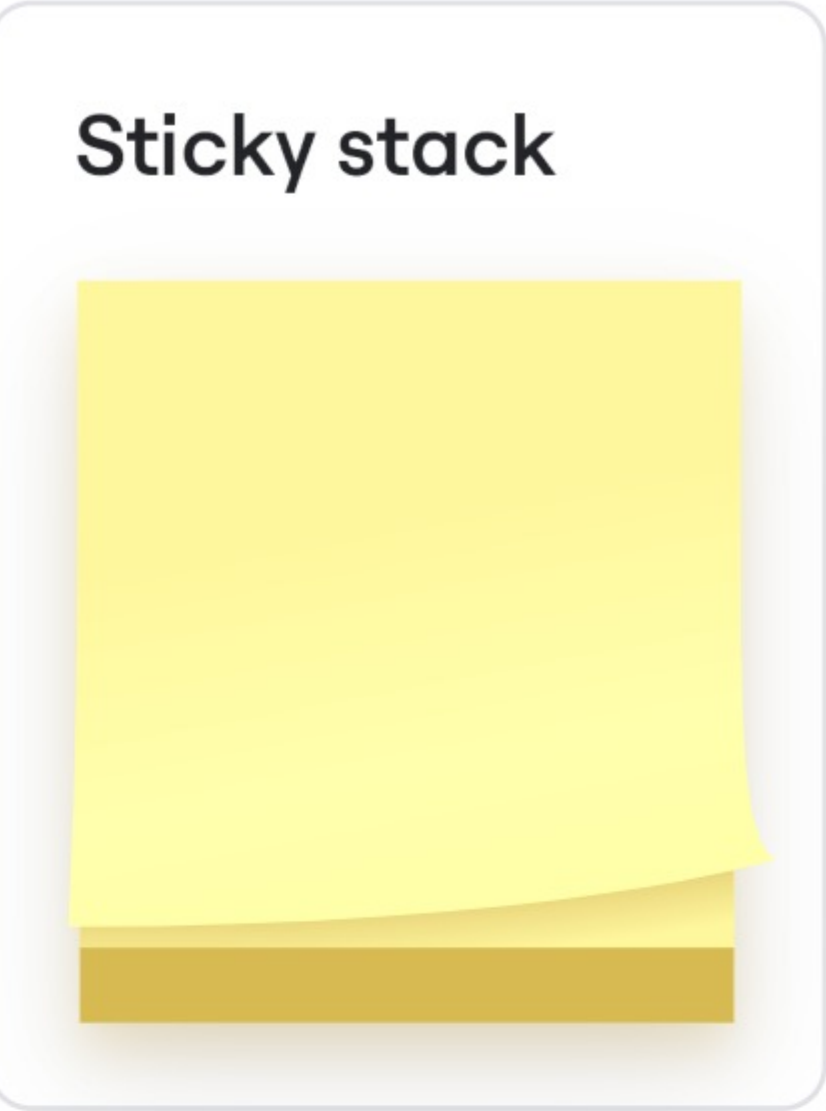

2 - Relative path normalization


Write a test list for a function that takes a relative path as a string and returns its normalized equivalent. A path may contain "." and ".." with the usual meanings.

Examples of Normalization	
Original Relative Path ⌘	Normalized Relative Path (POSIX/Web style)
directory/../file.txt	file.txt
./folder/file.txt	folder/file.txt
folder//file.txt	folder/file.txt
../other.txt	../other.txt
. or "" (empty string)	.
a/b/c/../../f.bin	a/f.bin

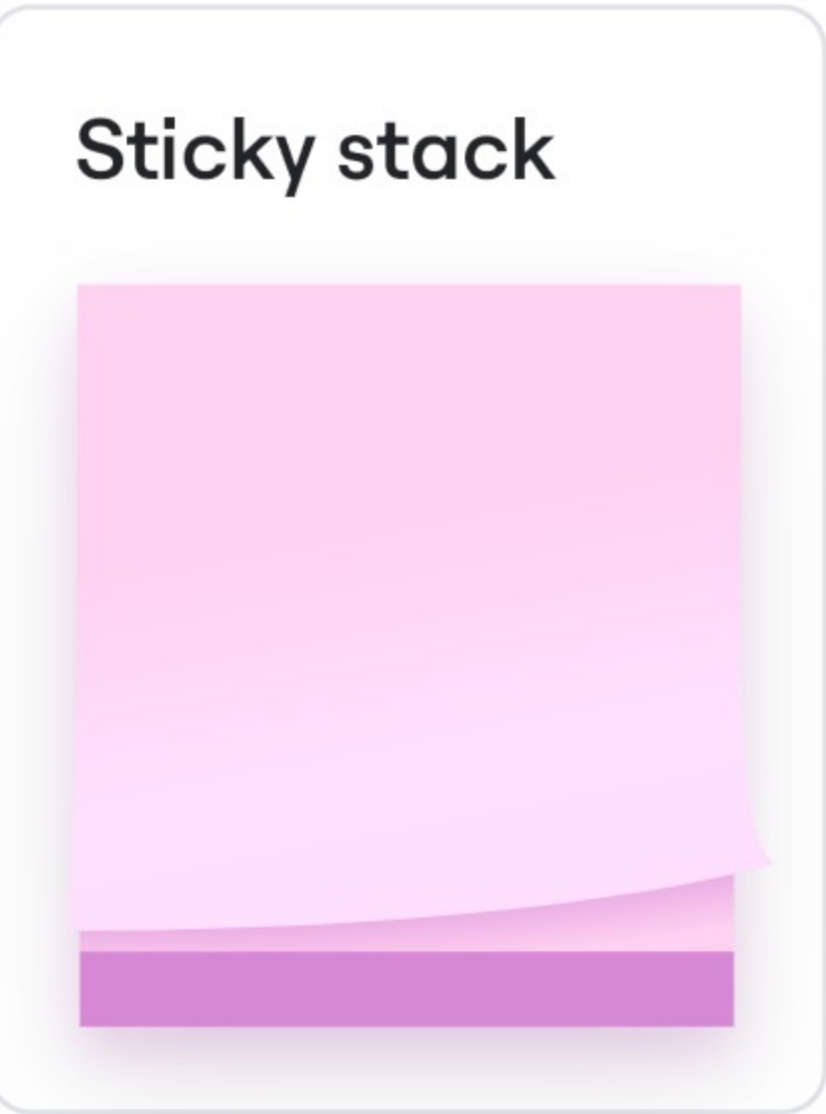

1 - Fizzbuzz


Write a test list for a program that takes an integer as an argument and prints the number to stdout. However, if the number is a multiple of three, the program should print “Fizz” instead of the number and if it's a multiple of five it should print “Buzz”. If the number is a multiple of both three and five, it should print “Fizzbuzz”.

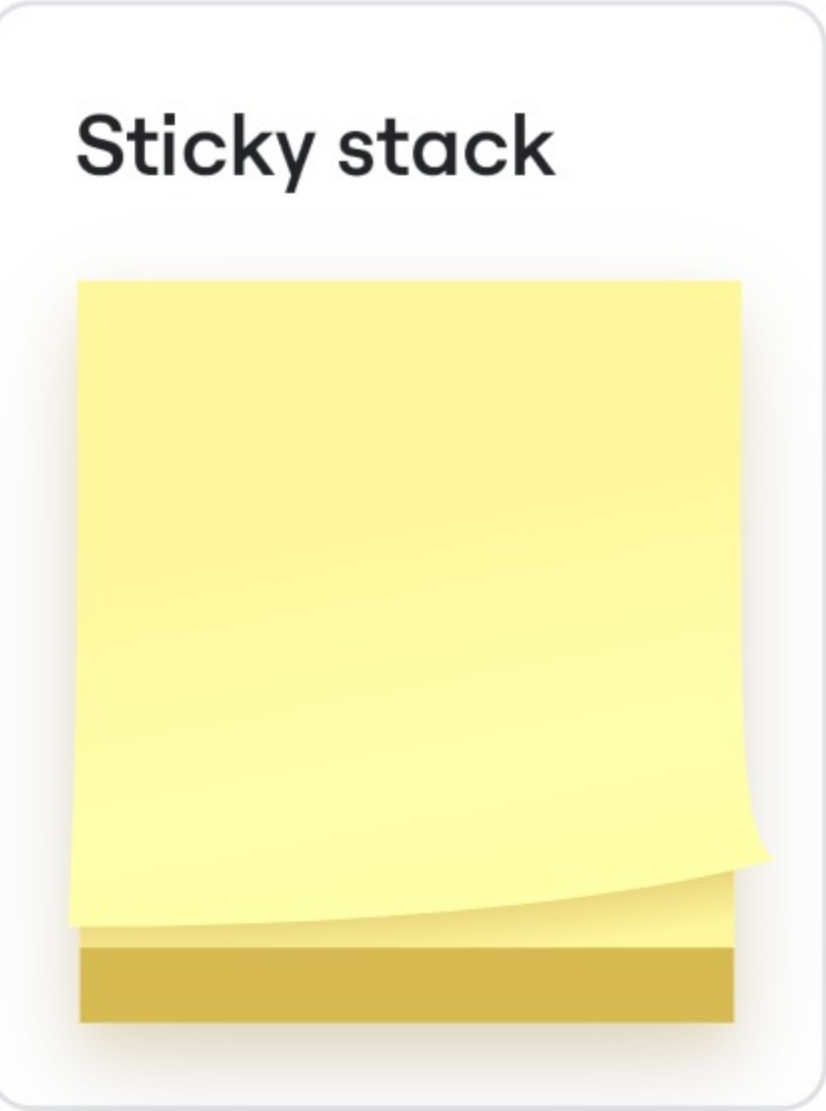

2 - Relative path normalization


Write a test list for a function that takes a relative path as a string and returns its normalized equivalent. A path may contain "." and ".." with the usual meanings.

Examples of Normalization	
Original Relative Path ⌘	Normalized Relative Path (POSIX/Web style)
directory/../file.txt	file.txt
./folder/file.txt	folder/file.txt
folder//file.txt	folder/file.txt
../other.txt	../other.txt
. or "" (empty string)	.
a/b/c/../../f.bin	a/f.bin

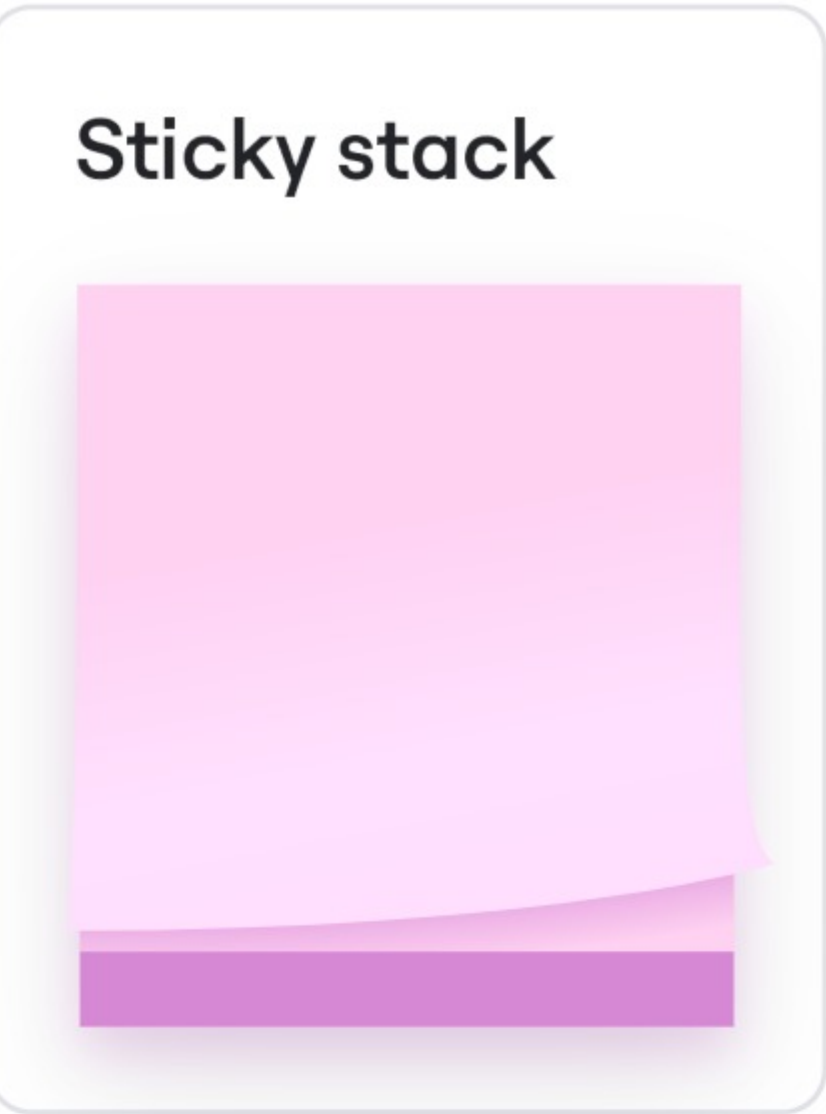

1 - Fizzbuzz


Write a test list for a program that takes an integer as an argument and prints the number to stdout. However, if the number is a multiple of three, the program should print “Fizz” instead of the number and if it's a multiple of five it should print “Buzz”. If the number is a multiple of both three and five, it should print “Fizzbuzz”.

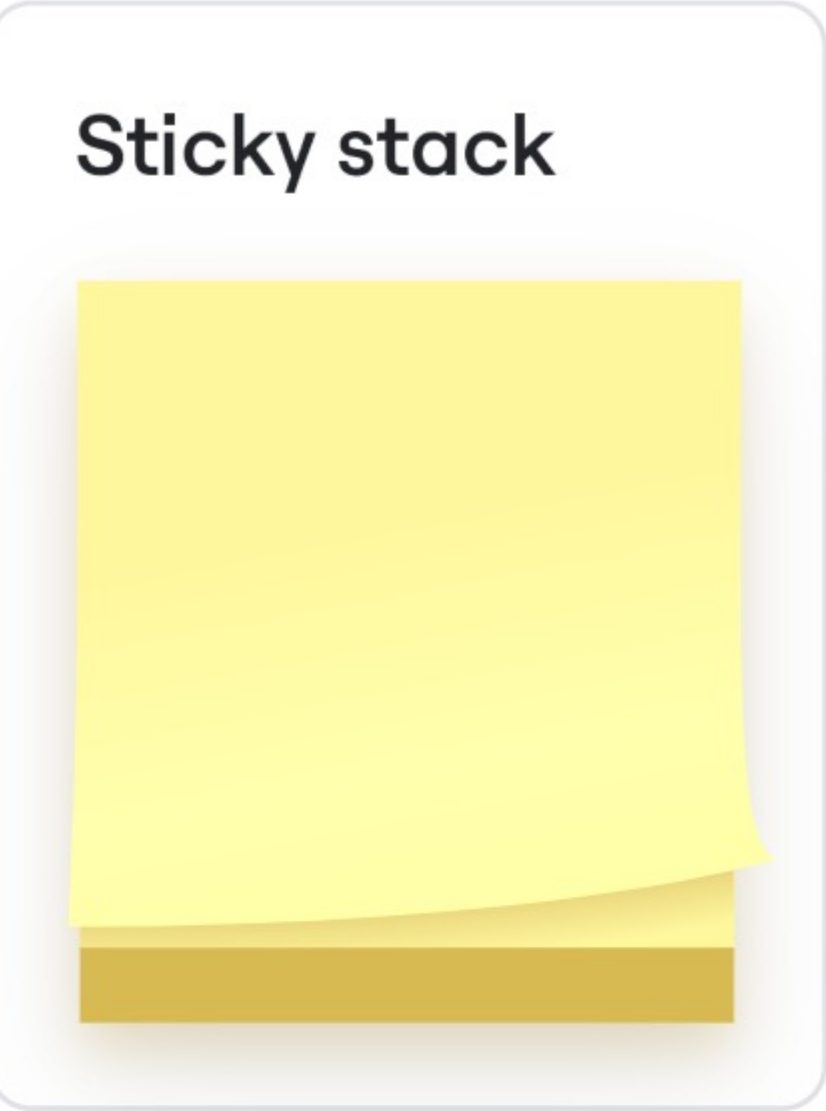

2 - Relative path normalization


Write a test list for a function that takes a relative path as a string and returns its normalized equivalent. A path may contain "." and ".." with the usual meanings.

Examples of Normalization	
Original Relative Path ⌘	Normalized Relative Path (POSIX/Web style)
directory/../file.txt	file.txt
./folder/file.txt	folder/file.txt
folder//file.txt	folder/file.txt
../other.txt	../other.txt
. or "" (empty string)	.
a/b/c/../../f.bin	a/f.bin

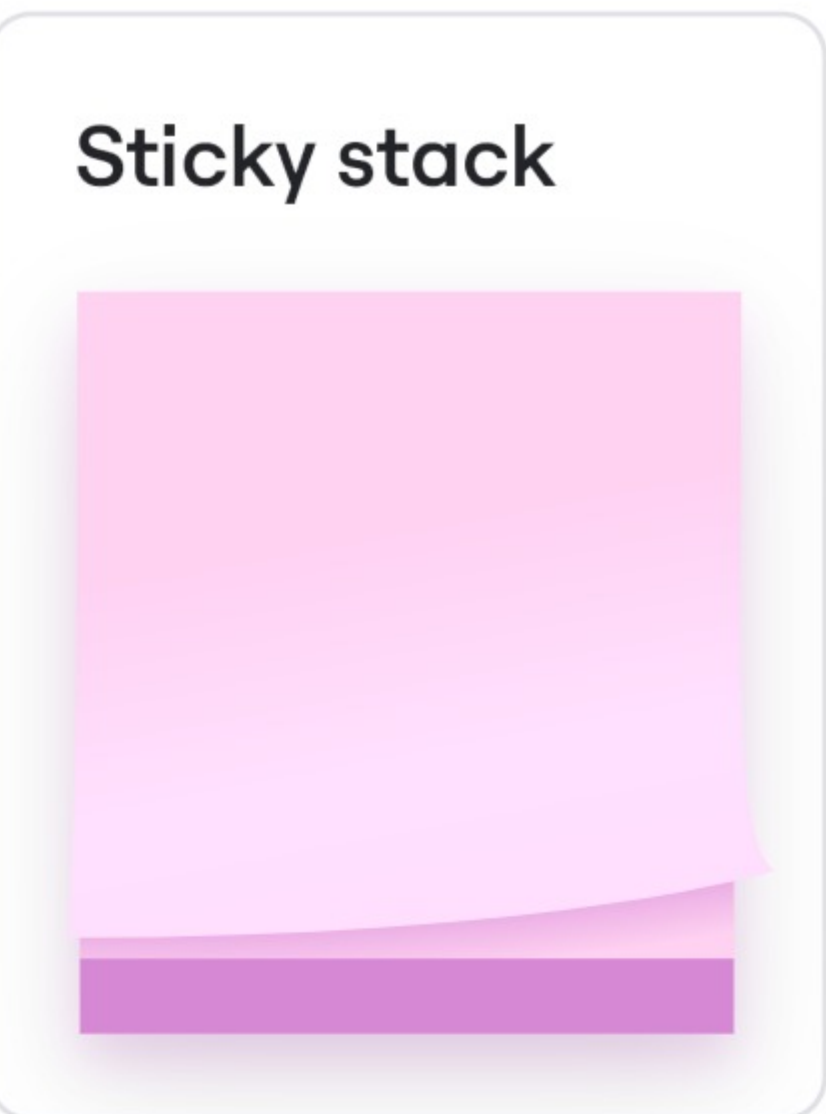

1 - Fizzbuzz

Write a test list for a program that takes an integer as an argument and prints the number to stdout. However, if the number is a multiple of three, the program should print “Fizz” instead of the number and if it's a multiple of five it should print “Buzz”. If the number is a multiple of both three and five, it should print “Fizzbuzz”.

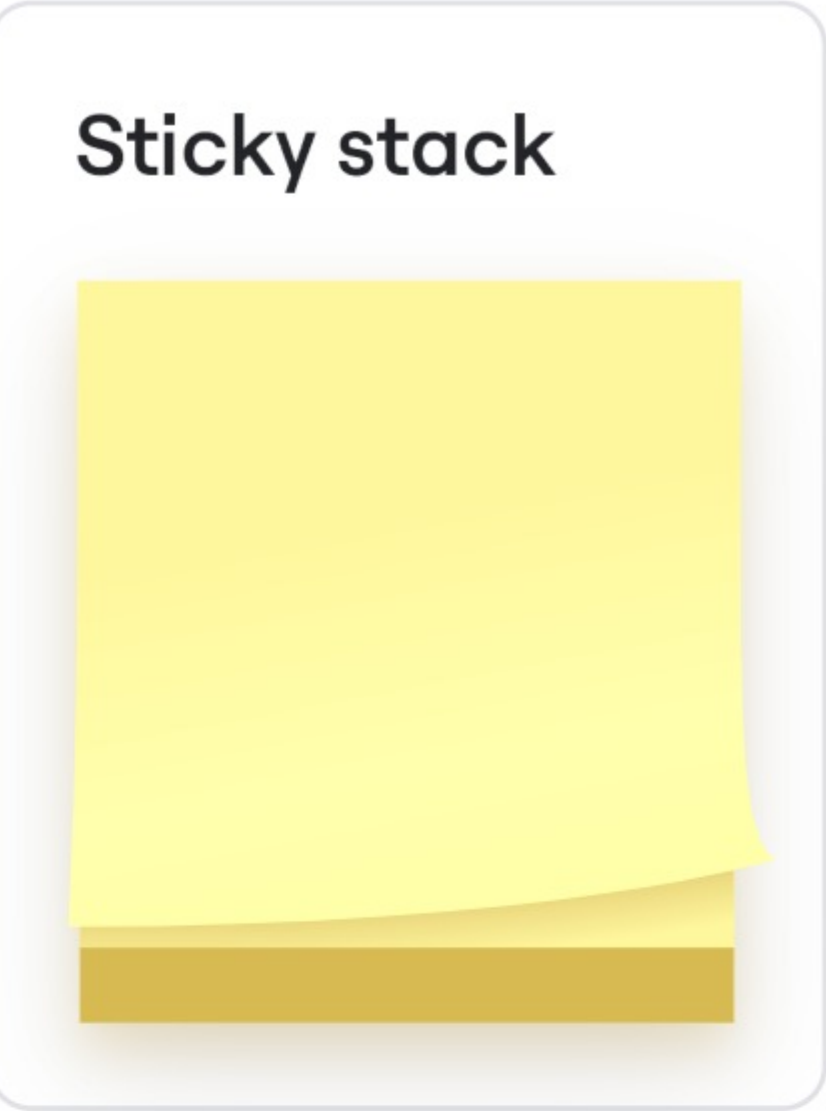

2 - Relative path normalization

Write a test list for a function that takes a relative path as a string and returns its normalized equivalent. A path may contain "." and ".." with the usual meanings.

Examples of Normalization	
Original Relative Path ⌕	Normalized Relative Path (POSIX/Web style)
directory/../file.txt	file.txt
./folder/file.txt	folder/file.txt
folder//file.txt	folder/file.txt
../other.txt	../other.txt
. or "" (empty string)	.
a/b/c/../../f.bin	a/f.bin

