

CS2102: Database Systems (AY2223 – Sem 1)

Midterm Exam


Submission Instructions

1. Please read **ALL** instructions carefully.
2. All the assessment is to be done using Exemplify; the assessment contains
 - (a) Fill in the Blank Questions: 1.1
 - (b) Multiple Response Questions: 1.2–1.3 (4 MRQs)
 - (c) Essay Questions: 2.1–2.5 (5 SQL queries)
 - (d) Your Internet connection will be blocked
 - (e) This is an open-book exam
3. No additional time will be given to submit.
4. For the SQL questions, there are additional instructions below; in a nutshell:
 - Use an IDE or text editor to write your queries and test them using `psql`
 - Prepare your final answer before submitting it to Exemplify according to the instructions in [Section 2](#)
 - Allocate sufficient time to prepare your final answers and to copy-&-paste them into Exemplify.
5. Failure to follow each of the instructions above may result in deduction of your marks.

Good Luck!

1 ER model & Relational Algebra (10 Marks)


1.1 Cardinalities (2 Marks). The given Entity-Relationship Diagram below does not show any attributes as they are of no relevance for this task. What is relevant are the numbers on the top right of the entity sets with the colour **BLUE**. These numbers indicate the number of instances of the entity sets Facility, Developer, and Landed.

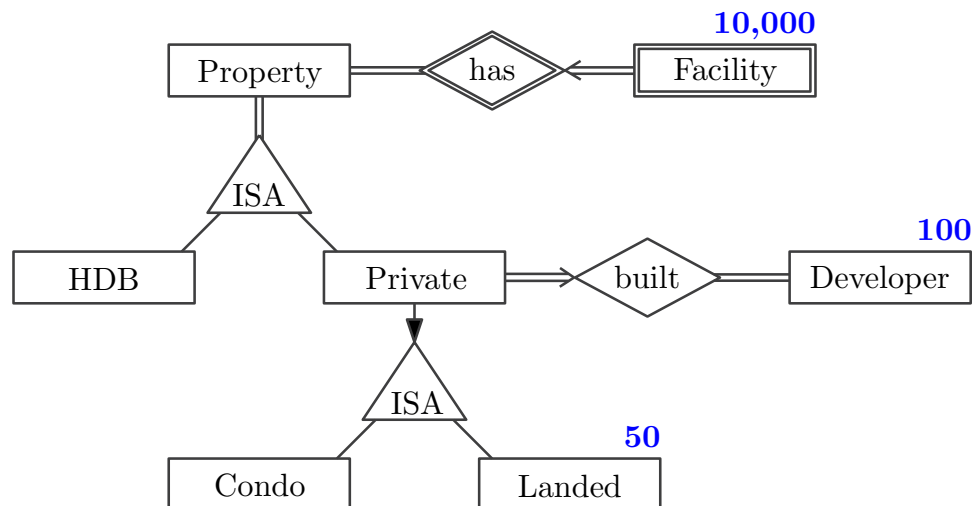

Complete the table below by identifying the **minimum** and **maximum** possible numbers of instances for the remaining entity sets.

| | minimum | maximum |
|----------|---------|---------|
| Property | | |
| HDB | | |
| Private | | |
| Condo | | |

1.2 Constraints (4 Marks). The ER Diagram below models a very simple University Course Database.

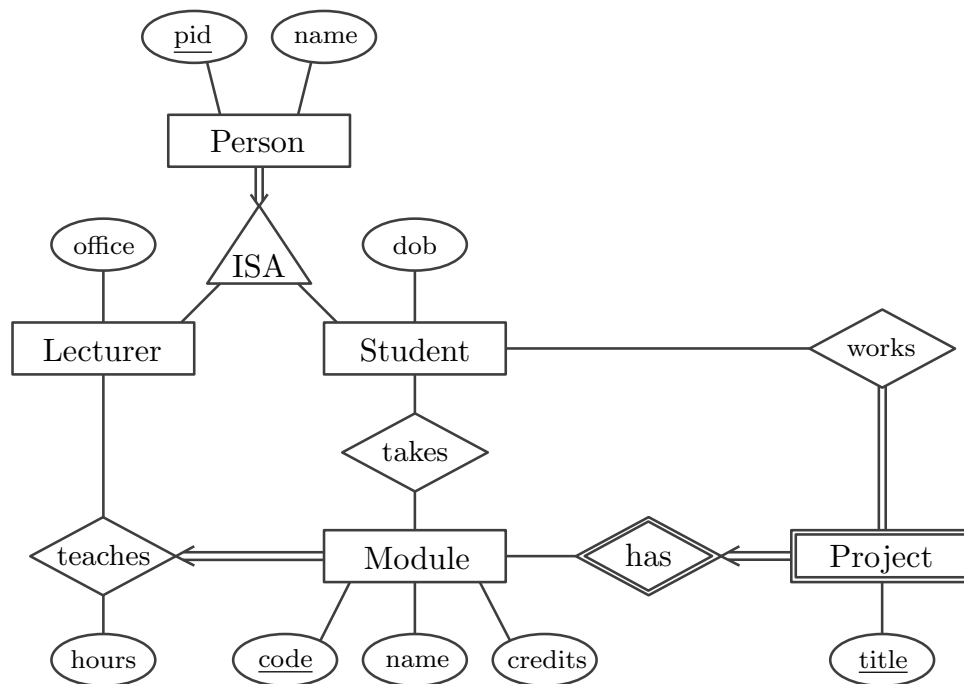

Based on this ER diagram, the following database schema has been created:

- `Person(pid, name)`
- `Lecturer(pid, office)`
- `Student(pid, dob)`
- `Module(code, name, credits, lecturer_id, hours)`
- `Project(code, title)`
- `Takes(student_id, code)`
- `Works(code, title, student_id)`

The foreign key constraints are as follows:

- `Lecturer.pid → Person.pid`
- `Student.pid → Person.pid`
- `Module.lecturer_id → Lecturer.pid`
- `Project.code → Module.code`
- `Takes.student_id → Student.pid`
- `Takes.code → Module.code`
- `Works.student_id → Student.pid`
- `(Works.code, Works.title) → (Project.code, Project.title)`

Let's assume the application requirements include the following list of 8 constraints (there might be more, but focus on these 8):

- (A) All Lecturers and Students are uniquely identified.
- (B) Each project must be worked on by at least one student.
- (C) The total number of teaching hours for a Lecturer cannot exceed 100h.
- (D) Each Module is taught by exactly one Lecturer.
- (E) A student can only work on a project that is part of a module the student is taking.
- (F) The credits for a module must either be 2, 4, or 8.
- (G) A Person must either be a Lecturer or a Student but not both.
- (H) The name of a person cannot be an empty string.

Given these 8 constraints, answer the following 2 questions:

- (a) Which of the 8 constraints above are **NOT CAPTURED** by the ER diagram?
Select ALL that apply.
 - (A) All Lecturers and Students are uniquely identified.
 - (B) Each project must be worked on by at least one student.
 - (C) The total number of teaching hours for a Lecturer cannot exceed 100h.
 - (D) Each Module is taught by exactly one Lecturer.
 - (E) A student can only work on a project that is part of a module the student is taking.
 - (F) The credits for a module must either be 2, 4, or 8.
 - (G) A Person must either be a Lecturer or a Student but not both.
 - (H) The name of a person cannot be an empty string.

- (b) Which constraints **CANNOT BE CAPTURED** when converting the ER Diagram into the database schema without using **TRIGGER** and using only concepts covered in lectures 1 - 6? Select ALL that apply.
- (A) All Lecturers and Students are uniquely identified.
 - (B) Each project must be worked on by at least one student.
 - (C) The total number of teaching hours for a Lecturer cannot exceed 100h.
 - (D) Each Module is taught by exactly one Lecturer.
 - (E) A student can only work on a project that is part of a module the student is taking.
 - (F) The credits for a module must either be 2, 4, or 8.
 - (G) A Person must either be a Lecturer or a Student but not both.
 - (H) The name of a person cannot be an empty string.

1.3 Equivalence of Queries (4 Marks).

- (a) Consider the following SQL query

```
SELECT l.pid, l.office
FROM Lecturer l
WHERE EXISTS (SELECT m.lecturer_id
               FROM Module m, Project p
               WHERE m.code = p.code
                  AND m.lecturer_id = l.pid
                  AND m.credits = 2);
```

Which of the following Relational Algebra expressions are equivalent to this SQL query? Select ALL that apply.

- (A) $Q_1 = \text{Lecturer} \bowtie \rho_{[\text{pid} \leftarrow \text{lecturer_id}]}(\text{Module}) \bowtie \text{Project}$
 $Q_{ans} = \pi_{[\text{pid}, \text{office}]}(\sigma_{[\text{credits}=2]}(\pi_{[\text{pid}, \text{office}, \text{credits}]}(Q_1)))$
- (B) $Q_1 = \sigma_{[\text{credits}=2]}(\text{Module}) \bowtie \pi_{[\text{code}]}(\text{Project})$
 $Q_{ans} = \pi_{[\text{pid}, \text{office}]}(\text{Lecturer} \bowtie_{[\text{pid}=\text{lecturer_id}]} Q_1)$
- (C) $Q_1 = \text{Lecturer} \bowtie_{[\text{pid}=\text{lecturer_id}]} \text{Module}$
 $Q_{ans} = \pi_{[\text{pid}, \text{office}]}(\sigma_{[\text{credits}=2]}(\pi_{[\text{pid}, \text{office}, \text{credits}]}(Q_1) \bowtie \text{Project}))$
- (D) $Q_1 = \text{Lecturer} \bowtie_{[\text{pid}=\text{lecturer_id}]} \text{Module}$
 $Q_{ans} = \pi_{[\text{pid}, \text{office}]}(\sigma_{[\text{credits}=2]}(Q_1) \bowtie \pi_{[\text{code}]}(\text{Project}))$
- (E) *None of the above*

(b) Consider the following Relational Algebra expression

$$Q_1 = \pi_{[\text{code}, \text{pid}, \text{hours}]}(\rho_{[\text{pid} \leftarrow \text{lecturer_id}]}(\text{Module}))$$

$$Q_{ans} = \pi_{[\text{name}, \text{office}]}(\sigma_{[\text{hours} > 40]}(\text{Person} \bowtie \text{Lecturer} \bowtie Q_1))$$

Which of the following SQL queries are equivalent to this Relational Algebra expression? Select ALL that apply.

(A)

```
SELECT p.name, l.office
FROM   Person p, Lecturer l
WHERE  p.pid = l.pid
      AND l.pid = ANY (SELECT lecturer_id
                       FROM   Module m
                       WHERE  m.hours > 40);
```

(B)

```
SELECT p.name, l.office
FROM   Person p, Lecturer l
WHERE  p.pid = l.pid
      AND l.pid IN (SELECT m.lecturer_id
                   FROM   Module m
                   WHERE  m.hours > 40);
```

(C)

```
SELECT p.name, l.office
FROM   Person p, Lecturer l
WHERE  p.pid = l.pid
      AND NOT EXISTS (SELECT 1
                     FROM   Module m
                     WHERE  m.lecturer_id = l.pid
                     AND    m.hours <= 40);
```

(D)

```
SELECT p.name, p.office
FROM   Person p, Lecturer l, Module m
WHERE  p.pid = l.pid
      AND l.pid = m.lecturer_id
      AND m.hours > 40;
```

(E) *None of the above*

2 Formulating SQL Queries (10 Marks)

In this part of the exam your task is to formulate queries in SQL. We use the same database that we introduced for Assignment 1. This means you can directly run and test your queries using `psql`. If needed, we provide the ER diagram and the `CREATE TABLE` statements for the database schema in the Appendix. But you should be very familiar with the database by now.

Instructions. To ensure successful submission and grading of your SQL queries adhere to the following instructions:

- For each question, you are to write a **single CREATE OR REPLACE VIEW SQL statement** to answer the question. You **MUST** use the view schema provided for each question without changing any part of the view schema (i.e., view name, column names, or the order of the columns). For example, the provided view schema for the question is "q2 (area)", and if your answer to this question is the query "SELECT name FROM areas;", then you must enter your answer in the answer box as follows:

```
CREATE OR REPLACE VIEW q2 (area) AS
SELECT name
FROM areas
;
```

- Each CREATE OR REPLACE VIEW statement must terminate with a semicolon.
- Each answer must be a syntactically valid SQL query. Test with `psql`!
- Each question must be answered independently of other questions, i.e., the answer for a question must not refer to any other view that is created for another question.
- Your answers must not use SQL constructs that are not covered in Lectures 1-6.
- Your answers must be executable on PostgreSQL. Test with `psql`!
- You must not enter any extraneous text for your answer (e.g., "My answer is: ...), or enter multiple answers (i.e., submit multiple SQL statements). Your answer should not contain any comments.

Recommendations. We recommend the following steps to answer each question:

- Write the answer query using your IDE or text editor of choice, and test it on your machine with `psql`.
- Once you are happy with your query, add the `CREATE OR REPLACE VIEW` statement for the corresponding question in front of the query. You can test the complete statement again with `psql` and create the view.
- Copy the complete `CREATE OR REPLACE VIEW` statement into the answer field in Exemplify (don't forget to the semicolon at the end!)

2.1 Query 1 (1 Mark): Find the number of subzones in the 'bukit merah' area with a population greater than 15,000!

```
CREATE OR REPLACE VIEW q1 (num_subzones) AS
```

2.2 Query 2 (2 Marks): Find the names of all areas in the 'central' region that do not contain any MRT station!

```
CREATE OR REPLACE VIEW q2 (area) AS
```

2.3 Query 3 (2 Marks): Find the name of the top-3 areas with the most MRT stops (not stations)! Include the number of stops in your result set! Additional note: You can ignore potential ties – that is, two or more areas having the same number of stops – the result for the top-3 areas is unambiguous.

```
CREATE OR REPLACE VIEW q3 (area, num_stops) AS
```


2.4 Query 4 (2 Marks): Find the names of all MRT stations along the East-West Line ('ew') from which you can reach any other line in just 1 stop. For example, from 'aljunied' ('ew9') you can reach 'paya lebar' ('cc9'), so 'aljunied' should be in your result set. In contrast, 'kallang' ('ew10') only connects to stations of the 'ew' line, so it should not be in your result set.


```
CREATE OR REPLACE VIEW q4 (mrt_station) AS
```

2.5 Query 5 (3 Marks): Find all areas that are served by 3 or more different MRT lines – that is, all areas that contain any number of MRT stations of at least 3 different lines. So if an area contains 5 MRT stations but from only 1 or 2 lines, this area should not be part of your result. Include the area names and the number of lines that serve each area in your result and sort by the number of lines in descending order.

```
CREATE OR REPLACE VIEW q5 (area, num_lines) AS
```

A Appendix

A.1 ER Diagram of Database for Task 2

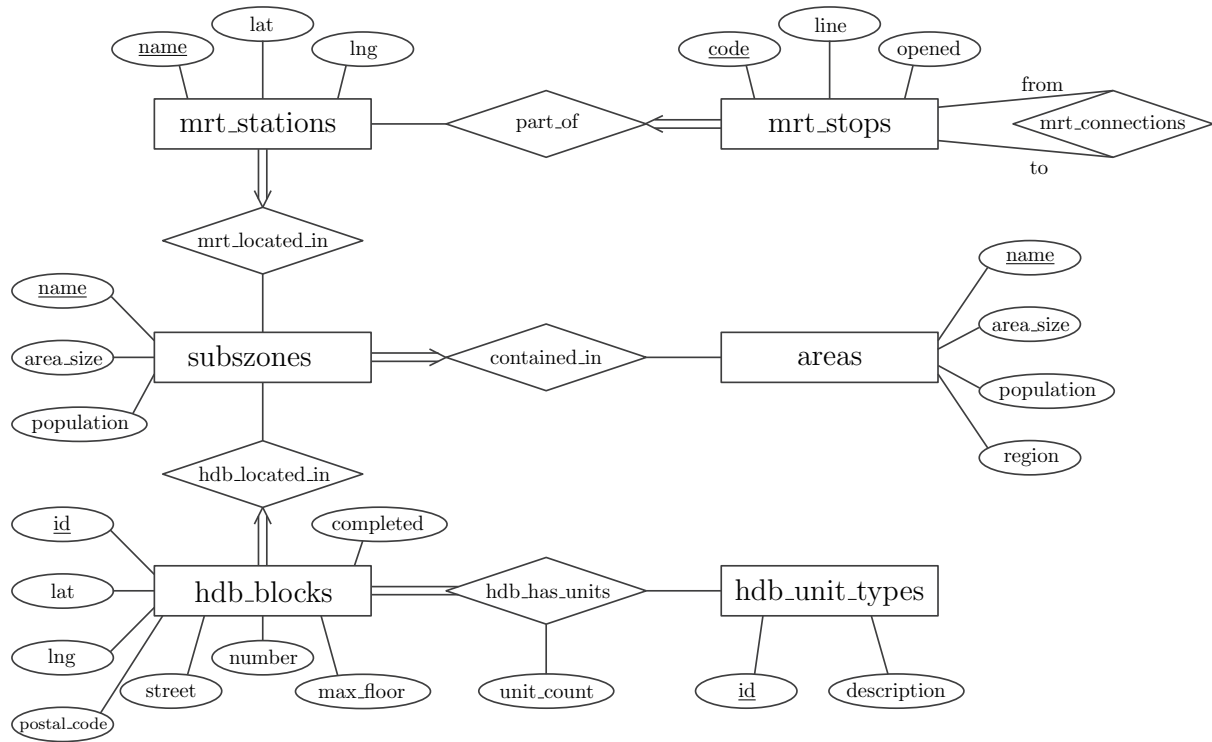

A.2 CREATE TABLE statements of Database for Task 2

```
CREATE TABLE areas (  
  name TEXT PRIMARY KEY,  
  area_size NUMERIC CHECK (area_size >= 0),  
  population INTEGER CHECK (population >= 0),  
  region TEXT NOT NULL  
);  
  
CREATE TABLE subzones (  
  name TEXT PRIMARY KEY,  
  area_size NUMERIC CHECK (area_size >= 0),  
  population INTEGER CHECK (population >= 0),  
  area TEXT NOT NULL,  
  FOREIGN KEY (area) REFERENCES areas (name)  
);
```

```

CREATE TABLE hdb_blocks (
  id INTEGER PRIMARY KEY,
  number TEXT NOT NULL,
  street TEXT NOT NULL,
  postal_code INTEGER NOT NULL CHECK (postal_code > 0),
  completed INTEGER NOT NULL,
  max_floor INTEGER NOT NULL CHECK (max_floor >= 0),
  lat NUMERIC NOT NULL,
  lng NUMERIC NOT NULL,
  subzone TEXT NOT NULL,
  FOREIGN KEY (subzone) REFERENCES subzones (name)
);

CREATE TABLE hdb_has_units (
  block_id INTEGER NOT NULL,
  unit_type TEXT NOT NULL,
  unit_count INTEGER NOT NULL CHECK (unit_count >= 0),
  PRIMARY KEY (block_id, unit_type),
  FOREIGN KEY (block_id) REFERENCES hdb_blocks (id)
);

CREATE TABLE mrt_stations (
  name TEXT PRIMARY KEY,
  lat NUMERIC NOT NULL,
  lng NUMERIC NOT NULL,
  subzone TEXT NOT NULL,
  FOREIGN KEY (subzone) REFERENCES subzones (name)
);

CREATE TABLE mrt_stops (
  code CHAR(4) PRIMARY KEY,
  line CHAR(2) NOT NULL,
  opened INTEGER NOT NULL CHECK (opened >= 0),
  station TEXT NOT NULL,
  FOREIGN KEY (station) REFERENCES mrt_stations (name)
);

CREATE TABLE mrt_connections (
  from_code CHAR(4),
  to_code CHAR(4),
  PRIMARY KEY (from_code, to_code),
  FOREIGN KEY (from_code) REFERENCES mrt_stops (code),
  FOREIGN KEY (to_code) REFERENCES mrt_stops (code)
);

CREATE TABLE hdb_unit_types (
  id CHAR(10) PRIMARY KEY,
  description TEXT NOT NULL
);

```