

Don't see what you're looking for? Log in for the full Help Center experience

Transactions not broadcast by Fireblocks

Updated 3 months ago

Overview

Some customers may generate outgoing transactions from their Fireblocks vault accounts or embedded wallets that Fireblocks does not broadcast. Fireblocks reports these transactions by monitoring blockchain nodes and all addresses managed within vault accounts.

These transactions are typically:

- Raw transactions signed by Fireblocks
- Transactions that use a previously exported private key (i.e., not signed by Fireblocks)

Important notes


- If the transaction destination is whitelisted in your workspace, it will be labeled in the transaction's details. If not, the destination is identified as a one-time address.
- Once a transaction hash is generated on the blockchain, Fireblocks will track the transaction and generate webhooks. Transactions not broadcast by Fireblocks can have Confirming, Completed, or Failed statuses.
- Transactions on UTXO blockchains may not display all data, but will always include the transaction hash and the source address.
- If your workspace does not have Raw Signing enabled and you are not otherwise expecting the transaction, you should determine the transaction's source. Occasionally, a contract call may produce this condition.

Monitoring non-broadcast transactions in the Console

Don't see what you're looking for? Log in for the full Help Center experience

Fireblocks Fireblocks Help Center

/

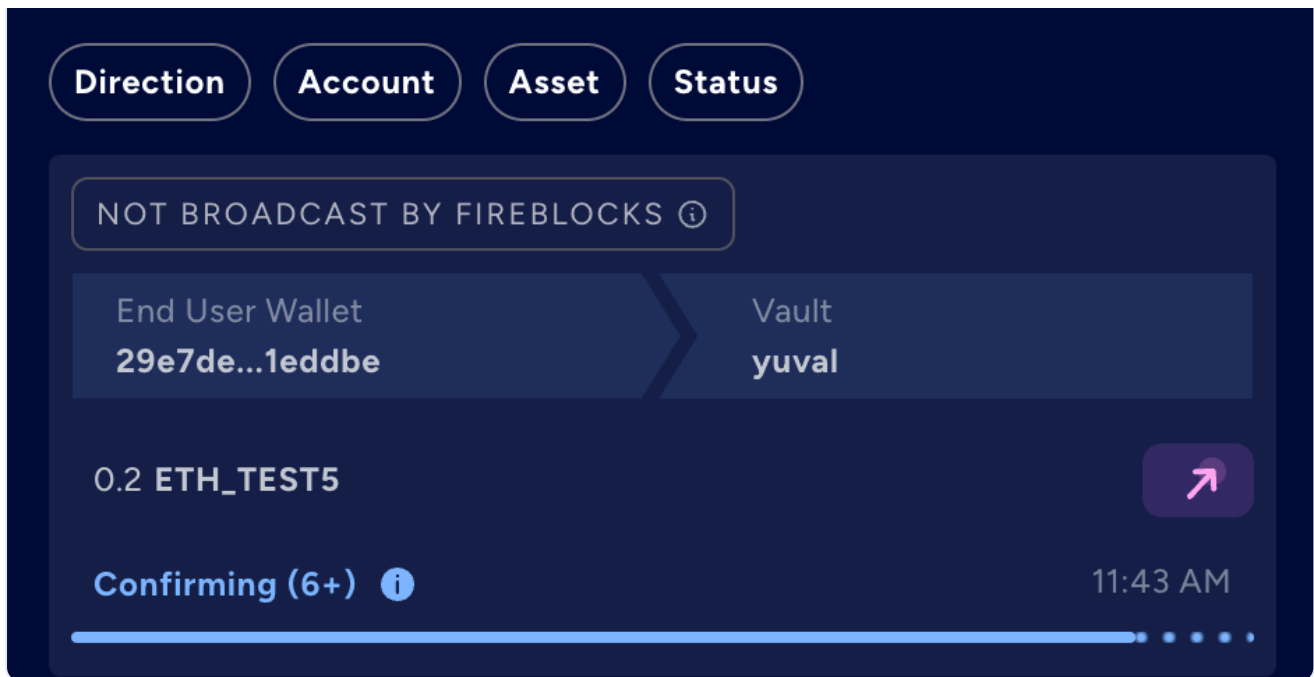

Monitoring non-broadcast transactions programmatically

You can programmatically identify transactions not broadcast by Fireblocks by checking the `notBroadcastByFireblocks` field in the transaction response:

- `notBroadcastByFireblocks = true`: The transaction was *not* signed by Fireblocks.
- `notBroadcastByFireblocks = false` or `null`: The transaction was signed and broadcast by Fireblocks.

This field is available in webhook notifications and any Fireblocks API endpoint that returns the `TransactionResponse` object.

Webhook example (TRANSACTION_STATUS_UPDATED):



```
{
  "type": "TRANSACTION_STATUS_UPDATED",
  "data": {
    "id": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  }
}
```

Don't see what you're looking for? Log in for the full Help Center experience

 Fireblocks Help Center

/

Was this article helpful?

Yes

No

ON THIS PAGE

Overview

Monitoring non-broadcast transactions in the Console

Monitoring non-broadcast transactions programmatically

Related Articles

-  Using dApps on non-EVM networks
-  Raw Signing
-  Typed Message Signing
-  Managing your Movement account on Fireblocks
-  Using the Recovery Tool for raw signing
-  Transaction lifecycle
-  Staking with Raw Signing
-  Cancel a transaction
-  Primary transaction statuses

Don't see what you're looking for? Log in for the full Help Center experience



Fireblocks Help Center

