# Self-Obtained and Evidence-Driven, but Not Sustained: Two Preregistered Level-4 Tests of a Self-Editing Campaign Layer

Junai P. Felix*
Independent Researcher, Taipei, Taiwan

October 2026
Version 1.0 · Preprint, not peer reviewed

**Abstract**

FELIX-C9 was the first study in this programme in which rewriting a program-repair system's improvement mechanism (IMP) paid off causally. Its gain rested on one of two campaigns. Here FELIX-C9's mission code is kept unchanged, and its campaign layer is replaced by a self-editing one. That layer keeps an archive of variants, has an improver program that edits itself, has writable parent-selection rules, and adopts a change only through a fixed gate outside anything it can edit.

In FRM-11 (preregistered; 2 campaigns, then 72 confirmatory missions on 24 fresh seeds), *both* campaigns independently found and committed the same structural rewrite, a tree-ensemble policy form, on their own hidden-seed evidence. The evolved IMP beat the default by +4.71 pp (95% CI 3.85 to 5.56; 23 of 24 seeds; exact one-sided Wilcoxon $p = 1.2 \times 10^{-7}$). FRM-12 (preregistered; confirm-only, 72 missions on 24 further fresh seeds, wider per-round search) replicated this at +4.92 pp (24/24, $p = 6 \times 10^{-8}$). It also showed that the choice was driven by evidence. A per-seed random pick from the campaigns' own proposals did no better than the default (+0.23 pp), and the evolved IMP beat it by +4.69 pp (22/0/2, $p = 2.4 \times 10^{-7}$).

Both studies nonetheless **failed** the ladder's sustained-progress criterion A-4, which requires a gain of at least 1 pp from round 16 to round 32 at $p < 0.01$: +1.08 pp ($p = 0.026$) and +0.81 pp ($p = 0.021$). Their preregistered verdict is therefore "B-1 pass but Tier A fails", not "Level 4 with causal support". The failure is structural. The evolved IMP reaches about 45% by round 16 and has little left to gain, while the far weaker default *passes* A-4 in both studies ($p = 0.003$ and $5 \times 10^{-6}$). No gain reached held-out task families. We also report a defect in FRM-11's random control, which collapsed onto the default, and how FRM-12 repaired it.

## 1 Introduction

A system that rewrites its own improvement mechanism meets common definitions of recursive self-improvement whether or not the rewriting helps. This programme has therefore separated two questions for nine preregistered studies [3]. The first is *definitional*: does the system meet a published Level-4 definition [1]? The second is *causal*: does the rewriting cause the improvement, compared with a frozen mechanism and with evidence-free rewriting? FELIX-C9 [2] answered the causal question positively for the first time (+2.57 pp against the default). Its gain, though, came entirely from the one campaign of two that sampled the useful structure, and it did not reach held-out families or real bugs.

This paper reports two further preregistered studies that ask whether a stronger, self-editing campaign layer makes the result solid. Concretely:

1. **Self-obtained.** Do *both* independent campaigns find the useful structure by their own evidence, rather than one by luck?
2. **Evidence-driven.** Does choosing by evidence beat choosing at random among the same proposals?
3. **The full ladder.** Are all of FELIX's Level-4 criteria met, including A-4, sustained progress within a mission?

The answers are yes, yes (once the control was repaired) and no. We report all three, the defects found along the way, and why we think A-4 fails.

*junai.felixx@gmail.com · ORCID 0009-0006-1641-0399

## 2 System and ladder

**Missions.** The task layer is FELIX-C9, frozen and unmodified (freeze hash `42288423...2643dedd`). A mission runs 32 rounds. Each round proposes candidate revisions of a repair policy, screens them on selection tasks, and promotes the best only if it passes an external audit on fresh tasks: a gain of at least 2% and a sign-test $p \leq 0.10$ on 300 tasks. Training uses 12 development families. The test covers all 16, so four families are held out. As in FELIX-C9, in-mission forking is off. IMP, the versioned rule that turns evidence into policy revisions, includes a structural gene for the policy's form: logistic (the default), three linear decoys known from development to be neutral or harmful, or a tree ensemble.

**Campaign layer.** FELIX-C9's campaign kept one incumbent and edited it with a fixed proposal rule. The replacement ("campaign10") keeps an *archive* of variants. A parent is chosen by writable *pool rules* (own score, clade credit or novelty, with a temperature, a leniency and an archive cap). The parent's *improver program*, a weighted list of edit operators, edits a copy of the whole genome: the IMP, the pool rules and the improver program itself. A candidate is scored on a small public panel of seeds. It becomes the incumbent only through a **fixed gate**, which sits outside the genome: its total on 4 hidden seeds must beat the incumbent's by more than one task per seed. In FELIX-C9 the corresponding margin was itself an editable gene. The improver starts from FELIX-C9's proposal shares.

**The ladder.** FELIX-C9's locked criteria are used unchanged. All tests are exact one-sided Wilcoxon signed-rank tests on 24 per-seed paired differences in round-32 test solve rate.

- **B-1** (rewriting pays off): E − D, with mean $\geq +1.0$ pp and $p < 0.01$.
- **B-2** (evidence matters): E − R, with mean $\geq +0.5$ pp and $p < 0.05$.
- **Tier A**:
  - A-1: promotions in at least 20 of 24 E missions.
  - A-2: each campaign commits at least once, and its final IMP differs from the default.
  - A-3: the editing procedure is inside the genome.
  - A-4: E's round-32 minus round-16 gain has mean $\geq +1.0$ pp and $p < 0.01$.
  - A-5: integrity. Sources match the freeze, every mission reconciles, and campaign logs replay.
- **Headroom**: D $\leq 85\%$. **Autonomy**: no interventions.

"Productive recursion: Level 4 with causal support" requires Tier A, B-1 and B-2. Here E is the evolved IMP, D the default IMP and R an evidence-free control.

## 3 FRM-11

**Design.** We registered the protocol, its freeze (`6d735312...`) and two addenda before any campaign result existed (Table 3). Two campaigns (seed bases 41000 and 42000) each ran until 48 unique full-scale missions had been used. Confirmatory missions ran on fresh seeds 9201–9224, with seed $i$ assigned to campaign $i \bmod 2$. Arm R replayed the campaign's own proposal operator once per commit and accepted every step regardless of evidence. Everything ran on GitHub-hosted runners, with the campaigns on separate runners and the 72 confirmatory missions split across 12 runners.

**Campaigns.** Both campaigns committed the tree learner through the fixed gate: campaign 0 made 2 commits in 32 steps, campaign 1 made 1 commit in 54 steps. Campaign 1's final mechanism had edited itself, and the archives held 12 and 24 mechanism edits. Every campaign log replayed to the same decisions, and all campaign missions reconciled.

**Results.** Table 1 gives the ladder. B-1 passed by a wide margin. The gain held in each campaign separately: +4.35 pp (11/1, $p = 0.0005$) and +5.08 pp (12/0, $p = 0.0002$). FELIX-C9 managed this in only one of its two campaigns. A-4 failed: +1.08 pp, $p = 0.026$, against a bar of $p < 0.01$. The preregistered verdict is **"B-1 pass but Tier A fails"**. Under the addenda's gating rule, nothing further (held-out, real-bug, self-obtained or sustained claims) could be claimed, and the follow-up runs were not launched.

**Two defects found in FRM-11's records.**

1. **Arm R equalled the default.** Replaying the campaign's proposal steps can reset genes, or change only the mechanism and leave the IMP alone. Campaign 0's two drift steps moved to trees and back. Campaign 1's single step changed only the mechanism. In both campaigns R's IMP was byte-identical to

Table 1: The Level-4 ladder in both studies. Seeds are counted as positive/negative/zero.

| Criterion | FRM-11 (seeds 9201–9224) | FRM-12 (seeds 9301–9324) |
|---|---|---|
| A-1 promotions $\geq 20/24$ | 24/24 ✓ | 24/24 ✓ |
| A-2 each campaign commits; E $\neq$ default | 2 and 1 commits; trees ✓ | inherited from FRM-11 ✓ |
| A-3 editing procedure in the genome | ✓ | inherited ✓ |
| **A-4** E r32 − r16 $\geq +1.0$ pp, $p < 0.01$ | +1.08 pp, $p = 0.026$ (15/5/4) × | +0.81 pp, $p = 0.021$ (13/6/5) × |
| A-5 integrity | 72/72 reconciled; replay ✓ | 72/72 reconciled ✓ |
| Headroom / autonomy | D = 40.6%; 0 interventions ✓ | D = 40.6%; 0 interventions ✓ |
| **B-1** E − D | +4.71 pp [3.85, 5.56], 23/1/0, $p = 1.2 \times 10^{-7}$ | +4.92 pp [4.15, 5.73], 24/0/0, $p = 6 \times 10^{-8}$ |
| **B-2** E − R | +5.00 pp, 24/0/0 (R ≡ D; defect 1) | +4.69 pp [3.63, 5.77], 22/0/2, $p = 2.4 \times 10^{-7}$ |
| Held-out families, E − D | −1.67 pp [−3.49, 0.26], $p = 0.96$ | −1.30 pp [−3.12, 0.57], $p = 0.92$ |
| D's own r32 − r16 | +1.59 pp, $p = 0.003$ | +1.58 pp, $p = 5 \times 10^{-6}$ |
| **Verdict** | **B-1 pass but Tier A fails** (both) | |

Brackets: 95% percentile bootstrap intervals of the mean (20,000 resamples of seeds). The $p$-values in the criterion rows are the runs' own, computed with FELIX-C9's `stats.py`.

Table 2: Development pilots (exploratory; seeds 9201–9204, previously used by FRM-11).

| Mission setting | E r32 − r16 | E − D | held-out E − D | D r32 − r16 |
|---|---|---|---|---|
| FRM-11 (8 candidates, 96 selection tasks, 300-task audit) | −0.16 | +4.38 | −0.31 | +1.48 |
| 600-task audit, 1% threshold | +0.08 | +4.22 | 0.00 | +1.72 |
| 900-task audit, 1% threshold | −0.94 | +2.34 | −0.63 | +2.81 |
| 16 candidates per round | +0.86 | +5.08 | +3.44 | +1.72 |
| **16 candidates, 192 selection tasks** (chosen) | +2.27 | +6.41 | +0.62 | +1.80 |

D's, so FRM-11's B-2 was a second E − D and *not* a test of whether evidence matters. FRM-11's B-2 row should be read in that light.

2. **Cross-hardware floating-point differences.** Because R and D had identical specifications, they should have produced identical missions. In 6 of 24 seeds they diverged after round 1 or 2, and all six divergent missions ran on the same two runner shards. This is consistent with a different CPU type giving float-level differences in the numerical library's solvers. The differences are noise, not bias, and missions are deterministic on a single machine.

# 4 Between the studies: why E stops improving

FRM-11's records show E saturating early. From round 16 to round 32, E's 24 missions had 384 rounds. In 239 of them the best candidate was better on the selection tasks but failed the audit, and 223 of those failed on both counts: a gain under 2%, and a sign test that 300 tasks could not resolve (a median of 21 tasks differed between old and new policy). Lowering the 2% threshold alone would have unlocked none of these rounds. Promotions fell from 118 in the first half to 36 in the second.

Two development pilots on four of FRM-11's spent seeds, 9201–9204 (four seeds, arms E and D, full missions; Table 2) tested whether a finer audit or a wider search restores late progress. A finer audit mostly helped the default, which narrowed E − D. A wider search per round (16 candidates instead of 8, judged on 192 selection tasks instead of 96) gave E +2.27 pp of late progress on those four seeds. FRM-12 adopted it. With hindsight, four seeds were too few to choose from: the effect did not replicate (Section 5).

# 5 FRM-12

**Design.** FRM-12 was registered after FRM-11's result was known (freeze `2aa99acc...`) and was *confirm-only*. Arm E is the Imp FRM-11's campaigns obtained by themselves; both campaigns' final Imps are identical in every gene a mission reads. Every mission uses the wider search. The R arm was repaired: for each seed, one of campaign $c$'s own recorded proposals is picked uniformly at random on a fixed stream, and its Imp is used. On the 24 seeds this drew 14 logistic, 3 l1, 3 balanced, 2 pairwise and 2 trees, a draw computed before the freeze and left unchanged. The 72 missions ran on fresh seeds 9301–9324 on one cloud machine, four at a time, with single-threaded numerical libraries. Two host restarts interrupted the run. Each time, every mission resumed from its last committed round, and no mission was dropped or selectively rerun. Both restarts are logged.

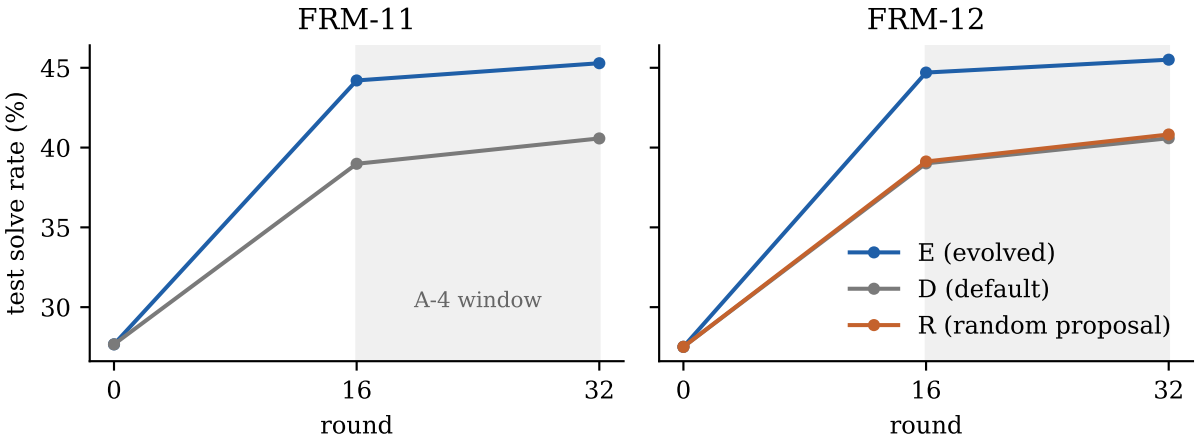



Figure 1: Mean test solve rate at rounds 0, 16 and 32. The shaded band is the A-4 window. E (the self-obtained tree-learner IMP) gains about 17 pp by round 16 and under 1 pp after it. D (the default) keeps improving and passes A-4 in both studies. FRM-11's R is not shown because it equalled D.

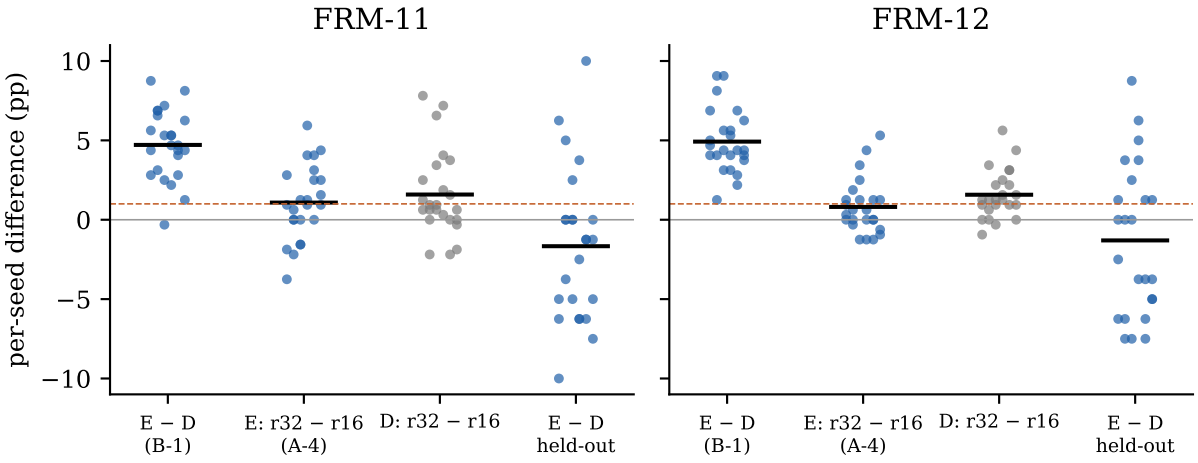



Figure 2: Per-seed differences in each study (24 seeds; bars are means). B-1 is positive on 47 of 48 seeds across the two studies. A-4 for E sits near zero, while the default's own second-half gain is larger. On held-out families E − D centres slightly below zero. The dashed line marks the 1 pp bar.

**Results.** B-1 replicated: +4.92 pp, 24 of 24 seeds. B-2 is now a genuine test, and it passed. The random proposal did no better than the default (R − D = +0.23 pp, $p = 0.29$), while E beat R by +4.69 pp (22/0/2). A-4 failed again (+0.81 pp, $p = 0.021$), so the verdict is again **"B-1 pass but Tier A fails"**. The held-out criteria H-1 and H-2, registered in advance and gated on the verdict, would also have failed (−1.30 pp and −0.73 pp).

## 6 Discussion

**What is established.** Across two studies on 48 fresh seeds, a self-editing campaign layer found the useful structural rewrite of IMP in each of its independent campaigns. The rewrite caused a gain of about 4.7–4.9 pp, nearly twice FELIX-C9's. That gain was not obtained by luck: a random pick from the same proposal stream gave none. In the terms of the synthesis [3], this campaign layer has better *judgement* than FELIX-C9's. It reached the useful structure reliably where FELIX-C9's search reached it once in two campaigns.

**Why A-4 fails.** A-4 was defined in Stage 3 [1], where the policy learner was linear and improved slowly over a whole mission. Under that learner, second-half progress was a reasonable marker of a mechanism that keeps improving. The tree-ensemble form the system now selects converges within half a mission (Figure 1).

By round 16, E is already about 4 pp above where the default *ends* at round 32, and it gains under 1 pp after that. Meanwhile the weaker default passes A-4 easily. As defined, A-4 rewards slow learners and penalises the better structure the system found. Under every setting we tried, the evolved Imp plateaued at round 16 and the default kept climbing. We do not redefine A-4 here: it was locked before both studies, and changing it after two failures would not be credible. A future study could preregister a progress criterion that is invariant to convergence speed, justified before any data.

**Reach, still.** Neither study showed any gain on held-out families. On the training families the gain was +6.8 to +7.0 pp; on held-out families it was −1.3 to −1.7 pp. The tree form fits the training families better without generalising, as FELIX-C9's post-hoc analysis found for every policy form [2]. The limit on transfer lies in what the system observes, not in how well its campaign layer judges.

# 7 Limitations

- **One synthetic domain.** All missions use one program-repair domain designed by the author. The useful structure comes from a menu the designer supplied; the system selects it but does not invent it. Real-bug transfer was not tested here.
- **FRM-12 is confirm-only.** It tests the product of FRM-11's campaigns under a wider search. It does not show that campaigns run under the wider search would obtain the same Imp.
- **Adaptive sequence.** FRM-12's setting was chosen after FRM-11's A-4 failure, from two four-seed pilots. The confirmatory seeds were fresh and the criteria unchanged, but the programme as a whole is adaptive.
- **Registration.** Both protocols were registered as timestamped commits in a private repository, not on a public registry. They are published byte-identical, and their hashes are in the freeze records, but the timestamps are not independently verifiable.
- **Errors.** FRM-11's R arm was defective (defect 1), so FRM-11 alone does not test B-2. Cross-hardware float differences (defect 2) and the decoy learner's unseeded solver (as disclosed for FELIX-C9) make some missions non-reproducible bit for bit.
- **AI assistance.** Design, implementation, analysis and drafting were carried out with substantial assistance from an AI system (Claude, Anthropic) under the author's direction. The AI is not part of the system under test. The FRM-11 R-arm defect was introduced in that implementation and found in review of the records.

# 8 Reproducibility and integrity

The preregistrations, addenda and freeze records are published in this repository's `protocols/frm11` and `protocols/frm12`. They are byte-identical to the registered files, whose SHA-256 the freeze records list. Per-seed results are in `data/frm11_per_seed.csv` and `data/frm12_per_seed.csv`, and `data/verify.py` recomputes every number in Table 1 from them on each change to the repository. Mission records, campaign logs and the frozen sources are held privately and are available to reviewers on request, as for the programme's earlier studies.

Table 3: Registration and first data (UTC, 2026-10-27 unless noted). Commit times are in the private repository.

| Document | Registered | First data |
|---|---|---|
| FRM-11 preregistration and freeze `6d735312...` | 02:46 | campaigns started 02:58 |
| Addendum 1 (held-out, real bugs) | 04:11 | first campaign result 06:22 |
| Addendum 2 (self-obtained, sustained) | 04:28 | first campaign result 06:22 |
| FRM-12 preregistration and freeze `2aa99acc...` | 21:30 | missions started 21:31 |

# 9 Conclusion

A self-editing campaign layer made FELIX's structural self-modification reliable. Both independent campaigns found the useful rewrite by their own evidence, the rewrite caused a gain that replicated on fresh seeds, and choosing by evidence beat choosing at random. The full Level-4 ladder was still not met, because the better mechanism the system found converges too fast for a sustained-progress criterion designed for slower learners. The benefit also stayed within the training distribution. Both results are reported as preregistered.

# References


[1] J. P. Felix. Level-4 bounded recursive self-improvement under a published definition: a preregistered test of a self-referential improvement mechanism (FELIX-C3), v1.3. Zenodo, 2026. doi:10.5281/zenodo.23366534.

[2] J. P. Felix. Rewriting the structure of its own improvement mechanism: a preregistered causal test of bounded recursive self-improvement (FELIX-C9), v1.2. Zenodo, 2026. doi:10.5281/zenodo.23427738.

[3] J. P. Felix. Reach, not judgement: what nine preregistered studies show about when self-modification pays off, v1.1. Zenodo, 2026. doi:10.5281/zenodo.23427841.


# A Per-seed results

Test solve rates in percent; E prom. is the number of promotions in the E mission; c is the assigned campaign.

Table 4: FRM-11.

| Seed | c | E r16 | E r32 | A-4 | D r32 | R r32 | E−D | E−D held-out | E prom. |
|---|---|---|---|---|---|---|---|---|---|
| 9201 | 0 | 48.44 | 44.69 | -3.75 | 39.06 | 39.06 | +5.62 | -10.00 | 7 |
| 9202 | 1 | 47.50 | 48.12 | +0.62 | 41.25 | 41.25 | +6.88 | +5.00 | 6 |
| 9203 | 0 | 43.75 | 42.19 | -1.56 | 42.50 | 41.56 | -0.31 | +0.00 | 7 |
| 9204 | 1 | 42.81 | 46.88 | +4.06 | 41.56 | 41.56 | +5.31 | +3.75 | 6 |
| 9205 | 0 | 42.50 | 46.56 | +4.06 | 43.75 | 43.75 | +2.81 | -6.25 | 8 |
| 9206 | 1 | 41.25 | 45.62 | +4.38 | 37.50 | 37.50 | +8.12 | +0.00 | 7 |
| 9207 | 0 | 38.12 | 40.94 | +2.81 | 38.12 | 38.44 | +2.81 | -6.25 | 6 |
| 9208 | 1 | 47.81 | 47.81 | +0.00 | 44.69 | 44.69 | +3.12 | +0.00 | 8 |
| 9209 | 0 | 48.12 | 48.12 | +0.00 | 42.81 | 42.81 | +5.31 | +2.50 | 6 |
| 9210 | 1 | 46.88 | 48.12 | +1.25 | 45.94 | 45.94 | +2.19 | -6.25 | 7 |
| 9211 | 0 | 47.81 | 50.31 | +2.50 | 45.62 | 44.06 | +4.69 | -1.25 | 6 |
| 9212 | 1 | 43.12 | 44.69 | +1.56 | 38.44 | 38.44 | +6.25 | -5.00 | 7 |
| 9213 | 0 | 43.44 | 44.38 | +0.94 | 35.62 | 35.62 | +8.75 | +6.25 | 6 |
| 9214 | 1 | 45.94 | 43.75 | -2.19 | 36.88 | 36.88 | +6.88 | +0.00 | 6 |
| 9215 | 0 | 42.50 | 40.94 | -1.56 | 38.44 | 35.00 | +2.50 | +0.00 | 7 |
| 9216 | 1 | 39.69 | 45.62 | +5.94 | 40.31 | 40.31 | +5.31 | -2.50 | 5 |
| 9217 | 0 | 43.75 | 43.75 | +0.00 | 39.38 | 39.38 | +4.38 | -1.25 | 7 |
| 9218 | 1 | 38.44 | 40.94 | +2.50 | 39.69 | 39.69 | +1.25 | -7.50 | 6 |
| 9219 | 0 | 47.19 | 45.31 | -1.88 | 40.94 | 39.38 | +4.38 | -5.00 | 6 |
| 9220 | 1 | 44.06 | 44.06 | +0.00 | 37.50 | 37.50 | +6.56 | -3.75 | 6 |
| 9221 | 0 | 44.69 | 45.94 | +1.25 | 38.75 | 38.75 | +7.19 | -5.00 | 7 |
| 9222 | 1 | 48.12 | 49.06 | +0.94 | 44.38 | 44.38 | +4.69 | -6.25 | 5 |
| 9223 | 0 | 41.88 | 45.00 | +3.12 | 40.94 | 41.25 | +4.06 | +10.00 | 5 |
| 9224 | 1 | 43.12 | 44.06 | +0.94 | 39.69 | 39.69 | +4.38 | -1.25 | 7 |

Table 5: FRM-12.

| Seed | c | E r16 | E r32 | A-4 | D r32 | R r32 | E−D | E−D held-out | E prom. |
|---|---|---|---|---|---|---|---|---|---|
| 9301 | 0 | 49.69 | 50.62 | +0.94 | 45.94 | 45.94 | +4.69 | -2.50 | 7 |
| 9302 | 1 | 43.12 | 43.12 | +0.00 | 41.88 | 41.88 | +1.25 | -6.25 | 4 |
| 9303 | 0 | 45.62 | 48.12 | +2.50 | 39.06 | 41.25 | +9.06 | +8.75 | 5 |
| 9304 | 1 | 47.50 | 51.88 | +4.38 | 46.25 | 45.00 | +5.63 | +3.75 | 5 |
| 9305 | 0 | 42.81 | 42.81 | +0.00 | 40.00 | 41.56 | +2.81 | -6.25 | 8 |
| 9306 | 1 | 42.81 | 41.88 | -0.94 | 37.50 | 36.88 | +4.38 | -3.75 | 7 |
| 9307 | 0 | 45.94 | 46.25 | +0.31 | 41.25 | 46.25 | +5.00 | +1.25 | 9 |
| 9308 | 1 | 46.56 | 47.19 | +0.62 | 39.06 | 39.06 | +8.12 | +0.00 | 7 |
| 9309 | 0 | 41.88 | 45.31 | +3.44 | 39.69 | 40.62 | +5.62 | +0.00 | 7 |
| 9310 | 1 | 45.31 | 45.94 | +0.62 | 42.81 | 40.31 | +3.12 | +6.25 | 7 |
| 9311 | 0 | 39.38 | 40.62 | +1.25 | 36.25 | 36.56 | +4.38 | -7.50 | 6 |
| 9312 | 1 | 40.31 | 39.69 | -0.62 | 35.94 | 36.25 | +3.75 | -5.00 | 7 |
| 9313 | 0 | 44.69 | 44.69 | +0.00 | 40.62 | 39.69 | +4.06 | -6.25 | 5 |
| 9314 | 1 | 45.00 | 44.69 | -0.31 | 40.62 | 40.62 | +4.06 | -7.50 | 5 |
| 9315 | 0 | 44.69 | 43.44 | -1.25 | 39.06 | 41.56 | +4.38 | +2.50 | 5 |
| 9316 | 1 | 50.62 | 49.38 | -1.25 | 45.31 | 45.31 | +4.06 | +5.00 | 6 |
| 9317 | 0 | 44.38 | 43.12 | -1.25 | 40.94 | 40.00 | +2.19 | -3.75 | 9 |
| 9318 | 1 | 44.69 | 45.94 | +1.25 | 41.88 | 40.62 | +4.06 | -5.00 | 8 |
| 9319 | 0 | 41.25 | 42.50 | +1.25 | 35.62 | 39.38 | +6.88 | +0.00 | 5 |
| 9320 | 1 | 44.06 | 45.94 | +1.88 | 36.88 | 38.44 | +9.06 | +3.75 | 6 |
| 9321 | 0 | 43.12 | 44.38 | +1.25 | 41.25 | 44.38 | +3.12 | -7.50 | 5 |
| 9322 | 1 | 49.06 | 49.06 | +0.00 | 43.75 | 40.94 | +5.31 | -3.75 | 6 |
| 9323 | 0 | 45.62 | 45.62 | +0.00 | 38.75 | 38.75 | +6.88 | +1.25 | 8 |
| 9324 | 1 | 44.69 | 50.00 | +5.31 | 43.75 | 38.44 | +6.25 | +1.25 | 6 |