



EUROPEAN COMMISSION
EUROSTAT

Directorate B: Methodology, corporate statistical and IT services
Unit B-3: IT for Statistical Production

User Manual for the Validation Rule Manager

VRM - User Manual

version 0.7.1-SNAPSHOT

Commission Européenne, 2920 Luxembourg, LUXEMBOURG - Tel. +352 43011



VRM - User Manual: User Manual for the Validation Rule Manager

by Commission Européenne, 2920 Luxembourg, LUXEMBOURG - Tel. +352 43011

version 0.7.1-SNAPSHOT

Copyright © 2020-2021 European Commission, EUROSTAT

Table of Contents

1. Getting Started	7
1.1. Opening VRM	7
1.2. User Interface	7
2. VTL Editor	11
2.1. Creating VTL File	11
2.2. Saving VTL File	11
2.3. Opening VTL File	12
2.4. Search and Replace	13
2.5. Syntax Highlighting	14
2.6. Autocomplete	15
2.7. Context Help	15
2.8. VTL Syntax Check	15
2.9. Syntax Errors	15
3. Data Structure Definitions	17
3.1. Importing Data Structure Definition	17
3.2. Using Data Structure Definition	21
3.2.1. Autocomplete	21
3.2.2. Highlighting	21
3.2.3. Preview of Elements	22
3.3. Reloading Data Structure Definition	23
4. Personal Repository	25
4.1. File Explorer	25
4.1.1. Opening File Explorer	25
4.1.2. Browsing Repository Tree	25
4.2. Managing Repository Items	26
4.2.1. Creating New Folder	26
4.2.2. Creating New File	27
4.2.3. Renaming Item	28
4.2.4. Deleting Item	29
4.2.5. Displaying Folder Details	29
4.2.6. Displaying Item Versions	31
4.3. VTL Editor Integration	33
4.3.1. Opening File	33
4.3.2. Saving File	34
4.3.3. File Version	35
5. Domain repository	37

5.1. File publication	37
5.2. Recycle Bin	37
6. Settings	39
6.1. Language Version	39
6.2. Color Theme	39
7. Keyboard Shortcuts	41
8. Accessibility	43
8.1. Accessibility Help	43
8.2. High Contrast Theme	43

List of Figures

1.1. VRM main view	7
2.1. Pop-up window of 'Open file' action	12
2.2. Pop-up panel of 'Search' action.	13
3.1. Import Data Structure Definition view	17
3.2. Import DSD icon on the Navigation sidebar	18
3.3. SDMX registry list	18
3.4. Filter panel for the DSD results	19
3.5. Search field in the DSD result list	19
3.6. Preview of the DSD contents in the result list	20
3.7. Selected DSD in the result list	20
3.8. VTL Editor autocomplete feature with DSD elements	21
3.9. Highlighted DSD elements in the VTL Editor	22
3.10. DSD Preview icon on the Status bar of the VTL Editor	22
3.11. DSD contents in the Details pane of the VTL Editor	23
3.12. Codelist contents in the Details pane of the VTL Editor	23
3.13. Prompt asking if DSD should be imported again	24
4.1. File Explorer icon on the Navigation sidebar	25
4.2. The repository tree in the File Explorer	26
4.3. New folder option in the File Explorer context menu	27
4.4. New folder name dialog window	27
4.5. New file option in the File Explorer context menu	28
4.6. New file name dialog window	28
4.7. Detailed List option in the File Explorer context menu	30
4.8. Folder details view	30
4.9. Versions option in the File Explorer context menu	31
4.10. Version history view	31
4.11. Compare icon in the version history view	32
4.12. Version comparison with differences highlighted	32
4.13. Open option in the File Explorer context menu	33
4.14. Opened file name on the top bar of the VTL Editor	33
4.15. Upload icon on the top bar of the VTL Editor	34
4.16. Upload file dialog window	34
4.17. File version on the bottom bar of the VTL Editor	35

Chapter 1. Getting Started

The Validation Rule Manager, or **VRM**, is a specialized online tool that allows statisticians to create, manage and share rules written in Validation and Transformation Language in a user friendly, effective and efficient way. The main part of the VRM is the VTL Editor, where user can edit VTL script files. This manual describes the features of the VRM.

1.1. Opening VRM

You can open **VRM** in browser from the dedicated link. It works in consistent manner in browsers **Chrome, Firefox, Microsoft Edge** (Internet Explorer is NOT supported) on desktop computers.

1.2. User Interface

VRM comes with a simple and intuitive layout, that maximizes the space provided for the editor while leaving ample room to browse and access the full context of your folder or project. You have available all the following elements for the interface:



Figure 1.1. VRM main view

- **(1) Menu** – options in menu are activated by clicking into the icons on the left part of the main window. The default – active Editor view – main menu contains all the following options from top to bottom:



- Import DSD
- File Explorer
- Manage Domains
- Settings

Hovering over the above items, will display a label with the name. If VTL Editor is not active, it will appear as top option in application main menu.

- **(2) VTL Editor Menu** – The options in editor menu are activated by clicking into the icons above the top-left corner of the VTL Editor. The editor menu contains all the following options from left to right:

- New File
- Open File
- Save File
- Upload File

Hovering over the above items, will display a label with the name.

- **(3) VTL Editor** – here you can edit the contents of your VTL scripts. The VTL Editor supports syntax highlighting and autocomplete.
- **(4) Status Bar** – here you can see various helpful details while you are interacting with the **VTL Editor**:
 - Arrow to expand the panel with details for errors
 - Number of errors
 - Cursor position (**Line and Column**)
 - **VTL language version** number
- **(5) Help** – this tab contains link to '**User Manual**' or will displayed in the content from application.
- **(6) Minimap** (code outline) – gives you a high-level overview of your source code, which is useful for quick navigation and code understanding.
- **(7) Panel** – displays potential errors with descriptions for the added code.



-
- **(8) Settings sidebar** – displays a drop-down menu for changing the **VTL version** or theme color.
 - **(9) Tab** – panel displays the name of the current text file.



Chapter 2. VTL Editor

In the **VTL Editor** you have available all the following functionalities for the files:

- Create VTL file
- Save file
- Open file
- Search and replace
- Syntax highlighting for VTL elements
- Autocomplete VTL syntax elements
- Display context help regarding VTL syntax elements and snippets
- Check VTL grammar for the file
- Display syntax errors with details on the list in the error panel

2.1. Creating VTL File

After opening application, you have the document opened, with empty code field in the editor. You can add new code or upload existing **VTL file** from the storage with using in editor menu option '**Open file**'. You can save the file at any time, **VTL Editor** also has autosave option, so you can go back to adding content even after closing the application.

2.2. Saving VTL File

You can also add changes to the tab with the code. If you click on the '**Save file**' option in editor menu, you have possibility to save **VTL file** to local storage at any time. Additionally, if you have unsaved changes and application is closed without saving file, after reopening editor, it will restore last version of used document. File changes and settings from the last opening are saved automatically and when the application is run, last saved version is automatically loaded.

Procedure of saving **VTL Editor** contents to local storage:

1. Choose icon '**Save**' in editor menu.
2. If the file has a path added on your computer, the file will be saved or if not, you will see a window and you should add the path to save the file.
3. You see success/error message for saving file.

2.3. Opening VTL File

If you click on the '**Open file**' option in editor menu, you have possibility to load external file into the editor. Additionally, you have the option to open more than one file. New additional files will be opened in newly created browser tabs.

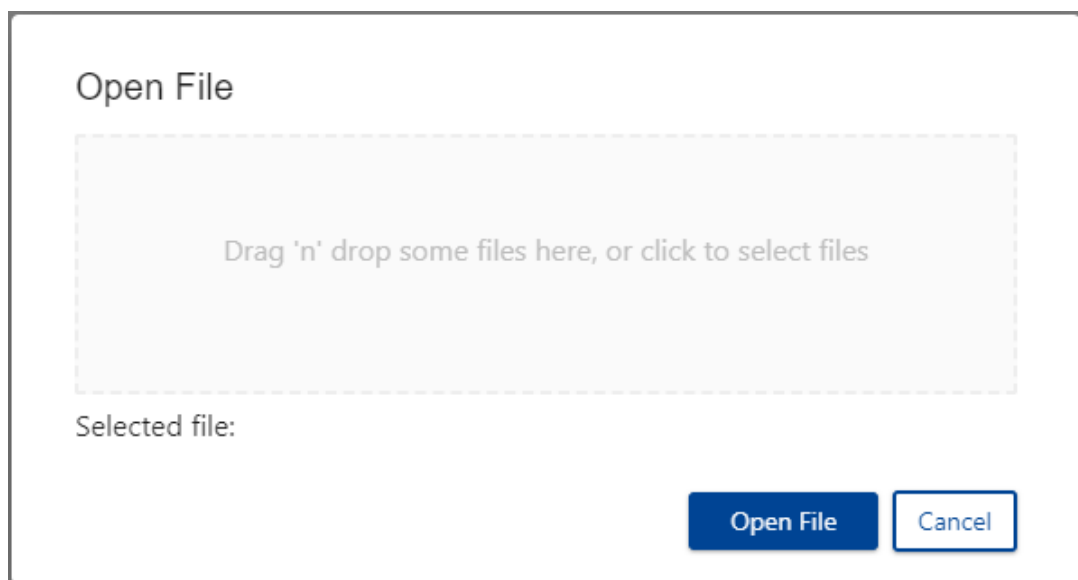


Figure 2.1. Pop-up window of 'Open file' action

Procedure of opening text **VTL file** from local storage:

1. Go to editor menu.
2. Choose icon '**Open file**'
3. A pop-up window will appear with the title 'Open File'. You have two options for upload a text **VTL file** from local storage:
 - click on field marked with a dashed line and uploads file from the path to the file on local storage,
 - dragging the file and dropping it in the appropriate field marked with a dashed line on the main screen.

4. To finalize the opening of the file, press the **'Open file' button** on the bottom-right side of the pop-up window.

2.4. Search and Replace

You can search for text in a file by pressing **Ctrl + F**. This will open up the find panel on the top-right side of editor:



Figure 2.2. Pop-up panel of 'Search' action.

In the **find feature** you have available all the following functionalities:

- (1) **Expand/switch mode** – rotates between search and replace mode.
- (2) **'Find' input field options from left to right:**
 - **Match Case** – switch for case-sensitive search
 - **Match Whole Word** – switch to compare search phrase only to whole words
 - **Use Regular Expression** – treats 'Find' input field value as a regular expression value
- (3) **Search options from left to right:**
 - **Result** – shows results of search in the form of "X of Y", where X is the number of current match and Y is overall number of found matches
 - **Previous match** – allows you to reverse the normal direction of search and find the previous match (if any).



- **Next match** – moves you to next match (if any).
- **Find in selection** – search will be limited to the selected text/code only
- **Close** – closes search panel
- **(4) Preserve Case** – forces replace to preserve case after replacement. Applies only to characters that are within length of replaced phrase
- **(5) Replace options from left to right:**
 - **Replace** – replaces actual match only
 - **Replace All** – replaces ALL found matches

Description of search usage:

Enter your search term here and press **Enter**. You can navigate between matches by continuously hitting **Enter** (or **Shift + Enter** to go backwards). The searched phrase is highlighted in the editor and scrollbar. If you want to replace a match, expand the **Search widget** to display the **Replace text box** and enter the text you want to replace it with in the Replace input field. Then hit **Enter** to replace the match and keep hitting **Enter** to replace each subsequent match or **Ctrl+Alt+Enter** to immediately replace all. The searched phrase is highlighted in the editor and scrollbar. Highlighting a word in the code editor will highlight all other matches in the file which makes it easier to check where a variable or function is being used. You can replace all in one file or replace a single change.

2.5. Syntax Highlighting

You have possibility to switch color to a different **syntax highlighting for VTL elements** in the code editor. You can edit your preferences by clicking on **Settings/Color theme** and choosing one option to display the theme preferences drop-down:

- VTL
- Light
- Dark
- High Contrast Dark



2.6. Autocomplete

The editor supports autocomplete of VTL elements and when you type a letter or hit **Ctrl+Space**, you will see a list of autocomplete suggestions. After choosing name from the list, by using mouse cursor or selecting with keyboard, selected keyword is added to the code.

2.7. Context Help

Context help regarding **VTL syntax elements and snippet** are displayed in the editor, after moving the cursor over the name and selecting the **'i'** icon in the line with the selected name. **Context help** is displayed during typing, as shown in the example:

2.8. VTL Syntax Check

For the content of the files, is checked structure. In case of syntax errors, they are underlined in application and details are added on the bottom error panel. Additionally, after moving your cursor to the place with error, you will see the error details.

2.9. Syntax Errors

VTL Editor displays potential errors and warnings in a dedicated page section and bottom panel. As default blue panel is collapsed. After press arrow on the left, you will see the list in the panel with line, column and message of **syntax or grammar error**. In the code, the position with error has red underline.

Chapter 3. Data Structure Definitions

The main part of the VRM is the VTL Editor, where you can create and modify scripts written in VTL. Statements in VTL scripts may contain references to the data set that adheres to specific Data Structure Definition (DSD). The enhanced functionality of the editor makes it possible for you to use DSD. This chapter will show you the ways how to interact with the application to utilize DSD.

Import DSD tab consists of two parts: searching section and result section, where you can proceed with your choices.

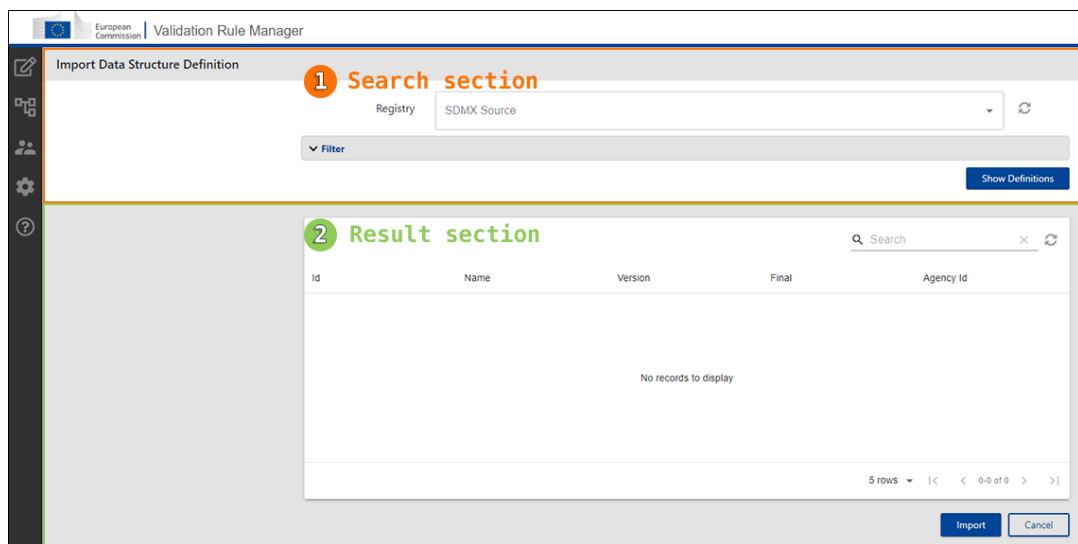


Figure 3.1. Import Data Structure Definition view

3.1. Importing Data Structure Definition

To import Data Structure Definition into the VTL Editor, follow this procedure:

1. On the **Navigation** sidebar select **Import DSD** icon.

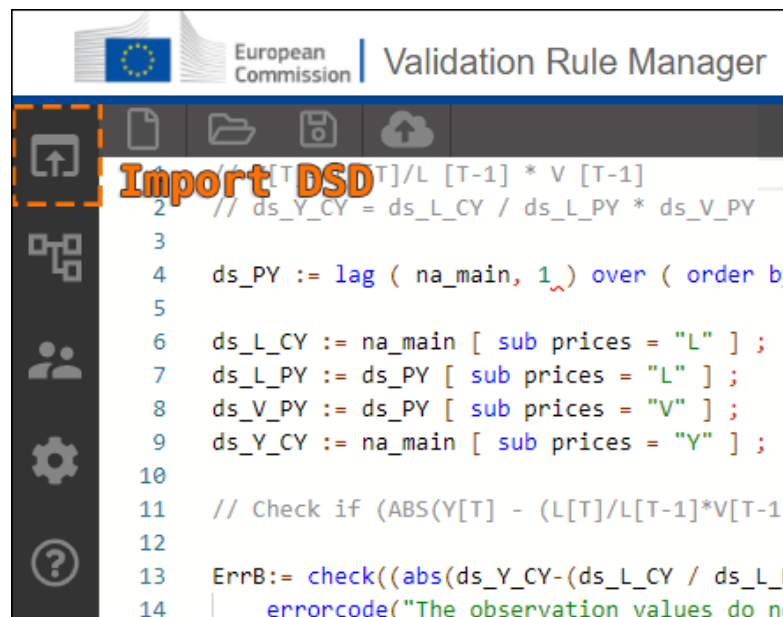


Figure 3.2. Import DSD icon on the Navigation sidebar

2. **Import Data Structure Definition** view is displayed (see [Figure 3.1, “Import Data Structure Definition view”](#)), where you can proceed with importing. First, select registry from the **Registry** dropdown list. This step is mandatory.

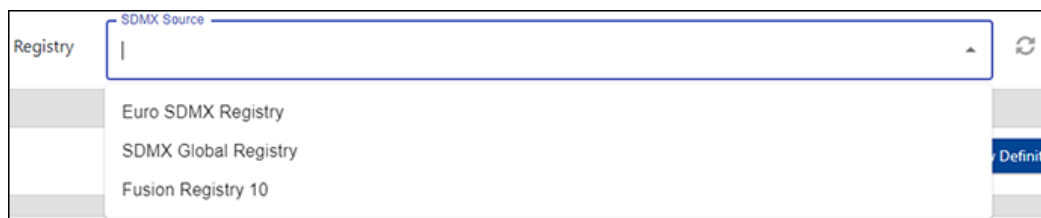


Figure 3.3. SDMX registry list

3. Optionally you may use additional filters by clicking on **Filter** bar. Now you can choose one or more agencies from the dropdown list and/or specific finalized status. Only data structure definitions that match the filter will be displayed as results.

Registry: SDMX Source: SDMX Global Registry

Selected registry URL: <https://registry.sdmx.org/FusionRegistry/>

Filter

Agency: Choose agency: International Monetary Fund (IMF) Bhutan National Statistics Bureau (NSB) United Nations Statistics Division (UNSD)

Final: All Yes No

Apply Clear

Show Definitions

Figure 3.4. Filter panel for the DSD results

4. Click **Apply** button to apply the filters. You may also clear all filters by clicking **Clear** button.
5. Confirm your choices by clicking **Show Definitions** button
6. Now the list of available DSDs is displayed. You can search for specific item in the results by typing content in **Search** field.

<div> <input type="text" value="Search"/> </div>					
Id	Name	Version	Final	Agency Id	
> <input type="checkbox"/> BOP	Balance of Payments and International Investment Position	1.14	TRUE	IMF	
> <input type="checkbox"/> GFS	Government Finance - IMF	1.0	TRUE	IMF	

Figure 3.5. Search field in the DSD result list

7. If more detailed information is needed, you can click chevron icon on the left side of particular item to display preview of DSD.

Search							
	Id	Name	Version	Final	Agency Id		
>	<input type="checkbox"/>	BOP	Balance of Payments and International Investment Position	1.14	TRUE	IMF	
	<input checked="" type="checkbox"/>	GFS	Government Finance - IMF	1.0	TRUE	IMF	
Search							
Type	Id	Name	Value Type	Agency Id	Code List Id	Version	Text Type
primaryMeasure	OBS_VALUE						
timeDimension	TIME_PERIOD						
attribute	OBS_STATUS	Observation status	codelist	SDMX	CL_OBS_STATUS	2.0	
attribute	REF_PERIOD_DETAIL	Reference period detail	codelist	ESTAT	CL_REF_PERIOD_DTL	1.0	
attribute	DECIMALS	Decimals	codelist	SDMX	CL_DECIMALS	1.0	
attribute	TITLE	Title	text				STRING
attribute	UNIT_MULT	Unit multiplier	codelist	SDMX	CL_UNIT_MULT	1.0	
attribute	TABLE_IDENTIFIER	Table identifier	codelist	ESTAT	CL_NA_TABLEID	1.5	
attribute	LAST_UPDATE	Last Update Date	text				DATE_TIME
attribute	COMPILING_ORG	Compiling organisation	codelist	IMF	CL_ORGANISATION	1.5	

Figure 3.6. Preview of the DSD contents in the result list

- When you've decided which DSD you want to import, click the checkbox in the left part of that item. At any time only one item can be selected.

Search							
	Id	Name	Version	Final	Agency Id		
>	<input checked="" type="checkbox"/>	BOP	Balance of Payments and International Investment Position	1.14	TRUE	IMF	
>	<input type="checkbox"/>	GFS	Government Finance - IMF	1.0	TRUE	IMF	

Figure 3.7. Selected DSD in the result list

- When DSD is selected in the list, click **Import** button to import DSD contents and apply it to VTL Editor features. When import process is successfully proceeded, you will be moved to the VTL Editor view.

10. If you want to terminate the importing process, click **Cancel** button and return to VTL Editor without applying new DSD. If any DSD was imported previously, it remains applied in the editor features.

3.2. Using Data Structure Definition

3.2.1. Autocomplete

After DSD is imported into the VTL Editor, their elements appear in the autocomplete feature. When you enter matching string autocomplete popup with element identifiers is displayed.

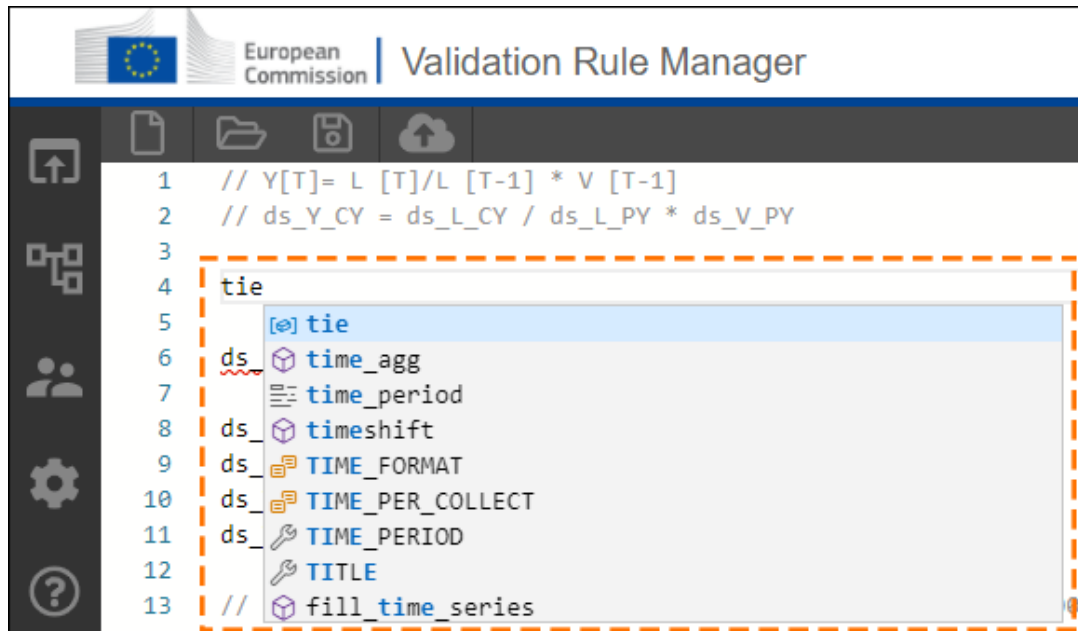


Figure 3.8. VTL Editor autocomplete feature with DSD elements

3.2.2. Highlighting

After DSD is imported into the VTL Editor, their elements are recognized by highlighting feature. When user enters element identifier in the VTL code, it is colored accordingly:

- Attribute – lime (#9ffb88)
- Dimension – orange (#f7b74e)
- Primary measure – purple (#953d55)

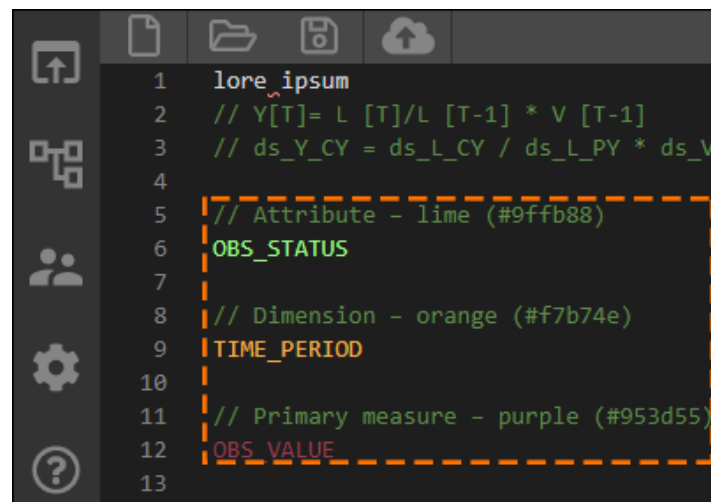


Figure 3.9. Highlighted DSD elements in the VTL Editor

3.2.3. Preview of Elements

When DSD is imported into the VTL Editor, you'll see the DSD icon on the blue bar at the bottom of the screen. To switch to DSD preview, click DSD identifier or adjacent icon on the blue bar at the bottom of the screen. Content in the bottom area of VTL Editor view might be toggled between error list and DSD preview.

Type	Id	Name	Value Type	Agency Id
primaryMeasure	OBS_VALUE			
timeDimension	TIME_PERIOD			
> attribute	TIME_FORMAT	Time format	codelist	SOMX
> attribute	OBS_STATUS	Observation status	codelist	ESTAT
> attribute	CONF_STATUS	Confidentiality status	codelist	SOMX

Figure 3.10. DSD Preview icon on the Status bar of the VTL Editor

Information about content of currently imported DSD is displayed in bottom area of VTL Editor.

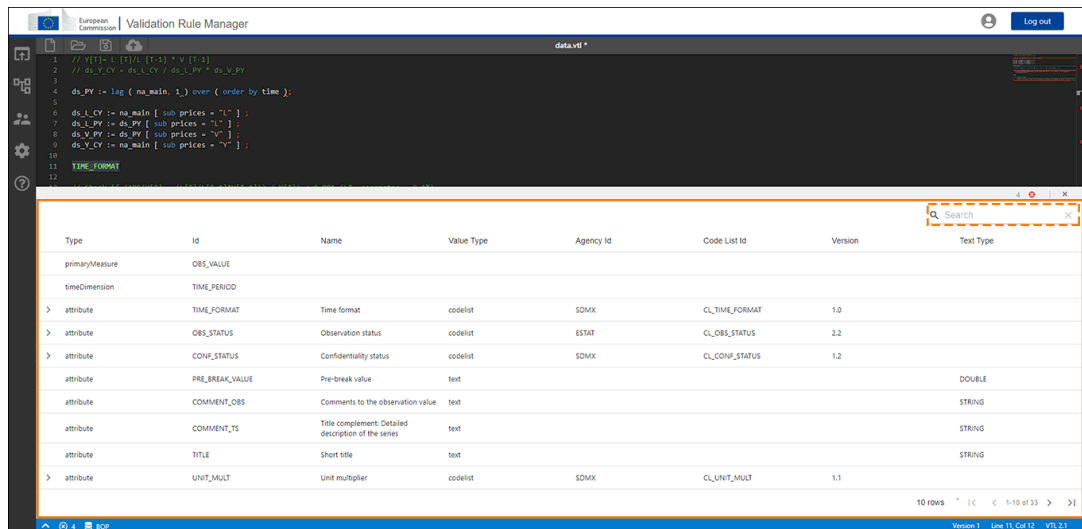


Figure 3.11. DSD contents in the Details pane of the VTL Editor

When you click chevron icon on the left side of DSD elements that have specific codelist assigned, contents of this codelist will be displayed.

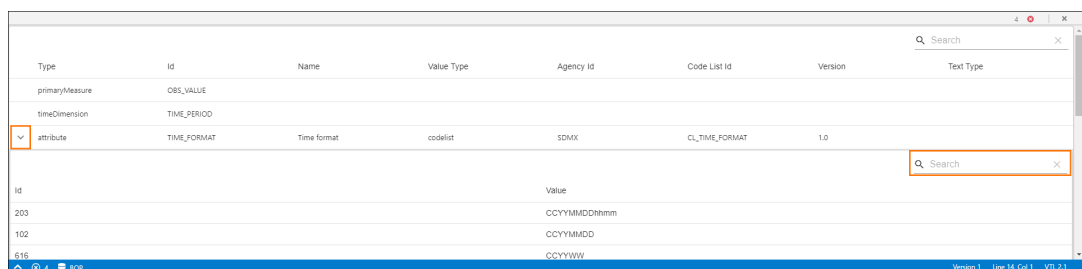


Figure 3.12. Codelist contents in the Details pane of the VTL Editor

3.3. Reloading Data Structure Definition

Information such as filename and contents of edited script, configuration, view state and recently imported DSD are continuously saved in case you close or reload VRM web page. When VRM web page is displayed again, you will see a message in a pop-up window, where you can proceed with your choice.

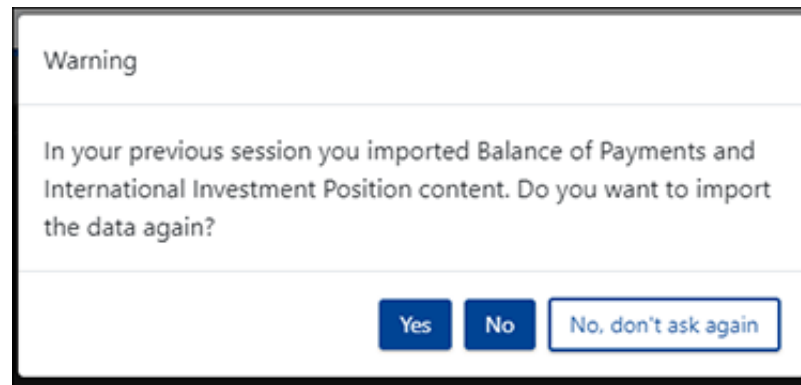


Figure 3.13. Prompt asking if DSD should be imported again

Click **Yes** button to reimport most recently used DSD.

Click **No** button to skip the reimporting process (the information about this particular DSD is kept in the system and you'll be asked again, when you reload the page).

Click **No, don't ask again** to stop the importing process and remove information about most recently used DSD.



Chapter 4. Personal Repository

Personal repository functionality of the VRM allows you to save script files and other items in the personal storage provided by the VRM. Saved items can be then opened or executed (if applicable). You can also organize them using folders in tree-like hierarchy resembling the one that you create on personal computer disk.

The VRM preserves version history of saved scripts, so any introduced changes can be reviewed and reversed if necessary.

4.1. File Explorer

File Explorer is the main component of the repository. It allows to view and manage folder structure, and script files.

4.1.1. Opening File Explorer

To open File Explorer, click **File Explorer** icon on the **Navigation** sidebar. The File Explorer displays in the left part of the screen, showing root folder contents. To hide it, click the icon again.

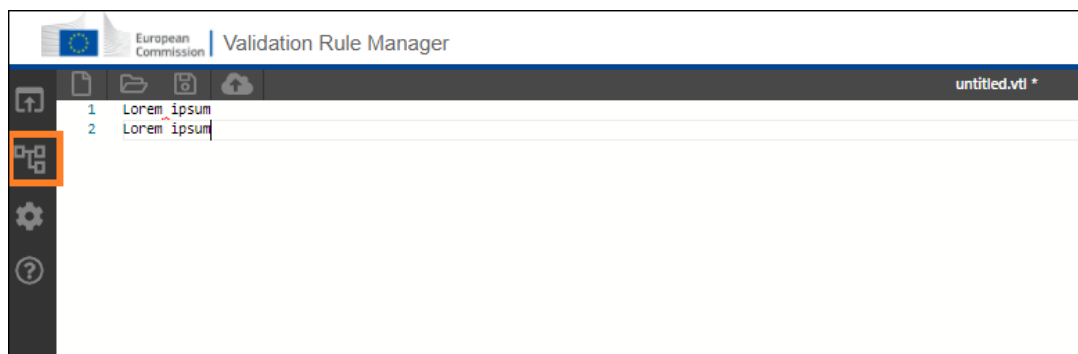


Figure 4.1. File Explorer icon on the Navigation sidebar

4.1.2. Browsing Repository Tree

To see the contents of the nested folders in the repository tree, click the triangle icon next to their name. This will expand the folder and display its child items below with an indent. Clicking the triangle again collapses the folder and hides its contents.

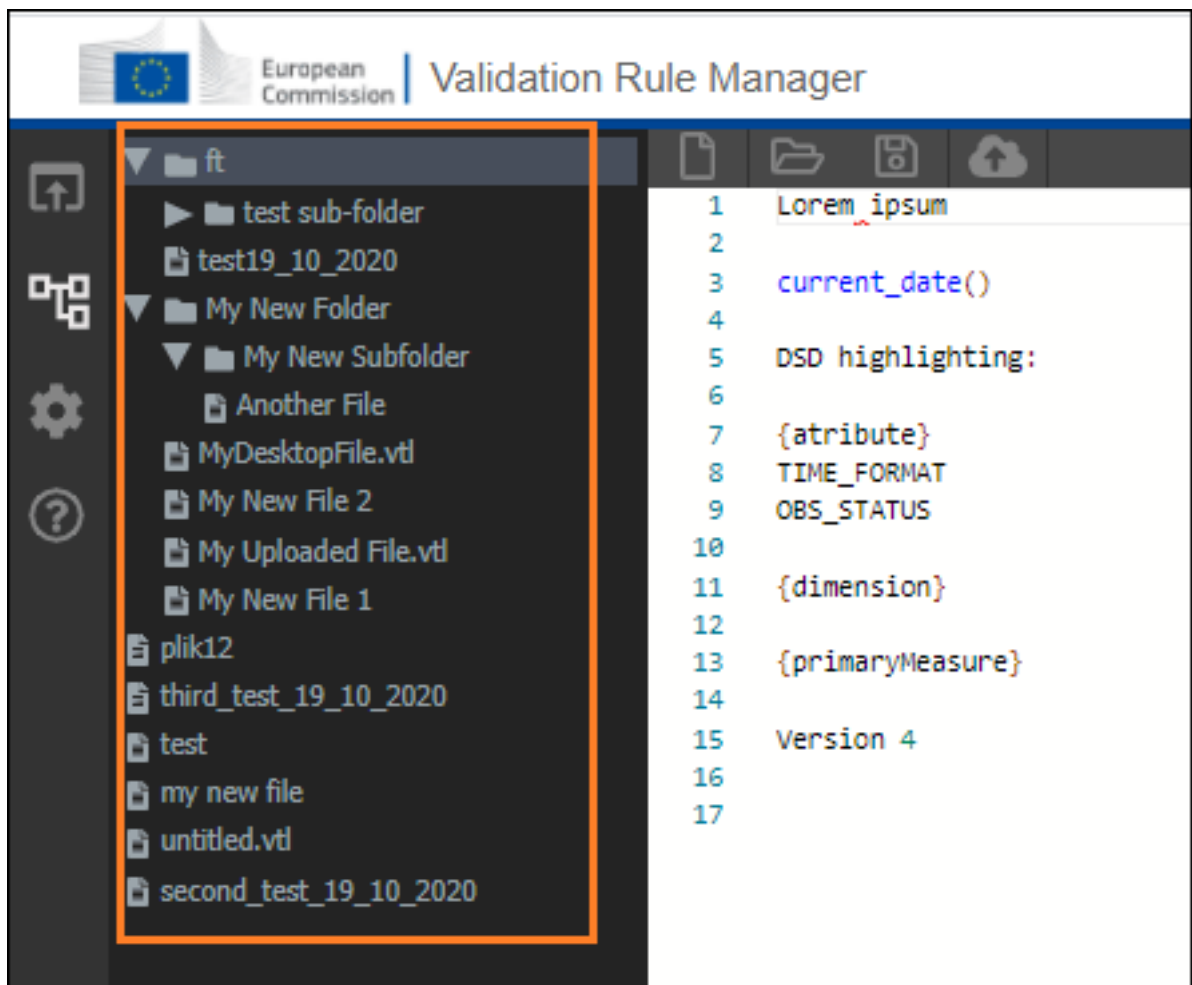


Figure 4.2. The repository tree in the File Explorer

4.2. Managing Repository Items

To manage files and folders, right-click desired item in the File Explorer. A menu with list of possible actions will be displayed. Menu options depend on item type.

4.2.1. Creating New Folder

To create new folder in the personal repository, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the folder that will be a parent of the new one.
3. Right-click parent folder name and select **New > Folder** options from the context menu. You can also right-click any child inside the parent folder that is not a folder itself.

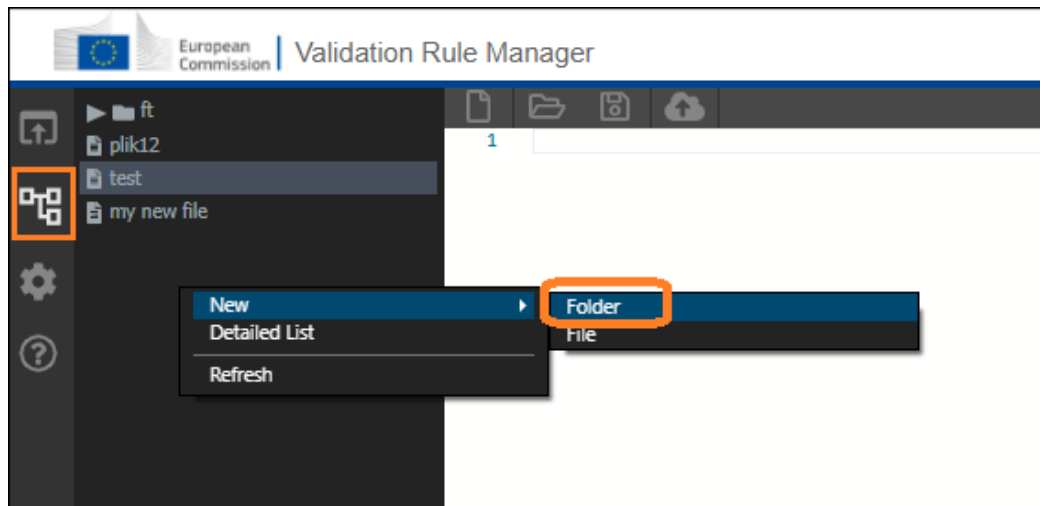


Figure 4.3. New folder option in the File Explorer context menu

4. Type the folder name in the text field and click **Create** button to confirm. Created folder will appear in the tree.

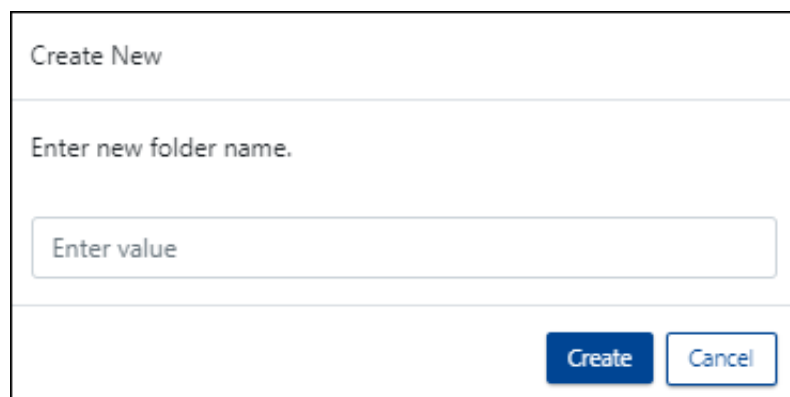
The screenshot shows a 'Create New' dialog window. It has a title bar 'Create New'. Below the title bar is a text input field with the placeholder text 'Enter new folder name.'. Below the input field is a button labeled 'Create' and a button labeled 'Cancel'.

Figure 4.4. New folder name dialog window

4.2.2. Creating New File

To create new file in the personal repository, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, "Opening File Explorer"](#).
2. Browse the tree to the folder where you want to place the new file.
3. Right-click parent folder name and select **New > File** options from the context menu. You can also right-click any child inside that folder that is not a folder itself.

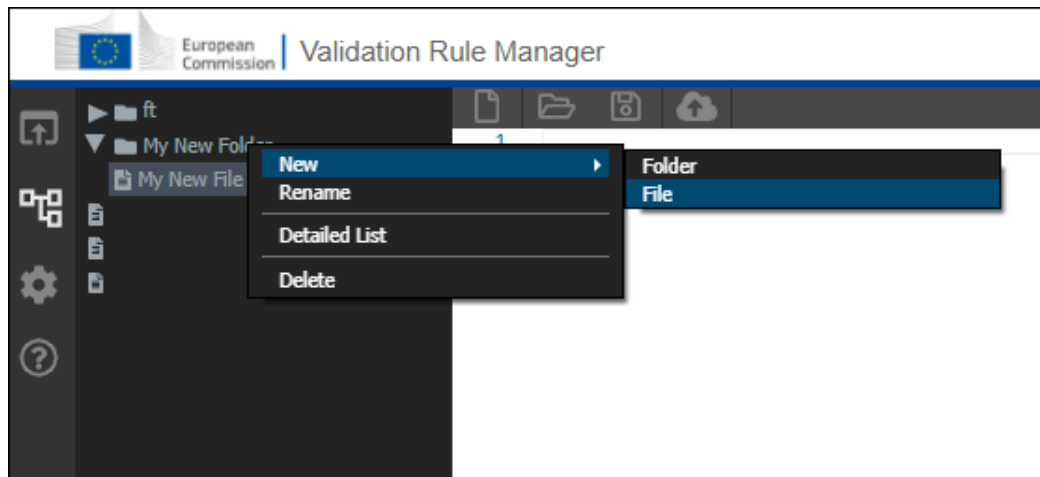


Figure 4.5. New file option in the File Explorer context menu

4. Type the file name in the text field and click **Create** button to confirm. Created file will appear in the tree.

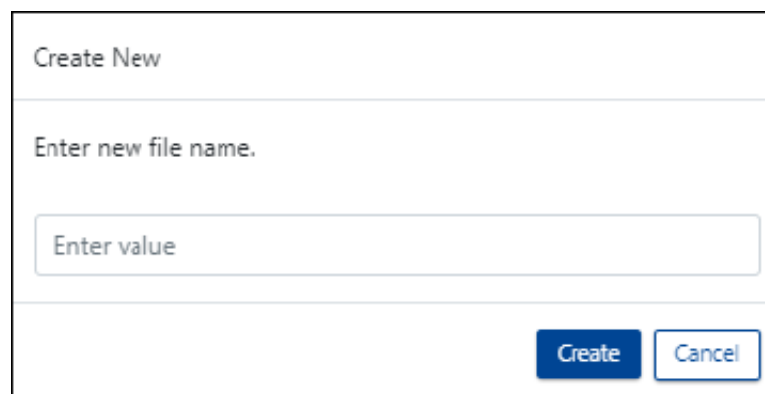


Figure 4.6. New file name dialog window

A new document is created, but not open automatically. To open the file, see [Section 4.3.1, “Opening File”](#).

4.2.3. Renaming Item

To rename an item in the personal repository, such as folder or file, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the item that you want to rename.
3. Right-click the item name and select **Rename** option from the context menu.



4. Type new name in the text field and click **Rename** button to confirm. Item name will be updated in the tree.

4.2.4. Deleting Item

To delete an item in the personal repository, such as folder or file, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the item that you want to delete.
3. Right-click the item name and select **Delete** option from the context menu.
4. Warning dialog window is displayed, prompting for confirmation. Click **Yes** button to confirm deletion.

4.2.5. Displaying Folder Details

You can view more detailed information about items from any folder stored in the repository. To see folder details, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the folder that contains items you want to see detailed information about.
3. Right-click the folder name and select **Detailed List** option from the context menu.

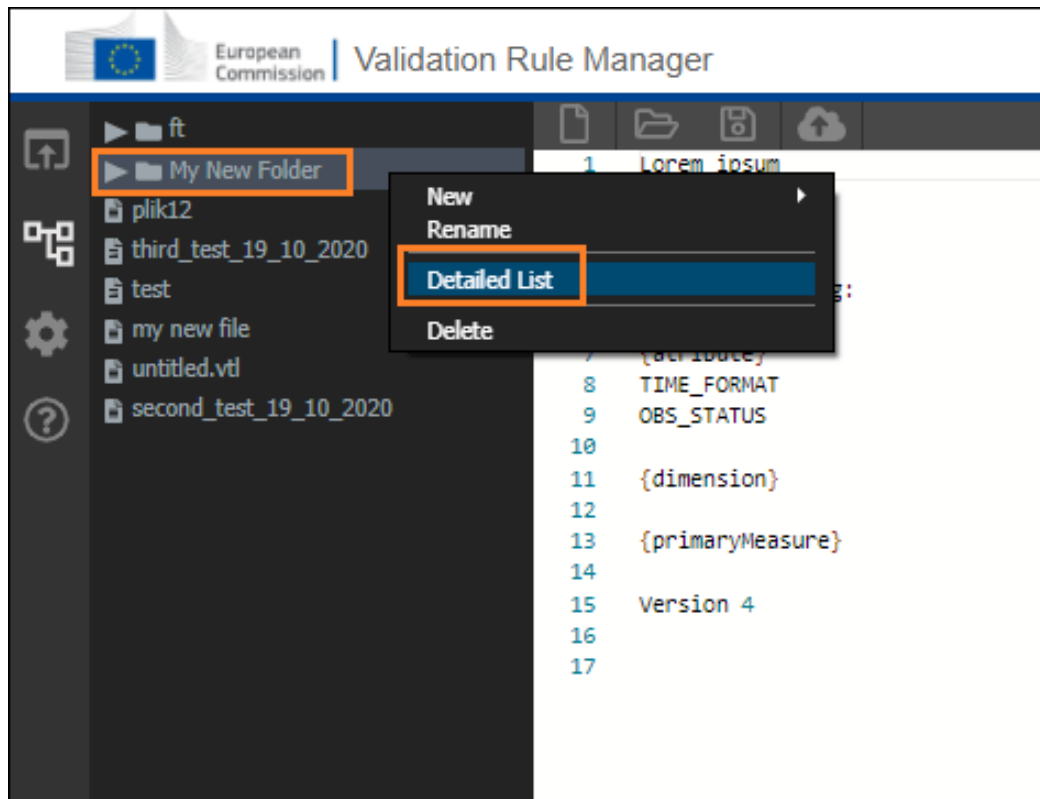


Figure 4.7. Detailed List option in the File Explorer context menu

4. The table with detailed information about contents of the selected folder is displayed in the main area of the VRM.

The screenshot shows the VRM interface with the 'Folder details view' for 'My New Folder'. The folder path is '/My New Folder/'. The table below displays the contents of the folder.

Name	Version	Created on	Modified on	Created by	Modified by
MyDesktopFile.vtl	4	10/19/2020, 12:18:40 PM	10/19/2020, 12:19:59 PM	Anonymous	Anonymous
My Uploaded File.vtl	2	10/18/2020, 3:48:40 PM	10/19/2020, 2:52:07 PM	Anonymous	Anonymous
My New File 1	0	10/18/2020, 3:15:00 PM	10/18/2020, 3:15:00 PM	Anonymous	Anonymous
My New File 2	1	10/18/2020, 3:20:43 PM	10/19/2020, 2:50:36 PM	Anonymous	Anonymous

5 rows | 1-4 of 4

Figure 4.8. Folder details view

The details include item name, version (in case of versioned items), creation date, name of the user who created the item, last modification date, and name of the user who most recently modified the item.

4.2.6. Displaying Item Versions

Some types of items are versioned in the repository. Every save operation creates new version and all previous versions are preserved. For each such item you can view version history, open any version, restore it as most recent, and compare two selected versions. To display item versions, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the item that you want to see version history for.
3. Right-click the item name and select **Versions** option from the context menu.

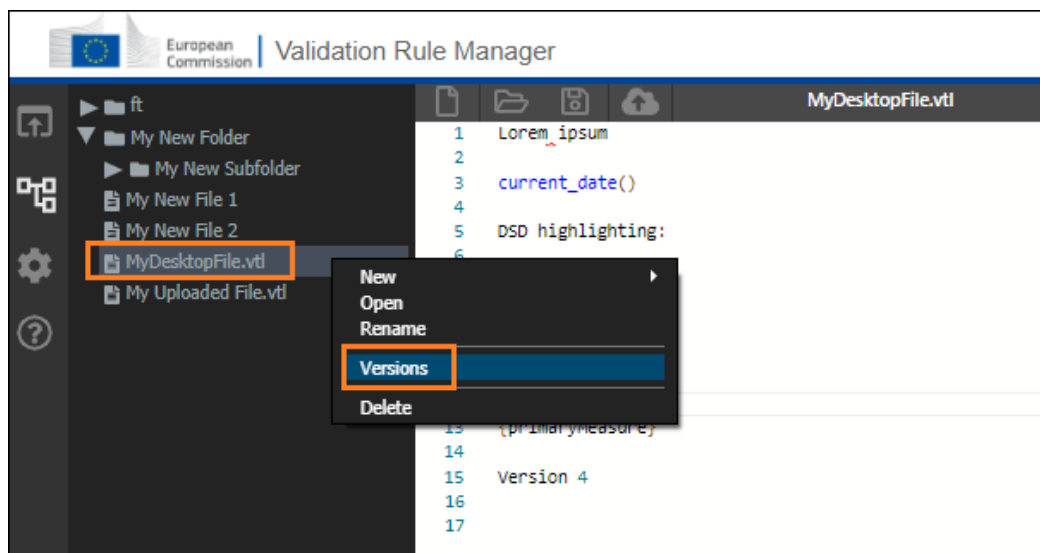


Figure 4.9. Versions option in the File Explorer context menu

4. The table with versions of the selected item is displayed in the main area of the VRM.

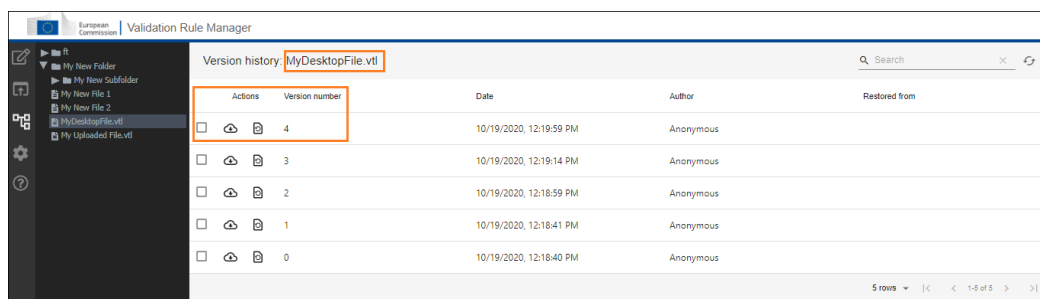


Figure 4.10. Version history view

The versions table allows you to perform several actions related to versions:

- To open any version, click **Open** icon in that version row.
- To restore version as most recent, click **Restore** icon in that version row.
- To compare two versions, select their checkboxes and click **Compare** icon in the top right corner of the view.











Version history: MyDesktopFile.vtl				Search		
Actions	Version number	Date	Author			
<input checked="" type="checkbox"/>  	4	10/19/2020, 12:19:59 PM	Anonymous			
<input type="checkbox"/>  	3	10/19/2020, 12:19:14 PM	Anonymous			
<input type="checkbox"/>  	2	10/19/2020, 12:18:59 PM	Anonymous			
<input type="checkbox"/>  	1	10/19/2020, 12:18:41 PM	Anonymous			
<input checked="" type="checkbox"/>  	0	10/19/2020, 12:18:40 PM	Anonymous			

Figure 4.11. Compare icon in the version history view

The additional **Refresh** icon allows to refresh the version table with current data from the repository.

When you compare versions, the difference view is displayed in the main area of the VRM. All differences between the versions are highlighted.

Compare "MyDesktopFile.vtl" versions 1 and 4	
<pre> 1 Lorem ipsum 2 3 current_date() 4 5 DSD highlighting: 6 7 {attribute} 8 TIME_FORMAT 9 OBS_STATUS 10 11 {dimension} 12 13 {primaryMeasure} 14 15-10/19/20 16 </pre>	<pre> 1 Lorem ipsum 2 3 current_date() 4 5 DSD highlighting: 6 7 {attribute} 8 TIME_FORMAT 9 OBS_STATUS 10 11 {dimension} 12 13 {primaryMeasure} 14 15-Version 4 16+ 17 </pre>

Figure 4.12. Version comparison with differences highlighted

4.3. VTL Editor Integration

4.3.1. Opening File

Files stored in the repository can be opened in the VTL Editor. To open the file, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, “Opening File Explorer”](#).
2. Browse the tree to the file you want to open.
3. Right-click the file and select **Open** option from the context menu.

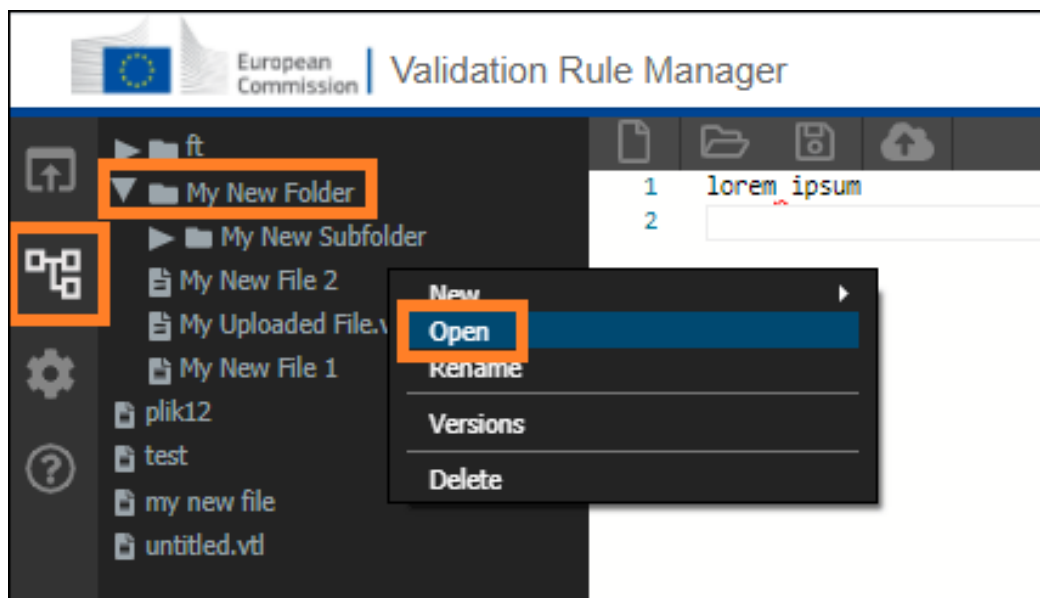


Figure 4.13. Open option in the File Explorer context menu

4. Selected file is open in the VTL Editor. Its name is displayed on the top bar.

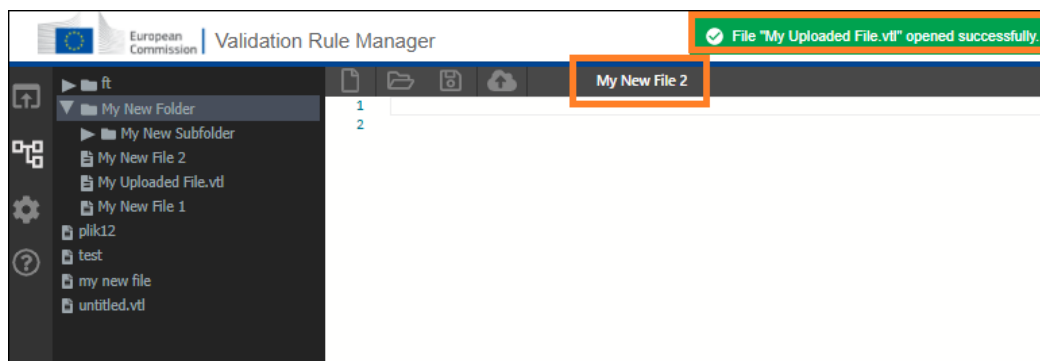


Figure 4.14. Opened file name on the top bar of the VTL Editor

4.3.2. Saving File

File changed in the VTL Editor can be saved to the personal repository. To save edited file that was open from the repository, simply click **Upload** icon on the top bar of the editor. New version of the file will be created in the repository.

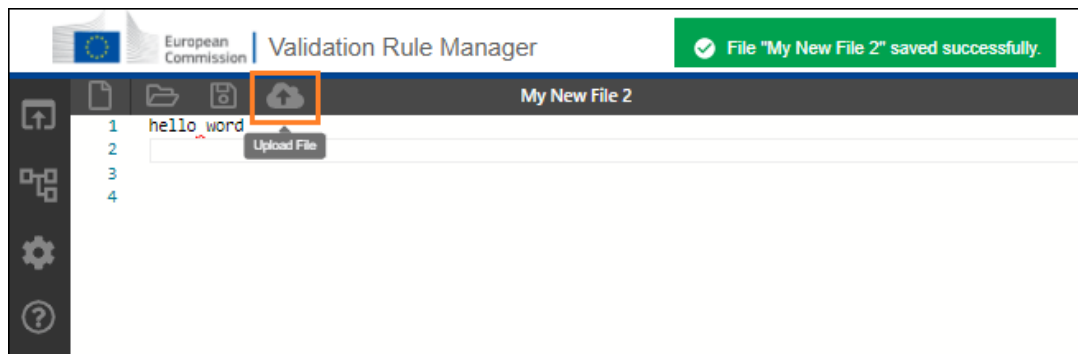


Figure 4.15. Upload icon on the top bar of the VTL Editor

To save the file that is new or opened from disk, follow the procedure below.

1. Open the File Explorer if it's closed. See [Section 4.1.1, "Opening File Explorer"](#).
2. Browse the tree to the folder where you want to save the file. Click the folder name to highlight it.
3. Click **Upload** icon on the top bar of the editor.
4. Confirmation dialog is displayed with selected repository path and file name text field. Optionally type new name in the input field. Click **Upload** button to confirm save. File will be uploaded to the repository and appear in the tree.

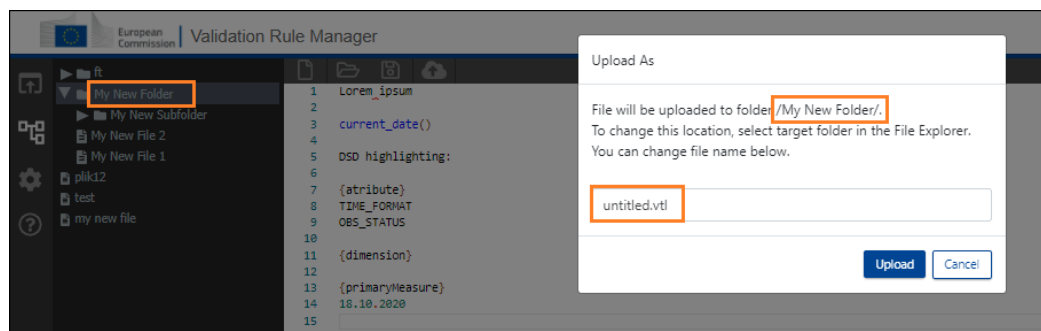


Figure 4.16. Upload file dialog window

4.3.3. File Version

VTL files stored in the repository are versioned. Every save operation creates new numbered version. All previous versions are preserved. You can see the version number of currently opened file on the blue bottom bar.

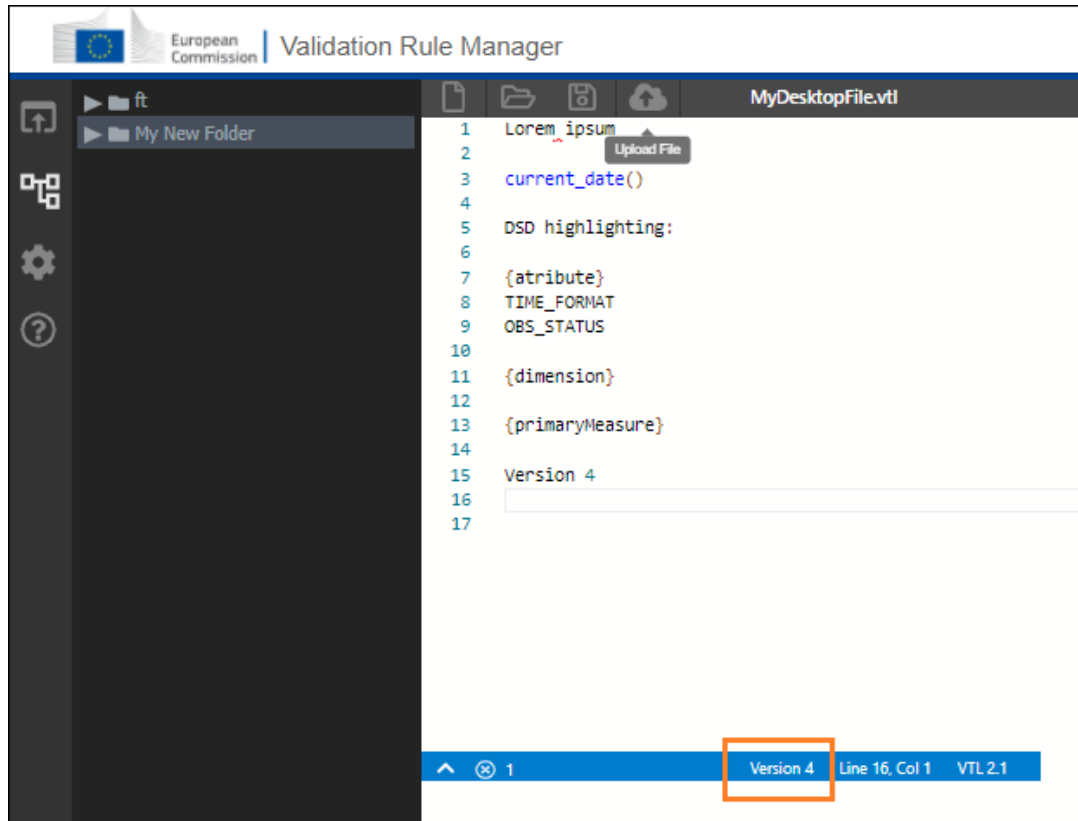


Figure 4.17. File version on the bottom bar of the VTL Editor



Chapter 5. Domain repository

Domain repository works identically to personal repository, except that it is a public repository available only to users of a given domain. Just creating a domain doesn't create a repository - it doesn't exist initially. It is only created when the first file is published by any user of that domain.

5.1. File publication

Publication is a tool/feature that is used to *publish current version of a given file*. It means that the published file is a perfect copy only until the original or published file version changes after publication.

Publication of files in the current version of the application is made from the level of the personal repository. Publishing a file creates a *copy of current version of script file*, and then saves the file in the repository of the selected domain. If this is the *first file* published for this domain – a repository will be created.

The version of the published file is always "0.1.0". It can be manually updated when needed.

5.2. Recycle Bin

Due to the public characteristics of the domain repository, it is secured with a two-step deletion of files. Unlike a personal repository, files are not deleted permanently by the domain user. They temporarily land in the **Recycle Bin**. In this state, they are only visible for the domain manager and admin through tools made available to them only. Depending on their decision, it can be restored or permanently deleted (no data recovery possible).

IMPORTANT! Due to the fact that after recovery/deletion operation, the state of the file is not updated - it is required to refresh the domain repository by calling the context menu on it (right-click) and selecting "*Refresh*" option.



Chapter 6. Settings

You can edit your preferences by clicking on **Settings** in main menu, then will see all the following options:

- Change theme color
- Switch VTL language version

6.1. Language Version

You have possibility to change the **VTL language version** in **Settings/ VTL Grammar Version**. The highest (currently 2.0) will be added as a default option.

6.2. Color Theme

You have possibility to change theme preferences in **Settings/ Color theme**. There will be available options to choose:

- **VTL** - similar to Light
- **Light** - light view
- **Dark** - dark view
- **High Contrast Dark** - high contrast



Chapter 7. Keyboard Shortcuts

The following commands are available when editing a file:

- **F1 or Alt+F1** Display the full list of commands
- **Ctrl-C** Copy the selected text to the clipboard
- **Ctrl-V** Paste the clipboard's contents to the selected text
- **Ctrl-X** Cut the selected text
- **Ctrl-S** Save current document file
- **Ctrl-O** Open a file in the current software
- **Ctrl+Space** Display the list of autocomplete suggestions
- **Ctrl-Z** Undo editing
- **Ctrl-Enter** Insert a new-line character
- **Ctrl-P** Print active window
- **Ctrl-F** Find text



Chapter 8. Accessibility

8.1. Accessibility Help

You can press **Alt+F1** or **Ctrl+F1** in Microsoft Edge to trigger the '**Show Accessibility Help**' dialog, while in an editor to find out the current position in the editor and to check the state of various accessibility options. The editor can be dynamically optimized for screen reader software from this dialog.

8.2. High Contrast Theme

You have possibility to turn on high contrast mode, for window with code in editor, on all platforms in '**Settings**'. There will be available option to display the Theme preferences drop-down and select the **High Contrast Dark**.