

# Hemodynamic Deconvolution Demystified: Sparsity-Driven Regularization at Work

Eneko Uruñuela<sup>a,b,\*</sup>, Thomas A.W. Bolton<sup>c,d</sup>, Dimitri Van De Ville<sup>c,e</sup>, César Caballero-Gaudes<sup>a,\*</sup>

<sup>a</sup>*Basque Center on Cognition, Brain and Language (BCBL), Donostia-San Sebastián, Spain.*

<sup>b</sup>*University of the Basque Country (EHU/UPV), Donostia-San Sebastián, Spain.*

<sup>c</sup>*Ecole Polytechnique Fédérale de Lausanne (EPFL), Lausanne, Switzerland.*

<sup>d</sup>*Gamma Knife Center, Department of Clinical Neuroscience, Centre Hospitalier Universitaire Vaudois (CHUV), Lausanne, Switzerland*

<sup>e</sup>*Faculty of Medicine, University of Geneva, Geneva, Switzerland*

---

## Abstract

Deconvolution of the hemodynamic response is an important step to access short timescales of brain activity recorded by functional magnetic resonance imaging (fMRI). Albeit conventional deconvolution algorithms have been around for a long time (e.g., Wiener deconvolution), recent state-of-the-art methods based on sparsity-pursuing regularization are attracting increasing interest to investigate brain dynamics and connectivity with fMRI. This technical note revisits the main concepts underlying two main methods, Paradigm Free Mapping and Total Activation, in the most accessible way. Despite their apparent differences in the formulation, these methods are theoretically equivalent as they represent the synthesis and analysis sides of the same problem, respectively. We demonstrate this equivalence in practice with their best-available implementations using both simulations, with different signal-to-noise ratios, and experimental fMRI data acquired during a motor task and resting-state. We evaluate the parameter settings that lead to equivalent results, and showcase the potential of these algorithms compared to other common approaches. This note is useful for practitioners interested in gaining a better understanding of state-of-the-art hemodynamic deconvolution, and aims to answer questions that practitioners often have regarding the differences between the two methods.

**Keywords:** fMRI deconvolution, paradigm free mapping, total activation, temporal regularization

---

## 1. Introduction

Functional magnetic resonance imaging (fMRI) data analysis is often directed to identify and disentangle the neural processes that occur in different brain regions during task or at rest. As the blood oxygenation level-dependent (BOLD) signal of fMRI is only a proxy for neuronal activity mediated through neurovascular coupling, an intermediate step that estimates the activity-inducing signal, at the timescale of fMRI, from the BOLD timeseries can be useful. Conventional analysis of task fMRI data relies on the general linear models (GLM) to establish statistical parametric maps of brain activity by regression of the empirical timecourses against hypothetical ones built from

---

\*Corresponding authors

Email addresses: e.urunuela@bcbl.eu (Eneko Uruñuela), c.caballero@bcbl.eu (César Caballero-Gaudes)

9 the knowledge of the experimental paradigm. However, timing information of the paradigm can be  
10 unknown, inaccurate, or insufficient in some scenarios such as naturalistic stimuli, resting-state, or  
11 clinically-relevant assessments.

12 Deconvolution and methods alike are aiming to estimate neuronal activity by undoing the  
13 blurring effect of the hemodynamic response, characterized as a hemodynamic response function  
14 (HRF)<sup>1</sup>. Given the inherently ill-posed nature of hemodynamic deconvolution, due to the strong  
15 temporal low-pass characteristics of the HRF, the key is to introduce additional constraints in  
16 the estimation problem that are typically expressed as regularizers. For instance, the so-called  
17 Wiener deconvolution is expressing a “minimal energy” constraint on the deconvolved signal, and  
18 has been used in the framework of psychophysiological interaction analysis to compute the interac-  
19 tion between a seed’s activity-inducing timecourse and an experimental modulation (Glover, 1999;  
20 Gitelman et al., 2003; Gerchen et al., 2014; Di and Biswal, 2018; Freitas et al., 2020). Complement-  
21 arily, the interest in deconvolution has increased to explore time-varying activity in resting-state  
22 fMRI data (Prete et al., 2017; Keilholz et al., 2017; Lurie et al., 2020; Bolton et al., 2020). In that  
23 case, the aim is to gain better insights of the neural signals that drive functional connectivity at  
24 short time scales, as well as learning about the spatio-temporal structure of functional components  
25 that dynamically construct resting-state networks and their interactions (Karahanoglu and Ville,  
26 2017).

27 Deconvolution of the resting-state fMRI signal has illustrated the significance of transient, sparse  
28 spontaneous events (Petridou et al., 2012; Allan et al., 2015) that refine the hierarchical clusteriza-  
29 tion of functional networks (Karahanoglu et al., 2013) and reveal their temporal overlap based  
30 on their signal innovations not only in the human brain (Karahanoglu and Ville, 2015), but also  
31 in the spinal cord (Kinany et al., 2020). Similar to task-related studies, deconvolution allows to  
32 investigate modulatory interactions within and between resting-state functional networks (Di and  
33 Biswal, 2013, 2015). In addition, decoding of the deconvolved spontaneous events allows to decipher  
34 the flow of spontaneous thoughts and actions across different cognitive and sensory domains while  
35 at rest (Karahanoglu and Ville, 2015; Gonzalez-Castillo et al., 2019; Tan et al., 2017). Beyond find-  
36 ings on healthy subjects, deconvolution techniques have also proven its utility in clinical conditions  
37 to characterize functional alterations of patients with a progressive stage of multiple sclerosis at  
38 rest (Bommarito et al., 2020), to find functional signatures of prodromal psychotic symptoms and  
39 anxiety at rest on patients suffering from schizophrenia (Zöller et al., 2019), to detect the foci of  
40 interictal events in epilepsy patients without an EEG recording (Lopes et al., 2012; Karahanoglu  
41 et al., 2013), or to study functional dissociations observed during non-rapid eye movement sleep  
42 that are associated with reduced consolidation of information and impaired consciousness (Tarun  
43 et al., 2020).

44 The algorithms for hemodynamic deconvolution can be classified based on the assumed hemo-  
45 dynamic model and the optimization problem used to estimate the neuronal-related signal. Most  
46 approaches assume a linear time-invariant model for the hemodynamic response that is inverted  
47 by means of variational (regularized) least squares estimators (Glover, 1999; Gitelman et al., 2003;  
48 Gaudes et al., 2010, 2012, 2013; Caballero-Gaudes et al., 2019; Hernandez-Garcia and Ulfarsson,  
49 2011; Karahanoglu et al., 2013; Cherkaooui et al., 2019; Hütel et al., 2021; Costantini et al., 2022),  
50 logistic functions (Bush and Cisler, 2013; Bush et al., 2015; Loula et al., 2018), probabilistic mixture

---

<sup>1</sup>Note that the term deconvolution is also alternatively employed to refer to the estimation of the hemodynamic response shape assuming a known activity-inducing signal or neuronal activity (Goutte et al., 2000; Marrelec et al., 2002; Ciuciu et al., 2003; Casanova et al., 2008).

models (Pidnebesna et al., 2019), convolutional autoencoders (Hütel et al., 2018) or nonparametric homomorphic filtering (Sreenivasan et al., 2015). Alternatively, several methods have also been proposed to invert non-linear models of the neuronal and hemodynamic coupling (Riera et al., 2004; Penny et al., 2005; Friston et al., 2008; Havlicek et al., 2011; Aslan et al., 2016; Madi and Karameh, 2017; Ruiz-Euler et al., 2018).

Among the variety of approaches, those based on regularized least squares estimators have been employed more often due to their appropriate performance at small spatial scales (e.g., voxelwise). Relevant for this work, two different formulations can be established for the regularized least-squares deconvolution problem, either based on a synthesis- or analysis-based model (Elad et al., 2007; Ortelli and van de Geer, 2019). The rationale of the synthesis-based model is that we know or suspect that the true signal (here, the neuronally-driven BOLD component of the fMRI signal) can be represented as a linear combination of predefined patterns or dictionary atoms (for instance, the hemodynamic response function). In contrast, the analysis-based approach considers that the true signal is analyzed by some relevant operator and the resulting signal is small (i.e., sparse).

As members of the groups that developed Paradigm Free Mapping (synthesis-based solved with regularized least-squares estimators such as ridge-regression Gaudes et al. 2010 or LASSO Gaudes et al. 2013) and Total Activation (analysis-based also solved with a regularized least-squares estimator using generalized total variation Karahanoglu et al. 2011; Karahanoglu et al. 2013 ) deconvolution methods for fMRI data analysis, we are often contacted by researchers who want to know about the similarities and differences between the two methods and which one is better. It depends—and to clarify this point, this note revisits synthesis- and analysis-based deconvolution methods for fMRI data and comprises four sections. First, we present the theory behind these two deconvolution approaches based on regularized least squares estimators that promote sparsity: Paradigm Free Mapping (PFM) (Gaudes et al., 2013) — available in AFNI as *3dPFM*<sup>2</sup> and *3dMEPFM*<sup>3</sup> for single-echo and multi-echo data, respectively — and Total Activation (TA) (Karahanoglu et al., 2013) — available as part of the *iCAPs toolbox*<sup>4</sup>. We describe the similarities and differences in their analytical formulations, and how they can be related to each other. Next, we assess their performance controlling for a fair comparison on simulated and experimental data. Finally, we discuss their benefits and shortcomings and conclude with our vision on potential extensions and developments.

## 2. Theory

### 2.1. Notations and definitions

Matrices of size  $N$  rows and  $M$  columns are denoted by boldface capital letters, e.g.,  $\mathbf{X} \in \mathbb{R}^{N \times M}$ , whereas column vectors of length  $N$  are denoted as boldface lowercase letters, e.g.,  $\mathbf{x} \in \mathbb{R}^N$ . Scalars are denoted by lowercase letters, e.g.,  $k$ . Continuous functions are denoted by brackets, e.g.,  $h(t)$ , while discrete functions are denoted by square brackets, e.g.,  $x[k]$ . The Euclidean norm of a matrix  $\mathbf{X}$  is denoted as  $\|\mathbf{X}\|_2$ , the  $\ell_1$ -norm is denoted by  $\|\mathbf{X}\|_1$  and the Frobenius norm is denoted by  $\|\mathbf{X}\|_F$ . The discrete integration ( $\mathbf{L}$ ) and difference ( $\mathbf{D}$ ) operators are defined as:

<sup>2</sup>[https://afni.nimh.nih.gov/pub/dist/doc/program\\_help/3dPFM.html](https://afni.nimh.nih.gov/pub/dist/doc/program_help/3dPFM.html)

<sup>3</sup>[https://afni.nimh.nih.gov/pub/dist/doc/program\\_help/3dMEPFM.html](https://afni.nimh.nih.gov/pub/dist/doc/program_help/3dMEPFM.html)

<sup>4</sup><https://c4science.ch/source/iCAPs/>

$$\mathbf{L} = \begin{bmatrix} 1 & 0 & \dots & & \\ 1 & 1 & 0 & \dots & \\ 1 & 1 & 1 & 0 & \dots \\ \vdots & \ddots & \ddots & \ddots & \ddots \end{bmatrix}, \quad \mathbf{D} = \begin{bmatrix} 1 & 0 & \dots & & \\ 1 & -1 & 0 & \dots & \\ 0 & \ddots & \ddots & \ddots & \dots \\ \vdots & \ddots & 0 & 1 & -1 \end{bmatrix}.$$

89    2.2. Conventional general linear model analysis

Conventional general linear model (GLM) analysis puts forward a number of regressors incorporating the knowledge about the paradigm or behavior. For instance, the timing of epochs for a certain condition can be modeled as an indicator function  $p(t)$  (e.g., Dirac functions for event-related designs or box-car functions for block-designs) convolved with the hemodynamic response function (HRF)  $h(t)$ , and sampled at TR resolution (Friston et al., 1994, 1998; Boynton et al., 1996; Cohen, 1997):

$$x(t) = p * h(t) \rightarrow x[k] = p * h(k \cdot \text{TR}).$$

The vector  $\mathbf{x} = [x[k]]_{k=1,\dots,N} \in \mathbb{R}^N$  then constitutes the regressor modelling the hypothetical response, and several of them can be stacked as columns of the design matrix  $\mathbf{X} = [\mathbf{x}_1 \dots \mathbf{x}_L] \in \mathbb{R}^{N \times L}$ , leading to the well-known GLM formulation:

$$\mathbf{y} = \mathbf{X}\boldsymbol{\beta} + \mathbf{e}, \quad (1)$$

90 where the empirical timecourse  $\mathbf{y} \in \mathbb{R}^N$  is explained by a linear combination of the regressors in  $\mathbf{X}$   
 91 weighted by the parameters in  $\boldsymbol{\beta} \in \mathbb{R}^L$  and corrupted by additive noise  $\mathbf{e} \in \mathbb{R}^N$ . Under independent  
 92 and identically distributed Gaussian assumptions of the latter, the maximum likelihood estimate of  
 93 the parameter weights reverts to the ordinary least-squares estimator; i.e., minimizing the residual  
 94 sum of squares between the fitted model and measurements. The number of regressors  $L$  is typically  
 95 much less than the number of measurements  $N$ , and thus the regression problem is over-determined  
 96 and does not require additional constraints or assumptions (Henson and Friston, 2007).

In the deconvolution approach, no prior knowledge of the hypothetical response is taken into account, and the purpose is to estimate the deconvolved activity-inducing signal  $\mathbf{s}$  from the measurements  $\mathbf{y}$ , which can be formulated as the signal model

$$\mathbf{y} = \mathbf{H}\mathbf{s} + \mathbf{e}, \quad (2)$$

where  $\mathbf{H} \in \mathbb{R}^{N \times N}$  is a Toeplitz matrix that represents the discrete convolution with the HRF, and  $\mathbf{s} \in \mathbb{R}^N$  is a length- $N$  vector with the unknown activity-inducing signal. Note that the temporal resolution of the activity-inducing signal and the corresponding Toeplitz matrix is generally assumed to be equal to the TR of the acquisition, but it could also be higher if an upsampled estimate is desired. Despite the apparent similarity with the GLM equation, there are two important differences. First, the multiplication with the design matrix of the GLM is an expansion as a weighted linear combination of its columns, while the multiplication with the HRF matrix represents a convolution operator. Second, determining  $\mathbf{s}$  is an ill-posed problem given the nature of the HRF. As it can be seen intuitively, the convolution matrix  $\mathbf{H}$  is highly collinear (i.e., its columns are highly correlated) due to large overlap between shifted HRFs (see Figure 2C), thus introducing uncertainty in the estimates of  $\mathbf{s}$  when noise is present. Consequently, additional assumptions under the form of

regularization terms (or priors) in the estimate are needed to reduce their variance. In the least squares sense, the optimization problem to solve is given by

$$\hat{\mathbf{s}} = \arg \min_{\mathbf{s}} \frac{1}{2} \|\mathbf{y} - \mathbf{H}\mathbf{s}\|_2^2 + \Omega(\mathbf{s}). \quad (3)$$

The first term quantifies data fitness, which can be justified as the log-likelihood term derived from Gaussian noise assumptions, while the second term  $\Omega(\mathbf{s})$  brings in regularization and can be interpreted as a prior on the activity-inducing signal. For example, the  $\ell_2$ -norm of  $\mathbf{s}$  (i.e.,  $\Omega(\mathbf{s}) = \lambda \|\mathbf{s}\|_2^2$ ) is imposed for ridge regression or Wiener deconvolution, which introduces a trade-off between the data fit term and “energy” of the estimates that is controlled by the regularization parameter  $\lambda$ . regularized terms are related to the elastic net (i.e.,  $\Omega(\mathbf{x}) = \lambda_1 \|\mathbf{x}\|_2^2 + \lambda_2 \|\mathbf{x}\|_1$ ) [REF].

### 2.3. Paradigm Free Mapping

In paradigm free mapping (PFM), the formulation of Eq. (3) was considered equivalently as fitting the measurements using the atoms of the HRF dictionary (i.e., columns of  $\mathbf{H}$ ) with corresponding weights (entries of  $\mathbf{s}$ ). This model corresponds to a synthesis formulation. In Gaudes et al. 2013 a sparsity-pursuing regularization term was introduced on  $\mathbf{s}$ , which in a strict way reverts to choosing  $\Omega(\mathbf{s}) = \lambda \|\mathbf{s}\|_0$  as the regularization term and solving the optimization problem (Bruckstein et al., 2009). However, finding the optimal solution to the problem demands an exhaustive search across all possible combinations of the columns of  $\mathbf{H}$ . Hence, a pragmatic solution is to solve the convex-relaxed optimization problem for the  $\ell_1$ -norm, commonly known as Basis Pursuit Denoising (Chen et al., 2001) or equivalently as the least absolute shrinkage and selection operator (LASSO) (Tibshirani, 1996):

$$\hat{\mathbf{s}} = \arg \min_{\mathbf{s}} \frac{1}{2} \|\mathbf{y} - \mathbf{H}\mathbf{s}\|_2^2 + \lambda \|\mathbf{s}\|_1, \quad (4)$$

which provides fast convergence to a global solution. Imposing sparsity on the activity-inducing signal implies that it is assumed to be well represented by a reduced subset of few non-zero coefficients at the fMRI timescale, which in turn trigger event-related BOLD responses. Hereinafter, we refer to this assumption as the *spike model*. [However, even if PFM was developed as a spike model, its formulation in Eq.\(4\) can be extended to estimate the innovation signal, i.e., the derivative of the activity-inducing signal, as described in section 2.5.](#)

### 2.4. Total Activation

Alternatively, deconvolution can be formulated as if the signal to be recovered directly fits the measurements and at the same time satisfies some suitable regularization, which leads to

$$\hat{\mathbf{x}} = \arg \min_{\mathbf{x}} \frac{1}{2} \|\mathbf{y} - \mathbf{x}\|_2^2 + \Omega(\mathbf{x}). \quad (5)$$

Under this analysis formulation, total variation (TV), i.e., the  $\ell_1$ -norm of the derivative  $\Omega(\mathbf{x}) = \lambda \|\mathbf{D}\mathbf{x}\|_1$ , is a powerful regularizer since it favors recovery of piecewise-constant signals (Chambolle, 2004). Going beyond, the approach of generalized TV introduces an additional differential operator  $\mathbf{D}_{\mathbf{H}}$  in the regularizer that can be tailored as the inverse operator of a linear system (Karahanoglu et al., 2011), that is,  $\Omega(\mathbf{x}) = \lambda \|\mathbf{D}\mathbf{D}_{\mathbf{H}}\mathbf{x}\|_1$ . In the context of hemodynamic deconvolution, Total Activation is proposed for which the discrete operator  $\mathbf{D}_{\mathbf{H}}$  is derived from the inverse of the continuous-domain linearized Balloon-Windkessel model (Buxton et al., 1998; Friston et al., 2000).

<sup>118</sup> The interested reader is referred to (Khalidov et al., 2011; Karahanoglu et al., 2011; Karahanoglu  
<sup>119</sup> et al., 2013) for a detailed description of this derivation.

Therefore, the solution of the Total Activation (TA) problem

$$\hat{\mathbf{x}} = \arg \min_{\mathbf{x}} \frac{1}{2} \|\mathbf{y} - \mathbf{x}\|_2^2 + \lambda \|\mathbf{D}\mathbf{D}_{\mathbf{H}}\mathbf{x}\|_1 \quad (6)$$

<sup>120</sup> will yield the activity-related signal  $\mathbf{x}$  for which the activity-inducing signal  $\mathbf{s} = \mathbf{D}_{\mathbf{H}}\mathbf{x}$  and the  
<sup>121</sup> so-called innovation signal  $\mathbf{u} = \mathbf{D}\mathbf{s}$ , i.e., the derivate of the activity-inducing signal, will also be  
<sup>122</sup> available, as they are required for the regularization. We refer to modeling the activity-inducing  
<sup>123</sup> signal based on the innovation signal as the *block model*. Nevertheless, even if TA was originally  
<sup>124</sup> developed as a block model, its formulation in Eq.(6) can be made equivalent to the spike model  
<sup>125</sup> as shown in section 2.5.

### <sup>126</sup> 2.5. Unifying both perspectives

<sup>127</sup> PFM and TA are based on the synthesis- and analysis-based formulation of the deconvolution  
<sup>128</sup> problem, respectively. They are also tailored for the spike and block model, respectively. In the first  
<sup>129</sup> case, the recovered deconvolved signal is synthesized to be matched to the measurements, while in  
<sup>130</sup> the second case, the recovered signal is directly matched to the measurements but needs to satisfy  
<sup>131</sup> its analysis in terms of deconvolution. This also corresponds to using the forward or backward  
<sup>132</sup> model of the hemodynamic system, respectively. Hence, it is possible to make both approaches  
<sup>133</sup> equivalent (Elad et al., 2007)<sup>5</sup>.

<sup>134</sup> To start with, TA can be made equivalent to PFM by adapting it for the spike model; i.e., when  
<sup>135</sup> removing the derivative operator  $\mathbf{D}$  of the regularizer in Eq. (6), it can be readily verified that  
<sup>136</sup> replacing in that case  $\mathbf{x} = \mathbf{H}\mathbf{s}$  leads to identical equations and thus both assume a spike model,  
<sup>137</sup> since  $\mathbf{H}$  and  $\mathbf{D}_{\mathbf{H}}$  will cancel out each other (Karahanoglu et al., 2011)<sup>6</sup>.

Conversely, the PFM spike model can also accommodate the TA block model by modifying Eq.  
(4) with the forward model  $\mathbf{y} = \mathbf{H}\mathbf{L}\mathbf{u} + \mathbf{e}$ . Here, the activity-inducing signal  $\mathbf{s}$  is rewritten in terms  
of the innovation signal  $\mathbf{u}$  as  $\mathbf{s} = \mathbf{L}\mathbf{u}$  where the matrix  $\mathbf{L}$  is the first-order integration operator  
(Cherkaoui et al., 2019; Uruñuela et al., 2020). This way, PFM can estimate the innovation signal  
 $\mathbf{u}$  as follows:

$$\hat{\mathbf{u}} = \arg \min_{\mathbf{u}} \frac{1}{2} \|\mathbf{y} - \mathbf{H}\mathbf{L}\mathbf{u}\|_2^2 + \lambda \|\mathbf{u}\|_1, \quad (7)$$

<sup>138</sup> and becomes equivalent to TA by replacing  $\mathbf{u} = \mathbf{D}\mathbf{D}_{\mathbf{H}}\mathbf{x}$ , and thus adopting the block model. Based  
<sup>139</sup> on the previous equations (4), (6) and (7), it is clear that both PFM and TA can operate under the  
<sup>140</sup> spike and block models, providing a convenient signal model according to the different assumptions  
<sup>141</sup> of the underlying neuronal-related signal. This work evaluates the core of the two techniques; i.e.,  
<sup>142</sup> the regularized least-squares problem with temporal regularization without considering the spatial  
<sup>143</sup> regularization term originally incorporated in TA. For the remainder of this paper, we will use the  
<sup>144</sup> PFM and TA formalisms with both spike and block models.

---

<sup>5</sup>Without dwelling into technicalities, for total variation, this equivalence is correct up to the constant, which is in the null space of the derivative operator.

<sup>6</sup>Again, this holds up to elements of the null space.

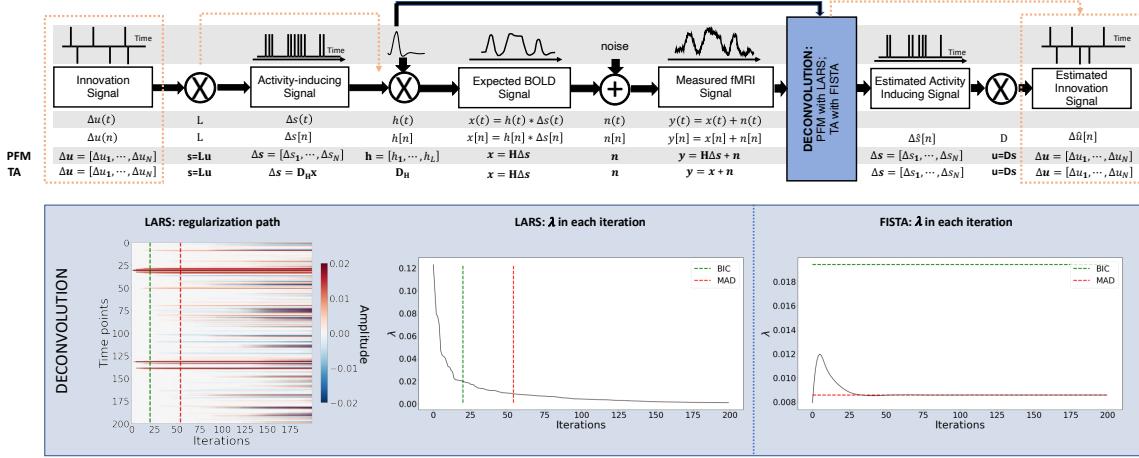


Figure 1: Flowchart detailing the different steps of the fMRI signal and the deconvolution methods described. The orange arrows indicate the flow to estimate the innovation signals, i.e., the derivative of the activity-inducing signal. The blue box depicts the iterative *modus operandi* of the two algorithms used in this paper to solve the paradigm free mapping (PFM) and total activation (TA) deconvolution problems. The plot on the left shows the regularization path obtained with the least angle regression (LARS) algorithm, where the x-axis illustrates the different iterations of the algorithm, the y-axis represents points in time, and the color describes the amplitude of the estimated signal. The middle plot depicts the decreasing values of  $\lambda$  for each iteration of LARS as the regularization path is computed. The green and red dashed lines in both plots illustrate the Bayesian information criterion (BIC) and median absolute deviation (MAD) solutions, respectively. Comparatively, the changes in  $\lambda$  when the fast iterative shrinkage-thresholding algorithm (FISTA) method is made to converge to the MAD estimate of the noise are shown on the right. Likewise, the  $\lambda$  corresponding to the BIC and MAD solutions are shown with dashed lines.

#### 145 2.6. Algorithms and parameter selection

146 Despite their apparent resemblance, the practical implementations of the PFM and TA meth-  
 147 ods proposed different algorithms to solve the corresponding optimization problem and select an  
 148 adequate regularization parameter  $\lambda$  (Gaudes et al., 2013; Karahanoglu et al., 2013). The PFM  
 149 implementation available in AFNI employs the least angle regression (LARS) (Efron et al., 2004),  
 150 whereas the TA implementation uses the fast iterative shrinkage-thresholding algorithm (FISTA)  
 151 (Beck and Teboulle, 2009). The blue box in Figure 1 provides a descriptive view of the iterative  
 152 *modus operandi* of the two algorithms.

153 On the one hand, LARS is a homotopy approach that computes all the possible solutions to  
 154 the optimization problem and their corresponding value of  $\lambda$ ; i.e., the regularization path, and  
 155 the solution according to the Bayesian Information Criterion (BIC) (Schwarz, 1978), was recom-  
 156 mended as the most appropriate in the case of PFM approaches since AIC often tends to overfit  
 157 the signal(Gaudes et al., 2013; Caballero-Gaudes et al., 2019).

On the other hand, FISTA is an extension of the classical gradient algorithm that provides fast convergence for large-scale problems. In the case of FISTA though, the regularization parameter  $\lambda$  must be selected prior to solving the problem, but can be updated in every iteration so that the residuals of the data fit converge to an estimated noise level of the data  $\hat{\sigma}$ :

$$\lambda^{n+1} = \frac{N\hat{\sigma}}{\frac{1}{2}\|\mathbf{y} - \mathbf{x}^n\|_F^2} \lambda^n, \quad (8)$$

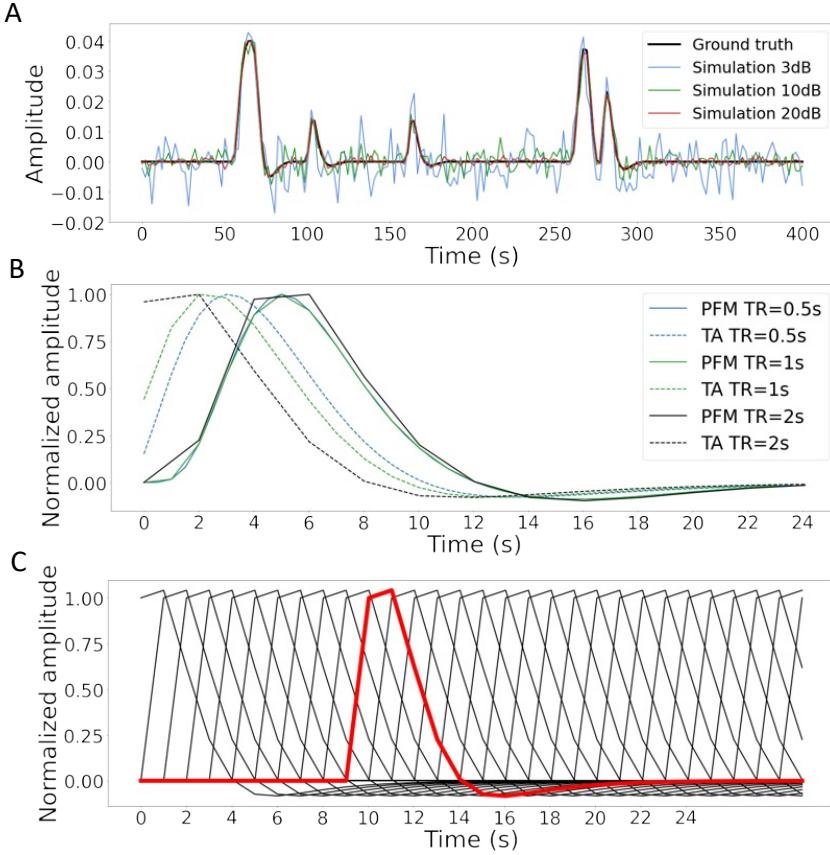


Figure 2: A) Simulated signal with different SNRs (20 dB, 10 dB and 3 dB) and ground truth given in signal percentage change (SPC). B) Canonical HRF models typically used by PFM (solid line) and TA (dashed line) at TR = 0.5 s (blue), TR = 1 s (green) and TR = 2 s (black). Without loss of generality, the waveforms are scaled to unit amplitude for visualization. C) Representation of shifted HRFs at TR = 2 s that build the design matrix for PFM when the HRF model has been matched to that in TA. The red line corresponds to one of the columns of the HRF matrix.

158 where  $x^n$  is the  $n^{th}$  iteration estimate,  $\lambda^n$  and  $\lambda^{n+1}$  are the  $n^{th}$  and  $n + 1^{th}$  iteration values for the  
 159 regularization parameter  $\lambda$ , and  $N$  is the number of points in the time-course. The pre-estimated  
 160 noise level can be obtained as the median absolute deviation (MAD) of the fine-scale wavelet  
 161 coefficients (Daubechies, order 3) of the fMRI timecourse. The MAD criterion has been adopted  
 162 in TA (Karahanoglu et al., 2013). Of note, similar formulations based on the MAD estimate have  
 163 also been applied in PFM formulations (Gaudes et al., 2012, 2011).

164 **3. Methods**

165 *3.1. Simulated data*

In order to compare the two methods while controlling for their correct performance, we created a simulation scenario that can be found in the GitHub repository shared in Section 6. For the sake of illustration, we describe here the simulations corresponding to a timecourse with a duration of 400 seconds ( $TR = 2$  s) where the activity-inducing signal includes 5 events, which are convolved with the canonical HRF. Different noise sources (physiological, thermal, and motion-related) were also added and we simulated three different scenarios with varying signal-to-noise ratios ( $SNR = [20 \text{ dB}, 10 \text{ dB}, 3 \text{ dB}]$ ) that represent high, medium and low contrast-to-noise ratios as shown in Figure 2A. Noise was created following the procedure in (Gaudes et al., 2013) as the sum of uncorrelated Gaussian noise and sinusoidal signals to simulate a realistic noise model with thermal noise, cardiac and respiratory physiological fluctuations, respectively. The physiological signals were generated as

$$\sum_{i=1}^2 \frac{1}{2^{i-1}} (\sin(2\pi f_{r,i}t + \phi_{r,i}) + \sin(2\pi f_{c,i}t + \phi_{c,i})), \quad (9)$$

166 with up to second-order harmonics per cardiac ( $f_{c,i}$ ) and respiratory ( $f_{r,i}$ ) component that were  
167 randomly generated following normal distributions with variance 0.04 and mean  $if_r$  and  $if_c$ , for  
168  $i = [1, 2]$ . We set the fundamental frequencies to  $f_r = 0.3$  Hz for the respiratory component (Birn  
169 et al., 2006)) and  $f_c = 1.1$  Hz for the cardiac component (Shmueli et al., 2007)). The phases of  
170 each harmonic  $\phi$  were randomly selected from a uniform distribution between 0 and  $2\pi$  radians.  
171 To simulate physiological noise that is proportional to the change in BOLD signal, a variable ratio  
172 between the physiological ( $\sigma_P$ ) and the thermal ( $\sigma_0$ ) noise was modeled as  $\sigma_P/\sigma_0 = a(tSNR)^b + c$ ,  
173 where  $a = 5.01 \times 10^{-6}$ ,  $b = 2.81$ , and  $c = 0.397$ , following the experimental measures available in  
174 Table 3 from (Triantafyllou et al., 2005)).

175 *3.2. Experimental data*

176 To compare the performance of the two approaches as well as illustrate their operation, we  
177 employ two representative experimental datasets.

178 **Motor task dataset:** One healthy subject was scanned in a 3T MR scanner (Siemens) under a  
179 Basque Center on Cognition, Brain and Language Review Board-approved protocol. T2\*-weighted  
180 multi-echo fMRI data was acquired with a simultaneous-multislice multi-echo gradient echo-planar  
181 imaging sequence, kindly provided by the Center of Magnetic Resonance Research (University of  
182 Minnesota, USA) (Feinberg et al., 2010; Moeller et al., 2010; Setsompop et al., 2011), with the  
183 following parameters: 340 time frames, 52 slices, Partial-Fourier = 6/8, voxel size =  $2.4 \times 2.4 \times 3$   
184 mm<sup>3</sup>, TR = 1.5 s, TEs = 10.6/28.69/46.78/64.87/82.96 ms, flip angle = 70°, multiband factor =  
185 4, GRAPPA = 2.

186 During the fMRI acquisition, the subject performed a motor task consisting of five different  
187 movements (left-hand finger tapping, right-hand finger tapping, moving the left toes, moving the  
188 right toes and moving the tongue) that were visually cued through a mirror located on the head  
189 coil. These conditions were randomly intermixed every 16 seconds, and were only repeated once  
190 the entire set of stimuli were presented. Data preprocessing consisted of first, discarding the first 10  
191 volumes of the functional data to achieve a steady state of magnetization. Then, image realignment  
192 to the skull-stripped single-band reference image (SBRef) was computed on the first echo, and the  
193 estimated rigid-body spatial transformation was applied to all other echoes (Jenkinson et al., 2012;

Jenkinson and Smith, 2001). A brain mask obtained from the SBRef volume was applied to all the echoes and the different echo timeseries were optimally combined (OC) voxelwise by weighting each timeseries contribution by its T2\* value (Posse et al., 1999). AFNI (Cox, 1996) was employed for a detrending of up to 4<sup>th</sup>-order Legendre polynomials, within-brain spatial smoothing (3 mm FWHM) and voxelwise signal normalization to percentage change. Finally, distortion field correction was performed on the OC volume with Topup (Andersson et al., 2003), using the pair of spin-echo EPI images with reversed phase encoding acquired before the ME-EPI acquisition (Glasser et al., 2016).

**Resting-state datasets:** One healthy subject was scanned in a 3T MR scanner (Siemens) under a Basque Center on Cognition, Brain and Language Review Board-approved protocol. Two runs of T2\*-weighted fMRI data were acquired during resting-state, each with 10 min duration, with 1) a standard gradient-echo echo-planar imaging sequence (monoband) (TR = 2000 ms, TE = 29 ms, flip-angle = 78°, matrix size = 64 × 64, voxel size = 3 × 3 × 3 mm<sup>3</sup>, 33 axial slices with interleaved acquisition, slice gap = 0.6 mm) and 2) a simultaneous-multislice gradient-echo echo-planar imaging sequence (multiband factor = 3, TR = 800 ms, TE = 29 ms, flip-angle = 60°, matrix size = 64 × 64, voxel size = 3 × 3 × 3 mm<sup>3</sup>, 42 axial slices with interleaved acquisition, no slice gap). Single-band reference images were also collected in both resting-state acquisitions for head motion realignment. Field maps were also obtained to correct for field distortions.

During both acquisitions, participants were instructed to keep their eyes open, fixating a white cross that they saw through a mirror located on the head coil, and not to think about anything specific. The data was pre-processed using AFNI (Cox, 1996). First, volumes corresponding to the initial 10 seconds were removed to allow for a steady-state magnetization. Then, the voxel time-series were despiked to reduce large-amplitude deviations and slice-time corrected. Inhomogeneities caused by magnetic susceptibility were corrected with FUGUE (FSL) using the field map images (Jenkinson et al., 2012). Next, functional images were realigned to a base volume (monoband: volume with the lowest head motion; multiband: single-band reference image). Finally, a simultaneous nuisance regression step was performed comprising up to 6<sup>th</sup>-order Legendre polynomials, low-pass filtering with a cutoff frequency of 0.25 Hz (only on multiband data to match the frequency content of the monoband), 6 realignment parameters plus temporal derivatives, 5 principal components of white matter (WM), 5 principal components of lateral ventricle voxels (anatomical CompCor) (Behzadi et al., 2007) and 5 principal components of the brain's edge voxels ,(Patriat et al., 2015). WM, CSF and brain's edge-voxel masks were obtained from Freesurfer tissue and brain segmentations. In addition, scans with potential artifacts were identified and censored when the euclidean norm of the temporal derivative of the realignment parameters (ENORM) was larger than 0.4, and the proportion of voxels adjusted in the despiking step exceeded 10%.

### 3.3. Selection of the hemodynamic response function

In their original formulations, PFM and TA specify the discrete-time HRF in different ways. For PFM, the continuous-domain specification of the canonical double-gamma HRF (Henson and Friston, 2007) is sampled at the TR and then put as shifted impulse responses to build the matrix  $\mathbf{H}$ . In the case of TA, however, the continuous-domain linearized version of the balloon-windkessel model is discretized to build the linear differential operator in  $\mathbf{D}_\mathbf{H}$ . While the TR only changes the resolution of the HRF shape for PFM, the impact of an equivalent impulse response of the discretized differential operator at different TR is more pronounced. As shown in Figure 2B, longer TR leads to equivalent impulse responses of TA that are shifted in time, provoking a lack of the initial baseline and rise of the response. We refer the reader to Figure S1 to see the differences in the estimation of the activity-inducing and innovation signals when both methods use the HRF

in their original formulation. To avoid differences between PFM and TA based on their built-in HRF, we choose to build the synthesis operator  $\mathbf{H}$  with shifted versions of the HRF given by the TA analysis operator (e.g., see Figure 2C for the TR=2s case).

#### 3.4. Selection of the regularization parameter

We use the simulated data to compare the performance of the two deconvolution algorithms with both BIC and MAD criteria to set the regularization parameter  $\lambda$  (see section 2.6). We also evaluate if the algorithms behave differently in terms of the estimation of the activity-inducing signal  $\hat{\mathbf{s}}$  using the spike model described in (4) and the block model based on the innovation signal  $\hat{\mathbf{u}}$  in (7).

For selection based on the BIC, LARS was initially performed with the PFM deconvolution model to obtain the solution for every possible  $\lambda$  in the regularization path. Then, the values of  $\lambda$  corresponding to the BIC optimum were adopted to solve the TA deconvolution model by means of FISTA.

For a selection based on the MAD estimate of the noise, we apply the temporal regularization in its original form for TA, whereas for PFM the selected  $\lambda$  corresponds to the solution whose residuals have the closest standard deviation to the estimated noise level of the data  $\hat{\sigma}$ .

#### 3.5. Analyses in experimental fMRI data

**Difference between approaches:** To assess the discrepancies between both approaches when applied on experimental fMRI data, we calculate the square root of the sum of squares of the differences (RSSD) between the activity-inducing signals estimated with PFM and TA on the three experimental datasets as

$$\text{RSSD} = \sqrt{\frac{1}{N} \sum_{k=1}^N (\hat{s}_{\text{PFM}}[k] - \hat{s}_{\text{TA}}[k])^2}, \quad (10)$$

where  $N$  is the number of timepoints of the acquisition. The RSSD of the innovation signals  $\hat{\mathbf{u}}$  was computed equally.

**Task fMRI data:** In the analysis of the motor task data, we evaluate the performance of PFM and TA in comparison with a conventional General Linear Model analysis (*3dDeconvolve* in AFNI) that takes advantage of the information about the duration and onsets of the motor trials. Given the block design of the motor task, we only make this comparison with the block model.

**Resting-state fMRI data:** We also illustrate the usefulness of deconvolution approaches in the analysis of resting-state data where information about the timings of neuronal-related BOLD activity cannot be predicted. Apart from being able to explore individual maps of deconvolved activity (i.e., innovation signals, activity-inducing signals, or hemodynamic signals) at the temporal resolution of the acquisition (or deconvolution), here we calculate the [average extreme points of the activity-inducing and innovation maps \(given that these examples do not have a sufficient number of scans to perform a clustering step\)](#) and illustrate how popular approaches like co-activation patterns (CAPs)(Tagliazucchi et al., 2012; Liu et al., 2018) and innovation-driven co-activation patterns (iCAPs) (Karahanoğlu and Ville, 2015) can be applied on the deconvolved signals to reveal patterns of coordinated brain activity. To achieve this, we calculate the average time-series in a seed of 9 voxels located in the precuneus, supramarginal gyrus, and occipital gyri independently, and solve the deconvolution problem to find the activity-inducing and innovation signals in the seeds. We then apply a 95<sup>th</sup> percentile threshold and average the maps of the time-frames that survive the

threshold. Finally, we apply the same procedure to the original— i.e., non-deconvolved— signal in the seed and compare the results with the widely-used seed correlation approach.

## 4. Results

### 4.1. Performance based on the regularization parameter

Figure 3A shows the regularization paths of PFM and TA side by side obtained for the spike model of Eq. (4) for SNR=3 dB. The solutions for all three SNR conditions are shown in Figures S2 and S3. Starting from the maximum  $\lambda$  corresponding to a null estimate and for decreasing values of  $\lambda$ , LARS computes a new estimate at the value of  $\lambda$  that reduces the sparsity promoted by the  $l_1$ -norm and causes a change in the active set of non-zero coefficients of the estimate (i.e., a zero coefficient becomes non-zero or vice versa) as shown in the horizontal axis of the heatmaps. Vertical dashed lines depict the selection of the regularization parameter based on the BIC, and thus, the colored coefficients indicated by these depict the estimated activity-inducing signal  $\hat{s}$ . Figure 3B illustrates the resulting estimates of the activity-inducing and activity-related hemodynamic signals when basing the selection of  $\lambda$  on the BIC for SNR=3 dB. Given that the regularization paths of both approaches are identical, it can be clearly observed that the BIC-based estimates are identical too for the corresponding  $\lambda$ . Thus, Figures 3A, 3B, S2 and S3 demonstrate that, regardless of the simulated SNR condition, the spike model of both deconvolution algorithms produces identical regularization paths when the same HRF and regularization parameters are applied, and hence, identical estimates of the activity-inducing signal  $\hat{s}$  and neuronal-related hemodynamic signal  $\hat{x}$ . Likewise, Figure 3C demonstrates that the regularization paths for the block model defined in Eqs. (6) and (7) also yield virtually identical estimates of the innovation signals for both PFM and TA methods. Again, the BIC-based selection of  $\lambda$  is identical for both PFM and TA. As illustrated in Figure 3D, the estimates of the innovation signal  $u$  also show no distinguishable differences between the algorithms. Figures 3 A-D demonstrate that both PFM and TA yield equivalent regularization paths and estimates of the innovation signal and activity-inducing signal regardless of the simulated SNR condition when applying the same HRF and regularization parameters with the block and spike models.

As for selecting  $\lambda$  with the MAD criterion defined in Eq. (8), Figure 3E depicts the estimated activity-inducing and activity-related signals for the simulated low-SNR setting using the spike model, while Figure 3F shows the estimated signals corresponding to the block model. Both plots in Figure 3E and F depict nearly identical results between PFM and TA with both models. Given that the regularization paths of both techniques are identical, minor dissimilarities are owing to the slight differences in the selection of  $\lambda$  due to the quantization of the values returned by LARS.

### 4.2. Performance on experimental data

Figure 4 depicts the RSSD maps revealing differences between PFM and TA estimates for the spike (Figure 4A and C) and block (Figure 4B and D) models when applied to the three experimental fMRI datasets. The RSSD values are virtually negligible (i.e., depicted in yellow) in most of the within-brain voxels and lower than the amplitude of the estimates of the activity-inducing and innovation signals. Based on the maximum value of the range shown in each image, we observe that the similarity between both approaches is more evident for the spike model (with both selection criteria) and the block model with the BIC selection. However, given the different approaches used for the selection of the regularization parameter  $\lambda$  based on the MAD estimate of the noise(i.e., converging so that the residuals of FISTA are equal to the MAD estimate of the

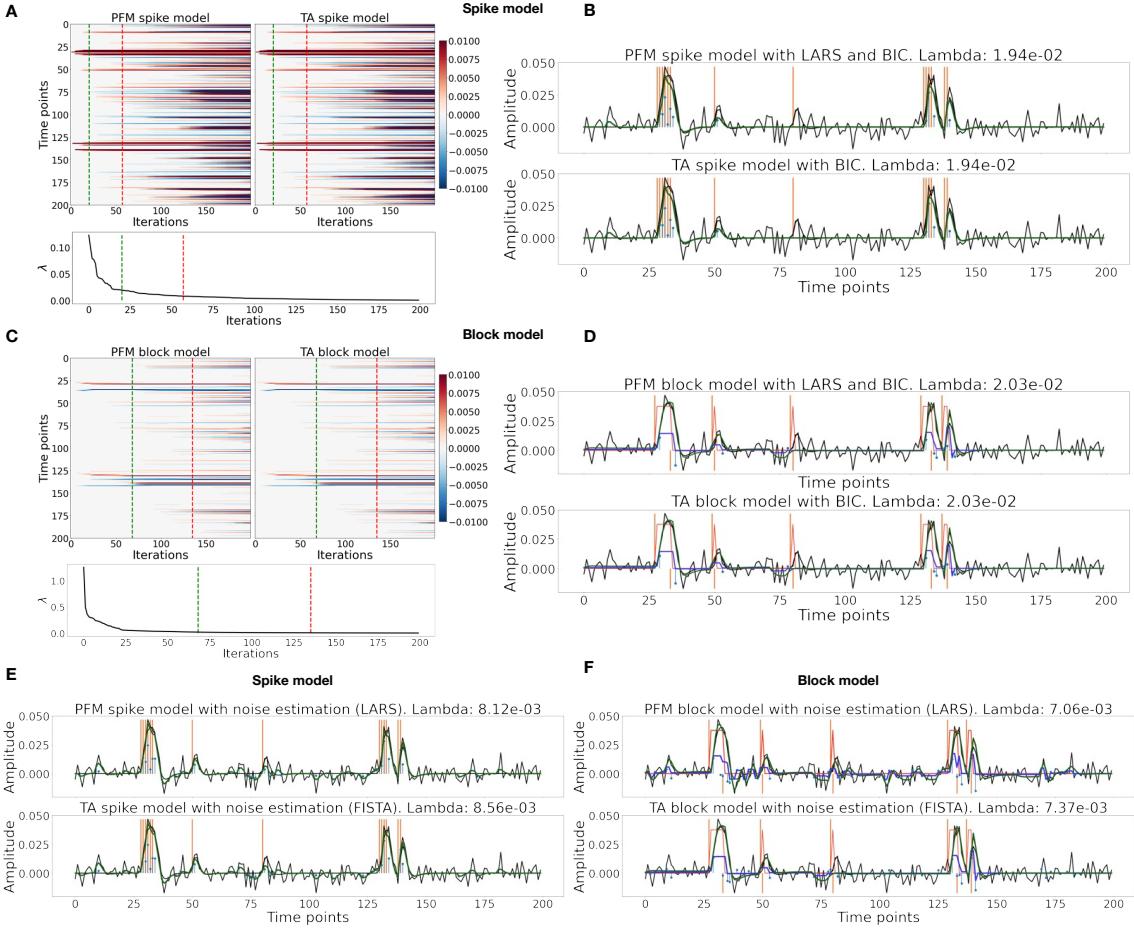


Figure 3: (A) Heatmap of the regularization paths of the activity-inducing signals (spike model) estimated with PFM and TA as a function of  $\lambda$  for the simulated data with SNR = 3 dB (x-axis: increasing number of iterations or  $\lambda$  as given by LARS; y-axis: time; color: amplitude). Vertical lines denote iterations corresponding to the BIC (dashed line) and MAD (dotted line) selection of  $\lambda$ . (B) Estimated activity-inducing (blue) and activity-related (green) signals with a selection of  $\lambda$  based on the BIC. Orange and red lines depict the ground truth. (C) Heatmap of the regularization paths of the innovation signals (block model) estimated with PFM and TA as a function of  $\lambda$  for the simulated data with SNR = 3 dB. (D) Estimated innovation (blue), activity-inducing (darker blue), and activity-related (green) signals with a selection of  $\lambda$  based on the BIC. (E) Activity-inducing and activity-related (fit,  $\chi$ ) signals estimated with PFM (top) and TA (bottom) when  $\lambda$  is selected based on the MAD method with the spike model, and (F) with the block model for the simulated data with SNR = 3 dB.

noise for TA vs. finding the LARS residual that is closest to the MAD estimate of the noise), higher RSSD values can be observed with the largest differences occurring in gray matter voxels. These areas also correspond to low values of  $\lambda$  (see Figure S4) and MAD estimates of the noise (see Figure S5), while the highest values are visible in regions with signal dropouts, ventricles, and white matter. These differences that arise from the differing methods to find the optimal

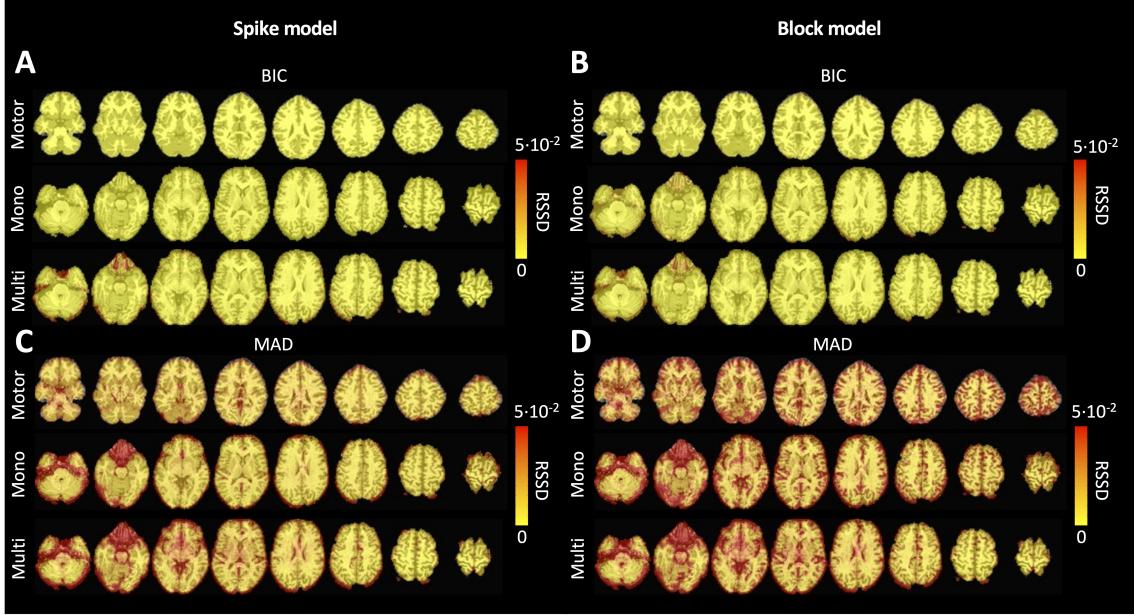


Figure 4: Square root of the sum of squared differences (RSSD) between the estimates obtained with PFM and TA for (A) spike model (activity-inducing signal) and BIC selection of  $\lambda$ , (B) block model (innovation signal) and BIC selection, (C) spike model (activity-inducing signal) and MAD selection, (D) block model (innovation signal) and MAD selection. RSSD maps are shown for the three experimental fMRI datasets: the motor task (Motor), the monoband resting-state (Mono), and the multiband resting-state (Multi) datasets.

regularization parameter based on the MAD estimate of the noise can be clearly seen in the root sum of squares (RSS) of the estimates of the two methods (Figure S6). These differences are also observable in the ATS calculated from estimates obtained with the MAD selection as shown in Figure S9. However, the identical regularization paths shown in Figure S7 demonstrate that both methods perform equivalently on experimental data (see estimates of innovation signal obtained with an identical selection of  $\lambda$  in Figure S8). Hence, the higher RSSD values originate from the different methods to find the optimal regularization parameter based on the MAD estimate of the noise that yield different solutions as shown by the dashed vertical lines in Figure S7.

Figure 5 depicts the results of the analysis of the Motor dataset with the PFM and TA algorithms using the BIC selection of  $\lambda$  (see Figure S9 for results with MAD selection), as well as a conventional GLM approach. The Activation Time Series (top left), calculated as the sum of squares of all voxel amplitudes (positive vs. negative) for a given moment in time, obtained with PFM and TA show nearly identical patterns. These ATS help to summarize the four dimensional information available in the results across the spatial domain and identify instances of significant BOLD activity. The second to sixth rows show the voxel timeseries and the corresponding activity-related, activity-inducing and innovation signals obtained with PFM using the BIC criterion of representative voxels in the regions activated in each of the motor tasks. The TA-estimated time-series are not shown because they were virtually identical. The maps shown on the right correspond to statistical parametric maps obtained with the GLM for each motor condition ( $p < 0.001$ ) as well as the maps

342 of the PFM and TA estimates at the onsets of individual motor events (indicated with arrows in  
343 the timecourses). The estimated activity-related, activity-inducing and innovation signals clearly  
344 reveal the activity patterns of each condition in the task, as they exhibit a BOLD response locked to  
345 the onset and duration of the conditions. Overall, activity maps of the innovation signal obtained  
346 with PFM and TA highly resemble those obtained with a GLM for individual events, **with small**  
347 **differences arising from the distinct specificity of the GLM and deconvolution analyses.** Notice that  
348 the differences observed with the different approaches to select  $\lambda$  based on the MAD estimate shown  
349 in Figure 4 are reflected on the ATS shown in Figure S9 as well.

350 As an illustration of the insights that deconvolution methods can provide in the analysis of  
351 resting-state data, Figure 6 depicts the **average activity-inducing and innovation maps of common**  
352 **resting-state networks** obtained from thresholding and averaging the activity-inducing and innova-  
353 tion signals, respectively, estimated from the resting-state multiband data using PFM with a  
354 selection of  $\lambda$  based on the BIC. The **average activity-inducing maps** obtained via deconvolution  
355 show spatial patterns of the default mode network (DMN), dorsal attention network (DAN), and  
356 visual network (VIS) that highly resemble the maps obtained with conventional seed correlation  
357 analysis using Pearson's correlation, and the **average maps of extreme points** of the signal (i.e., with  
358 no deconvolution). With deconvolution, the **average activity-inducing maps seem to depict more**  
359 **accurate spatial delineation** (i.e., less smoothness) than those obtained from the original data, while  
360 **maintaining the structure of the networks.** The BIC-informed selection of  $\lambda$  yields spatial patterns  
361 of **average activity-inducing and innovation maps** that are more sparse than those obtained with a  
362 selection of  $\lambda$  based on the MAD estimate (see Figure S10). Furthermore, the spatial patterns of  
363 the **average innovation maps** based on the innovation signals using the block model yield comple-  
364 **mentary information to those obtained with the activity-inducing signal since iCAPs allow to reveal**  
365 **regions with synchronous innovations, i.e., with the same upregulating and downregulating events.**  
366 For instance, it is interesting to observe that the structure of the visual network nearly disappears in  
367 its corresponding **average innovation maps**, suggesting the existence of different temporal neuronal  
368 patterns across voxels in the primary and secondary visual cortices.

## 369 5. Discussion and conclusion

370 Hemodynamic deconvolution can be formulated using a synthesis- and analysis-based approach  
371 as proposed by PFM and TA, respectively. This work demonstrates that the theoretical equivalence  
372 of PFM and TA is confirmed in practice given virtually identical results when the same HRF  
373 model and equivalent regularization parameters are employed. Hence, we argue that previously  
374 observed differences in performance can be explained by specific settings, such as the HRF model  
375 and selection of the regularization parameter, convergence thresholds, as well as the addition of  
376 a spatial regularization term in the spatiotemporal TA formulation (Karahanoglu et al., 2013).  
377 **For instance, the use of PFM with the spike model in (Tan et al., 2017) was seen not to be**  
378 **ideal due to the prolonged trials in the paradigm, which might be better described with the block**  
379 **model.** However, given the equivalence of the temporal deconvolution, incorporating extra spatial  
380 or temporal regularization terms in the optimization problem should not modify this equivalence  
381 providing convex operators are employed. For a convex optimization problem, with a unique global  
382 solution, iterative shrinkage thresholding procedures alternating between the different regularization  
383 terms guarantee convergence; e.g., the generalizgoed forward-backward splitting (Raguet et al.,  
384 2013) algorithm originally employed for TA. Our findings are also in line with the equivalence of  
385 analysis and synthesis methods in under-determined cases ( $N \leq V$ ) demonstrated in (Elad et al.,

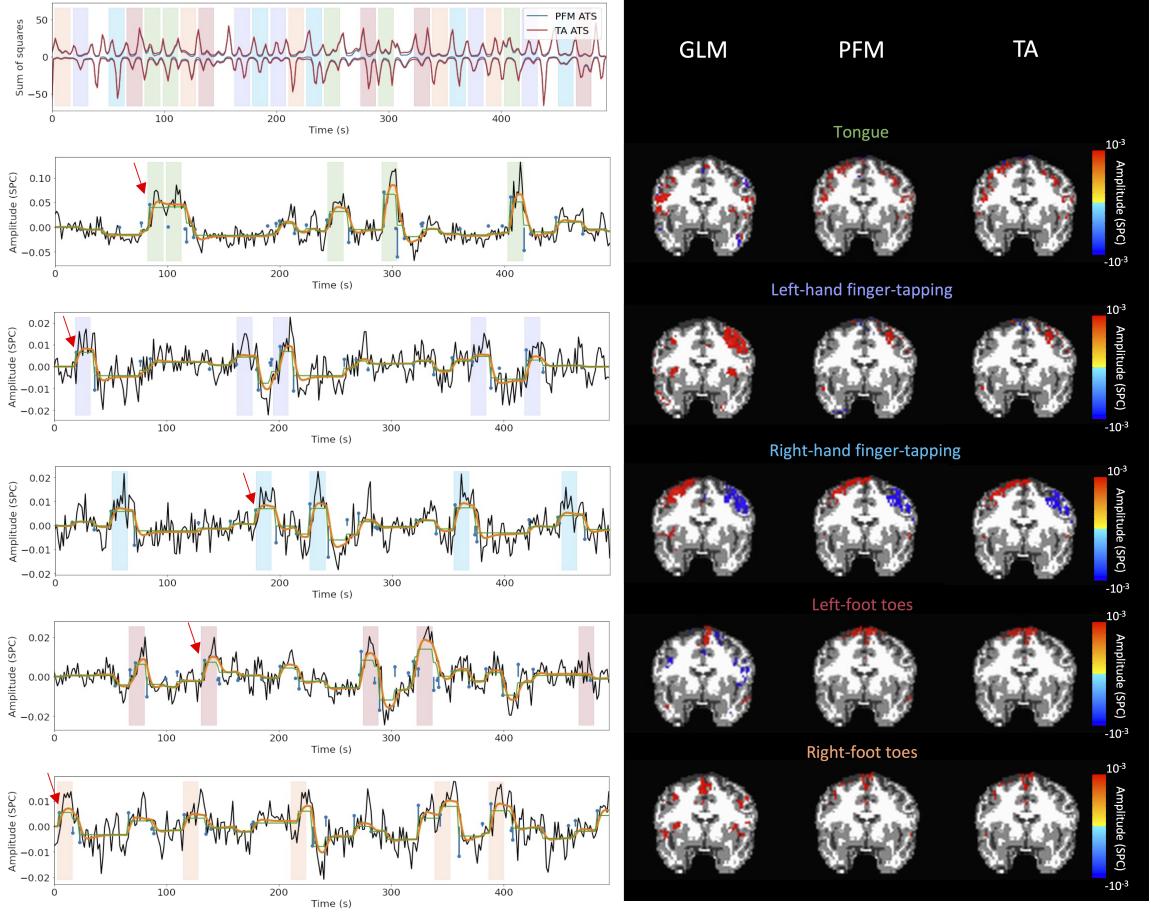


Figure 5: Activity maps of the motor task using a selection of  $\lambda$  based on the BIC estimate. Row 1: Activation time-series (ATS) of the innovation signals estimated by PFM (in blue) or TA (in red) calculated as the sum of squares of all voxels at every timepoint. Positive-valued and negative-valued contributions were separated into two distinct time-courses. Color-bands indicate the onset and duration of each condition in the task (green: tongue motion, purple: left-hand finger-tapping, blue: right-hand finger-tapping, red: left-foot toes motion, orange: right-foot toes motion). Rows 2-6: time-series of a representative voxel for each task with the PFM-estimated innovation (blue), PFM-estimated activity-inducing (green), and activity-related (i.e., fitted, orange) signals, with their corresponding GLM, PFM, and TA maps on the right (representative voxels indicated with green arrows). Amplitudes are given in signal percentage change (SPC). The maps shown on the right are sampled at the time-points labeled with the red arrows and display the innovation signals at these moments across the whole brain.

386 2007) and (Ortelli and van de Geer, 2019). Still, we have shown that a slight difference in the  
 387 selection of the regularization parameter can lead to small differences in the estimated signals when  
 388 employing the block model with the MAD selection of  $\lambda$ . However, since their regularization paths  
 389 are equivalent, the algorithms can easily be forced to converge to the same selection of  $\lambda$ , thus  
 390 resulting in identical estimated signals.

391 Nevertheless, the different formulations of analysis and synthesis deconvolution models bring

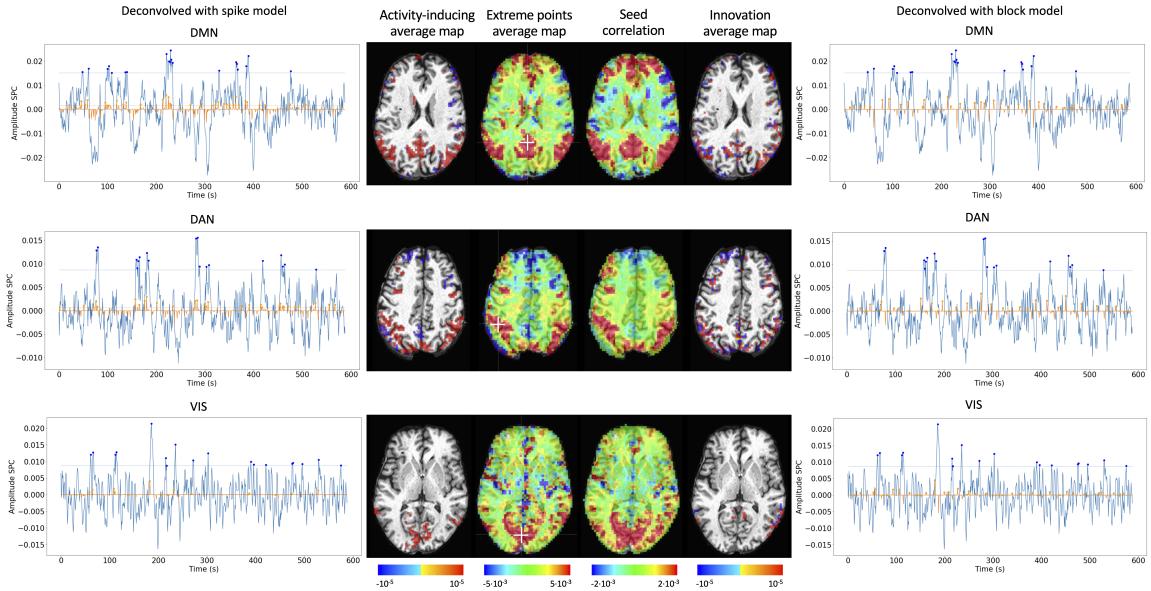


Figure 6: Average activity-inducing (left) and innovation (right) maps obtained from PFM-estimated activity-inducing and innovation signals, respectively, using a BIC-based selection of  $\lambda$ . Time-points selected with a 95<sup>th</sup> percentile threshold (horizontal lines) are shown over the average time-series (blue) in the seed region (white cross) and the deconvolved signals, i.e., activity inducing (left) and innovation (right) signals (orange). Average maps of extreme points and seed correlation maps are illustrated in the center.

392 along different kinds of flexibility. One notable advantage of PFM is that it can readily incorporate  
 393 any HRF as part of the synthesis operator (Elad et al., 2007), only requiring the sampled HRF at the  
 394 desired temporal resolution, which is typically equal to the TR of the acquisition. Conversely, TA  
 395 relies upon the specification of the discrete differential operator that inverts the HRF, which needs  
 396 to be derived either by the inverse solution of the sampled HRF impulse response, or by discretizing  
 397 a continuous-domain differential operator motivated by a biophysical model. The more versatile  
 398 structure of PFM allows for instance an elegant extension of the algorithm to multi-echo fMRI  
 399 data (Caballero-Gaudes et al., 2019) where multiple measurements relate to a common underlying  
 400 signal. Therefore, the one-to-many synthesis scenario (i.e., from activity-inducing to several activity-  
 401 related signals) is more cumbersome to express using TA; i.e., a set of differential operators should  
 402 be defined and the differences between their outputs constrained. Conversely, the one-to-many  
 403 analysis scenario (i.e., from the measurements to several regularizing signals) is more convenient  
 404 to be expressed by TA; e.g., combining spike and block regularizers. While the specification of the  
 405 differential operator in TA only indirectly controls the HRF, the use of the derivative operator to  
 406 enforce the block model, instead of the integrator in PFM, impacts positively the stability and rate  
 407 of the convergence of the optimization algorithms. Moreover, analysis formulations can be more  
 408 suitable for online applications that are still to be explored in fMRI data, but are employed for  
 409 calcium imaging deconvolution (Friedrich et al., 2017; Jewell et al., 2019), and which have been  
 410 applied for offline calcium deconvolution (Farouj et al., 2020).

411 Deconvolution techniques can be used before more downstream analysis of brain activity in terms

of functional network organization as they estimate interactions between voxels or brain regions that occur at the activity-inducing level, and are thus less affected by the slowness of the hemodynamic response compared to when the BOLD signals are analyzed directly. In addition, deconvolution approaches hold a close parallelism to recent methodologies aiming to understand the dynamics of neuronal activations and interactions at short temporal resolution and that focus on extreme events of the fMRI signal (Lindquist et al., 2007). As an illustration, Figure 6 shows that the innovation- or activity-inducing CAPs computed from deconvolved events in a single resting-state fMRI dataset closely resemble the conventional CAPs computed directly from extreme events of the fMRI signal (Liu and Duyn, 2013; Liu et al., 2013, 2018; Cifre et al., 2020a,b; Zhang et al., 2020; Tagliazucchi et al., 2011, 2012, 2016; Rolls et al., 2021). Similarly, we hypothesize that these extreme events will also show a close resemblance to intrinsic ignition events (Deco and Kringelbach, 2017; Deco et al., 2017). As shown in the maps, deconvolution approaches can offer a more straightforward interpretability of the activation events and resulting functional connectivity patterns. Here, CAPs were computed as the average of spatial maps corresponding to the events of a single dataset. Beyond simple averaging, clustering algorithms (e.g., K-means and consensus clustering) can be employed to discern multiple CAPs or iCAPs at the whole-brain level for a large number of subjects. Previous findings based on iCAPs have for instance revealed organizational principles of brain function during rest (Karahanoglu and Ville, 2015) and sleep (Tarun et al., 2021) in healthy controls, next to alterations in 22q11ds (Zoeller et al., 2019) and multiple sclerosis (Bommarito et al., in press). Next to CAPs-inspired approaches, dynamic functional connectivity has recently been investigated with the use of co-fluctuations and edge-centric techniques (Faskowitz et al., 2020; Esfahlani et al., 2020; Jo et al., 2021; Sporns et al., 2021; van Oort et al., 2018). The activation time series shown in Figure 5 aim to provide equivalent information to the root of sum of squares timecourses used in edge-centric approaches, where timecourses with peaks delineate instances of significant brain activity. Future work could address which type of information is redundant or distinct across these frameworks. In summary, these examples illustrate that deconvolution techniques can be employed prior to other computational approaches and could serve as an effective way of denoising the fMRI data. We foresee an increase in the number of studies that take advantage of the potential benefits of using deconvolution methods prior to functional connectivity analyses.

In sum, hemodynamic deconvolution approaches using sparsity-driven regularization are valuable tools to complete the fMRI processing pipeline. Although the two approaches examined in detail here provide alternative representations of the BOLD signals in terms of innovation and activity-inducing signals, their current implementations have certain limitations, calling for further developments or more elaborate models, where some of them have been initially addressed in the literature. One relevant focus is to account for the variability in HRF that can be observed in different regions of the brain. The impact of HRF variability could be reduced using structured regularization terms along with multiple basis functions (Gaudes et al., 2012) or procedures that estimate the HRF shape in an adaptive fashion in both analysis (Farouj et al., 2019) and synthesis formulations (Cherkaoui et al., 2020a). Another avenue of research consists in leveraging spatial information by adopting multivariate deconvolution approaches that operate at the whole-brain level, instead of working voxelwise and beyond regional regularization terms (e.g. as proposed in Karahanoglu et al. 2013). Operating at the whole-brain level would open the way for methods that consider shared neuronal activity using mixed norm regularization terms (Uruñuela-Tremiño et al., 2019) or can capture long-range neuronal cofluctuations using low rank decompositions (Cherkaoui et al., 2020a). For example, multivariate deconvolution approaches could yield better localized activity patterns while reducing the effect of global fluctuations such as respiratory artifacts, which

458 cannot be modelled at the voxel level Uruñuela et al. 2021.

459 Similar to solving other inverse problems by means of regularized estimators, the selection of  
460 the regularization parameter is critical to correctly estimate the neuronal-related signal. Hence,  
461 methods that take advantage of a more robust selection of the regularization parameter could  
462 considerably yield more reliable estimates of the neuronal-related signal. For instance, the stability  
463 selection (Meinshausen and Bühlmann, 2010; Uruñuela et al., 2020) procedure could be included  
464 to the deconvolution problem to ensure that the estimated coefficients are obtained with high  
465 probability. Furthermore, an important issue of regularized estimation is that the estimates are  
466 biased with respect to the true value. In that sense, the use of non-convex  $\ell_{p,q}$ -norm regularization  
467 terms (e.g.,  $p < 1$ ) can reduce this bias while maintaining the sparsity constraint, at the cost of  
468 potentially converging to a local minima of the regularized estimation problem. In practice, these  
469 approaches could avoid the optional debiasing step that overcomes the shrinkage of the estimates and  
470 obtain a more accurate and less biased fit of the fMRI signal (Gaudes et al., 2013; Caballero-Gaudes  
471 et al., 2019). Finally, cutting-edge developments on physics-informed deep learning techniques  
472 for inverse problems (Akçakaya et al., 2021; Monga et al., 2021; Ongie et al., 2020; Cherkaoui  
473 et al., 2020b) could be transferred for deconvolution by considering the biophysical model of the  
474 hemodynamic system and could potentially offer algorithms with reduced computational time and  
475 more flexibility.

## 476 6. Code and data availability

477 The code and materials used in this work can be found in the following GitHub repository:  
478 [https://github.com/eurunuela/pfm\\_vs\\_ta](https://github.com/eurunuela/pfm_vs_ta). We encourage the reader to explore the parameters  
479 (e.g., SNR, varying HRF options and mismatch between algorithms, TR, number of events, onsets,  
480 and durations) in the provided Jupyter notebooks. Likewise, the data used to produce the figures  
481 can be found in <https://osf.io/f3ryg/>.

## 482 7. Acknowledgements

483 We thank Stefano Moia and Vicente Ferrer for data availability, and Younes Farouj for valuable  
484 comments on the manuscript. This research was funded by the Spanish Ministry of Economy and  
485 Competitiveness (RYC-2017-21845), the Basque Government (BERC 2018-2021, PIB\_2019\_104,  
486 PRE\_2020\_2\_0227), and the Spanish Ministry of Science, Innovation and Universities (PID2019-  
487 105520GB-100), and the Swiss National Science Foundation (grant 205321\_163376).

## 488 8. CRediT

489 Eneko Uruñuela: Conceptualisation, Methodology, Software, Formal Analysis, Investigation,  
490 Data Curation, Writing (OD), Writing (RE), Visualisation, Funding acquisition. Thomas A.W.  
491 Bolton: Conceptualisation, Methodology, Writing (RE). Dimitri Van de Ville: Conceptualisation,  
492 Methodology, Writing (RE). César Caballero-Gaudes: Conceptualisation, Methodology, Software,  
493 Formal Analysis, Investigation, Data Curation, Writing (OD), Writing (RE), Visualisation, Funding  
494 acquisition.

495    **References**

- 496    Akçakaya, M., Yaman, B., Chung, H., Ye, J.C., 2021. Unsupervised deep learning methods for  
497    biological image reconstruction [arXiv:2105.08040](https://arxiv.org/abs/2105.08040).
- 498    Allan, T.W., Francis, S.T., Caballero-Gaudes, C., Morris, P.G., Liddle, E.B., Liddle, P.F., Brookes,  
499    M.J., Gowland, P.A., 2015. Functional connectivity in MRI is driven by spontaneous BOLD  
500    events. *PLOS ONE* 10, e0124577. doi:[10.1371/journal.pone.0124577](https://doi.org/10.1371/journal.pone.0124577).
- 501    Andersson, J.L., Skare, S., Ashburner, J., 2003. How to correct susceptibility distortions in spin-  
502    echo echo-planar images: application to diffusion tensor imaging. *NeuroImage* 20, 870–888.  
503    doi:[10.1016/s1053-8119\(03\)00336-7](https://doi.org/10.1016/s1053-8119(03)00336-7).
- 504    Aslan, S., Cemgil, A.T., Akin, A., 2016. Joint state and parameter estimation of the hemodynamic  
505    model by particle smoother expectation maximization method. *Journal of Neural Engineering*  
506    13, 046010. doi:[10.1088/1741-2560/13/4/046010](https://doi.org/10.1088/1741-2560/13/4/046010).
- 507    Beck, A., Teboulle, M., 2009. A fast iterative shrinkage-thresholding algorithm for linear inverse  
508    problems. *SIAM Journal on Imaging Sciences* 2, 183–202. doi:[10.1137/080716542](https://doi.org/10.1137/080716542).
- 509    Behzadi, Y., Restom, K., Liau, J., Liu, T.T., 2007. A component based noise correction method  
510    (CompCor) for BOLD and perfusion based fMRI. *NeuroImage* 37, 90–101. doi:[10.1016/j.neuroimage.2007.04.042](https://doi.org/10.1016/j.neuroimage.2007.04.042).
- 512    Birn, R.M., Diamond, J.B., Smith, M.A., Bandettini, P.A., 2006. Separating respiratory-variation-  
513    related fluctuations from neuronal-activity-related fluctuations in fMRI. *NeuroImage* 31, 1536–  
514    1548. doi:[10.1016/j.neuroimage.2006.02.048](https://doi.org/10.1016/j.neuroimage.2006.02.048).
- 515    Bolton, T.A., Morgenroth, E., Preti, M.G., Ville, D.V.D., 2020. Tapping into multi-faceted human  
516    behavior and psychopathology using fMRI brain dynamics. *Trends in Neurosciences* 43, 667–680.  
517    doi:[10.1016/j.tins.2020.06.005](https://doi.org/10.1016/j.tins.2020.06.005).
- 518    Bommarito, G., Tarun, A., Farouj, Y., Preti, M.G., Petracca, M., Droby, A., Mendili, M.M.E.,  
519    Inglese, M., Ville, D.V.D., 2020. Altered anterior default mode network dynamics in progressive  
520    multiple sclerosis. *medRxiv* doi:[10.1101/2020.11.26.20238923](https://doi.org/10.1101/2020.11.26.20238923).
- 521    Bommarito, G., Tarun, A., Farouj, Y., Preti, M.G., Petracca, M., Droby, A., Mounir El Mendili,  
522    M., Inglese, M., Van De Ville, D., in press. Altered anterior default mode network dynamics in  
523    progressive multiple sclerosis. *Multiple Sclerosis Journal* doi:[10.1177/13524585211018116](https://doi.org/10.1177/13524585211018116).
- 524    Boynton, G.M., Engel, S.A., Glover, G.H., Heeger, D.J., 1996. Linear systems analysis of functional  
525    magnetic resonance imaging in human v1. *The Journal of Neuroscience* 16, 4207–4221. doi:[10.1523/jneurosci.16-13-04207.1996](https://doi.org/10.1523/jneurosci.16-13-04207.1996).
- 527    Bruckstein, A.M., Donoho, D.L., Elad, M., 2009. From sparse solutions of systems of equations to  
528    sparse modeling of signals and images. *SIAM Review* 51, 34–81. doi:[10.1137/060657704](https://doi.org/10.1137/060657704).
- 529    Bush, K., Cisler, J., 2013. Decoding neural events from fMRI BOLD signal: A comparison of  
530    existing approaches and development of a new algorithm. *Magnetic Resonance Imaging* 31, 976–  
531    989. doi:[10.1016/j.mri.2013.03.015](https://doi.org/10.1016/j.mri.2013.03.015).

- 532 Bush, K., Zhou, S., Cisler, J., Bian, J., Hazaroglu, O., Gillispie, K., Yoshigoe, K., Kilts, C.,  
533 2015. A deconvolution-based approach to identifying large-scale effective connectivity. Magnetic  
534 Resonance Imaging 33, 1290–1298. doi:10.1016/j.mri.2015.07.015.
- 535 Buxton, R.B., Wong, E.C., Frank, L.R., 1998. Dynamics of blood flow and oxygenation changes  
536 during brain activation: the balloon model. Magnetic resonance in medicine 39, 855–864.
- 537 Caballero-Gaudes, C., Moia, S., Panwar, P., Bandettini, P.A., Gonzalez-Castillo, J., 2019. A  
538 deconvolution algorithm for multi-echo functional MRI: Multi-echo sparse paradigm free mapping.  
539 NeuroImage 202, 116081. doi:10.1016/j.neuroimage.2019.116081.
- 540 Casanova, R., Ryali, S., Serences, J., Yang, L., Kraft, R., Laurienti, P.J., Maldjian, J.A., 2008. The  
541 impact of temporal regularization on estimates of the BOLD hemodynamic response function: A  
542 comparative analysis. NeuroImage 40, 1606–1618. doi:10.1016/j.neuroimage.2008.01.011.
- 543 Chambolle, A., 2004. An algorithm for total variation minimization and applications. Journal of  
544 Mathematical imaging and vision 20, 89–97.
- 545 Chen, S.S., Donoho, D.L., Saunders, M.A., 2001. Atomic decomposition by basis pursuit. SIAM  
546 review 43, 129–159.
- 547 Cherkaoui, H., Moreau, T., Halimi, A., Ciuciu, P., 2019. Sparsity-based blind deconvolution of  
548 neural activation signal in fMRI, in: ICASSP 2019 - 2019 IEEE International Conference on  
549 Acoustics, Speech and Signal Processing (ICASSP), IEEE. pp. 1323–1327. doi:10.1109/icassp.  
550 2019.8683358.
- 551 Cherkaoui, H., Moreau, T., Halimi, A., Leroy, C., Ciuciu, P., 2020a. Multivariate semi-blind  
552 deconvolution of fMRI time series. URL: <https://hal.archives-ouvertes.fr/hal-03005584>.  
553 working paper or preprint.
- 554 Cherkaoui, H., Sulam, J., Moreau, T., 2020b. Learning to solve TV regularised problems with  
555 unrolled algorithms 33, 11513–11524. URL: <https://proceedings.neurips.cc/paper/2020/file/84fec9a8e45846340fdf5c7c9f7ed66c-Paper.pdf>.
- 557 Cifre, I., Flores, M.T.M., Ochab, J.K., Chialvo, D.R., 2020a. Revisiting non-linear functional brain  
558 co-activations: directed, dynamic and delayed. arXiv:2007.15728.
- 559 Cifre, I., Zarepour, M., Horovitz, S.G., Cannas, S.A., Chialvo, D.R., 2020b. Further results on why  
560 a point process is effective for estimating correlation between brain regions. Papers in Physics  
561 12, 120003. doi:10.4279/PIP.120003.
- 562 Ciuciu, P., Poline, J.B., Marrelec, G., Idier, J., Pallier, C., Benali, H., 2003. Unsupervised robust  
563 nonparametric estimation of the hemodynamic response function for any fmri experiment. IEEE  
564 transactions on medical imaging 22, 1235–1251. doi:10.1109/TMI.2003.817759.
- 565 Cohen, M.S., 1997. Parametric analysis of fMRI data using linear systems methods. NeuroImage  
566 6, 93–103. doi:10.1006/nimg.1997.0278.
- 567 Costantini, I., Deriche, R., Deslauriers-Gauthier, S., 2022. An anisotropic 4d filtering approach to  
568 recover brain activation from paradigm-free functional MRI data. Frontiers in Neuroimaging 1.  
569 doi:10.3389/fnimg.2022.815423.

- 570 Cox, R.W., 1996. AFNI: Software for analysis and visualization of functional magnetic resonance  
571 neuroimages. Computers and Biomedical Research 29, 162–173. doi:10.1006/cbmr.1996.0014.
- 572 Deco, G., Kringelbach, M.L., 2017. Hierarchy of information processing in the brain: A novel  
573 ‘intrinsic ignition’ framework. Neuron 94, 961–968. doi:10.1016/j.neuron.2017.03.028.
- 574 Deco, G., Tagliazucchi, E., Laufs, H., Sanjuán, A., Kringelbach, M.L., 2017. Novel intrinsic ignition  
575 method measuring local-global integration characterizes wakefulness and deep sleep. eNeuro 4.  
576 doi:10.1523/ENEURO.0106-17.2017.
- 577 Di, X., Biswal, B.B., 2013. Modulatory interactions of resting-state brain functional connectivity.  
578 PLoS ONE 8, e71163. doi:10.1371/journal.pone.0071163.
- 579 Di, X., Biswal, B.B., 2015. Characterizations of resting-state modulatory interactions in the human  
580 brain. Journal of Neurophysiology 114, 2785–2796. doi:10.1152/jn.00893.2014.
- 581 Di, X., Biswal, B.B., 2018. Toward task connectomics: Examining whole-brain task modulated  
582 connectivity in different task domains. Cerebral Cortex 29, 1572–1583. doi:10.1093/cercor/  
583 bhy055.
- 584 Efron, B., Hastie, T., Johnstone, I., Tibshirani, R., 2004. Least angle regression. The Annals of  
585 Statistics 32, 407–499. doi:10.1214/009053604000000067.
- 586 Elad, M., Milanfar, P., Rubinstein, R., 2007. Analysis versus synthesis in signal priors. Inverse  
587 Problems 23, 947–968. doi:10.1088/0266-5611/23/3/007.
- 588 Esfahlani, F.Z., Jo, Y., Faskowitz, J., Byrge, L., Kennedy, D.P., Sporns, O., Betzel, R.F., 2020.  
589 High-amplitude cofluctuations in cortical activity drive functional connectivity. Proceedings of  
590 the National Academy of Sciences 117, 28393–28401. doi:10.1073/pnas.2005531117.
- 591 Farouj, Y., Karahanoglu, F.I., Ville, D.V.D., 2019. Bold signal deconvolution under uncertain  
592 hÆmodynamics: A semi-blind approach, in: 2019 IEEE 16th International Symposium on  
593 Biomedical Imaging (ISBI 2019), IEEE. IEEE. pp. 1792–1796. doi:10.1109/isbi.2019.8759248.
- 594 Farouj, Y., Karahanoglu, F.I., Ville, D.V.D., 2020. Deconvolution of sustained neural activity from  
595 large-scale calcium imaging data 39, 1094–1103. doi:10.1109/tmi.2019.2942765.
- 596 Faskowitz, J., Esfahlani, F.Z., Jo, Y., Sporns, O., Betzel, R.F., 2020. Edge-centric functional  
597 network representations of human cerebral cortex reveal overlapping system-level architecture.  
598 Nature neuroscience 23, 1644–1654. doi:10.1038/s41593-020-00719-y.
- 599 Feinberg, D.A., Moeller, S., Smith, S.M., Auerbach, E., Ramanna, S., Glasser, M.F., Miller, K.L.,  
600 Ugurbil, K., Yacoub, E., 2010. Multiplexed echo planar imaging for sub-second whole brain  
601 fMRI and fast diffusion imaging. PLoS ONE 5, e15710. doi:10.1371/journal.pone.0015710.
- 602 Freitas, L.G., Bolton, T.A., Krikler, B.E., Jochaut, D., Giraud, A.L., Hüppi, P.S., Ville, D.V.D.,  
603 2020. Time-resolved effective connectivity in task fMRI: Psychophysiological interactions of co-  
604 activation patterns. NeuroImage 212, 116635. doi:10.1016/j.neuroimage.2020.116635.
- 605 Friedrich, J., Zhou, P., Paninski, L., 2017. Fast online deconvolution of calcium imaging data.  
606 PLOS Computational Biology 13, e1005423. doi:10.1371/journal.pcbi.1005423.

- 607 Friston, K., Fletcher, P., Josephs, O., Holmes, A., Rugg, M., Turner, R., 1998. Event-related fMRI:  
608 Characterizing differential responses. *NeuroImage* 7, 30–40. doi:10.1006/nimg.1997.0306.
- 609 Friston, K., Trujillo-Barreto, N., Daunizeau, J., 2008. DEM: A variational treatment of dynamic  
610 systems. *NeuroImage* 41, 849–885. doi:10.1016/j.neuroimage.2008.02.054.
- 611 Friston, K.J., Jezzard, P., Turner, R., 1994. Analysis of functional MRI time-series. *Human Brain  
612 Mapping* 1, 153–171. doi:10.1002/hbm.460010207.
- 613 Friston, K.J., Mechelli, A., Turner, R., Price, C.J., 2000. Nonlinear responses in fmri: the balloon  
614 model, volterra kernels, and other hemodynamics. *NeuroImage* 12, 466–477.
- 615 Gaudes, C.C., Karahanoglu, F.I., Lazeyras, F., Ville, D.V.D., 2012. Structured sparse deconvolution  
616 for paradigm free mapping of functional MRI data, in: 2012 9th IEEE International Symposium  
617 on Biomedical Imaging (ISBI), IEEE. IEEE. pp. 322–325. doi:10.1109/isbi.2012.6235549.
- 618 Gaudes, C.C., Petridou, N., Dryden, I.L., Bai, L., Francis, S.T., Gowland, P.A., 2010. Detection  
619 and characterization of single-trial fMRI bold responses: Paradigm free mapping. *Human Brain  
620 Mapping* 32, 1400–1418. doi:10.1002/hbm.21116.
- 621 Gaudes, C.C., Petridou, N., Francis, S.T., Dryden, I.L., Gowland, P.A., 2013. Paradigm free  
622 mapping with sparse regression automatically detects single-trial functional magnetic resonance  
623 imaging blood oxygenation level dependent responses. *Human Brain Mapping* , n/a–n/adoi:10.  
624 1002/hbm.21452.
- 625 Gaudes, C.C., Van De Ville, D., Petridou, N., Lazeyras, F., Gowland, P., 2011. Paradigm-free  
626 mapping with morphological component analysis: Getting most out of fmri data, in: Wavelets  
627 and Sparsity XIV, International Society for Optics and Photonics. p. 81381K.
- 628 Gerchen, M.F., Bernal-Casas, D., Kirsch, P., 2014. Analyzing task-dependent brain network changes  
629 by whole-brain psychophysiological interactions: A comparison to conventional analysis. *Human  
630 Brain Mapping* 35, 5071–5082. doi:10.1002/hbm.22532.
- 631 Gitelman, D.R., Penny, W.D., Ashburner, J., Friston, K.J., 2003. Modeling regional and psy-  
632 chophysiological interactions in fMRI: the importance of hemodynamic deconvolution. *NeuroImage*  
633 19, 200–207. doi:10.1016/s1053-8119(03)00058-2.
- 634 Glasser, M.F., Smith, S.M., Marcus, D.S., Andersson, J.L.R., Auerbach, E.J., Behrens, T.E.J.,  
635 Coalson, T.S., Harms, M.P., Jenkinson, M., Moeller, S., Robinson, E.C., Sotiroopoulos, S.N., Xu,  
636 J., Yacoub, E., Ugurbil, K., Essen, D.C.V., 2016. The human connectome project's neuroimaging  
637 approach. *Nature Neuroscience* 19, 1175–1187. doi:10.1038/nn.4361.
- 638 Glover, G.H., 1999. Deconvolution of impulse response in event-related BOLD fMRI1. *NeuroImage*  
639 9, 416–429. doi:10.1006/nimg.1998.0419.
- 640 Gonzalez-Castillo, J., Caballero-Gaudes, C., Topolski, N., Handwerker, D.A., Pereira, F., Ban-  
641 dettini, P.A., 2019. Imaging the spontaneous flow of thought: Distinct periods of cogni-  
642 tion contribute to dynamic functional connectivity during rest. *NeuroImage* 202, 116129.  
643 doi:10.1016/j.neuroimage.2019.116129.

- 644 Goutte, C., Nielsen, F.A., Hansen, L.K., 2000. Modeling the haemodynamic response in fmri using  
645 smooth fir filters. *IEEE transactions on medical imaging* 19, 1188–1201. doi:10.1109/42.897811.
- 646 Havlicek, M., Friston, K.J., Jan, J., Brazdil, M., Calhoun, V.D., 2011. Dynamic modeling of  
647 neuronal responses in fMRI using cubature kalman filtering. *NeuroImage* 56, 2109–2128. doi:10.  
648 1016/j.neuroimage.2011.03.005.
- 649 Henson, R., Friston, K., 2007. Chapter 14 - convolution models for fmri, in: Friston, K., Ash-  
650 burner, J., Kiebel, S., Nichols, T., Penny, W. (Eds.), *Statistical Parametric Mapping*. Academic  
651 Press, London, pp. 178–192. URL: <https://www.sciencedirect.com/science/article/pii/B9780123725608500140>, doi:<https://doi.org/10.1016/B978-012372560-8/50014-0>.
- 653 Hernandez-Garcia, L., Ulfarsson, M.O., 2011. Neuronal event detection in fMRI time series using  
654 iterative deconvolution techniques. *Magnetic Resonance Imaging* 29, 353–364. doi:10.1016/j.  
655 mri.2010.10.012.
- 656 Hütel, M., Antonelli, M., Melbourne, A., Ourselin, S., 2021. Hemodynamic matrix factorization for  
657 functional magnetic resonance imaging. *NeuroImage* 231, 117814. doi:10.1016/j.neuroimage.  
658 2021.117814.
- 659 Hütel, M., Melbourne, A., Ourselin, S., 2018. Neural activation estimation in brain networks  
660 during task and rest using BOLD-fMRI, in: *Medical Image Computing and Computer Assisted  
661 Intervention – MICCAI 2018*, Springer. Springer International Publishing. pp. 215–222. doi:10.  
662 1007/978-3-030-00931-1\_25.
- 663 Jenkinson, M., Beckmann, C.F., Behrens, T.E., Woolrich, M.W., Smith, S.M., 2012. FSL. *NeuroImage* 62, 782–790. doi:10.1016/j.neuroimage.2011.09.015.
- 665 Jenkinson, M., Smith, S., 2001. A global optimisation method for robust affine registration of brain  
666 images. *Medical Image Analysis* 5, 143–156. doi:10.1016/s1361-8415(01)00036-6.
- 667 Jewell, S.W., Hocking, T.D., Fearnhead, P., Witten, D.M., 2019. Fast nonconvex deconvolution of  
668 calcium imaging data. *Biostatistics* 21, 709–726. doi:10.1093/biostatistics/kxy083.
- 669 Jo, Y., Faskowitz, J., Esfahlani, F.Z., Sporns, O., Betzel, R.F., 2021. Subject identification us-  
670 ing edge-centric functional connectivity. *NeuroImage* 238, 118204. doi:10.1016/j.neuroimage.  
671 2021.118204.
- 672 Karahanoglu, F.I., Bayram, İ., Ville, D.V.D., 2011. A signal processing approach to generalized  
673 1-d total variation. *IEEE Transactions on Signal Processing* 59, 5265–5274. doi:10.1109/tsp.  
674 2011.2164399.
- 675 Karahanoglu, F.I., Caballero-Gaudes, C., Lazeyras, F., Ville, D.V.D., 2013. Total activation: fMRI  
676 deconvolution through spatio-temporal regularization. *NeuroImage* 73, 121–134. doi:10.1016/  
677 j.neuroimage.2013.01.067.
- 678 Karahanoglu, F.I., Grouiller, F., Gaudes, C.C., Seeck, M., Vulliemoz, S., Ville, D.V.D., 2013. Spatial  
679 mapping of interictal epileptic discharges in fMRI with total activation, in: *2013 IEEE  
680 10th International Symposium on Biomedical Imaging*, Ieee. IEEE. pp. 1500–1503. doi:10.1109/  
681 isbi.2013.6556819.

- 682 Karahanoglu, F.I., Ville, D.V.D., 2015. Transient brain activity disentangles fMRI resting-state  
683 dynamics in terms of spatially and temporally overlapping networks. *Nature Communications* 6,  
684 7751. doi:10.1038/ncomms8751.
- 685 Karahanoglu, F.I., Ville, D.V.D., 2017. Dynamics of large-scale fMRI networks: Deconstruct brain  
686 activity to build better models of brain function. *Current Opinion in Biomedical Engineering* 3,  
687 28–36. doi:10.1016/j.cobme.2017.09.008.
- 688 Keilholz, S., Caballero-Gaudes, C., Bandettini, P., Deco, G., Calhoun, V., 2017. Time-resolved  
689 resting-state functional magnetic resonance imaging analysis: Current status, challenges, and  
690 new directions. *Brain Connectivity* 7, 465–481. doi:10.1089/brain.2017.0543.
- 691 Khalidov, I., Fadili, J., Lazeyras, F., Ville, D.V.D., Unser, M., 2011. Activelets: Wavelets for  
692 sparse representation of hemodynamic responses. *Signal Processing* 91, 2810–2821. doi:10.1016/  
693 j.sigpro.2011.03.008.
- 694 Kinany, N., Pirondini, E., Micera, S., Ville, D.V.D., 2020. Dynamic functional connectivity of  
695 resting-state spinal cord fMRI reveals fine-grained intrinsic architecture. *Neuron* 108, 424–435.e4.  
696 doi:10.1016/j.neuron.2020.07.024.
- 697 Lindquist, M.A., Waugh, C., Wager, T.D., 2007. Modeling state-related fMRI activity using change-  
698 point theory. *NeuroImage* 35, 1125–1141. doi:10.1016/j.neuroimage.2007.01.004.
- 699 Liu, X., Chang, C., Duyn, J.H., 2013. Decomposition of spontaneous brain activity into distinct  
700 fMRI co-activation patterns. *Frontiers in Systems Neuroscience* 7, 101. doi:10.3389/fnsys.  
701 2013.00101.
- 702 Liu, X., Duyn, J.H., 2013. Time-varying functional network information extracted from brief  
703 instances of spontaneous brain activity. *Proceedings of the National Academy of Sciences* 110,  
704 4392–4397. doi:10.1073/pnas.1216856110.
- 705 Liu, X., Zhang, N., Chang, C., Duyn, J.H., 2018. Co-activation patterns in resting-state fMRI  
706 signals. *NeuroImage* 180, 485–494. doi:10.1016/j.neuroimage.2018.01.041.
- 707 Lopes, R., Lina, J., Fahoum, F., Gotman, J., 2012. Detection of epileptic activity in fMRI without  
708 recording the EEG. *NeuroImage* 60, 1867–1879. doi:10.1016/j.neuroimage.2011.12.083.
- 709 Loula, J., Varoquaux, G., Thirion, B., 2018. Decoding fMRI activity in the time domain improves  
710 classification performance. *NeuroImage* 180, 203–210. doi:10.1016/j.neuroimage.2017.08.018.
- 711 Lurie, D.J., Kessler, D., Bassett, D.S., Betzel, R.F., Breakspear, M., Kheilholz, S., Kucyi, A.,  
712 Liégeois, R., Lindquist, M.A., McIntosh, A.R., Poldrack, R.A., Shine, J.M., Thompson, W.H.,  
713 Bielczyk, N.Z., Douw, L., Kraft, D., Miller, R.L., Muthuraman, M., Pasquini, L., Razi, A.,  
714 Vidaurre, D., Xie, H., Calhoun, V.D., 2020. Questions and controversies in the study of time-  
715 varying functional connectivity in resting fMRI. *Network Neuroscience* 4, 30–69. doi:10.1162/  
716 netn\_a\_00116.
- 717 Madi, M.K., Karameh, F.N., 2017. Hybrid cubature kalman filtering for identifying nonlinear  
718 models from sampled recording: Estimation of neuronal dynamics. *PLOS ONE* 12, e0181513.  
719 doi:10.1371/journal.pone.0181513.

- 720 Marrelec, G., Benali, H., Ciuciu, P., Poline, J.B., 2002. Bayesian estimation of the hemo-  
721 dynamic response function in functional mri. AIP Conference Proceedings 617, 229–247.  
722 URL: <https://aip.scitation.org/doi/abs/10.1063/1.1477050>, doi:10.1063/1.1477050,  
723 arXiv:<https://aip.scitation.org/doi/pdf/10.1063/1.1477050>.
- 724 Meinshausen, N., Bühlmann, P., 2010. Stability selection. Journal of the Royal Statistical Society:  
725 Series B (Statistical Methodology) 72, 417–473. doi:10.1111/j.1467-9868.2010.00740.x.
- 726 Moeller, S., Yacoub, E., Olman, C.A., Auerbach, E., Strupp, J., Harel, N., Ugurbil, K., 2010.  
727 Multiband multislice GE-EPI at 7 tesla, with 16-fold acceleration using partial parallel imaging  
728 with application to high spatial and temporal whole-brain fMRI. Magnetic Resonance in Medicine  
729 63, 1144–1153. doi:10.1002/mrm.22361.
- 730 Monga, V., Li, Y., Eldar, Y.C., 2021. Algorithm unrolling: Interpretable, efficient deep learning  
731 for signal and image processing. IEEE Signal Processing Magazine 38, 18–44. doi:10.1109/MSP.  
732 2020.3016905.
- 733 Ongie, G., Jalal, A., Metzler, C.A., Baraniuk, R.G., Dimakis, A.G., Willett, R., 2020. Deep learning  
734 techniques for inverse problems in imaging. IEEE Journal on Selected Areas in Information  
735 Theory 1, 39–56. doi:10.1109/JSAIT.2020.2991563.
- 736 van Oort, E.S.B., Mennes, M., Navarro Schröder, T., Kumar, V.J., Zaragoza Jimenez, N.I., Grodd,  
737 W., Doeller, C.F., Beckmann, C.F., 2018. Functional parcellation using time courses of instant-  
738 neous connectivity. NeuroImage 170, 31–40. doi:10.1016/j.neuroimage.2017.07.027.
- 739 Ortelli, F., van de Geer, S., 2019. Synthesis and analysis in total variation regularization.  
740 arXiv:1901.06418.
- 741 Patriat, R., Molloy, E.K., Birn, R.M., 2015. Using edge voxel information to improve motion  
742 regression for rs-fMRI connectivity studies. Brain Connectivity 5, 582–595. doi:10.1089/brain.  
743 2014.0321.
- 744 Penny, W., Ghahramani, Z., Friston, K., 2005. Bilinear dynamical systems. Philosophical Trans-  
745 actions of the Royal Society B: Biological Sciences 360, 983–993. doi:10.1098/rstb.2005.1642.
- 746 Petridou, N., Gaudes, C.C., Dryden, I.L., Francis, S.T., Gowland, P.A., 2012. Periods of rest in  
747 fMRI contain individual spontaneous events which are related to slowly fluctuating spontaneous  
748 activity. Human Brain Mapping 34, 1319–1329. doi:10.1002/hbm.21513.
- 749 Pidnebesna, A., Fajnerová, I., Horáček, J., Hlinka, J., 2019. Estimating sparse neuronal signal from  
750 hemodynamic response: the mixture components inference approach. bioRxiv doi:10.1101/2019.  
751 12.19.876508.
- 752 Posse, S., Wiese, S., Gembbris, D., Mathiak, K., Kessler, C., Grosse-Ruyken, M.L., Elghahwagi,  
753 B., Richards, T., Dager, S.R., Kiselev, V.G., 1999. Enhancement of BOLD-contrast sensitivity  
754 by single-shot multi-echo functional MR imaging. Magnetic Resonance in Medicine 42, 87–97.  
755 doi:10.1002/(sici)1522-2594(199907)42:1<87::aid-mrm13>3.0.co;2-o.
- 756 Preti, M.G., Bolton, T.A., Ville, D.V.D., 2017. The dynamic functional connectome: State-of-the-  
757 art and perspectives. NeuroImage 160, 41–54. doi:10.1016/j.neuroimage.2016.12.061.

- 758 Raguet, H., Fadili, J., Peyré, G., 2013. A generalized forward-backward splitting. SIAM Journal  
759 on Imaging Sciences 6, 1199–1226. doi:10.1137/120872802.
- 760 Riera, J.J., Watanabe, J., Kazuki, I., Naoki, M., Aubert, E., Ozaki, T., Kawashima, R., 2004. A  
761 state-space model of the hemodynamic approach: nonlinear filtering of BOLD signals. NeuroImage  
762 21, 547–567. doi:10.1016/j.neuroimage.2003.09.052.
- 763 Rolls, E.T., Cheng, W., Feng, J., 2021. Brain dynamics: Synchronous peaks, functional connectivity,  
764 and its temporal variability. Human brain mapping 42, 2790–2801. doi:10.1002/hbm.25404.
- 765 Ruiz-Euler, H.C., Marques, J.R.F., Kappen, H.J., 2018. Nonlinear deconvolution by sampling  
766 biophysically plausible hemodynamic models. arXiv:1803.08797.
- 767 Schwarz, G., 1978. Estimating the dimension of a model. The Annals of Statistics 6, 461–464.  
768 doi:10.1214/aos/1176344136.
- 769 Setsompop, K., Gagoski, B.A., Polimeni, J.R., Witzel, T., Wedeen, V.J., Wald, L.L., 2011. Blipped-  
770 controlled aliasing in parallel imaging for simultaneous multislice echo planar imaging with re-  
771 duced g-factor penalty. Magnetic Resonance in Medicine 67, 1210–1224. doi:10.1002/mrm.23097.
- 772 Shmueli, K., van Gelderen, P., de Zwart, J.A., Horovitz, S.G., Fukunaga, M., Jansma, J.M., Duyn,  
773 J.H., 2007. Low-frequency fluctuations in the cardiac rate as a source of variance in the resting-  
774 state fMRI BOLD signal. NeuroImage 38, 306–320. doi:10.1016/j.neuroimage.2007.07.037.
- 775 Sporns, O., Faskowitz, J., Teixeira, A.S., Cutts, S.A., Betzel, R.F., 2021. Dynamic expression of  
776 brain functional systems disclosed by fine-scale analysis of edge time series. Network neuroscience  
777 (Cambridge, Mass.) 5, 405–433. doi:10.1162/netn\_a\_00182.
- 778 Sreenivasan, K.R., Havlicek, M., Deshpande, G., 2015. Nonparametric hemodynamic deconvolution  
779 of fMRI using homomorphic filtering. IEEE Transactions on Medical Imaging 34, 1155–1163.  
780 doi:10.1109/tmi.2014.2379914.
- 781 Tagliazucchi, E., Balenzuela, P., Fraiman, D., Chialvo, D.R., 2012. Criticality in large-scale brain  
782 fmri dynamics unveiled by a novel point process analysis. Frontiers in physiology 3, 15. doi:10.  
783 3389/fphys.2012.00015.
- 784 Tagliazucchi, E., Balenzuela, P., Fraiman, D., Montoya, P., Chialvo, D.R., 2011. Spontaneous bold  
785 event triggered averages for estimating functional connectivity at resting state. Neuroscience  
786 letters 488, 158–163. doi:10.1016/j.neulet.2010.11.020.
- 787 Tagliazucchi, E., Siniatchkin, M., Laufs, H., Chialvo, D.R., 2016. The voxel-wise functional con-  
788 nectome can be efficiently derived from co-activations in a sparse spatio-temporal point-process.  
789 Frontiers in neuroscience 10, 381. doi:10.3389/fnins.2016.00381.
- 790 Tan, F.M., Caballero-Gaudes, C., Mullinger, K.J., Cho, S.Y., Zhang, Y., Dryden, I.L., Francis,  
791 S.T., Gowland, P.A., 2017. Decoding fMRI events in sensorimotor motor network using sparse  
792 paradigm free mapping and activation likelihood estimates. Human Brain Mapping 38, 5778–  
793 5794. doi:10.1002/hbm.23767.
- 794 Tarun, A., Wainstein-Andriano, D., Sterpenich, V., Bayer, L., Perogamvros, L., Solms, M., Ax-  
795 macher, N., Schwartz, S., Ville, D.V.D., 2020. NREM sleep stages specifically alter dynamical  
796 integration of large-scale brain networks. Iscience 24, 101923. doi:10.1101/2020.07.08.193508.

- 797 Tarun, A., Wainstein-Andriano, D., Sterpenich, V., Bayer, L., Perogramvos, L., Solms, M., Ax-  
798 macher, N., Schwartz, S., Van De Ville, D., 2021. NREM sleep stages specifically alter dynamical  
799 integration of large-scale brain networks. *iScience* 24, 101923. doi:10.1016/j.isci.2020.101923.
- 800 Tibshirani, R., 1996. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical  
801 Society: Series B (Methodological)* 58, 267–288. doi:10.1111/j.2517-6161.1996.tb02080.x.
- 802 Triantafyllou, C., Hoge, R., Krueger, G., Wiggins, C., Potthast, A., Wiggins, G., Wald, L., 2005.  
803 Comparison of physiological noise at 1.5 t, 3 t and 7 t and optimization of fMRI acquisition  
804 parameters. *NeuroImage* 26, 243–250. doi:10.1016/j.neuroimage.2005.01.007.
- 805 Uruñuela, E., Jones, S., Crawford, A., Shin, W., Oh, S., Lowe, M., Caballero-Gaudes, C., 2020.  
806 Stability-based sparse paradigm free mapping algorithm for deconvolution of functional MRI  
807 data. *Proceedings of the Annual International Conference of the IEEE Engineering in Medicine  
808 and Biology Society, EMBS 2020-July*, 1092–1095. doi:10.1109/embc44109.2020.9176137.
- 809 Uruñuela, E., Moia, S., Caballero-Gaudes, C., 2021. A low rank and sparse paradigm free mapping  
810 algorithm for deconvolution of fMRI data doi:10.1109/isbi48211.2021.9433821.
- 811 Uruñuela-Tremiño, E., Moia, S., Gonzalez-Castillo, J., Caballero-Gaudes, C., 2019. Deconvolution  
812 of multi-echo functional MRI data with multivariate multi-echo sparse paradigm free mapping.  
813 ISMRM 27th Annual Meeting and Exhibition .
- 814 Zhang, X., Pan, W.J., Keilholz, S.D., 2020. The relationship between BOLD and neural activity  
815 arises from temporally sparse events. *NeuroImage* 207, 116390. doi:10.1016/j.neuroimage.  
816 2019.116390.
- 817 Zoeller, D., Sandini, C., Karahanoglu, F.I., Schaer, M., Eliez, S., Van De Ville, D., 2019. Large-  
818 scale brain network dynamics provide a measure of psychosis and anxiety in 22q11.2 deletion  
819 syndrome. *Biological Psychiatry: Cognitive Neuroscience and Neuroimaging* 4, 881–892. doi:10.  
820 1016/j.bpsc.2019.04.004.
- 821 Zöller, D., Sandini, C., Karahanoglu, F.I., Padula, M.C., Schaer, M., Eliez, S., Ville, D.V.D.,  
822 2019. Large-scale brain network dynamics provide a measure of psychosis and anxiety in 22q11.2  
823 deletion syndrome. *Biological Psychiatry: Cognitive Neuroscience and Neuroimaging* 4, 881–892.  
824 doi:10.1101/551796.

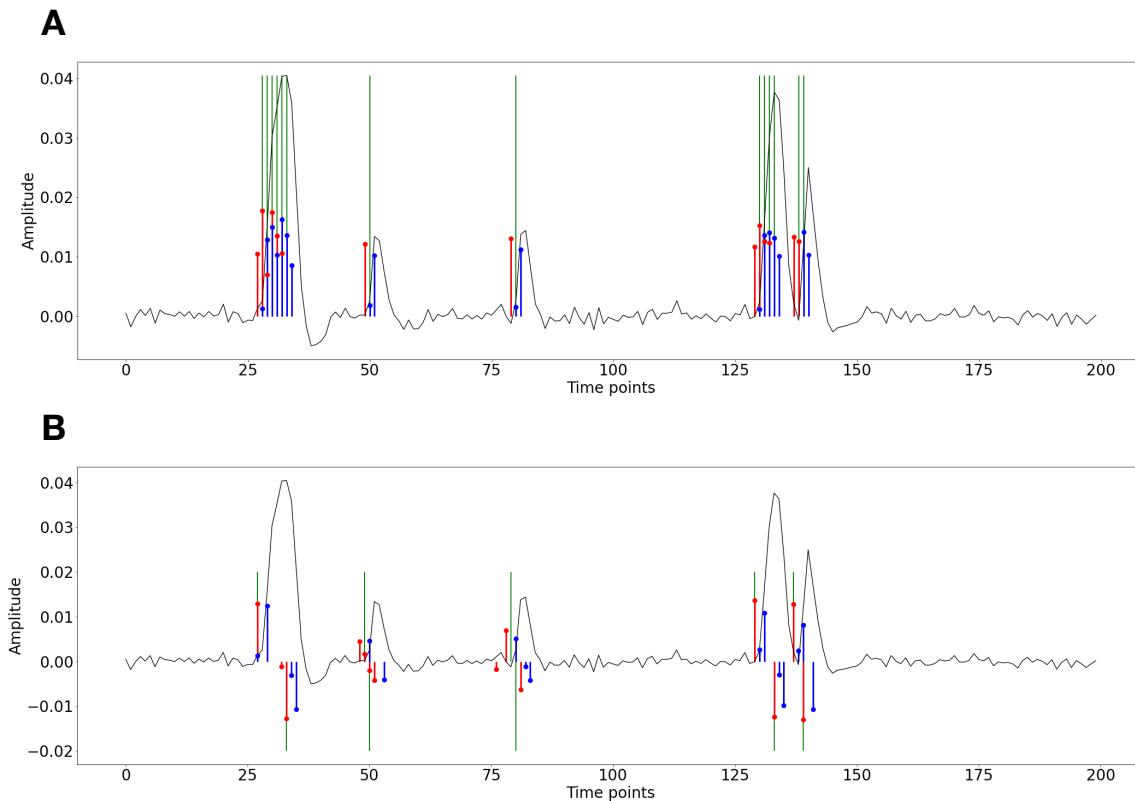


Figure S1: Activity-inducing (A) and innovation (B) signals estimated with PFM (red) and TA (blue) using their built-in HRF as opposed to using the same. The black line depicts the simulated signal, while the green lines indicate the onsets of the simulated neuronal events. X axis shows time in TRs.

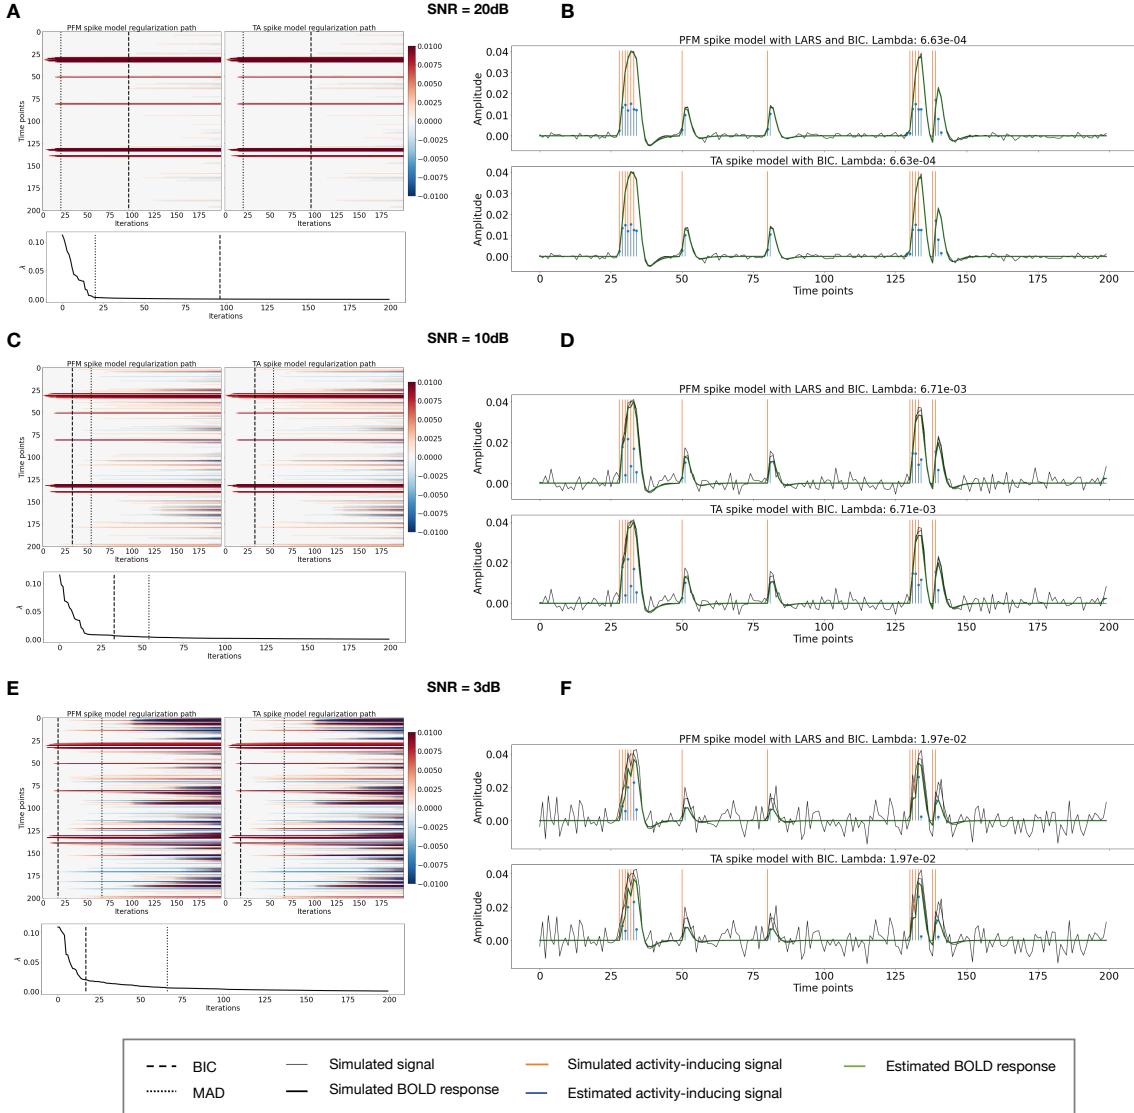


Figure S2: Spike model simulations. (Left) Heatmap of the regularization paths of the activity-inducing signal estimated with PFM and TA as a function of  $\lambda$  (increasing number of iterations in x-axis), whereas each row in the y-axis shows one time-point. Vertical lines denote iterations corresponding to the Akaike and Bayesian Information Criteria (AIC and BIC) optima. (Right) Estimated activity-inducing (blue) and activity-related (green) signals when set based on BIC. All estimates are identical, regardless of SNR.

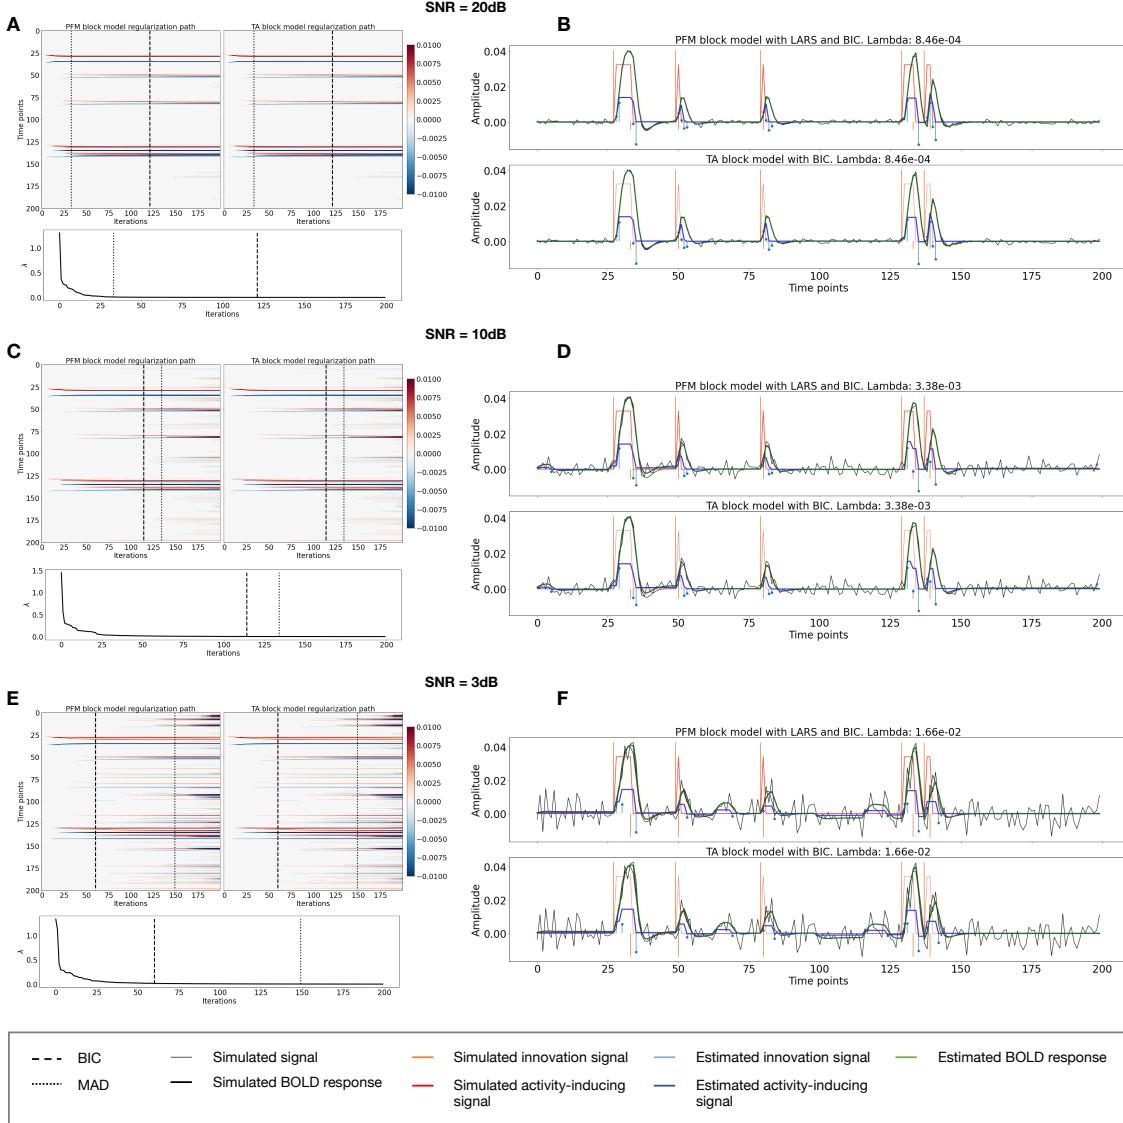


Figure S3: Block model simulations. (Left) Heatmap of the regularization paths of the innovation signal estimated with PFM and TA as a function of  $\lambda$  (increasing number of iterations in x-axis), whereas each row in the y-axis illustrates one time-point. Vertical lines denote iterations corresponding to the Akaike and Bayesian Information Criteria (AIC and BIC) optima. (Right) Estimated innovation (blue) and activity-related (green) signals when  $\lambda$  is set based on BIC. All the estimates are identical when compared between the PFM and TA cases, regardless of SNR.

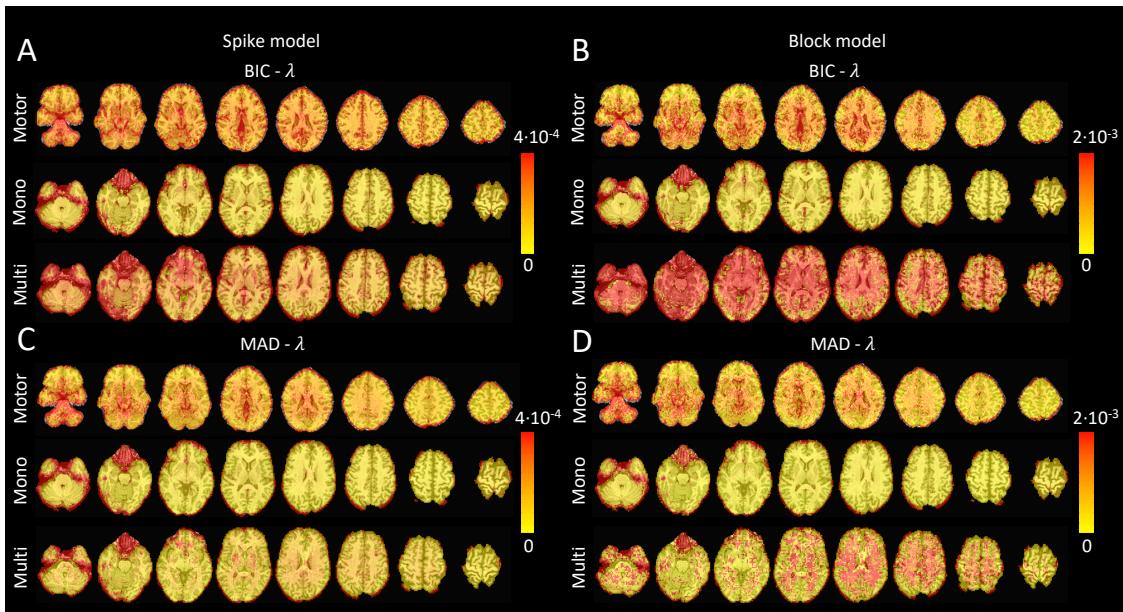


Figure S4: Values of  $\lambda$  across the different voxels in the brain used to estimate (A) the activity-inducing signal (spike model) and (B) the innovation signal (block model) with the BIC selection, as well as (C) the activity-inducing signal (block model) and (D) the innovation signal (block model) with a MAD-based selection. The  $\lambda$  maps are shown for the three experimental fMRI datasets: the motor task (Motor), the monoband resting-state (Mono), and the multiband resting-state (Multi) datasets.

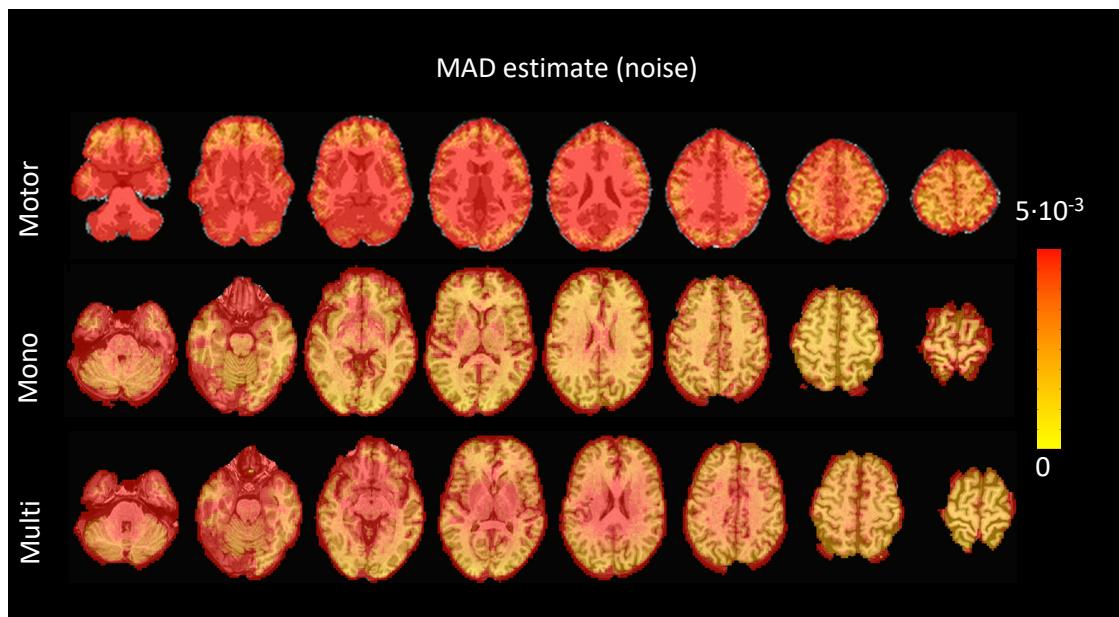


Figure S5: Values of the MAD estimate of standard deviation of the noise across the different voxels in the brain for the three experimental fMRI datasets: the motor task (Motor), the monoband resting-state (Mono), and the multiband resting-state (Multi) datasets.

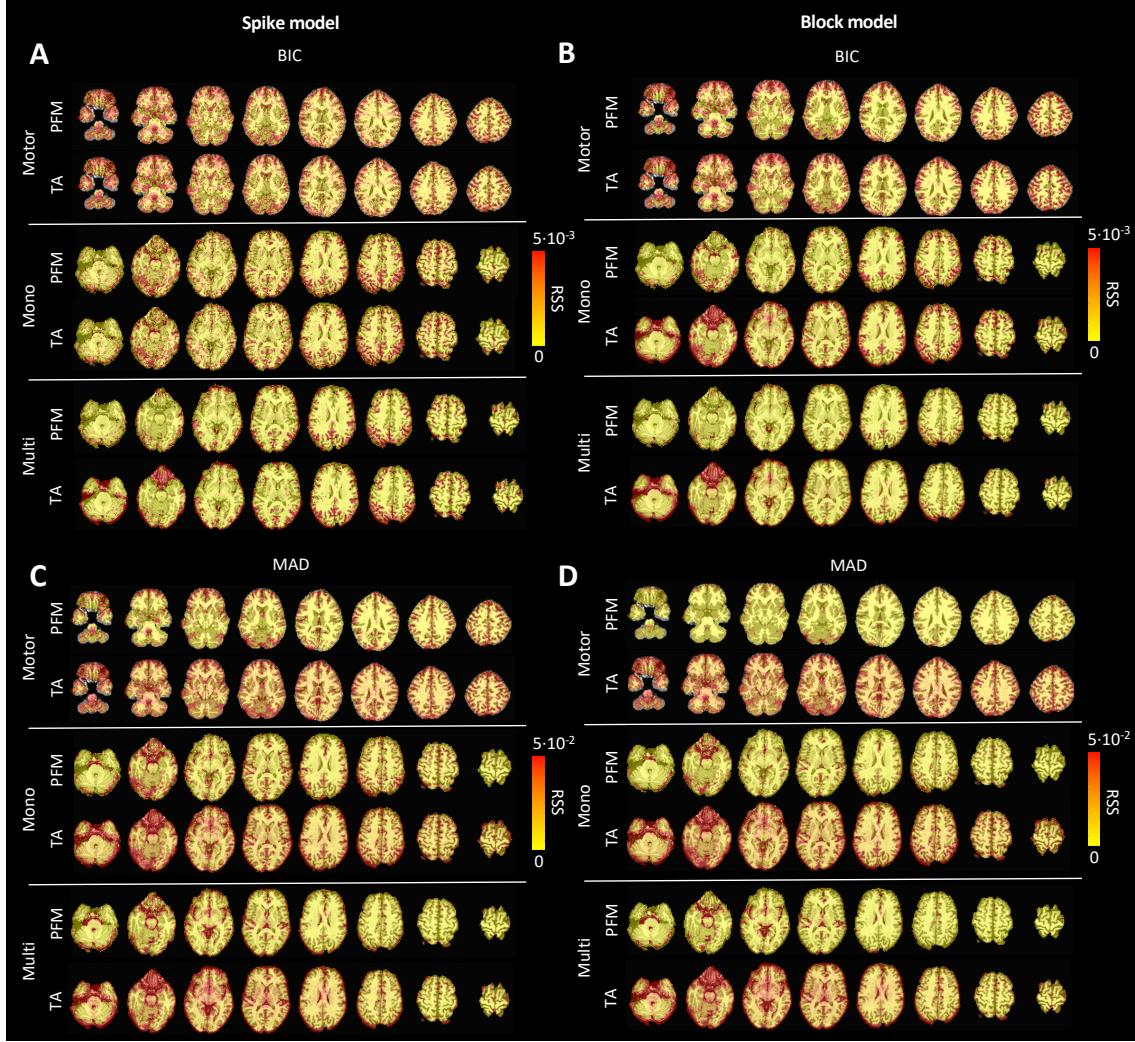


Figure S6: Root sum of squares (RSS) comparison between Paradigm Free Mapping and Total Activation for the three experimental fMRI datasets: the motor task (Motor), the monoband resting-state (Mono), and the multiband resting-state (Multi) datasets. RSS maps are shown for the spike (left) and block (right) models solved with a selection of  $\lambda$  based on the BIC (top) and MAD (bottom) criteria.

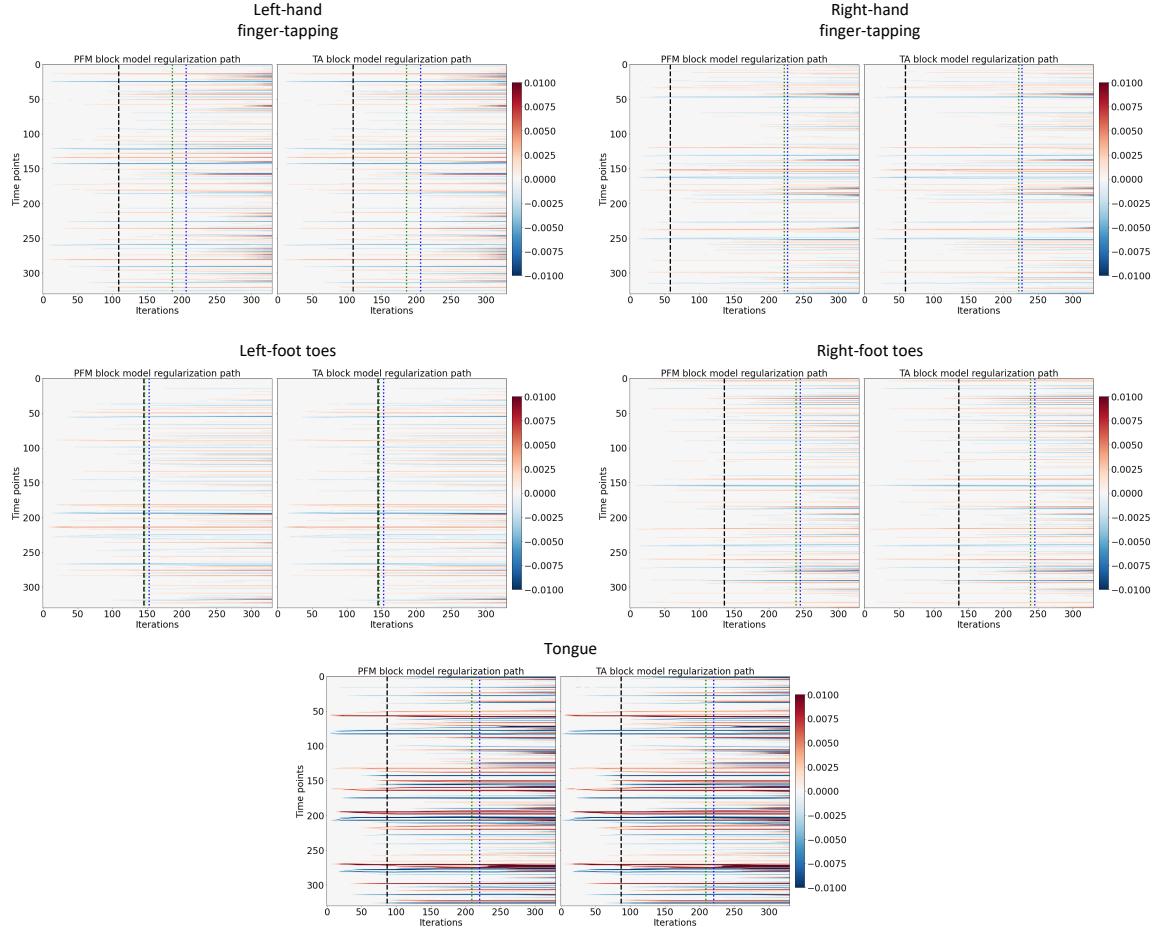


Figure S7: Regularization paths of the innovation signal estimated with PFM and TA as a function of  $\lambda$  (increasing number of iterations in x-axis, whereas each row in the y-axis shows one time-point) for the representative voxels of the motor task shown in Figure 5. Vertical lines denote selections of  $\lambda$  corresponding to the BIC (black), MAD based on LARS residuals (blue) and MAD based on FISTA residuals (green) optima.

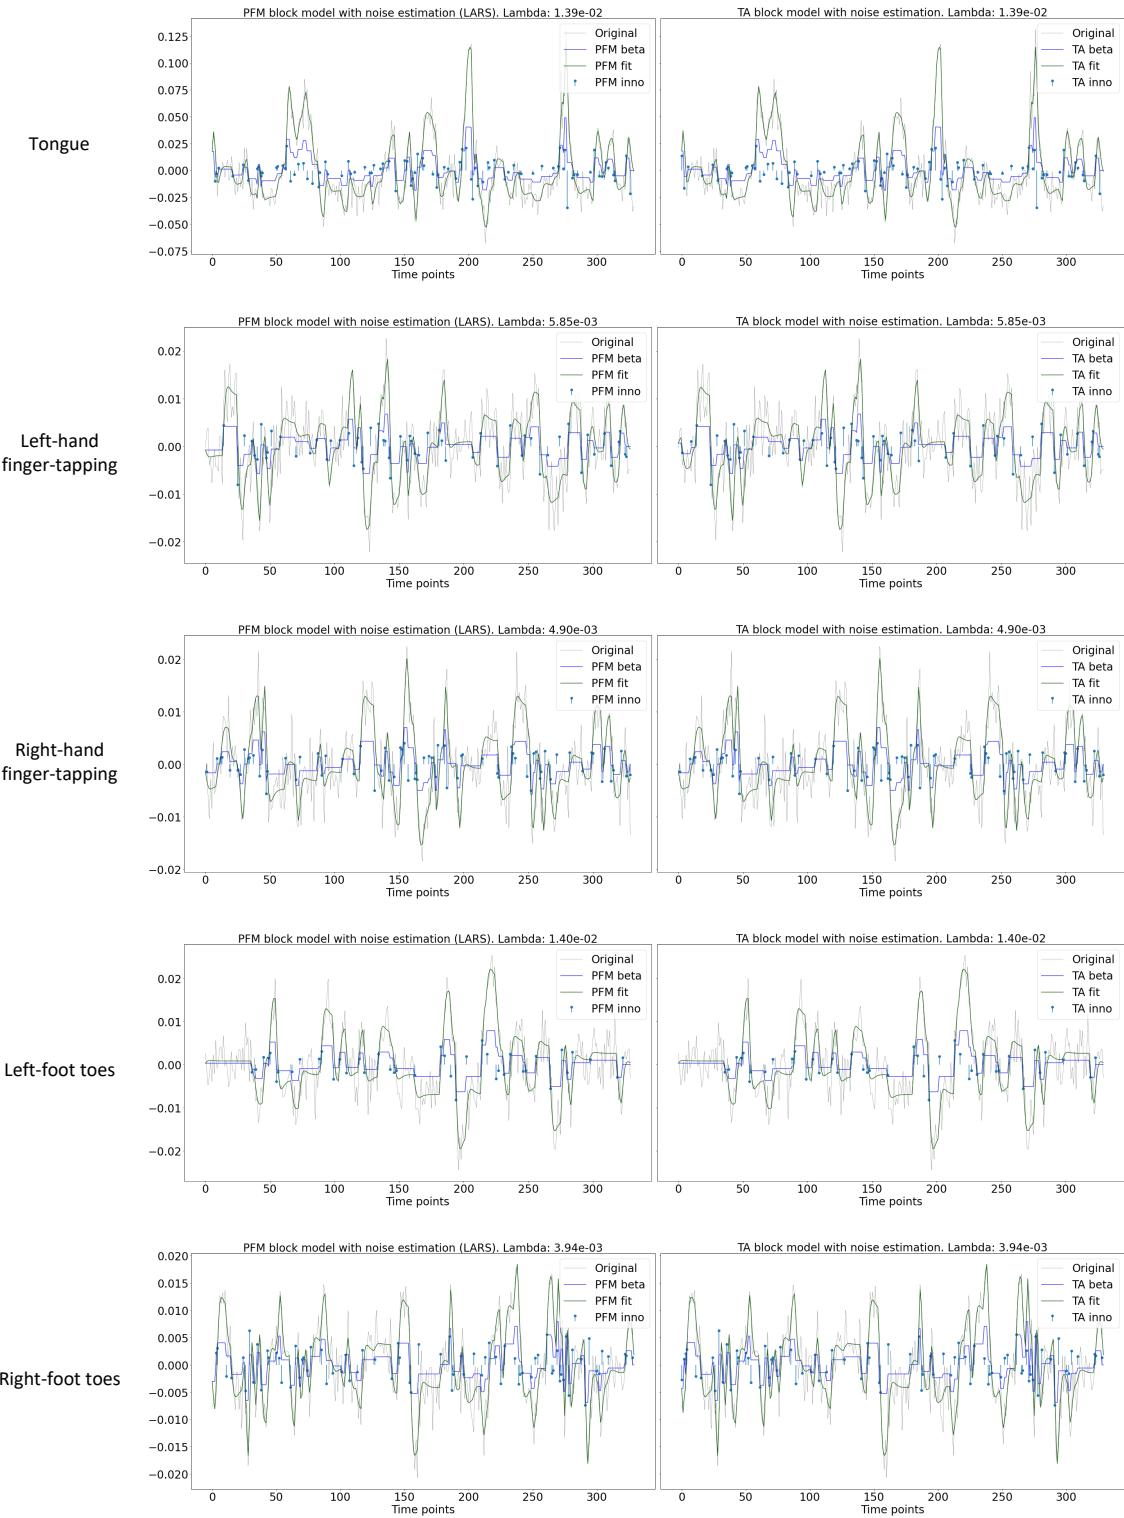


Figure S8: Estimated innovation signal (blue) and activity-related signal (green) for the representative voxels of the motor task shown in Figure 5 with the MAD selection of  $\lambda$  made by TA, i.e., employing the same  $\lambda$  with both PFM and TA.

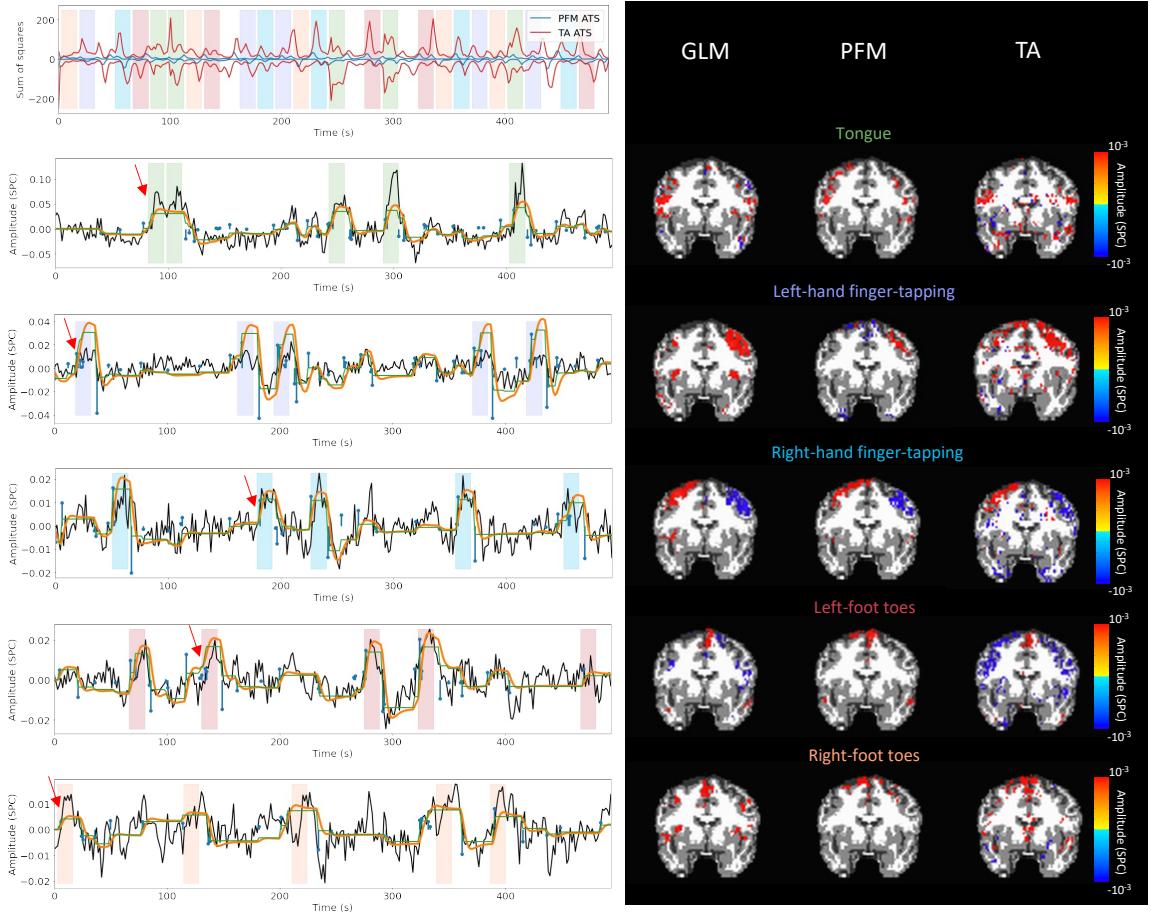


Figure S9: Activity maps of the motor task using a selection of  $\lambda$  based on the MAD estimate. Row 1: Activation time-series of the innovation signals estimated by PFM (in blue) or TA (in red) calculated as the sum of squares of all voxels at every timepoint. Positive-valued and negative-valued contributions were separated into two distinct timecourses. Color-bands indicate the onset and duration of each condition in the task (green: tongue, purple: left-hand finger-tapping, blue: right-hand finger-tapping, red: left-foot toes, orange: right-foot toes). Rows 2-6: time-series of a representative voxel for each task with the PFM-estimated innovation (blue), PFM-estimated activity-inducing (green), and activity-related (i.e., fitted, orange) signals, with their corresponding GLM, PFM, and TA maps on the right. The maps shown on the right are sampled at the time-point labeled with the red arrows and display the innovation signals at that moment across the whole brain.

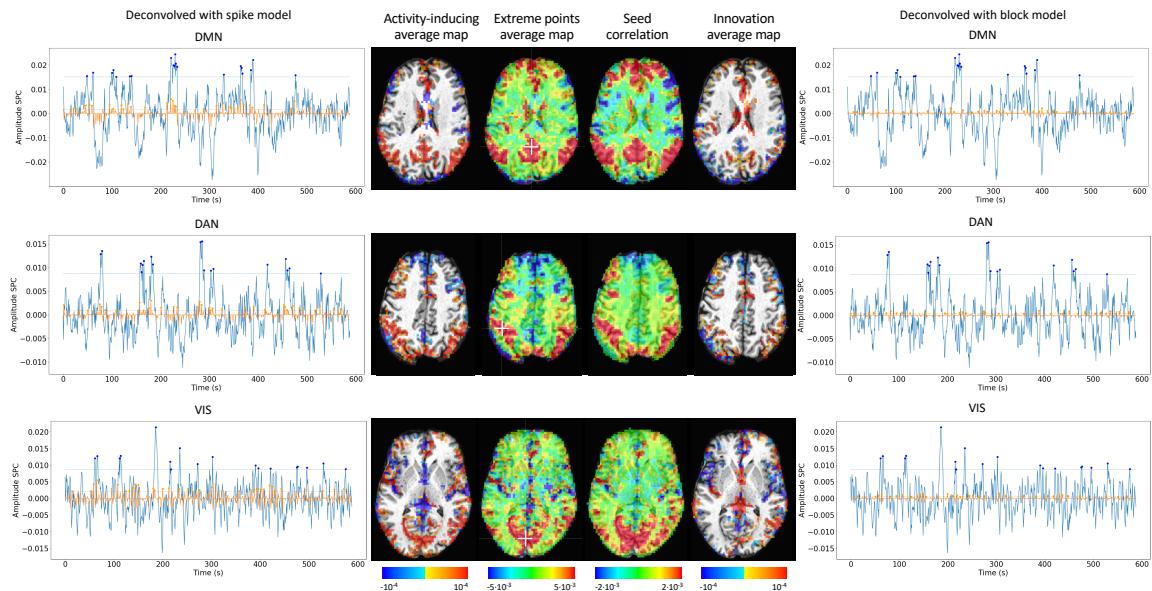


Figure S10: Activity-inducing CAPs (left) and innovation CAPs (right) obtained with the PFM-estimated activity-inducing and innovation signals respectively, using a MAD-based selection of  $\lambda$ . Time-points selected with a 95th percentile threshold are shown over the average time-series (blue) in the seed region (white-cross) and the deconvolved signal (orange). CAPs and seed correlation maps are illustrated in the center.