

SPRINT-2 TASK-2

TASK-1

```
Negative Numbers: ▶ Array(3) i task1.html:12
  0: -7
  1: -2
  2: -1
  length: 3
  ▶ [[Prototype]]: Array(0)

Replace Odd Numbers with 0: ▶ Array(6) i task1.html:16
  0: 0
  1: 10
  2: 0
  3: 20
  4: 22
  5: 0
  length: 6
  ▶ [[Prototype]]: Array(0)
```

TASK-2A

This page says
Enter a num (0 to n):

OK Cancel

This page says
Enter a num (0 to n):

OK Cancel

This page says

Enter a num (0 to n):

OK

Cancel

This page says

Enter a num (0 to n):

OK

Cancel

This page says

Enter a num (0 to n):

OK

Cancel

This page says

Total Sum: 14

OK

TASK-2B

This page says

Enter your age:

OK Cancel

This page says

You can vote but not rent a car.

OK


TASK-3A

This page says


Total Sum: 100

OK

TASK-3B

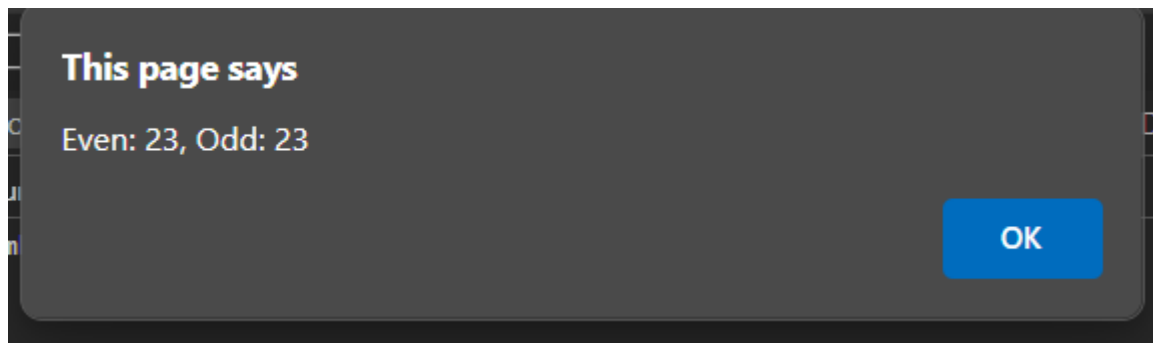

TASK-4A

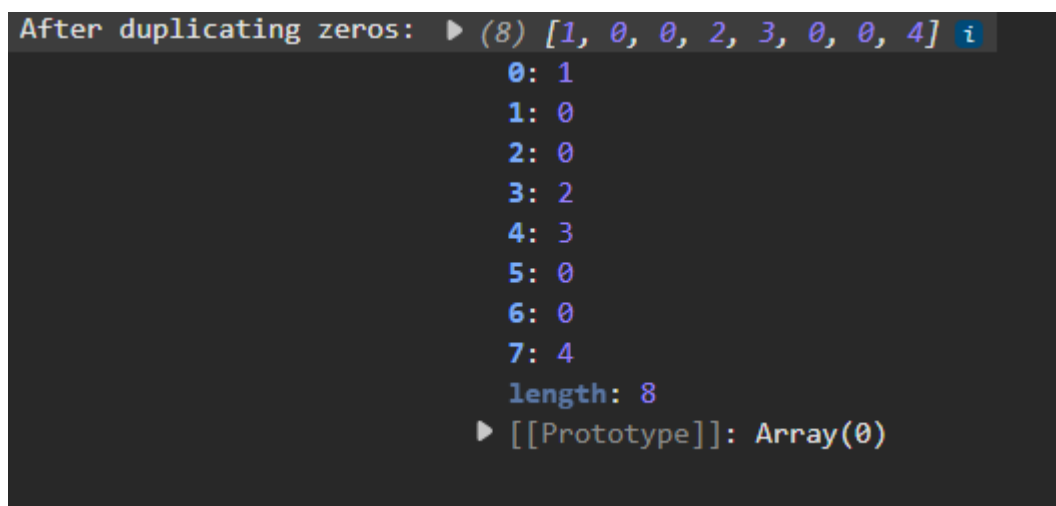

TASK-4B

After inserting half after divisible by 5:

```
► (14) [5, 2.5, 10, 5, 20, 10, 2, 0, 0, 33, 100, 50, 90, 45] i
```

0: 5

1: 2.5

2: 10

3: 5

4: 20

5: 10

6: 2

7: 0

8: 0

9: 33

10: 100

11: 50

12: 90

13: 45

length: 14

```
► [[Prototype]]: Array(0)
```

TASK-5

This page says

Enter a password to check:

[OK](#) [Cancel](#)

```
Password is strong. task5.html:21  
>
```