

Quotation Preview PDF - [R2][S16]

Overview	To preview pdf of quotation
Changes	CHANGE • Add Logic to display share and send email. • Add logic call check sum CI Multipay
Microservice	ms_sale
Linked Database Tables	
Linked External APIs	
Linked Internal APIs/Service	GET /ms-sales/v1/quotations/ul/{quotationId}/temp GET /ms-sales/v1/quotations/{quotationId}/preview GET /ms-commons/v1/systems/configuration GET /ms-sales/v1/quotations/{quotationId} GET /ms-sales/v1/prospects/{prospectId}/profile POST /ms-sales/v1/prospects/send-pdpa GET /ms-sales/v1/quotations/ol/{quotationId}/temp
Document Owner	@[SA] Patitta S. (Nungning)
Reference Document	
Status	NASA-10675: ปรับ api เช็ครวมทุน CI Multipay (Pro-44 → Mule Get Sum CI Multipay) COMPLETE NASA-10779: ปิดปุ่มแชร์และส่งอีเมลใน version Pre-prod COMPLETE NASA-10777: [Defect][Quotation][PDF ใบเสนอขาย][EG] - Product OL SP9 - Product: กรมธรรม์พิเศษเพื่อคนพิการ 20/10 [EG] แสดง Toggle เปลี่ยนภาษาเป็นแบบ enable ในกรณีภาษาอังกฤษ SIT PASSED

⚠ Please recheck **the latest UI design in Figma**. If there are any major changes or missing fields, please inform the document owner.

📄 Call API for initial page.

1. GET /ms-sales/v1/quotations/{quotationId}
2. GET /ms-sales/v1/prospects/{prospectId}/profile
3. GET /ms-commons/v1/systems/configuration
4. GET /ms-sales/v1/quotations/ul/{quotationId}/temp OR GET /ms-sales/v1/quotations/{quotationId}/preview

When one of APIs failed then display common error.


Quotation Preview PDF

Screen	Screen Fields	Reference Link	Field Name	Remark
	On load			[NASA-10779] Call API GET /ms-commons/v1/systems/configuration Query Parameter • category = share_document, send_document_email

 • Consent premium withdrawal 	ย้อนกลับ (<) แสดงผล เต็มหน้า จอ	GET / ms-sale s/v1/qu otation s/ul/{qu otationI d}/tem p GET / ms-sale s/v1/qu otation s/{quot ationI d}/previ ew	File	Back to previous page Logic: • If data.documents.s3Key of data.documents[.].type = 'QUOTATION' != null then call API GET /ms-sales/v1/quotations/{quotationId}/preview ◦ using S3key to calls POST /ms-commons/v1/s3/client/download ▪ bucket = {env}-asa-ms-sales-private ▪ s3Key = data.s3key • else ◦ If data.plan.type = 'UL' then call API GET /ms-sales/v1/quotations/ul/{quotationId}/temp ◦ If data.plan.type = 'OL' then call API GET /ms-sales/v1/quotations/ol/{quotationId}/temp ◦ else out of scope S10 • Open file which it return from API.
--	--	---	--	--

• If return from `GET /ms-sales/v1/quotation/s/{quotationId}/preview`

- Unlock file with `data.prospect.birthDate` format `DDMMYY (พ.ศ)`
- else open file without unlock

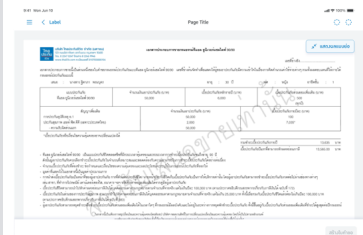

แชร์
(Move
position)



[NASA-10779]

- If `data.configurations[].category = share_document` and `data.plan.type = data.configurations[].key` and `data.configurations[].value = false`
 - then Hide share button
- else Follow logic `data.quotationPublishable`

- If not found
data.configurations[].category =
share_document then
Follow logic
data.quotationPublishable

If user click “แชร์” then

For quotation PDF and


return from `GET /ms-sales/v1/quotations/{quotationId}/preview`

- data.quotationPublishable = true then display share button

1. Call API (Active Log):

- FE store log on Local Storage. When the page changes, the frontend checks the oldest logs in local storage.

```
1 {  
2   "events": [  
3     {  
4       "eventCode":  
5       "quotation_share_ios",  
6       "timestamp":  
7       "2024-01-15T10:35:15+07:00",  
8       "deviceId":  
9       "4D77A838-1A4C-496B-A259-29674F75E5E5",  
10      "agentId":  
11      "0000000008"  
12    }  
13  ]  
14 }
```

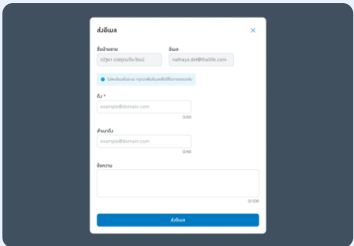			10 } ▪ If logs are at least 10 minutes old (compared to now), call the API <code>POST /ms-transaction-logs/v1/transaction-log/client/save-user-activity</code> to save them. • Check Setting Values in Sheet TL SMART Activity Log TL SMART Activity Log_R2_12122025.xlsx ◦ Tab: Event Specification(BBik) ◦ <code>eventCode</code> : quotation_share_ios ▪ Else, do nothing. 2. FE will display share modal of system. • Title = file name. • Subtitle = File type and file size.
ส่งอีเมล (Move position)	<code>POST /ms-members/v1/members/age/transaction-profile/get</code>		 [NASA-10779]

POST

/ms-sal

es/v1/q

uotation

s/send-

email

- If
data.configurations[].category =
send_document_email
and data.plan.type =
data.configurations[].key and
data.configurations[].value = false
 - then Hide send email button
- else Follow logic
data.quotationPublishable
- If not found
data.configurations[].category =
send_document_email
then Follow logic
data.quotationPublishable

For quotation PDF and

return from GET /ms-sales/v1/quotations/{quotationId}/preview

- data.quotationPublishable = true then display share button

If user click “ส่งอีเมล”

- Call POST /ms-members/v1/members/agent-profile/get for get agent data
- ชื่อฝ่ายขาย

- prefill ตามชื่อของ agent ที่ใช้ระบบ
 <<agentData>>.data
 .agentName
- disable

- อีเมล

- prefill ตามอีเมลของ agent ที่ใช้ระบบ
 <<agentData>>.data
 .email
- disable

- ถึง

- Required
- Max 60 charecters.

- สำเนาถึง

- Required
- Max 60 charecters.

- ข้อความ


- Max 100 charecters.

When user click “ส่งอีเมล” button, FE will check validation

- If pass then call [POS T /ms-sales/v1/quotati on/send-email - \[R2\]\[S 2\]](#)
- success



- fail

			 • Else display inline-error • File Rules (same as Share): ◦ No reference number → apply watermark ◦ With reference number → no watermark ◦ Password = ddmmyyyy (B.E.) ◦ File name format: YYYYMMDD-HHMMSS-PLANCODE-SALEID.pdf
ขอเลขอ้างอิง (Ref.)	GET / ms-sale s/v1/qu otation s/{quot ationI d} GET / ms-sale s/v1/qu otation s/{quot ationI d}/cons ent-pre mium-w	• GET / ms-sale s/v1/quot ations/{q uationI d} ◦ data.q uotatio nRefer ence.e nableB utton ◦ data.pl an.type ◦ data.pl an.plan	Logic: • If data.quotationReference.enableButton = true then enable button • If toggle EN on then disable else enable. Case Rider-GI-Multipay-D16 • If data.riders[].code = D16 ◦ Display popup-GI-Multipay-consent

	ithdraw al	Type	◦ If data.prospect.citizen Id != null ▪ Calls POST /ms -sales/v1/premium -cal/cimultipay/ch ecksum • Request ◦ firstname = data.prospect .firstName ◦ lastname = data.prospect .lastName ◦ citizenId = data.prospect .citizenId ▪ Invoke Cal engine script ▪ Render error result from invoke cal engine script {same as rider quotation calculation process} • When click FE calls API GET /ms-sales/v1/qu otations/{quotationId}/ consent-premium-with drawal ◦ Request query param ▪ productType mapping field
--	----------------------------------	------	---

{data.plan.type}

- planType mapping field
{data.plan.planType}

◦ Response status code

- If status = 1000 (success), then display Consent premium withdrawal

(mapping screen with response data)

- Title:

data.questionSet[0].questionSetName

- Description:

data.questionSet[0].questionGroup[0].text

- Answer options:
data.questionSet[0].questionGroup[0].options[0].label



- If not select radio option, then disable "Accept"

Condition”

button

- If selected radio option, then enable

“Accept Condition”

button

- When clicked “Accept Condition” button,

- FE calls [POST /ms-sales/v1/quotations/{quoteId}/consent-premium-withdrawal](#)

- Request body (mapping from response data

[GET /ms-sales/v1/quotations/{quoteId}/consent-premium-withdrawal](#))

- If selected option มีความประสงค์, then answer = “Y”

▪ If selected option ไม่มี ความประสงค์, then answer = “N”

◦ Response status code


▪ If status code = 1000 (success) or error code = 550067 (No action required), then continue flow FE check validate fields before calls

[POST /ms-sales/v1/quotation/s/generate-ref-no](#)


(Logic follow by below.)

▪ Else if error code = 550067 (No action required),


- then not display Consent premium withdrawal screen.
- FE check validate fields before call  [ST /ms-sales/v1/quotations/generate-ref-no](#)
 - If Validate fields fail. FE redirect to edit quotation and expand prospect section with inline error.



- After, call  [ST /ms-sales/v1/quotations/generate-ref-no](#)
 - If DOPA fail or error.code = 550020



- If any error




- call API  GET /
ms-sales/v1/qu
otations/{quotat
ionId}/status

with **type =**
ref_queue_stat
us as query
parameter (call
interval 1, 2, 3, 5,
8, 8, 8,.. sec)

- If
data.status[].
value = W





- If
data.status[].
value = F



- If
data.status[].
value = S, 
GET /ms-sale
s/v1/quotatio
ns/{quotation
Id}

- If
data.docum
ents.s3Key
of
data.docum
ents[].type
=
'QUOTATIO
N' != null

			(process complete)  ▪ Click ตกลง to close then call <code>GET /ms-sales/v1/quotations/{quotationId}</code>
ลงลายมือชื่อ	<code>GET /ms-sales/v1/quotation/{quotationId}</code>	<code>data.quotationSignature.enableButton</code>	Logic: • If <code>data.quotationSignature.enableButton = true</code> then enable button • If toggle EN on then disable else enable. • More Information <code>E-Signature Quotation</code>
ยินยอมข้อมูลส่วนบุคคล (PDPA)	<code>GET /ms-sales/v1/prospects/{prospectId}/profile</code> <code>POST /ms-sales/v1/prospects/send-pdpa</code>		Request: <code>prospectId</code> Logic: 1. If toggle EN on then disable else enable. 2. If no <code>refNo</code>, always disable 3. Call API API Get Profile a. If <code>consentStatusOptin = Y</code> from API Get Profile, display popup

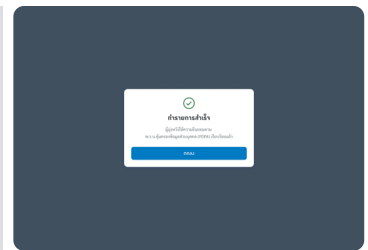

2. Display Modal (phone from `data.mobilePhone`)

If within countdown,
Continue countdown and
disable button from `data.pdpaRequestCountdown`

Change : Wording




Else


Change : Wording




3. Click then Call API
Send PDPA

If `error.code` =
550013 (already
consented), display
popup

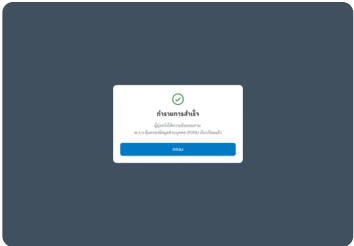			 Else (no any error), close modal and display success toast
แสดง ภาษา	GET / ms-com mons/v 1/syste ms/conf iguratio n		Behavior: Call API GET /ms-com mons/v1/systems/config uration - Query Parameter - key = {productType} , plan_code_th - category = “quotation_form“ - Separate data.value with , - If has TH and EN - enable this toggle - If data plan.code IN value of Key = plan_code_th - hide toggle - else Hide - Toggle - If data.plan.type = ‘UL’ then call API GET /ms-sales/v1/q uotations/ul/{quotati onId}/temp - If data.plan.type = ‘OL’ then call API GET /ms-sales/v1/q

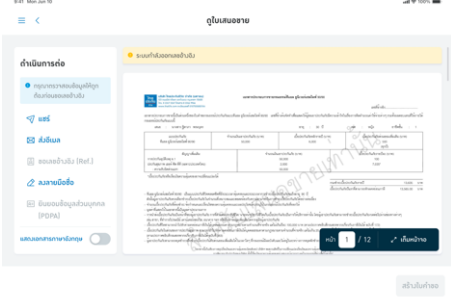				quotations/ol/{quotationId}/temp - Query Params (language) - If TH - language=TH - Else - language=EN - If EN then disable e-sign, gen ref and PDPA
	สร้างใบคำขอ	GET /ms-sale/s/v1/quotation/s/{quotationId}	data.referenceNo	Logic: If data.referenceNo != null then enable else disable.
		GET /ms-sale/s/v1/quotation/s/{quotationId}	- data.quotationReference.warningMessage - data.quotationReference.status	queue ref When have warning message - data.quotationReference.status = W then yellow - data.quotationReference.status = F then red

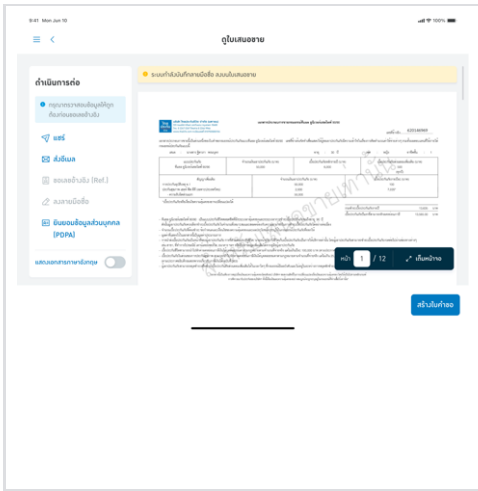

GET /
ms-sale
s/v1/qu
otation
s/{quot
ationId
d}

- data.quotationSignature.warningMessage
- data.quotationSignature.status

signature ref
When have warning message

- data.quotationSignature.status = W then yellow
- data.quotationSignature.status = F then red