

CamilleX Documentation

None

Thai Son Hoang

None

Table of contents

1. 1. CamilleX User Manual	3
2. Getting Started	4
2.1 Basic Tutorial	5

1. 1. CamilleX User Manual

[CamilleX](#) new constructs (called `XMachines` and `XContexts`) for Event-B modelling. The new constructs are text files which are automatically translated into the corresponding Rodin's Event-B constructs (i.e., `Machines` and `Contexts`) accordingly. Facility for translating to and from Rodin's components to CamilleX components can be invoked manually. CamilleX is inspired by [Camille](#) text editor for Rodin and is based on [XText](#) technology, hence the name CamilleX.

- *Getting Started:*
- *Installation:* Information for installing the *CamilleX* feature.
- *Basic tutorial:* This tutorial provides a step-by-step walk-through working with CamilleX constructs.

2. Getting Started

2.0.1 2.1 Installation

[CamilleX](#) is available from the main Rodin update site (under `CamilleX` category). There are two versions of the feature, the standard version for users and the SDK version for software developers which include source code.

2.0.2 2.2 Configuration

Windows users must change the workspace text file encoding to *UTF-8*. This can be updated under the `Rodin Preferences General/Workspace` then in the `Text file encoding` section, select **Other: UTF-8**.

2.0.3 2.3 IMPORTANT

Currently, *CamilleX* not only supports *standard* Event-B machines and contexts, but also supports *Machine Inclusion* (for composition), and *Record* extension to the Event-B modelling language.

Since the *XContexts* and *XMachines* are compiled to the Rodin files, the corresponding Rodin contexts and machines will be **OVERWRITTEN**. Any changes in the Rodin files will not be lost.

DO NOT USE the *CamilleX* if you use modelling plug-ins that use the Rodin files as source such as *UML-B* state-machines and class-diagrams, as the additional modelling elements will be over-written.

2.1 Basic Tutorial


2.4.1 Task 1. Create an Event-B Project

Introduction

The purpose of this task is to create an Event-B project for the CamilleX constructs.


Step 1. Create a New Event-B Project Named `club`

- Click on the new Event-B project button on the *Event-B Explorer*.

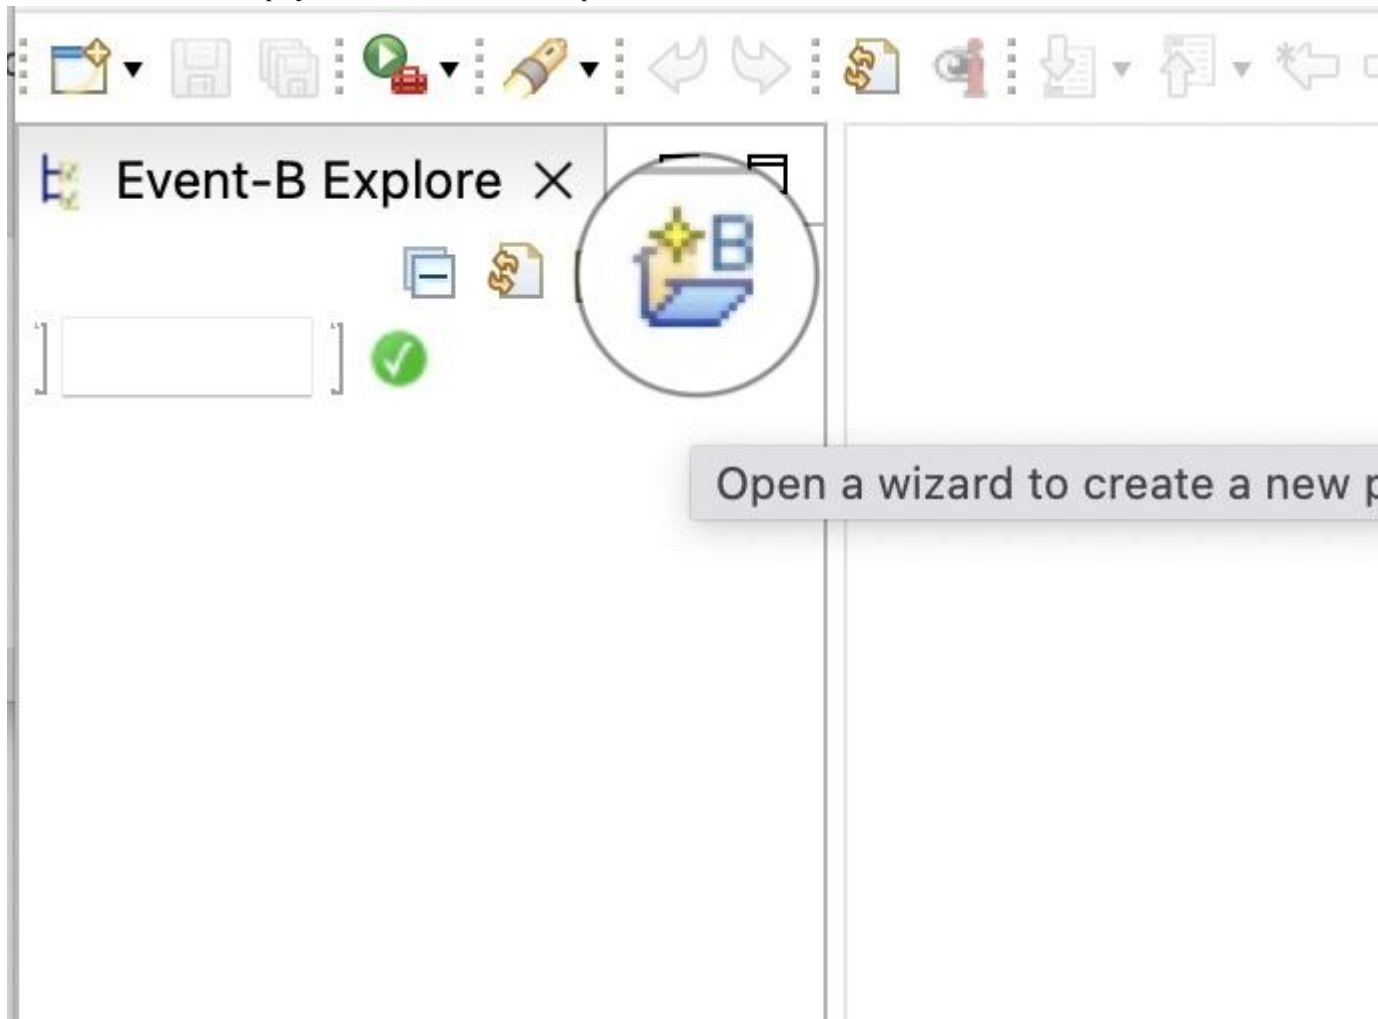

(The same wizard can be invoke through the menu `File -> New -> Event-B Project`)

- From the pop-up dialog, enter `Club` as the `Project name`

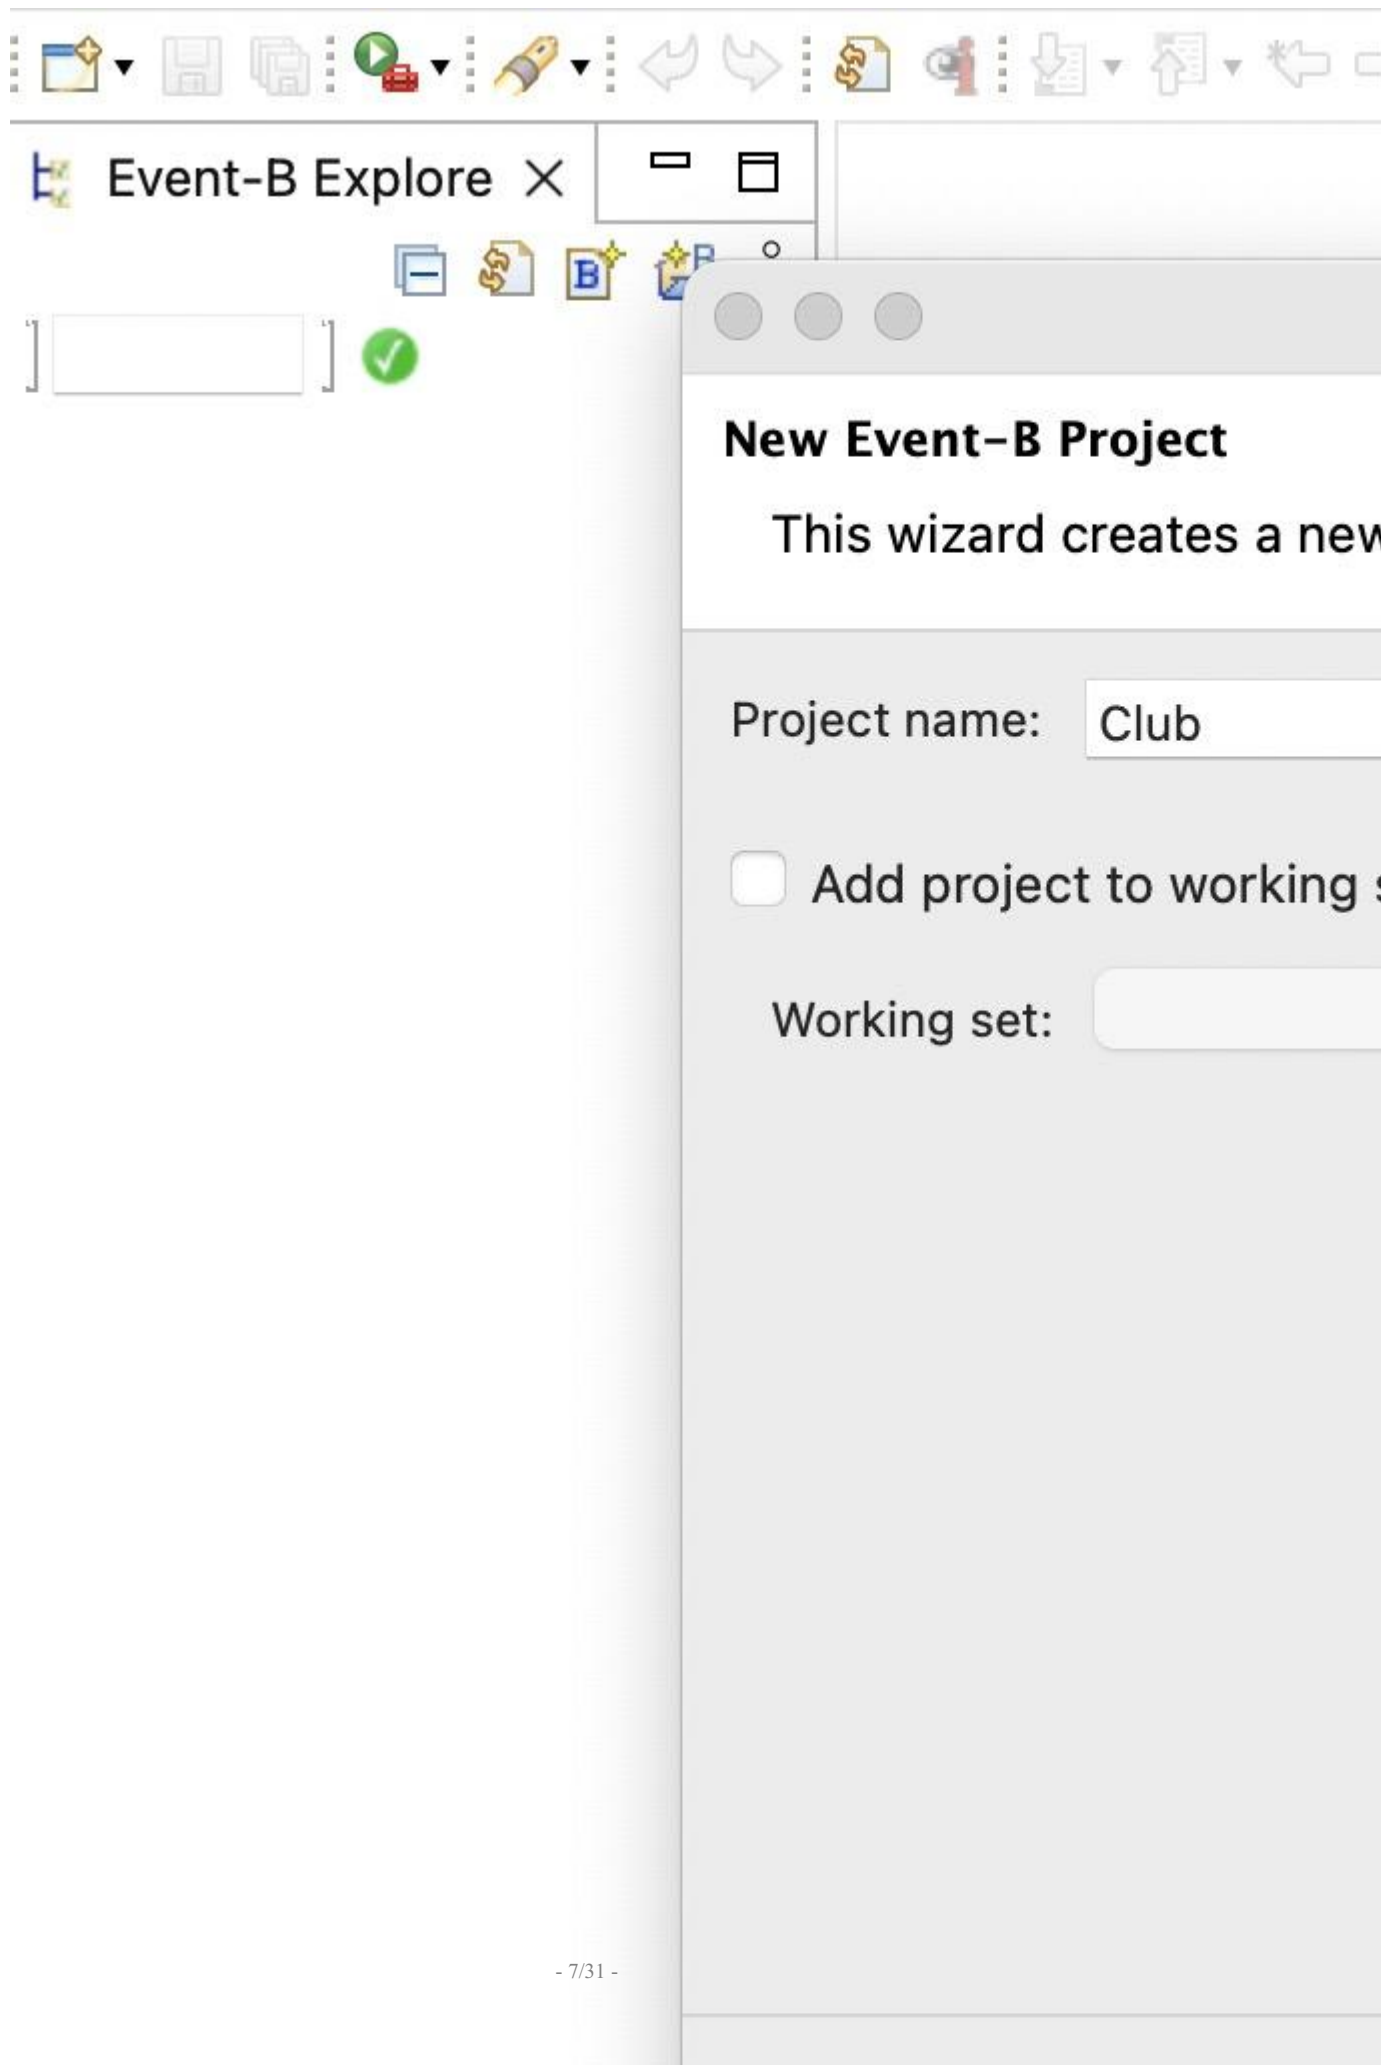

- Click `Finish` to confirm the creation of the project.

New Event-B Project

This wizard creates a new (empty) Event-B Project in

Project name:


☐ Add project to working sets

Working set:



Conclusion

By now, the project `Club` should be visible in the *Event-B Explorer*.

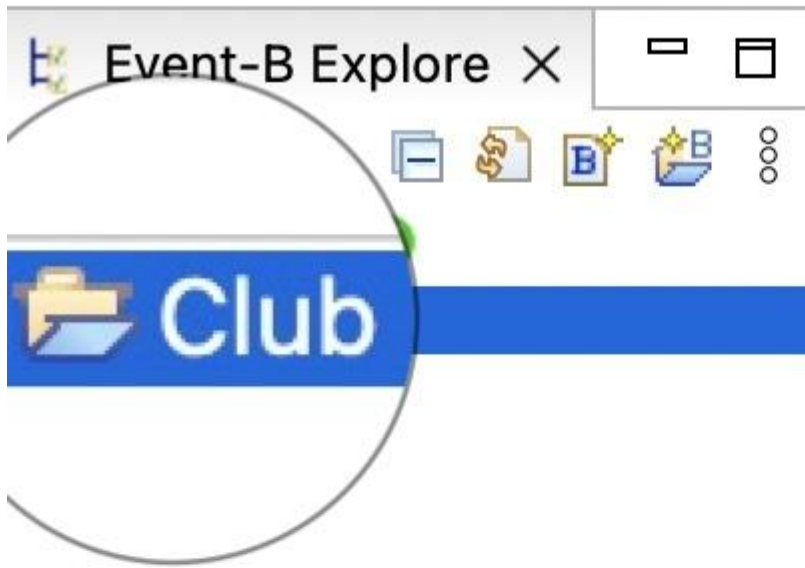

2.4.2 Task 2. Create an XContext


Introduction

The purpose of this task is to create a simple XContext within the newly created project.


Step 1. Create a New XContext Named `coursesCtx.bucx`

- Use the menu `File -> New -> Other` to open the `Select a wizard` dialog.

- On the pop-up Select a wizard dialog, navigate to General -> File, click Next.

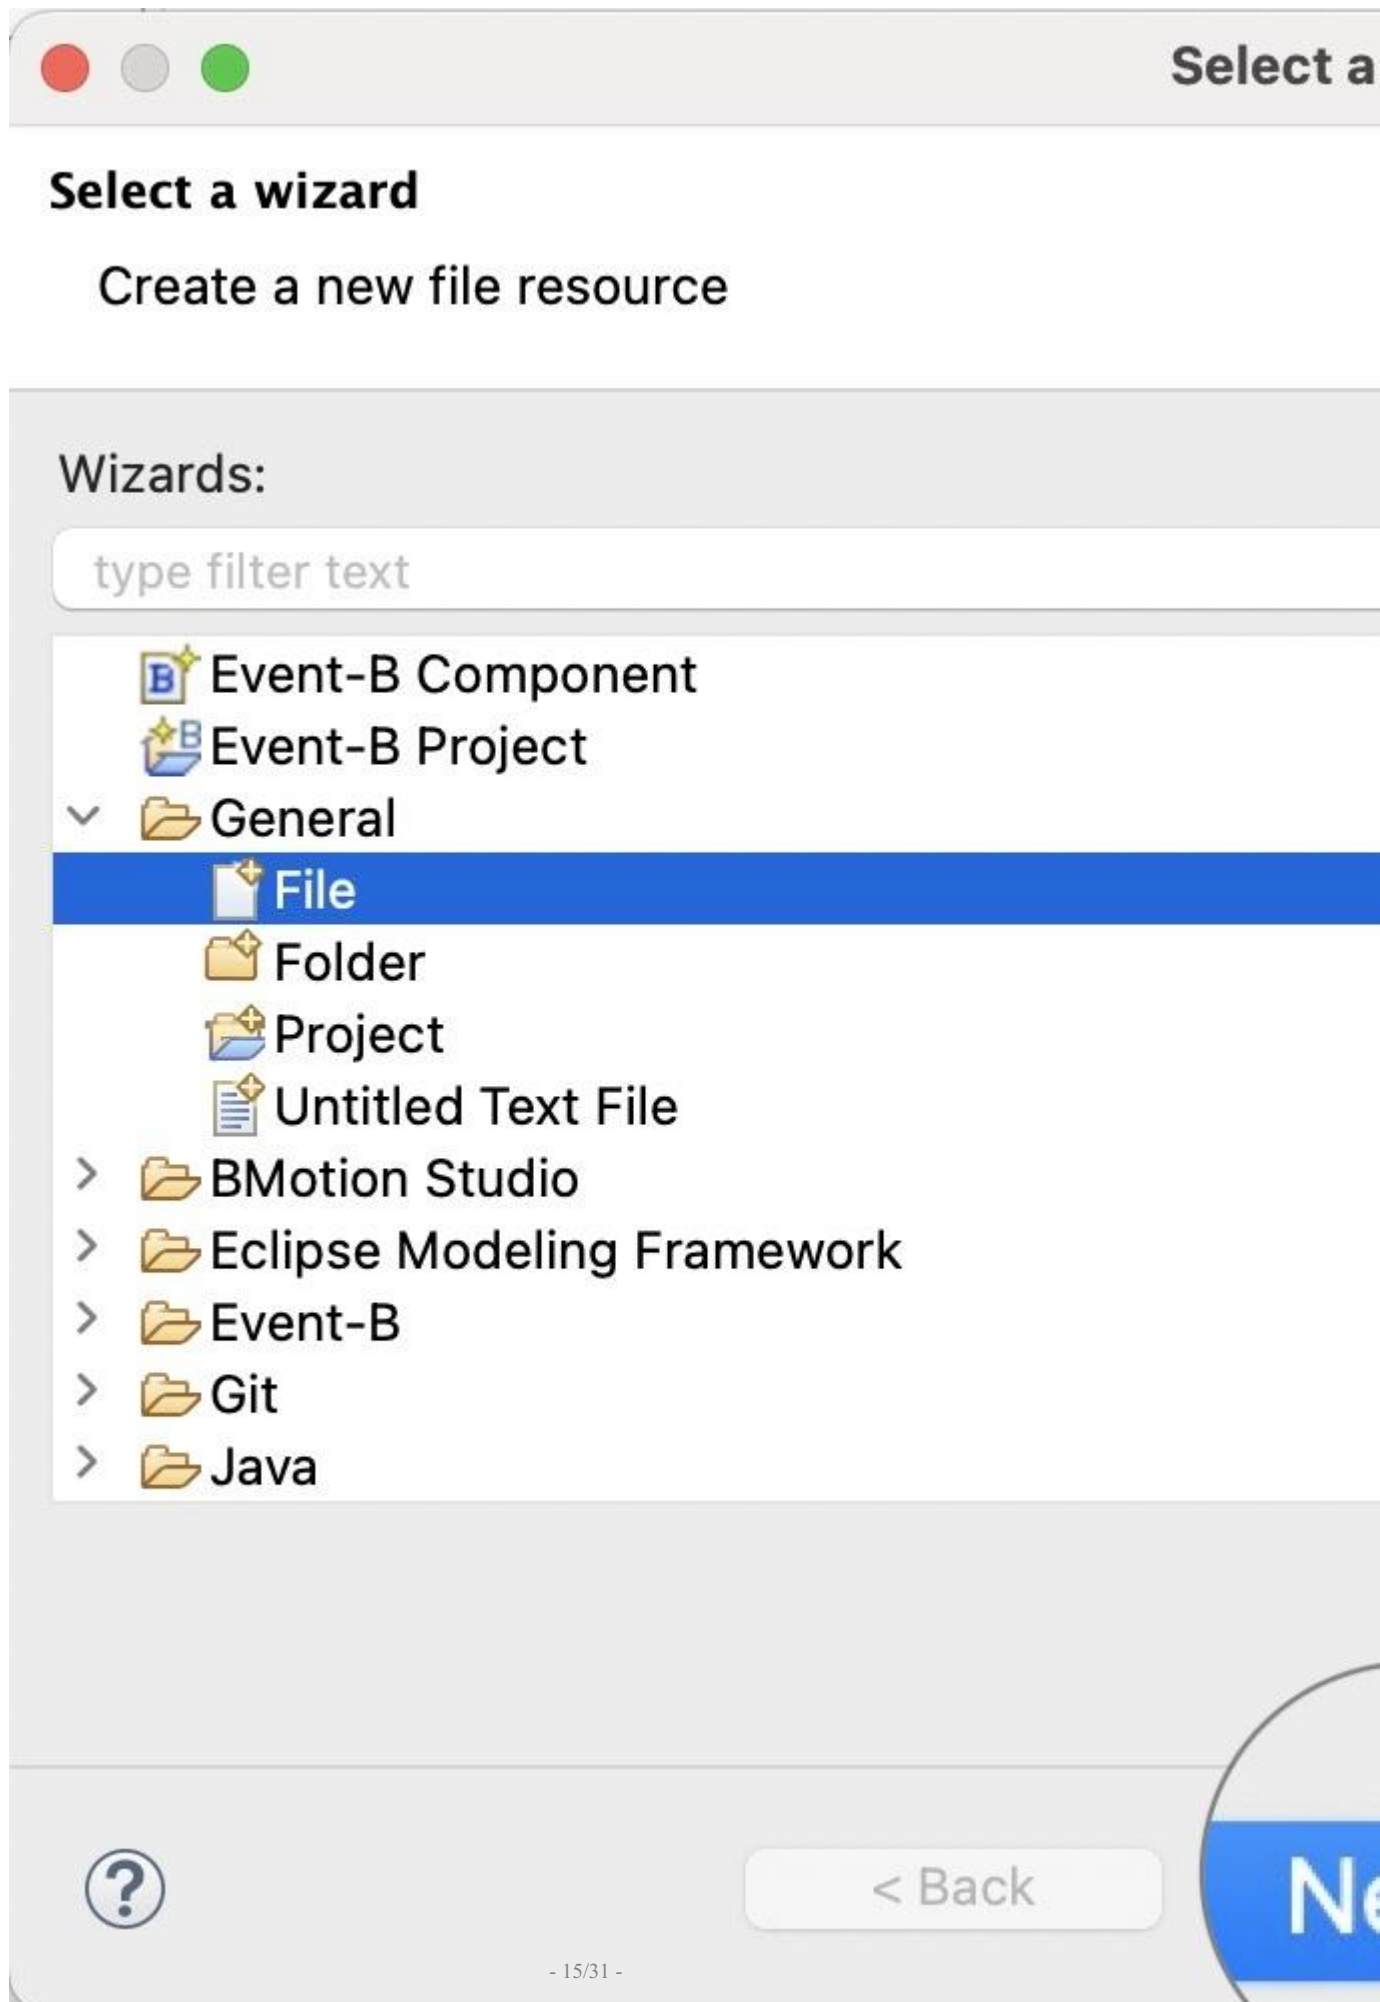

- On the `Create New File` dialog, choose `Club` project as the parent folder, and put `coursesCtx.bucx` as the `File name`. The file extension `.bucx` is important to indicate that the file is an *XContext*. Click `Finish` to confirm the file creation.



File

Create a new file resource.

Enter or select the parent folder:

Club




Club

File name:

Advanced >>

- **Important:** A pop-up dialog will be displayed asking to convert the `Club` project to an *XText* project, please answer **Yes**. This enables the *XText* builder to work automatically for converting CamilleX constructs to Rodin constructs.

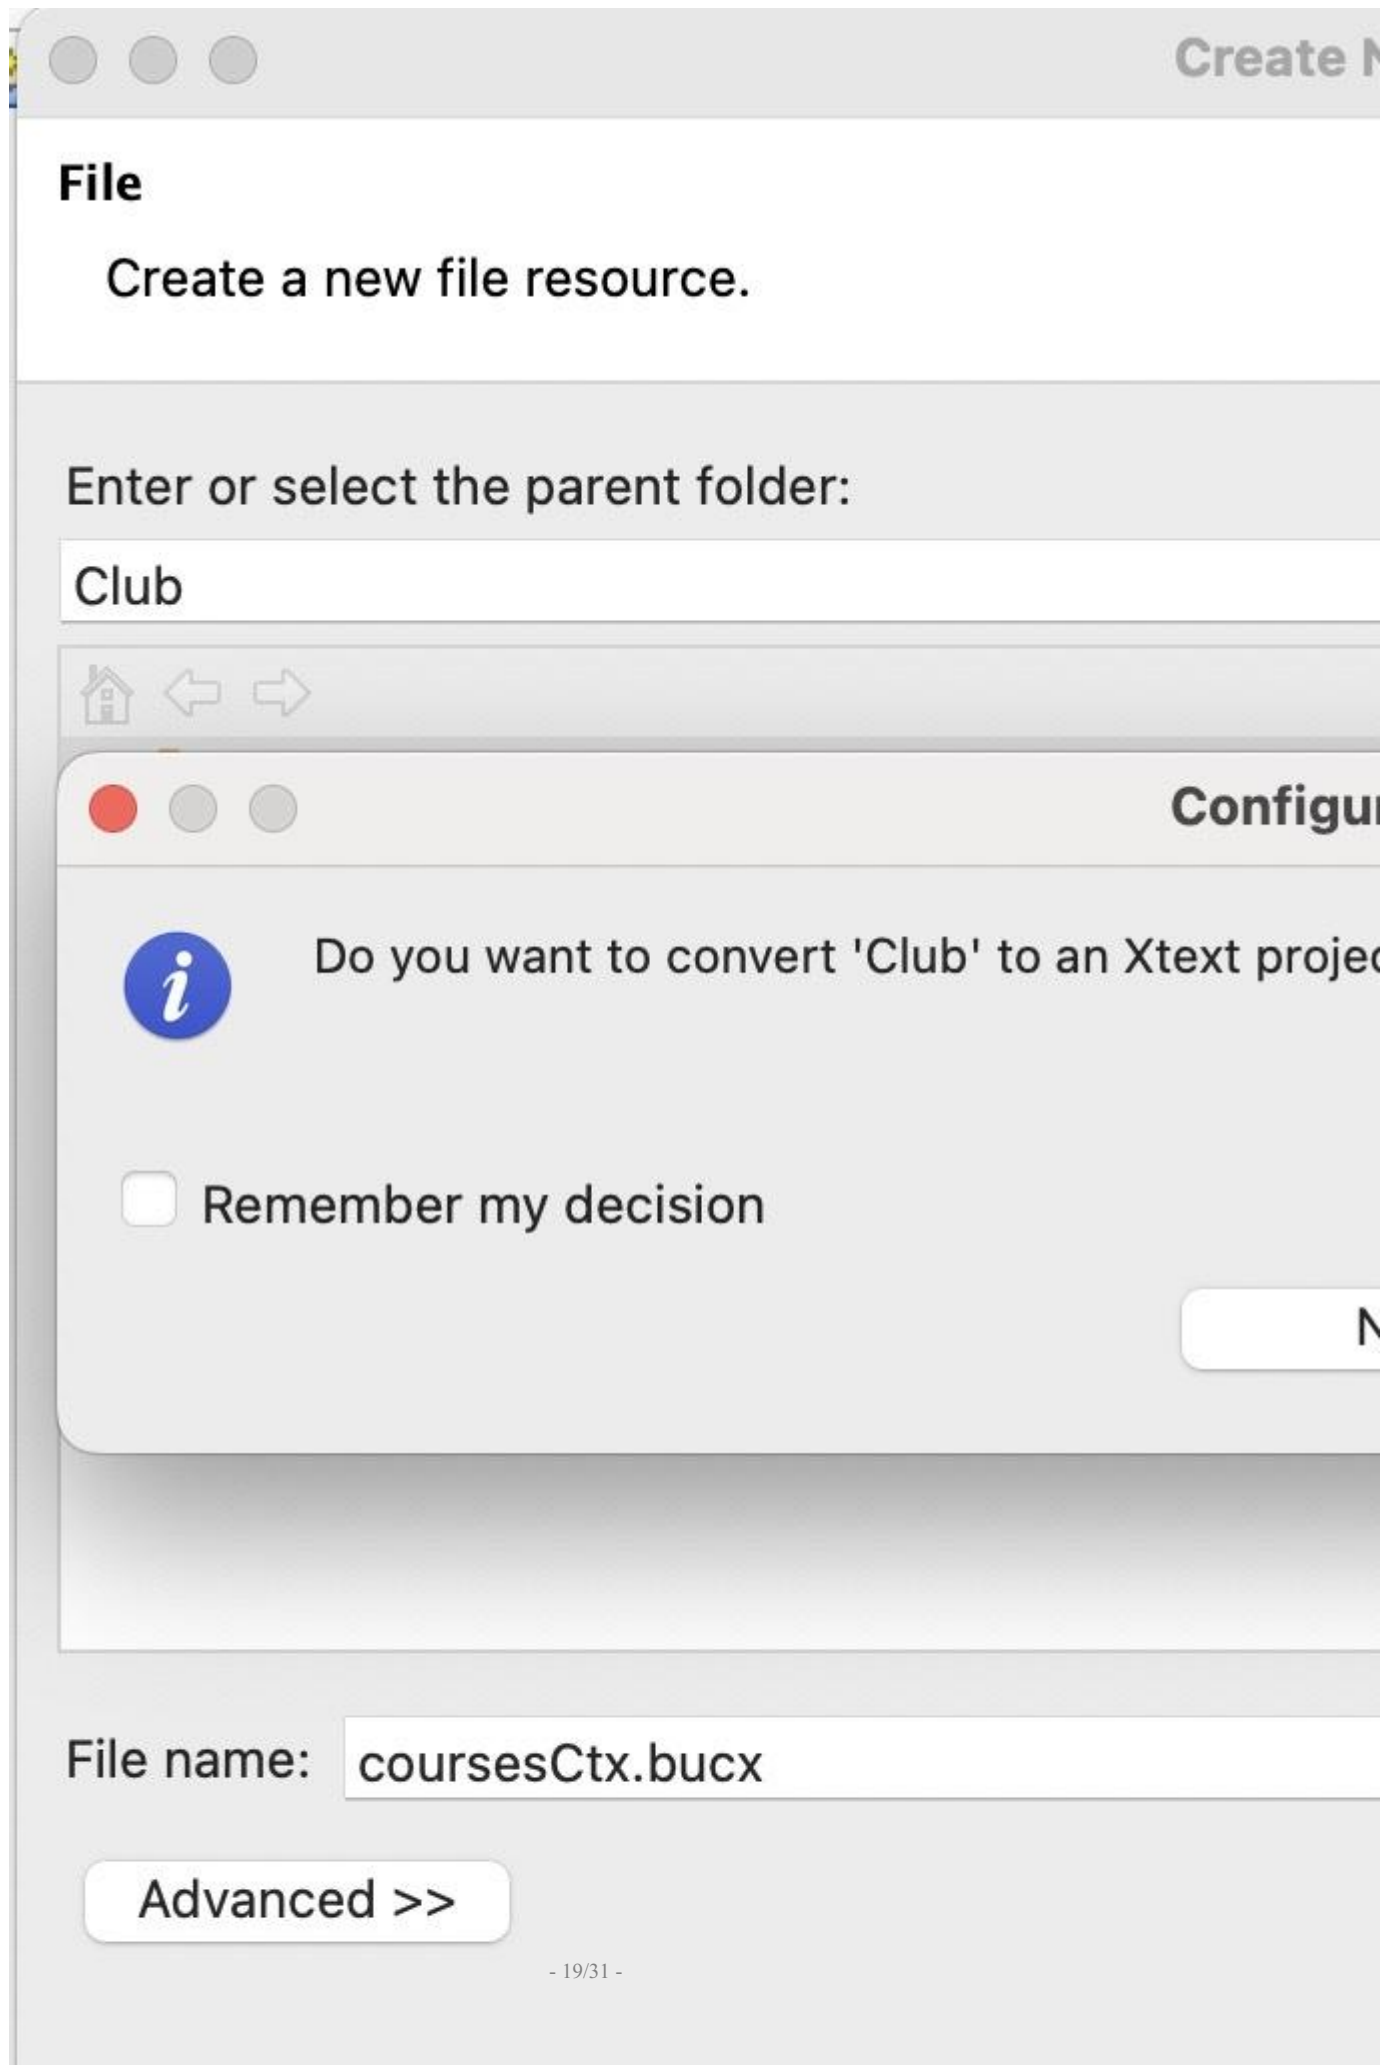

(If you miss this step, you can invoke it via right click on the `Club` project from the *Event-B Explorer* and `Configure -> Convert to XText Project`). The new created file `coursesCtx.bucx` will be opened automatically in an editor. It has some error markers and we will fix this in the next step.

Step 2. Set the Content of `courseCtx.bucx`

- Using the editor, set the content of `coursesCtx.bucx` as follows.

```
context coursesCtx
sets
    CRS      // The set of all courses
constants
    m        // The maximum number of courses
axioms
    @axm0_1: finite(CRS)      // There can only be a finite number of courses
    @axm0_2: m ∈ N1          // The maximum number of courses is a non-zero natural number
theorem @thm0_1: 0 < m      // The maximum number of courses is positive
end
```

***coursesCtx.bucx** ✕**context** coursesCtx**sets**

CRS // The set of all courses

constants

m // The maximum number of courses

axioms@axm0_1: **finite**(CRS) // There can only be@axm0_2: $m \in \mathbb{N}$ // The maximum number**theorem** @thm0_1: $0 < m$ // The maximum number**end**

Typesetting Mathematical Symbols

In order to typeset Event-B mathematical symbols, e.g., $\mathbb{N}1$, there are three different approaches.

1. Using *Content Assist*. *Content Assist* can translate *ASCII* characters into Unicode symbols. For example, when typing `NAT` and invoking content assist (e.g., on `Ctrl + Space` on Mac OS), a dropdown list will appear with options for typesetting `N` and `N1`.



*coursesCtx.bucx X

context coursesCtx**sets**

CRS // The set of all courses

constants

m // The maximum number of courses

axioms@axm0_1: **finite**(CRS) // There can only@axm0_2: $m \in \mathbb{N}$ // The maximum n**theorem** @thm0_1: $0 < \mathbb{N}$ **end**

N1

2. Using *Quick Fix*. The *CamilleX* editor offer quick fixes for ASCII untranslated formula. Untranslated formula are indicated by warnings with yellow squiggly lines under the formula. Hover the mouse over the untranslated formulae, a pop-up dialog will appear to

offer to translate the formulae.

***coursesCtx.bucx** X**context** coursesCtx**sets**

CRS // The set of all courses

constants

m // The maximum number of courses

axioms@axm0_1: **finite**(CRS) // There can only@axm0_2: m ∈ NAT1 // The maximum n**theorem** @thm0_1: 0 < m // The maximum n**end** Untranslated Predicate: $m \in \text{NAT1}$

1 quick fix available:

[Translated predicate to \$m \in \mathbb{N1}\$](#)

3. Using *Symbols* Table. Symbols can be inserted into the *CamilleX* editor. (If the *Symbols* table is not visible in your Rodin, you can open it from the menu `Window -> Show View -> Symbols`).

The screenshot shows the Event-B Explorer IDE interface. At the top is a toolbar with various icons for file operations, execution, and navigation. Below the toolbar, the left pane displays the 'Event-B Explorer' window with a project tree. The tree shows a folder named 'Club' which contains a file named 'coursesCtx.bucx'. Above the tree is a search bar with a green checkmark icon. The right pane shows the content of the selected file, 'coursesCtx.bucx', which contains Event-B code. The code is as follows:

```

context cours
sets
    CRS
constants
    m
axioms
    @axm0_1:
    @axm0_2:
theorem @thm0
end
  
```

Step 3. Save the `coursesCtx.bucx` file

Save the file `coursesCtx.bucx`, the *XText* builder will generate Rodin context `coursesCtx` automatically.

Conclusion

By now, the XContext “`coursesCtx.bucx`” and the corresponding Rodin Context “`coursesCtx`” should be visible in the Event-B Explorer.
`coursesCtx` in the File Explorer