COVID-19 subject 420

2021-06-23


The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

Experiment	Туре	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (>= 5 reads)
VSP0511-2	single experiment	NA	ETA	2020 - 12 - 07	7.34	B.1.607	98.8%	96.4%

Variants shared across samples

The heat map below shows how variants (reference genome /home/common/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

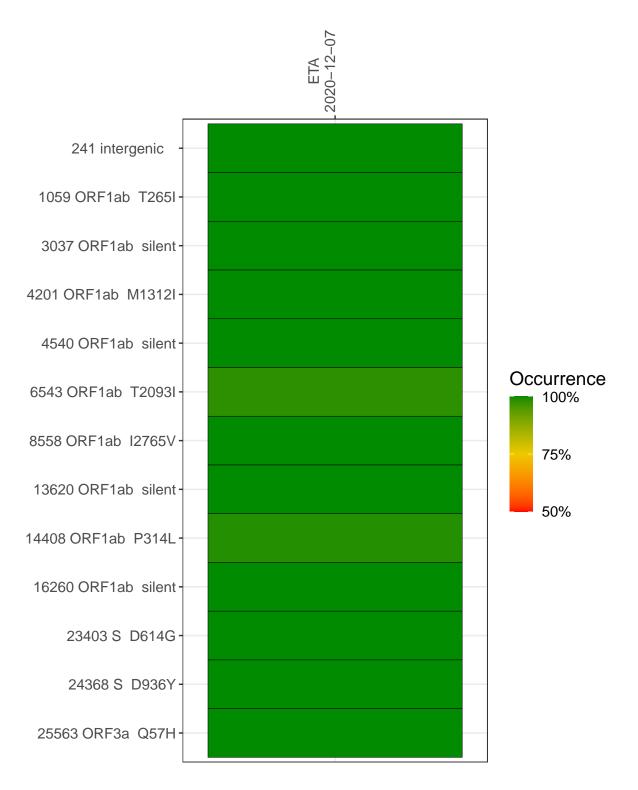


ETA 2020-12-07

241 intergenic	70
1059 ORF1ab T265I	38
3037 ORF1ab silent	28
4201 ORF1ab M1312I	102
4540 ORF1ab silent	127
6543 ORF1ab T2093I	109
8558 ORF1ab I2765V	20
13620 ORF1ab silent	44
14408 ORF1ab P314L	151
16260 ORF1ab silent	71
23403 S D614G	351
24368 S D936Y	25
25563 ORF3a Q57H	70
	VSP0511-2


Analyses of individual experiments and composite results

VSP0511-2 | 2020-12-07 | ETA | 420e | genomes | single experiment


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

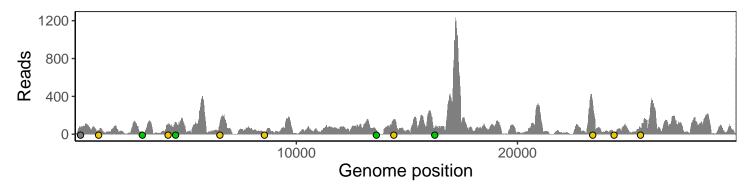

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

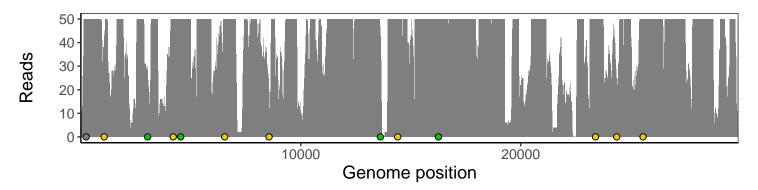

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

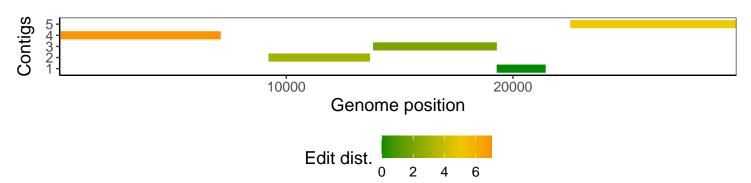

Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htslib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3
pangolin	3.1.3
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.3.3
tidyverse	1.2.1
ShortRead	1.34.2
GenomicAlignments	1.12.2
${\bf Summarized Experiment}$	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
GenomeInfoDb	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1