# COVID-19 subject UPHS-0096

2021-04-30


The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

Experiment	Type	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (>= 5 reads)
VSP1027-1	single experiment	NA	Saline	2021-03-08	26.09	B.1.1.519	99.0%	99.0%

#### Variants shared across samples

The heat map below shows how variants (reference genome /home/everett/projects/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

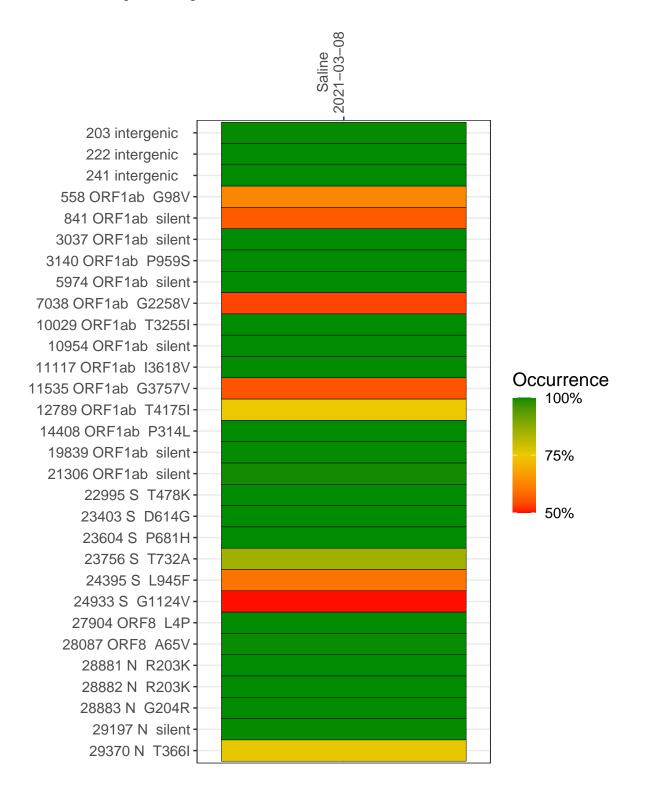

#### Saline 2021-03-08


2021-03-06
2197
2081
1577
314
267
369
350
1341
323
251
738
1667
1805
2072
3848
1167
18527
27
2904
1312
1175
695
3748
18671
16791
25
25
25
1527
1682
_




### Analyses of individual experiments and composite results

#### $VSP1027\text{-}1 \mid 2021\text{-}03\text{-}08 \mid Saline \mid UPHS\text{-}0096 \mid genomes \mid single \ experiment$


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

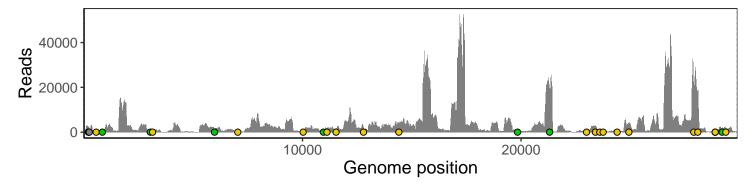

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

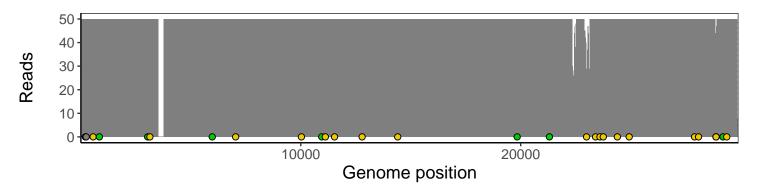

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

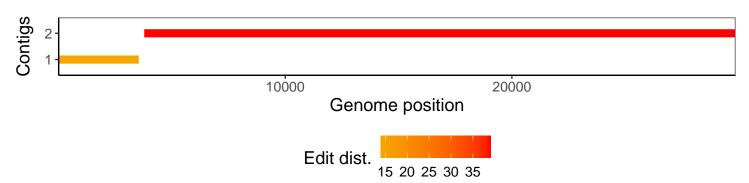

## Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htslib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3
pangolin	2.3.8
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.0.0
tidyverse	1.2.1
ShortRead	1.34.2
${\it Genomic Alignments}$	1.12.2
SummarizedExperiment	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
$\operatorname{GenomeInfoDb}$	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1