COVID-19 subject HUP Q-0064

2021-04-30


The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

Experiment	Туре	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (>= 5 reads)
VSP1231-1	single experiment	NA	Saline	2021-03-17	29.81	B.1.1.7	99.7%	99.7%

Variants shared across samples

The heat map below shows how variants (reference genome /home/everett/projects/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

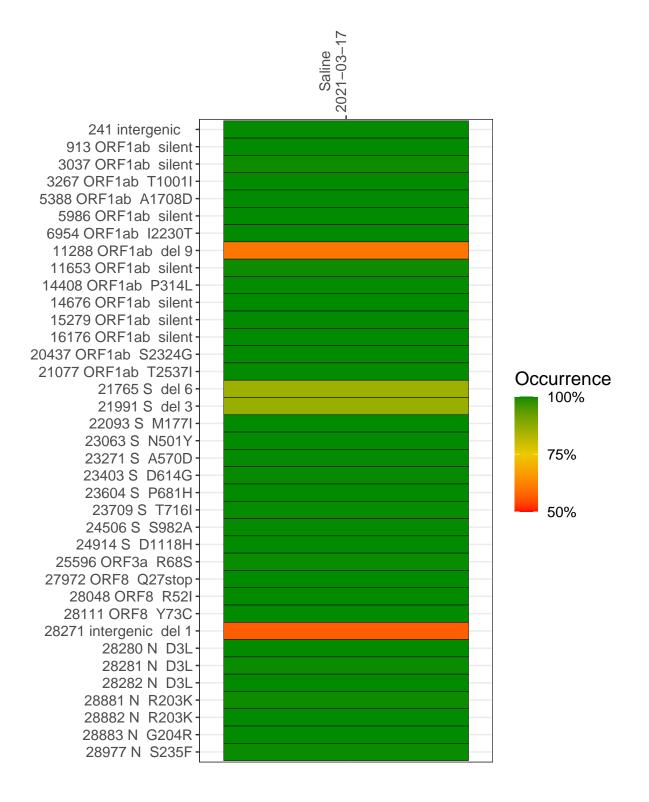

Saline 2021–03–17


2021-03-17
1515
5305
3838
4616
7023
3477
2399
5254
9211
5409
3109
8034
12564
4535
2585
2760
1937
4392
2508
5081
6324
6498
6121
3893
10492
2712
7092
7115
5900
2402
1311
1311
1404
283
281
282
466




Analyses of individual experiments and composite results

VSP1231-1 | 2021-03-17 | Saline | HUP Q-0064 | genomes | single experiment


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

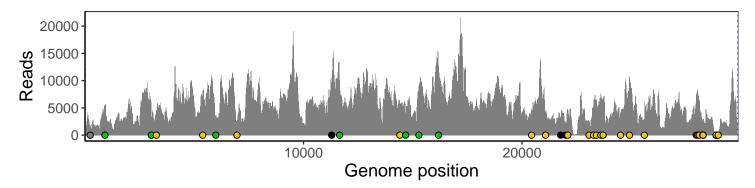

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

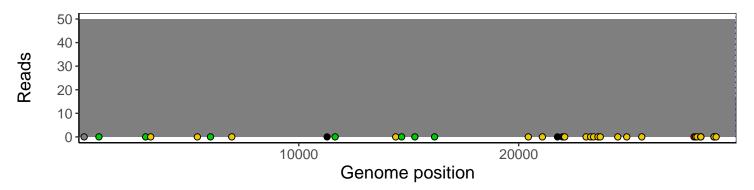

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

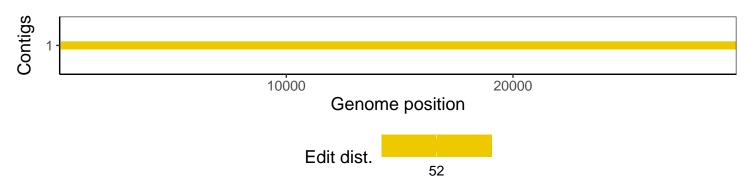

Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htslib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3
pangolin	2.3.8
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.0.0
tidyverse	1.2.1
ShortRead	1.34.2
${\it Genomic Alignments}$	1.12.2
SummarizedExperiment	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
$\operatorname{GenomeInfoDb}$	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1