

COVID-19 subject 414

2021-05-05

The table below provides a summary of subject samples for which sequencing data is available.

The experiments column shows the number of sequencing experiments performed for each specimen.


Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with $> 90\%$ sequence coverage.

Table 1. Sample summary.

Experiment	Type	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (≥ 5 reads)
VSP0491-2	single experiment	NA	ETA	2020-11-20	29.85	B.1.543	99.9%	99.6%

Variants shared across samples

The heat map below shows how variants (reference genome /home/everett/projects/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

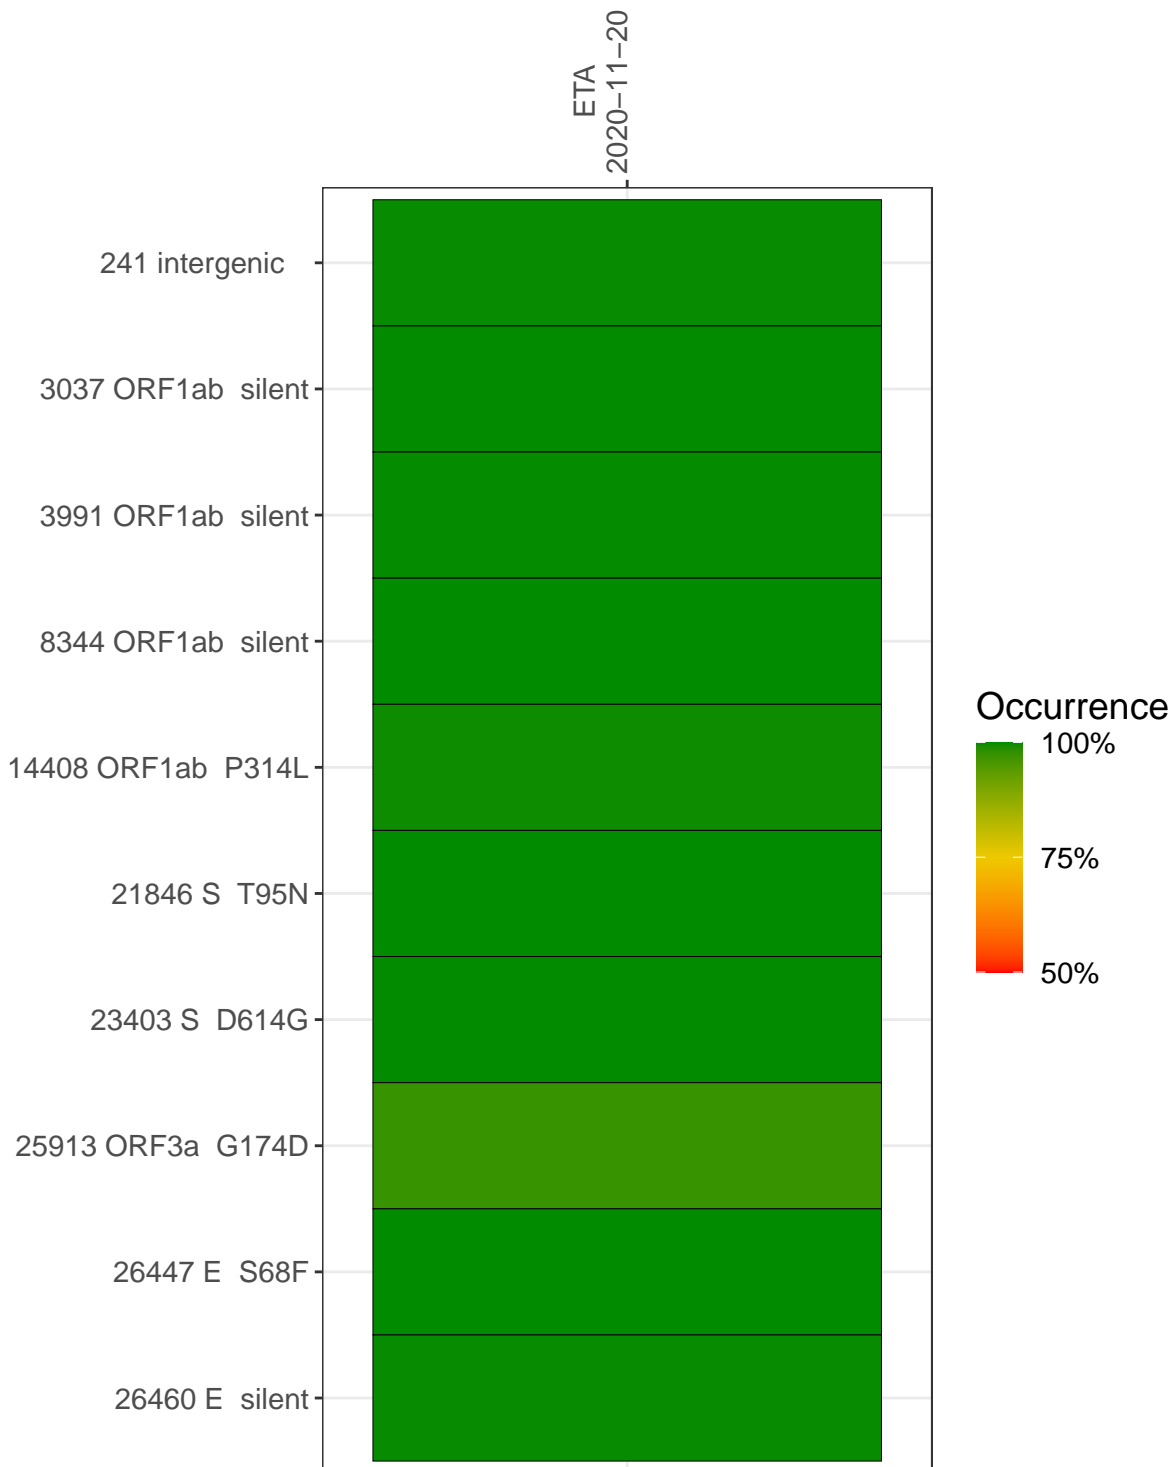

ETA
2020-11-20

241 intergenic

9117

3037 ORF1ab silent

2467

3991 ORF1ab silent

11601

8344 ORF1ab silent

74

14408 ORF1ab P314L

3797

21846 S T95N

7504

23403 S D614G

38834

25913 ORF3a G174D

4137

26447 E S68F

6430

26460 E silent

6033

Base change




VSP0491-2


Analyses of individual experiments and composite results

VSP0491-2 | 2020-11-20 | ETA | 414e-q | genomes | single experiment


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according to variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

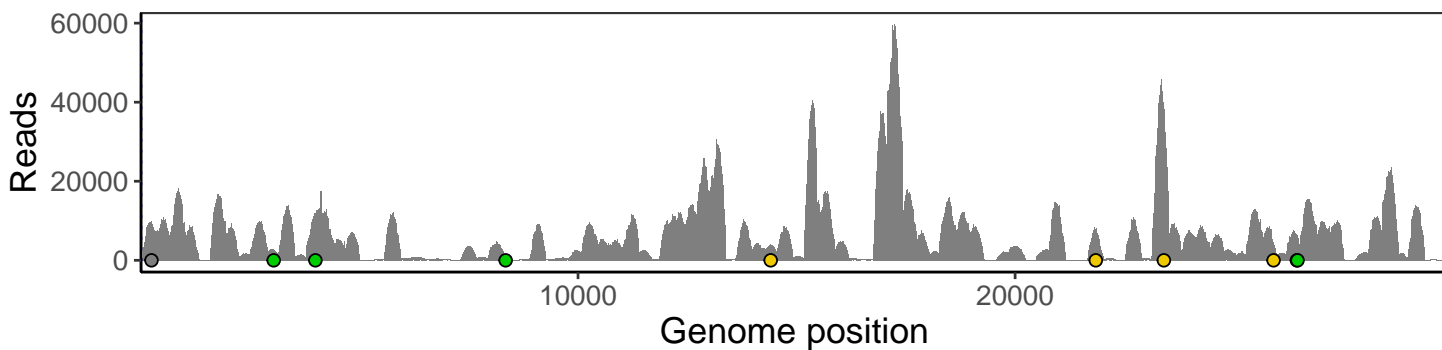

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

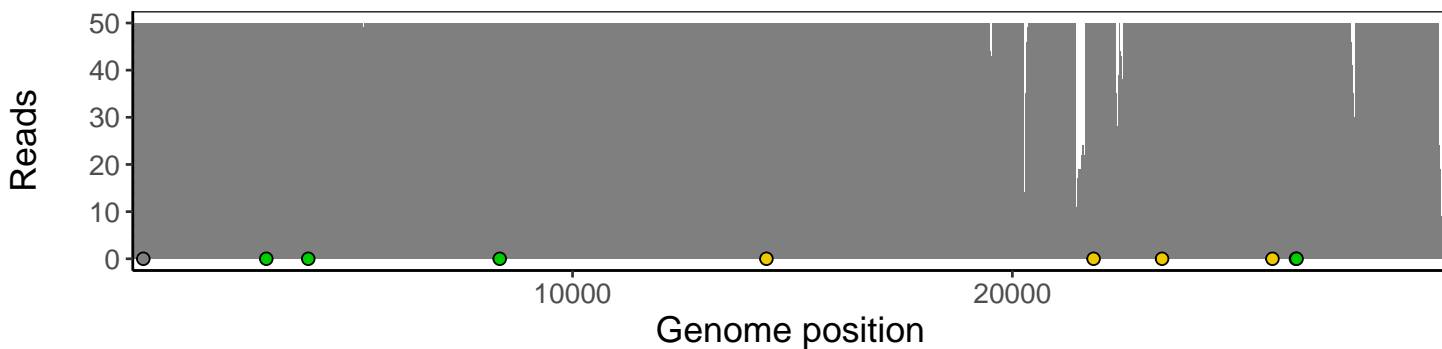

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

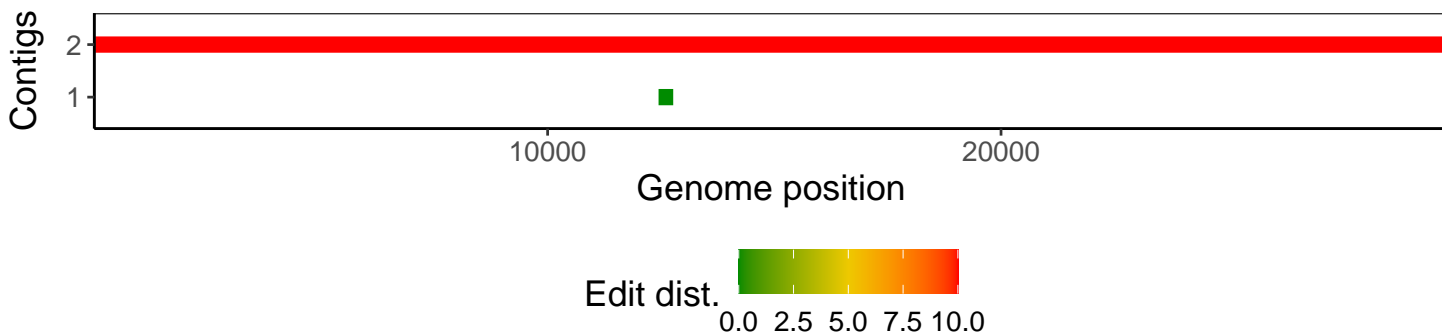

Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htlib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htlib 1.10.2-57-gf58a6f3
pangolin	2.3.8
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.0.0
tidyverse	1.2.1
ShortRead	1.34.2
GenomicAlignments	1.12.2
SummarizedExperiment	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
GenomeInfoDb	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1