COVID-19 subject HUP Q-0034

2021-04-30


The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

Experiment	Туре	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (>= 5 reads)
VSP1036-1	single experiment	NA	Saline	2021-03-08	29.86	B.1.1.7	99.9%	99.8%

Variants shared across samples

The heat map below shows how variants (reference genome /home/everett/projects/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

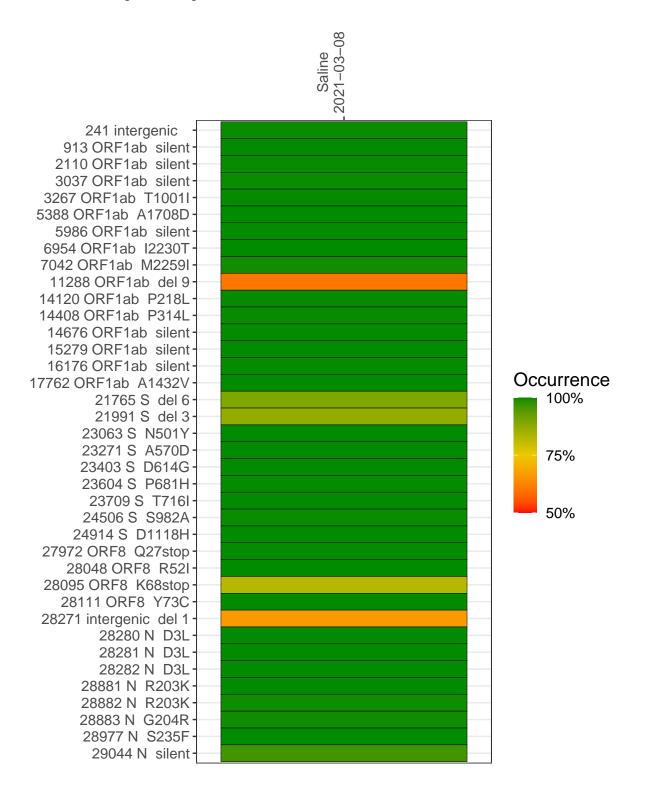

Saline 2021-03-08


2021-03-06
2195
6596
4759
4688
6577
10468
5424
2573
8560
6511
7704
5684
6013
10984
19412
4963
3459
2842
1852
7033
7533
6963
6898
5568
14821
8837
8771
11039
9654
3944
2497
2497
2718
274
273
273
625
2842




Analyses of individual experiments and composite results

$VSP1036\text{-}1 \mid 2021\text{-}03\text{-}08 \mid Saline \mid HUP \text{ Q-}0034 \mid genomes \mid single \text{ experiment}$


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

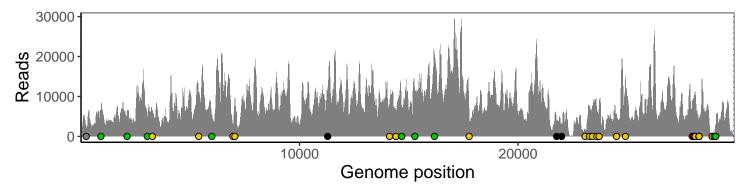

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

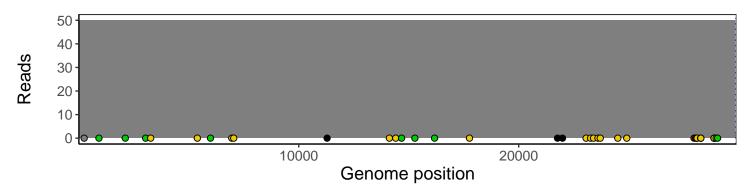

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

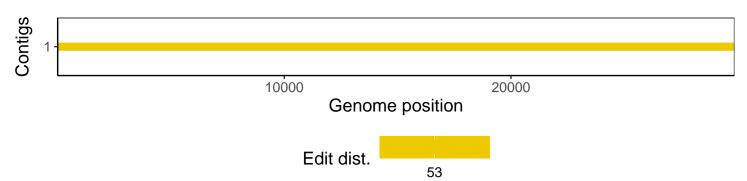

Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htslib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3
pangolin	2.3.8
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.0.0
tidyverse	1.2.1
ShortRead	1.34.2
${\it Genomic Alignments}$	1.12.2
SummarizedExperiment	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
$\operatorname{GenomeInfoDb}$	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1