COVID-19 subject UPHS-0704

2021-04-30


The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

Experiment	Туре	Genomes	Sample type	Sample date	Largest contig (KD)	Lineage	Reference read coverage	Reference read coverage (>= 5 reads)
VSP1922-1	single experiment	NA	Saliva	2021-03-17	29.87	P.1	99.9%	99.8%

Variants shared across samples

The heat map below shows how variants (reference genome /home/everett/projects/SARS-CoV-2-Philadelphia/Wuhan-Hu-1) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.

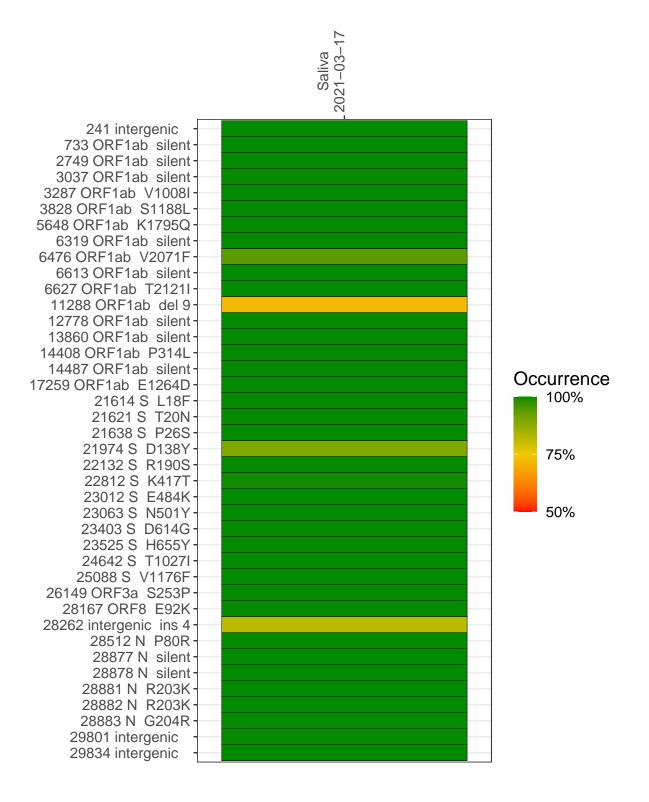

Saliva 2021–03–17


2021-03-17
2181
8633
14184
6447
7534
7232
6421
7872
5758
4913
4565
6158
8252
4108
9788
10406
40110
2692
2541
2712
2448
2533
9529
773
1103
14321
2639
4657
1785
3682
11302
12415
14739
1898
1882
1882
1882
1907
1963
1024




Analyses of individual experiments and composite results

VSP1922-1 | 2021-03-17 | Saliva | UPHS-0704 | genomes | single experiment


The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

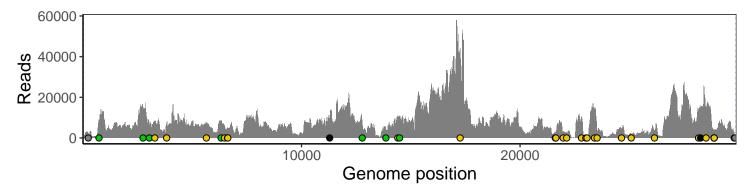

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

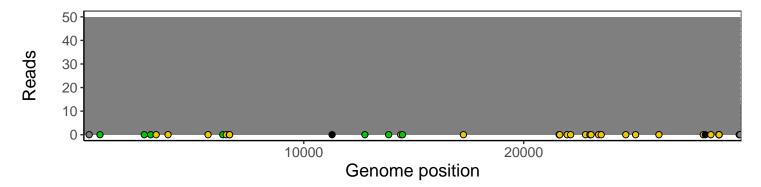

The longest five assembled contigs are shown below colored by their edit distance to the reference genome.

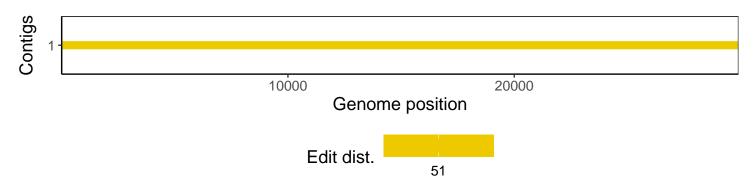

Software environment

Software/R package	Version
R	3.4.0
bwa	0.7.17-r1198-dirty
samtools	1.10 Using htslib 1.10
bcftools	1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3
pangolin	2.3.8
genbankr	1.4.0
optparse	1.6.0
forcats	0.3.0
stringr	1.4.0
dplyr	0.8.1
purrr	0.2.5
readr	1.1.1
tidyr	0.8.1
tibble	2.1.2
ggplot2	3.0.0
tidyverse	1.2.1
ShortRead	1.34.2
${\it Genomic Alignments}$	1.12.2
SummarizedExperiment	1.6.5
DelayedArray	0.2.7
matrixStats	0.54.0
Biobase	2.36.2
Rsamtools	1.28.0
GenomicRanges	1.28.6
$\operatorname{GenomeInfoDb}$	1.12.3
Biostrings	2.44.2
XVector	0.16.0
IRanges	2.10.5
S4Vectors	0.14.7
BiocParallel	1.10.1
BiocGenerics	0.22.1