COVID-19 subject E6

2021-01-28

The table below provides a summary of subject samples for which sequencing data is available. The experiments column shows the number of sequencing experiments performed for each specimen. Experiment specific analyses are shown at the end of this report. Lineages are called with the Pangolin software tool (Rambaut et al 2020) for genomes with > 90% sequence coverage.

Table 1. Sample summary.

| Experiment | Туре | Genomes | Sample type | Sample date | Largest contig (KD) | Lineage | Reference read coverage | Reference read coverage (>= 5 reads) |
|------------|-------------------|---------|-------------|-------------|------------------------|---------|----------------------------|--------------------------------------|
| VSP0002 | composite | NA | Vero cells | 2020-03-28 | 30.02 | NA | 99.8% | 99.8% |
| VSP0002-1m | single experiment | NA | Vero cells | 2020-03-28 | 30.00 | NA | 99.8% | 99.8% |
| VSP0002-2m | single experiment | NA | Vero cells | 2020-03-28 | 29.90 | NA | 99.8% | 99.8% |
| VSP0002-3m | single experiment | NA | Vero cells | 2020-03-28 | 29.82 | NA | 99.8% | 99.4% |

Variants shared across samples

The heat map below shows how variants (reference genome USA-WA1-2020) are shared across subject samples where the percent variance is colored. Variants are called if a variant position is covered by 5 or more reads, the alternative base is found in > 50% of read pairs and the variant yields a PHRED score > 20. Gray tiles denote positions where the variant was not the major variant or no variants were found. The relative base compositions of each experiment used to calculate tiles are shown in the following plot where the total number of position reads are shown atop of each plot.


 $No\ variants\ found$

 $No\ variants\ found$


Analyses of individual experiments and composite results


$VSP0002 \mid 2020-03-28 \mid Vero cells \mid E6 \mid composite result$

The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

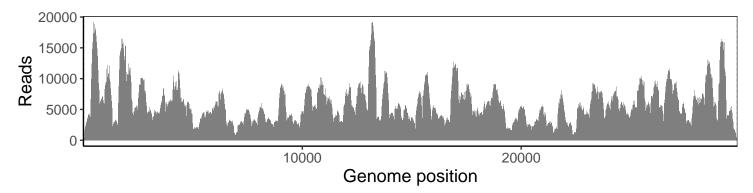


Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

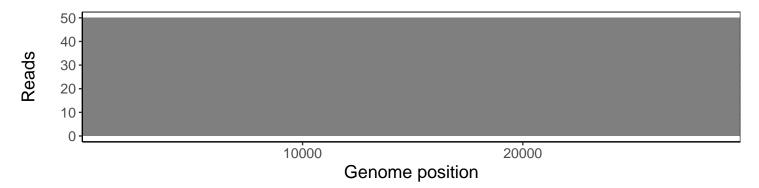

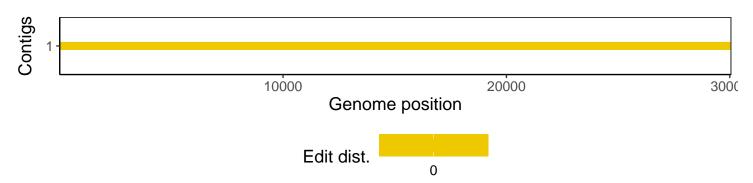



VSP0002-1m | 2020-03-28 | Vero cells | E6 | genomes | single experiment

The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

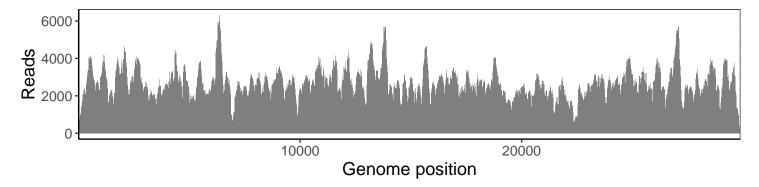


Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

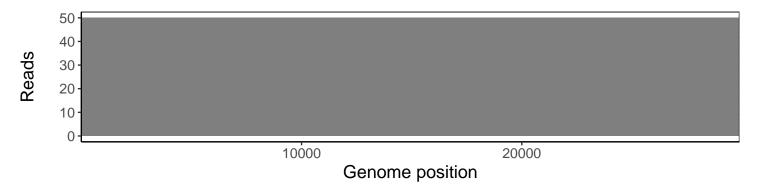

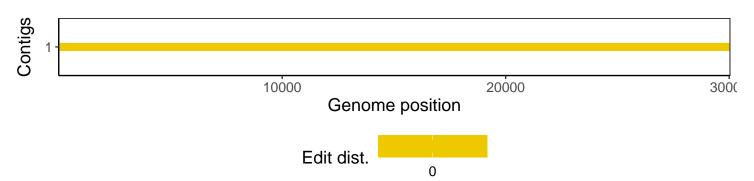



VSP0002-2m | 2020-03-28 | Vero cells | E6 | genomes | single experiment

The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

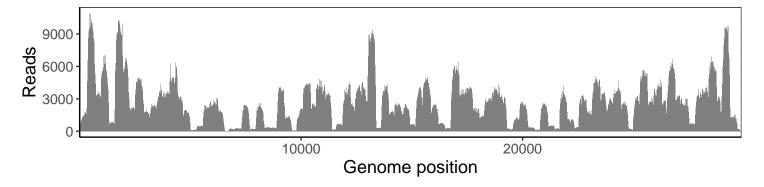


Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

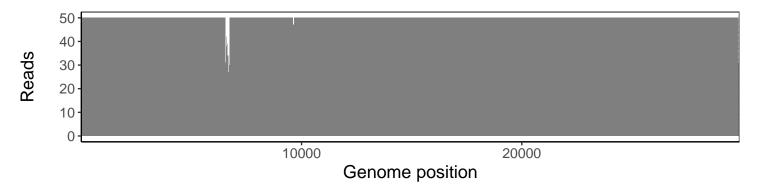

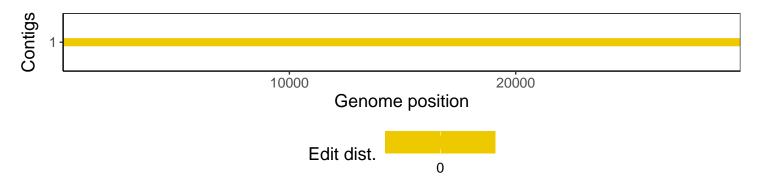



VSP0002-3m | 2020-03-28 | Vero cells | E6 | genomes | single experiment

The plot below shows the number of reads covering each nucleotide position in the reference genome. Variants are shown as colored dots along the bottom of the plot and are color coded according by variant types: gray - transgenic, green - silent, gold - missense, red - nonsense, black - indel.

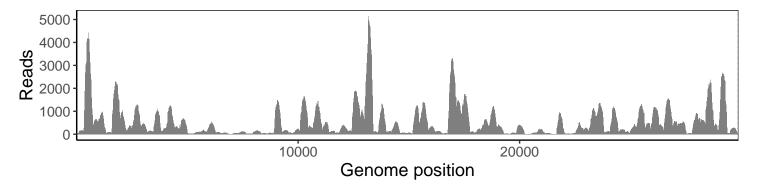

Excerpt from plot above focusing on reads coverage from 0 to 50 NT.

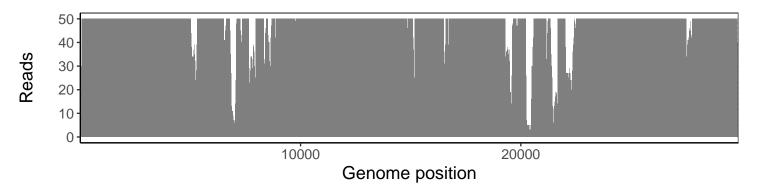

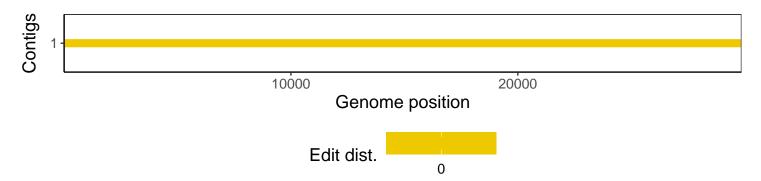

Software environment

| Software/R package | Version |
|-------------------------------|--|
| R | 3.4.0 |
| bwa | 0.7.17-r1198-dirty |
| samtools | 1.10 Using htslib 1.10 |
| bcftools | 1.10.2-34-g1a12af0-dirty Using htslib 1.10.2-57-gf58a6f3 |
| pangolin | 2.1.7 |
| genbankr | 1.4.0 |
| optparse | 1.6.0 |
| forcats | 0.3.0 |
| stringr | 1.4.0 |
| dplyr | 0.8.1 |
| purrr | 0.2.5 |
| readr | 1.1.1 |
| tidyr | 0.8.1 |
| tibble | 2.1.2 |
| ggplot2 | 3.0.0 |
| tidyverse | 1.2.1 |
| ShortRead | 1.34.2 |
| ${\it Genomic Alignments}$ | 1.12.2 |
| SummarizedExperiment | 1.6.5 |
| DelayedArray | 0.2.7 |
| matrixStats | 0.54.0 |
| Biobase | 2.36.2 |
| Rsamtools | 1.28.0 |
| GenomicRanges | 1.28.6 |
| $\operatorname{GenomeInfoDb}$ | 1.12.3 |
| Biostrings | 2.44.2 |
| XVector | 0.16.0 |
| IRanges | 2.10.5 |
| S4Vectors | 0.14.7 |
| BiocParallel | 1.10.1 |
| BiocGenerics | 0.22.1 |