
**AGENT GUIDE | STEP 1 OF 9**

# Start with the controller ready

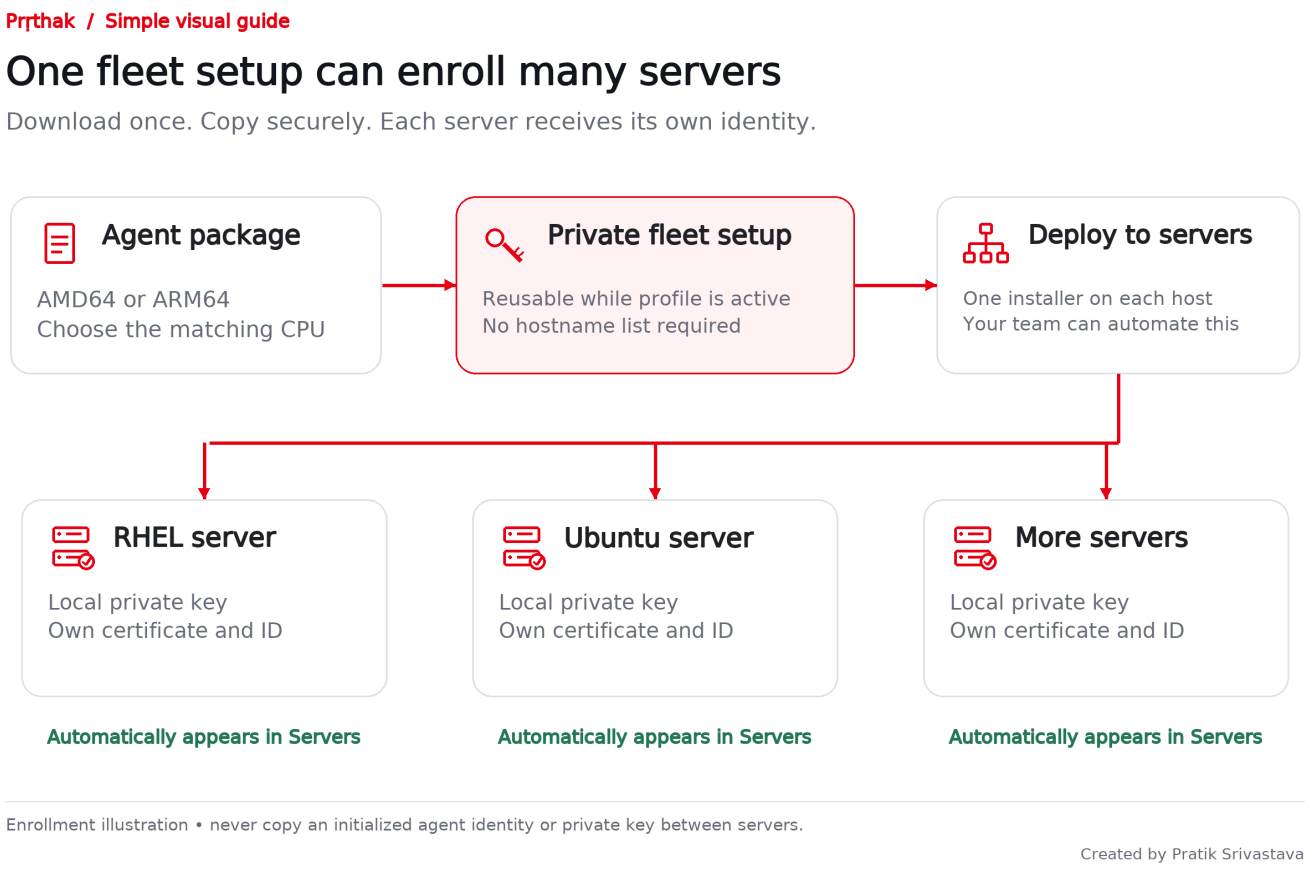


One reusable setup file; a separate private identity for every server.

Use an installed HTTPS controller and sign in as Admin or Super Admin. Ask the server team to confirm each server is RHEL 8/9 or Ubuntu 26.04, with systemd and sudo/root access.

Ask which CPU package to use: x86_64 = AMD64; aarch64 = ARM64. The same CPU binary supports both Linux families. The agent binary needs no separate Go, Python or Git setup; firewalld uses its normal OS packages.


Agents need outbound access to 8788/8789, with no inbound management port. Complete GUI Steps 1-4, then command sheets on pages 10-13. After installation, return to Step 7 to check the server.



© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 2 OF 9**

# Create one reusable fleet setup

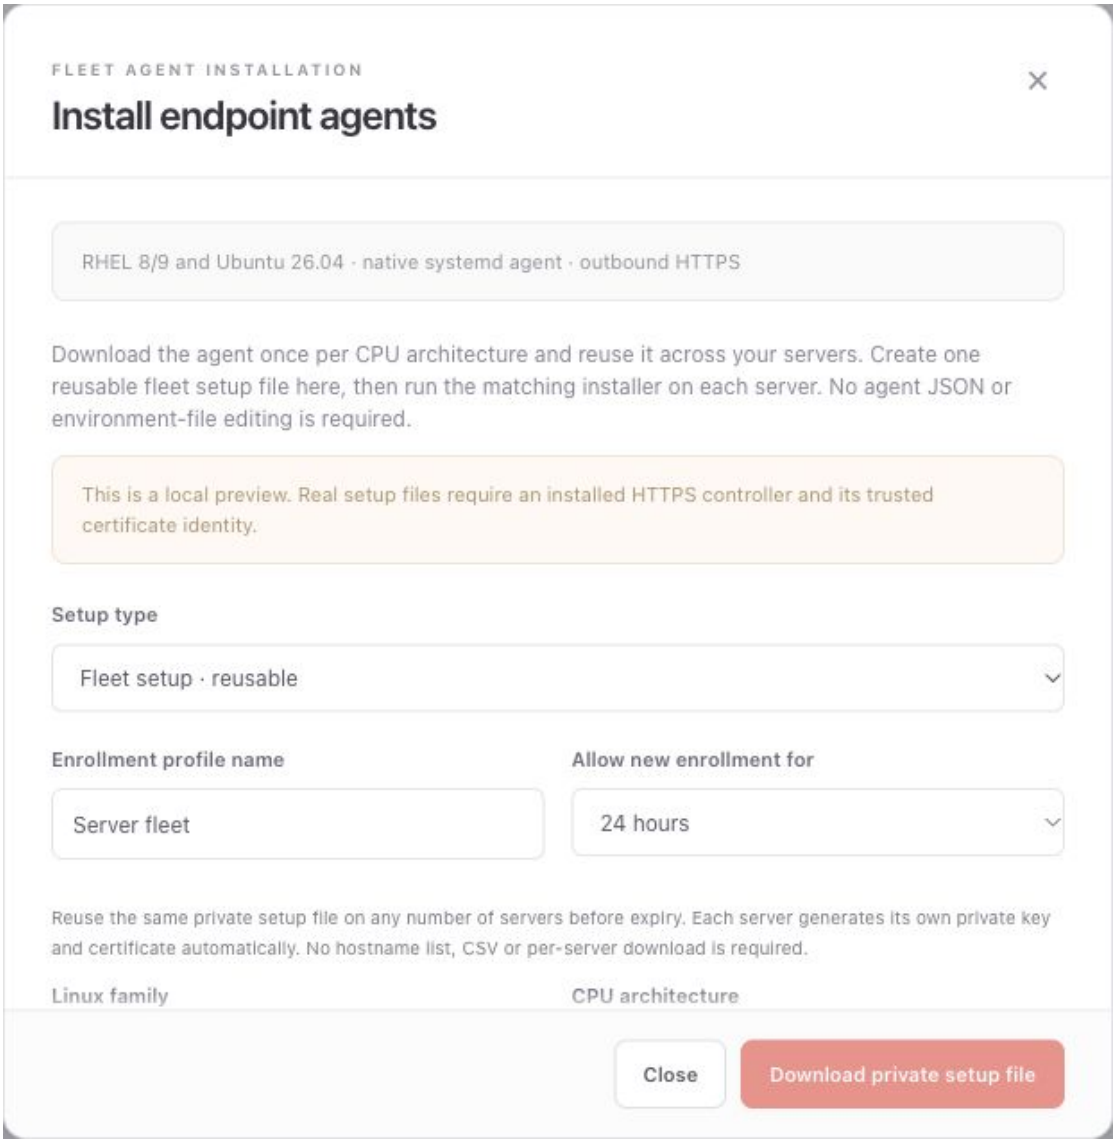


SYNTHETIC PREVIEW · Current synthetic preview. Real setup downloads require the installed HTTPS controller.

Click Install agent. Choose Fleet setup · reusable, enter a profile name and choose how long new enrollment is allowed.


Choose the matching Linux family and CPU architecture. The release team provides the agent package; the GUI download button supplies only the private setup file. Do not generate 20 different agents.

A fleet setup can be reused until it expires or is revoked. There is no fixed enrollment-count limit.


© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 3 OF 9**

# Enter the correct controller addresses

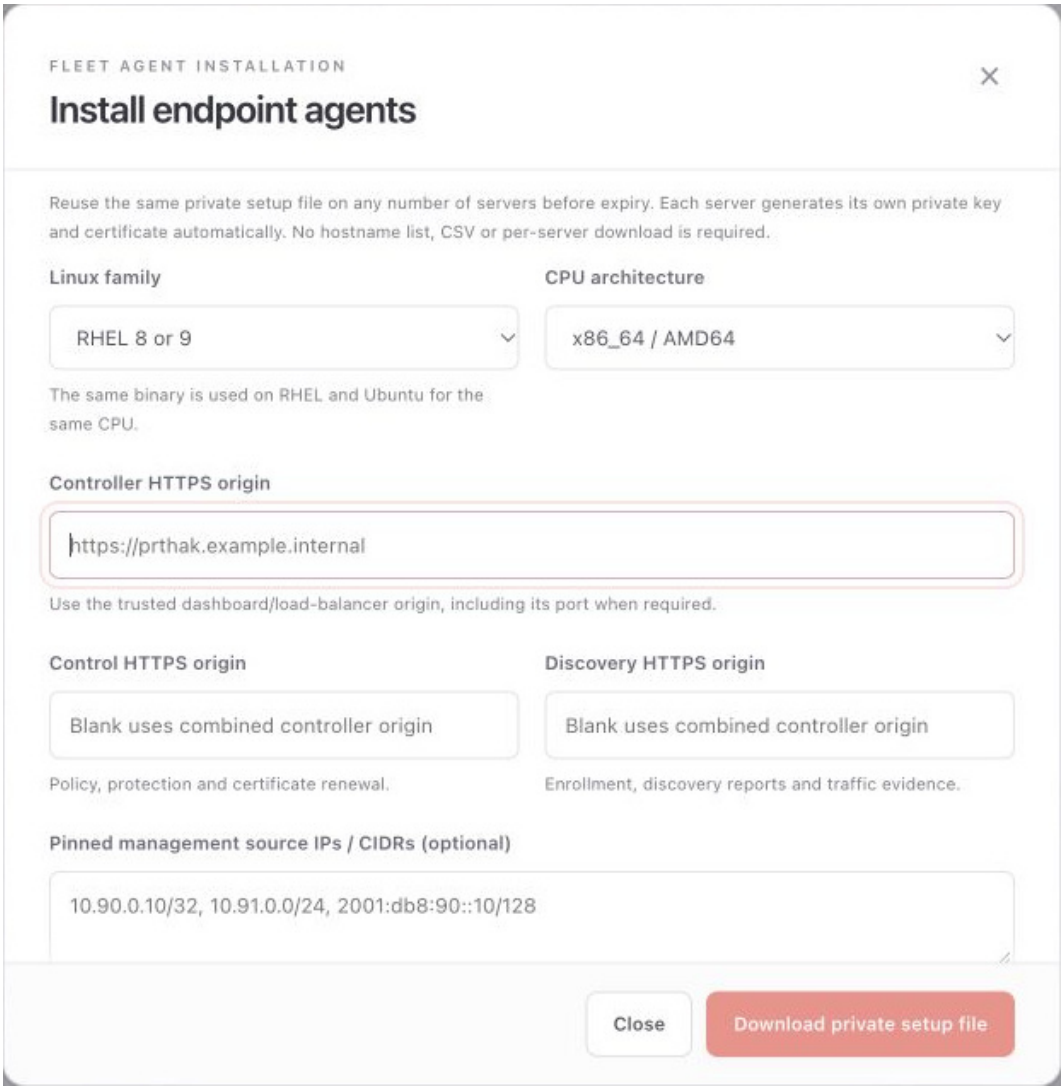


SYNTHETIC PREVIEW · Current synthetic preview. Replace example names with the actual trusted addresses provided by your team.

For a direct default-port installation, use the same trusted name with these ports. The three addresses have different jobs:

Management / Control / Discovery, in that order


```
https://YOUR-CONTROLLER-NAME:8787
https://YOUR-CONTROLLER-NAME:8788
https://YOUR-CONTROLLER-NAME:8789
```

Use your actual LB URLs if they differ. Add the approved public HTTPS CA chain when required. Never upload a private key in the agent CA field.


© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 4 OF 9**

# Choose preparation and download

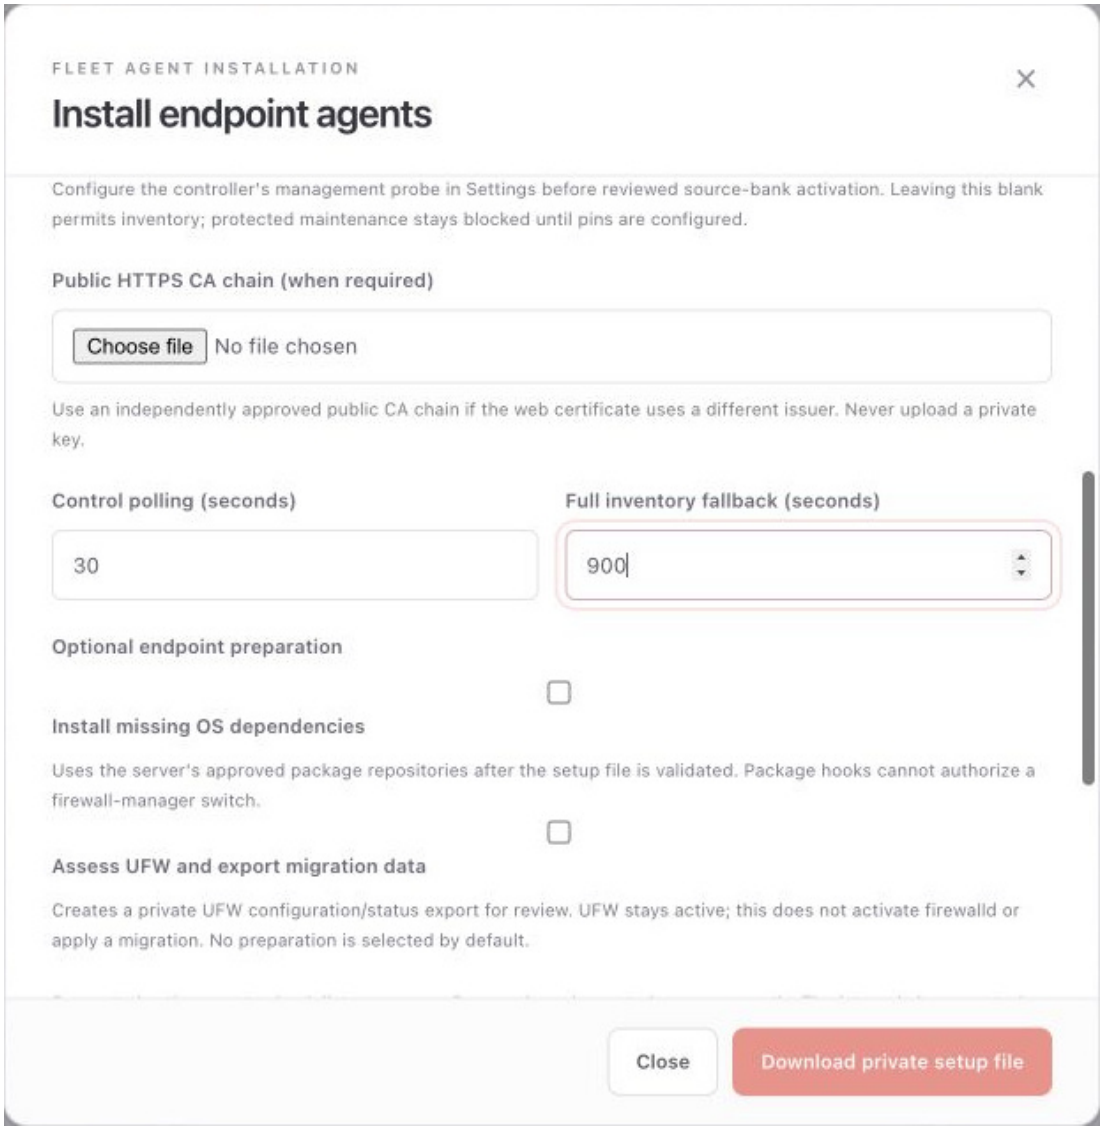


SYNTHETIC PREVIEW · Current synthetic preview. The disabled download is a preview limitation, not the installed workflow.

Keep Control polling = 30 and Full inventory fallback = 900. Select Install missing OS dependencies only if your server team approves package installation. Otherwise, they must already provide firewalld, iproute/iproute2, ca-certificates and util-linux.


If Ubuntu uses UFW, optionally select Assess UFW and export migration data. UFW stays active. Installing missing firewalld packages does not start it or switch firewall managers.

Click Download private setup file. Keep prthak-agent-setup.json private. New installs stay monitor-only; installation does not authorize firewall changes.


© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 5 OF 9**

# Copy the two items to each server

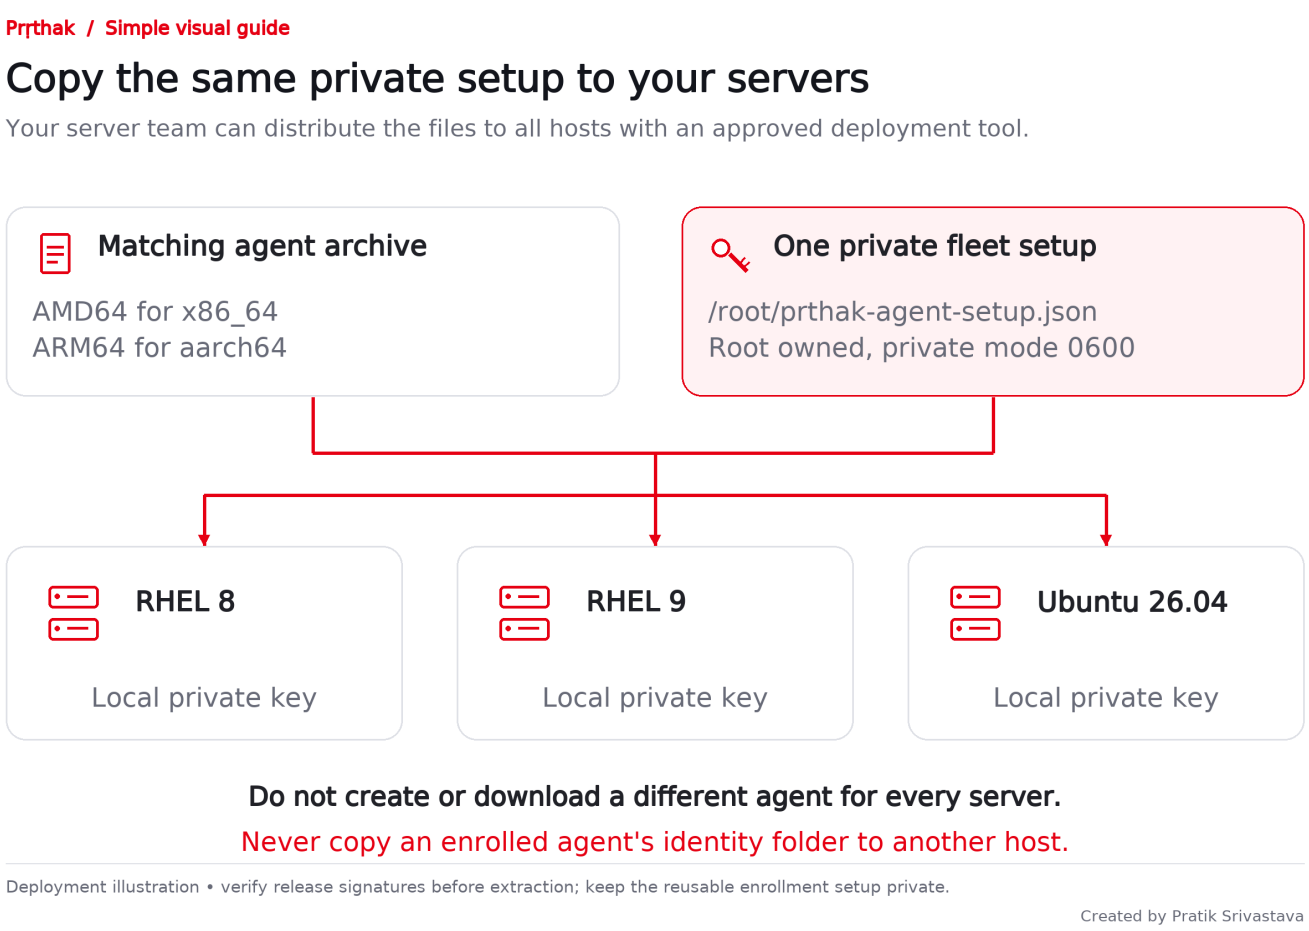


Use your approved private deployment or file-transfer tool. Do not email the enrollment file.

For copy-and-paste commands: follow command sheets 10-13, then return to Step 7. The command sheets already perform installation; do not run it twice.

Ask your release/server team for prthak-agent-0.16.0-linux-amd64.tar.gz or prthak-agent-0.16.0-linux-arm64.tar.gz. They must verify the signature with approved independent trust and extract the matching package into a protected root-owned release folder on each server.

Copy the same private setup to /root/prthak-agent-setup.json, owned by root with permission 0600 (0400 is also accepted). The server team can set this in the transfer tool.


Do not copy another server's existing agent credentials or state. Your deployment tool can repeat the transfer and installation across all 20 hosts.



© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 6 OF 9**

# Run one matching installer

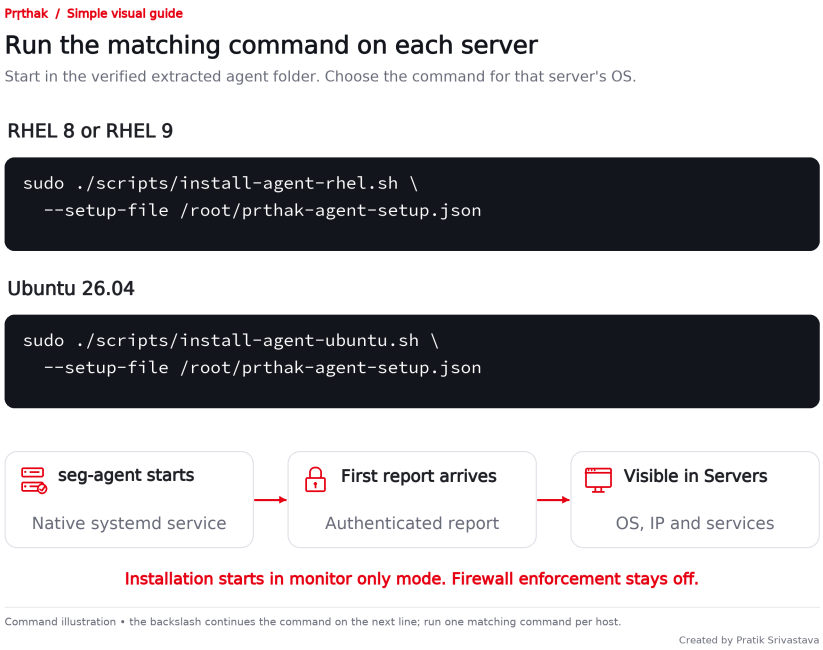


Installation illustration. Run one matching command on each server, from its extracted release folder.

If command sheets 10-13 are complete, skip to Step 7. Use the matching command below only if you have not already run the installer.

RHEL 8 or 9

```
sudo ./scripts/install-agent-rhel.sh \
  --setup-file /root/prthak-agent-setup.json
```

Ubuntu 26.04

```
sudo ./scripts/install-agent-ubuntu.sh \
  --setup-file /root/prthak-agent-setup.json
```


Choose one command for that server. Wait for the result. The installer starts the seg-agent systemd service; it does not start firewalld or disable UFW.

A successful file install can still be waiting for the first report. Check the dashboard before calling the endpoint connected.


© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 7 OF 9**

# Find the server and its services

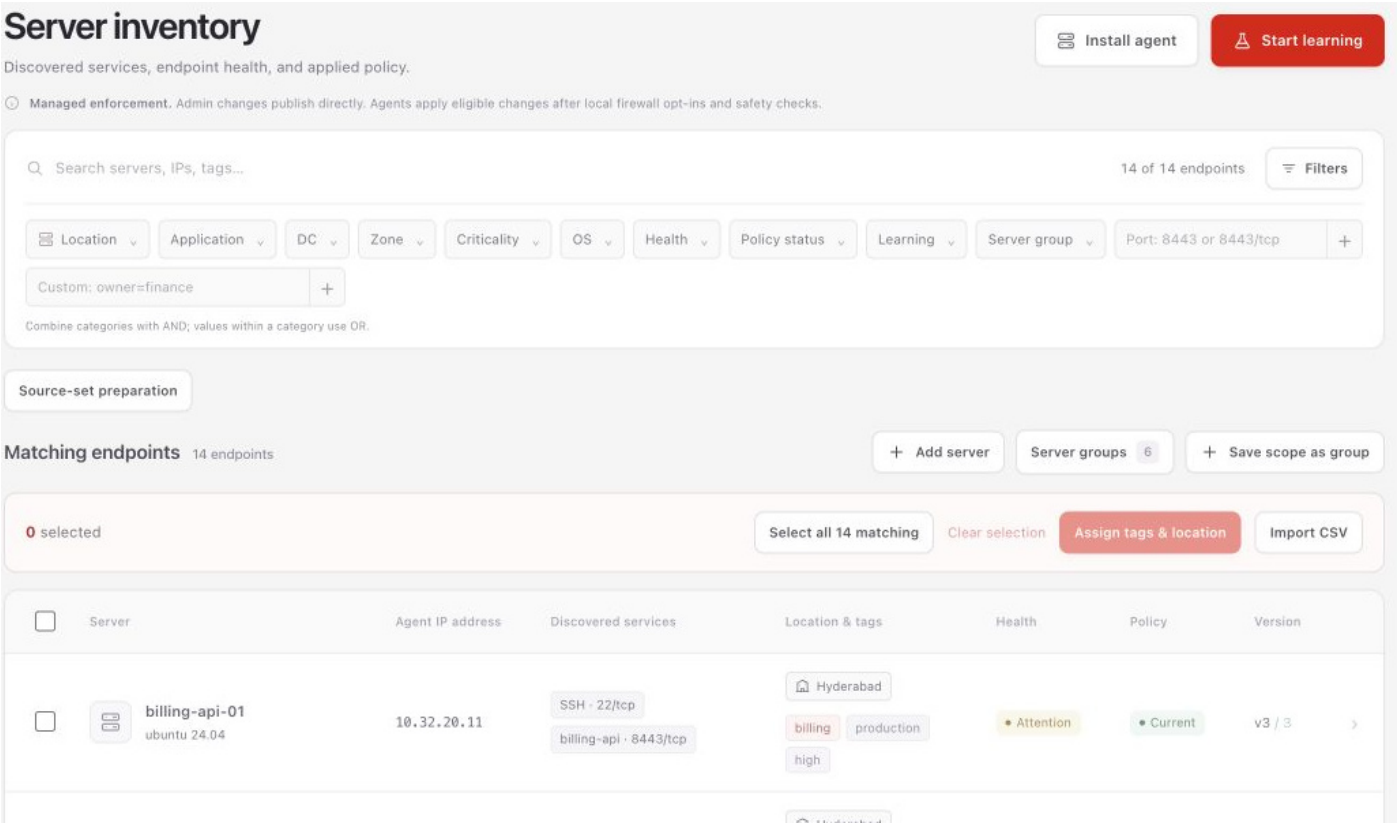


SYNTHETIC PREVIEW · Current synthetic inventory. The example OS versions are fixture data, not additional installer support.

Click Servers. Search for the hostname or its reported IP. Check a fresh heartbeat, correct OS and discovered service ports. Open its row for Services & health and Discovered services.


Example: SSH can be recognised on 2022 from the running process. The agent reports its interface IPs even when the controller connection crosses NAT.

New listener checks run every 5 seconds on supported native agents; full inventory normally refreshes every 15 minutes. A missing heartbeat raises an offline alert.


© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 8 OF 9**

# Assign the location and tags

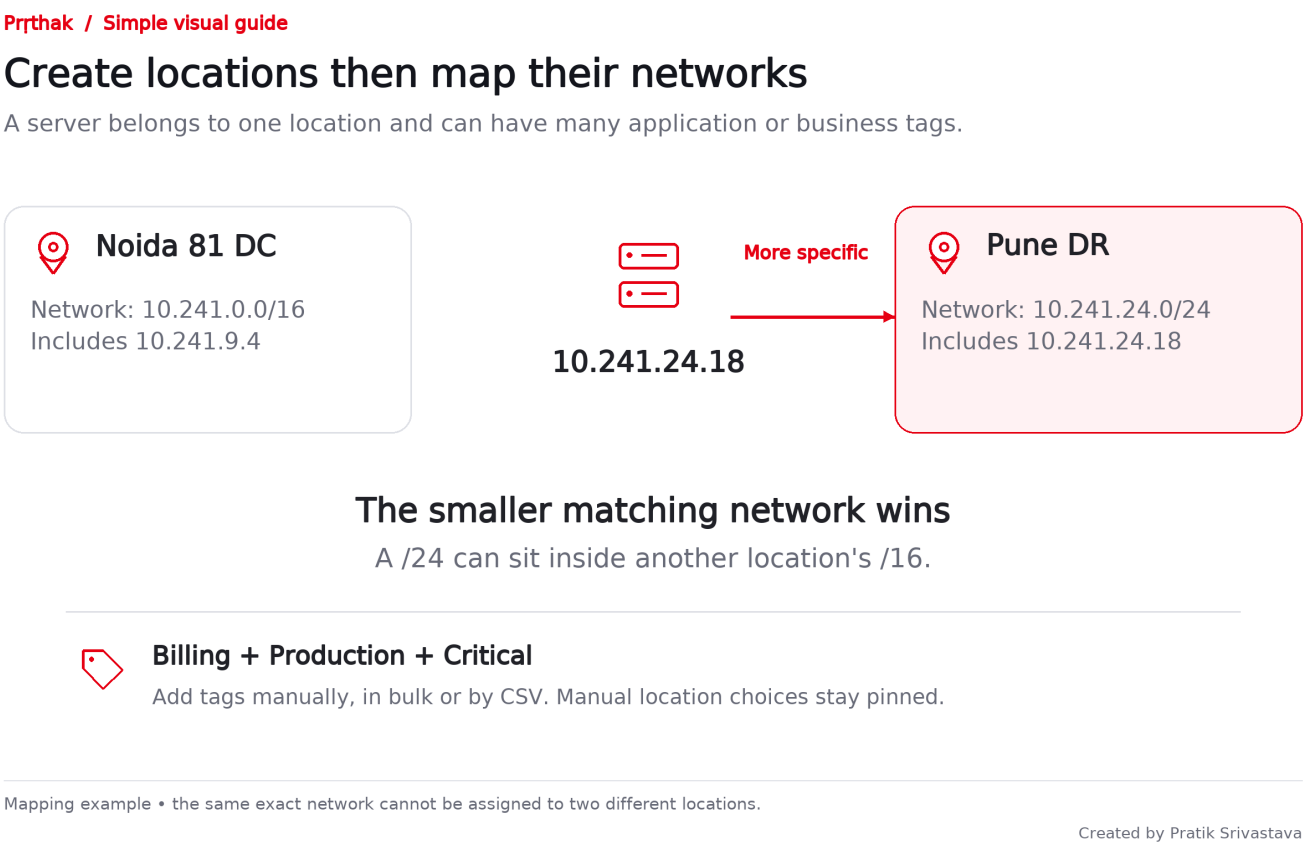


Create location names first. The example network ranges explain automatic assignment.

In Locations, create each real DC/cloud location. In Servers, select one or more hosts and click Assign tags & location. A host has one location and many tags.

For automatic assignment, add a subnet mapping. A /24 can override a larger /16. The same exact network cannot be allocated to two locations. Manual assignments remain in control.


You can also use Import CSV. Business tags and DCs are managed in the dashboard, not sent by the agent.



© 2026 Airtel Payments Bank. All rights reserved.

**AGENT GUIDE | STEP 9 OF 9**

# Start safely and know what to check

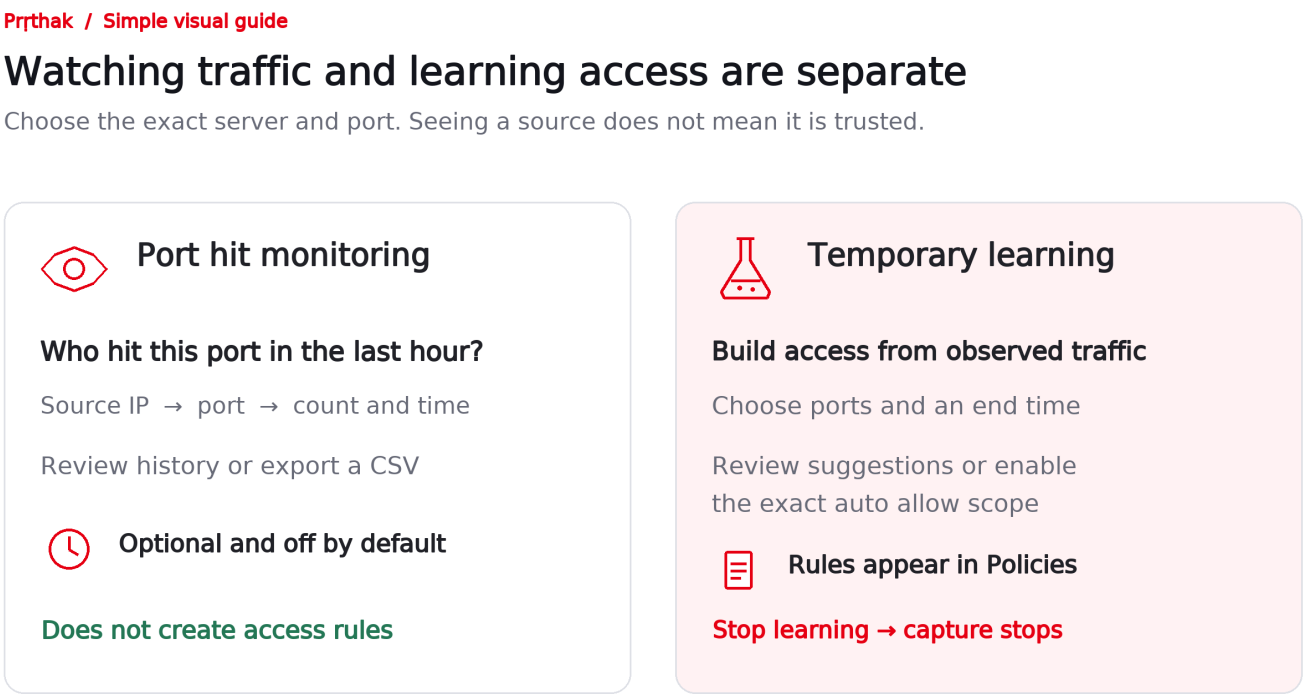


Monitoring records activity. Automatic learned access needs its own explicit authorization and endpoint opt-in.

First check inventory in monitor-only mode. Seeing a server does not mean firewalld enforcement is enabled. Use the reviewed configuration workflow before live policy changes.

Missing server? Ask the server team to check setup-file ownership, expiry, clocks, trusted CA and the exact 8788/8789 URLs. Keep an existing firewall manager running while the issue is reviewed.

No traffic history? Enable temporary learning or optional per-port monitoring separately. Neither is collecting by default. Agent CPU/memory depends on the workload; profile it during the pilot.

Native RHEL/Ubuntu firewall, rollback and DC testing remain to be performed in your environment.



© 2026 Airtel Payments Bank. All rights reserved.

**COMMAND SHEET 1 OF 4 | RHEL 8/9 OR UBUNTU 26.04**

# Prepare the endpoint and copy the files

In the controller GUI, choose Fleet setup · reusable and tick Install missing OS dependencies BEFORE downloading the private setup. This authorizes the signed helper to install firewalld/network packages while preserving existing firewall activity. Existing UFW stays active; no firewall cutover occurs.

On your laptop - open the endpoint SSH session

```
ssh YOUR_USER@SERVER_IP
```

In the endpoint SSH window - prepare tar and a private upload folder

```
set -eu
. /etc/os-release
case "$ID:$VERSION_ID" in
  rhel:8|rhel:8.*|rhel:9|rhel:9.*) sudo dnf install -y tar ;;
  ubuntu:26.04)
    sudo apt-get update
    sudo apt-get install -y tar ;;
  *) printf '%s\n' 'Unsupported endpoint OS'; exit 1 ;;
esac
mkdir -p "$HOME/prthak-media"
chmod 0700 "$HOME/prthak-media"
```

In a SECOND laptop terminal - copy the approved files

```
scp "/PATH/TO/prthak-agent-0.16.0-linux-amd64.tar.gz" \
  "/PATH/TO/prthak-agent-0.16.0-linux-arm64.tar.gz" \
  "/PATH/TO/prthak-agent-setup.json" \
  YOUR_USER@SERVER_IP:prthak-media/
```

The release administrator must verify both archive signatures before transfer. Copying both CPU archives lets the next page choose automatically; unused archive bytes are not installed. The GUI supplies JSON only, not the agent binary. Keep this setup private and use an unexpired profile.


© 2026 Airtel Payments Bank. All rights reserved.

**COMMAND SHEET 2 OF 4 | RUN IN THE ENDPOINT SSH WINDOW**

# Select the CPU and check the agent package

Use the exact 0.16.0 archives from this guide. The block detects the CPU, protects the matching package and checks its bytes. It also protects the private setup. Checksum approval is separate from the release administrator's signature/publisher approval.

Choose and verify automatically - same commands on RHEL and Ubuntu

```
set -eu
case "$(uname -m)" in
  x86_64|amd64)
    PRTHAK_ARCH=amd64
    PRTHAK_SUM=df54b6e023c10900d811e231986809c96c896bd97c73df0b72f3fd90bacc362b
    ;;
  aarch64|arm64)
    PRTHAK_ARCH=arm64
    PRTHAK_SUM=2a6bcb36a44e5d6514d2084beecc6416e79d4a4e3f274f8115c9924c70fa46fd
    ;;
  *) printf '%s\n' 'Unsupported CPU'; exit 1 ;;
esac
PRTHAK_AGENT="prthak-agent-0.16.0-linux-$PRTHAK_ARCH"
sudo install -d -o root -g root -m 0700 /var/tmp/prthak-media
sudo install -o root -g root -m 0600 \
  "$HOME/prthak-media/$PRTHAK_AGENT.tar.gz" \
  "/var/tmp/prthak-media/$PRTHAK_AGENT.tar.gz"
printf '%s  %s\n' "$PRTHAK_SUM" \
  "/var/tmp/prthak-media/$PRTHAK_AGENT.tar.gz" \
  | sudo sha256sum -c -
sudo install -o root -g root -m 0600 \
  "$HOME/prthak-media/prthak-agent-setup.json" \
  /root/prthak-agent-setup.json
```

Continue only after the package check prints OK. Do not hand-edit the JSON or copy another endpoint's initialized keys/state. These commands are for a fresh agent installation; pending enforcement/recovery or an existing changed configuration needs its reviewed workflow.


© 2026 Airtel Payments Bank. All rights reserved.

**COMMAND SHEET 3 OF 4 | RUN IN THE ENDPOINT SSH WINDOW**

# Extract and run the matching agent installer

The block chooses the CPU and Linux family automatically. The setup file must already contain the approved Install missing OS dependencies choice. Genuine systemd, sudo access and working approved package repositories are required.

RHEL 8/9 or Ubuntu 26.04 - one matching installer per host

```
set -eu
case "$(uname -m)" in
  x86_64|amd64) PRTHAK_ARCH=amd64 ;;
  aarch64|arm64) PRTHAK_ARCH=arm64 ;;
  *) printf '%s\n' 'Unsupported CPU'; exit 1 ;;
esac
PRTHAK_AGENT="prthak-agent-0.16.0-linux-$PRTHAK_ARCH"
sudo install -d -o root -g root -m 0755 /opt/prthak/agent-releases
sudo tar --no-same-owner --no-same-permissions \
  -xzf "/var/tmp/prthak-media/$PRTHAK_AGENT.tar.gz" \
  -C /opt/prthak/agent-releases
cd "/opt/prthak/agent-releases/$PRTHAK_AGENT"
. /etc/os-release
case "$ID" in
  rhel)
    sudo ./scripts/install-agent-rhel.sh \
      --setup-file /root/prthak-agent-setup.json ;;
  ubuntu)
    sudo ./scripts/install-agent-ubuntu.sh \
      --setup-file /root/prthak-agent-setup.json ;;
  *) printf '%s\n' 'Unsupported endpoint OS'; exit 1 ;;
esac
```

Wait for the result. The signed preparation helper handles missing packages without activating firewalld or disabling UFW. The installer enables seg-agent only. Initial access-policy enforcement stays off. No Python, Go or Git installation is needed for the agent binary.


© 2026 Airtel Payments Bank. All rights reserved.

**COMMAND SHEET 4 OF 4 | CHECK THIS ENDPOINT AND THE DASHBOARD**

# Confirm the agent is connected

On the endpoint - service and recent status

```
set +e
sudo systemctl status seg-agent.service --no-pager
sudo /usr/local/bin/seg-agent \
  --config /etc/seg-agent/config.json --status
sudo journalctl -u seg-agent.service -n 40 --no-pager
```

These read-only checks continue so you can see every result, even if one reports a problem. A nonzero status is not a pass; inspect the message and the dashboard receipt.

In the GUI, open Servers and search for this hostname/IP. Confirm a recent heartbeat, correct Linux version and discovered services. A completed file installation does not prove the first authenticated report arrived.

If missing, check the exact control/discovery URLs, approved 8788/8789 access, HTTPS CA trust, server clock and fleet-profile expiry. Ask your server team to review any preparation error; do not disable UFW, SELinux or certificate checks.

Reuse the same valid fleet setup for the other servers. Each creates its own identity. Assign the one DC/location and business tags in the dashboard. Start with monitoring; live firewall enforcement and default deny require separate guarded configuration.

These command sheets describe the current installers. Native RHEL/Ubuntu package hooks, firewalld/rollback and the real 20-server/DC deployment remain to be tested in your environment.



© 2026 Airtel Payments Bank. All rights reserved.