
AGENT GUIDE | STEP 1 OF 9

Start with the controller ready

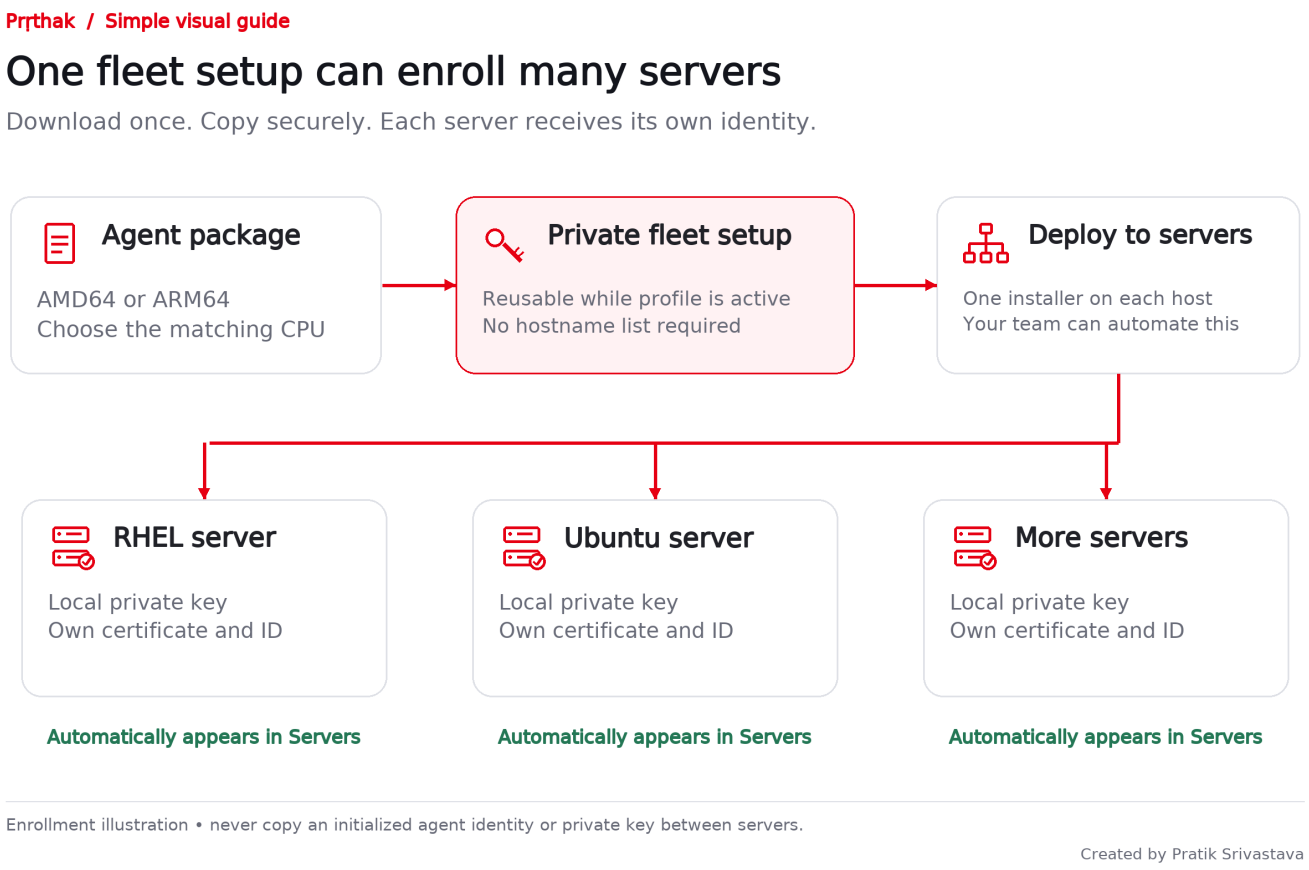

One reusable setup file; a separate private identity for every server.

Use an installed HTTPS controller and sign in as Admin or Super Admin. Ask the server team to confirm each server is RHEL 8/9 or Ubuntu 26.04, with systemd and sudo/root access.


Ask which CPU package to use: x86_64 = AMD64; aarch64 = ARM64. The same CPU binary supports both Linux families. The agent binary needs no separate Go, Python or Git setup; firewalld uses its normal OS packages.

Agents need outbound access to 8788/8789, with no inbound management port. Complete GUI Steps 1-4, copy the approved files, then run the single installer command. Step 7 confirms the first report.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 2 OF 9

Create one reusable fleet setup

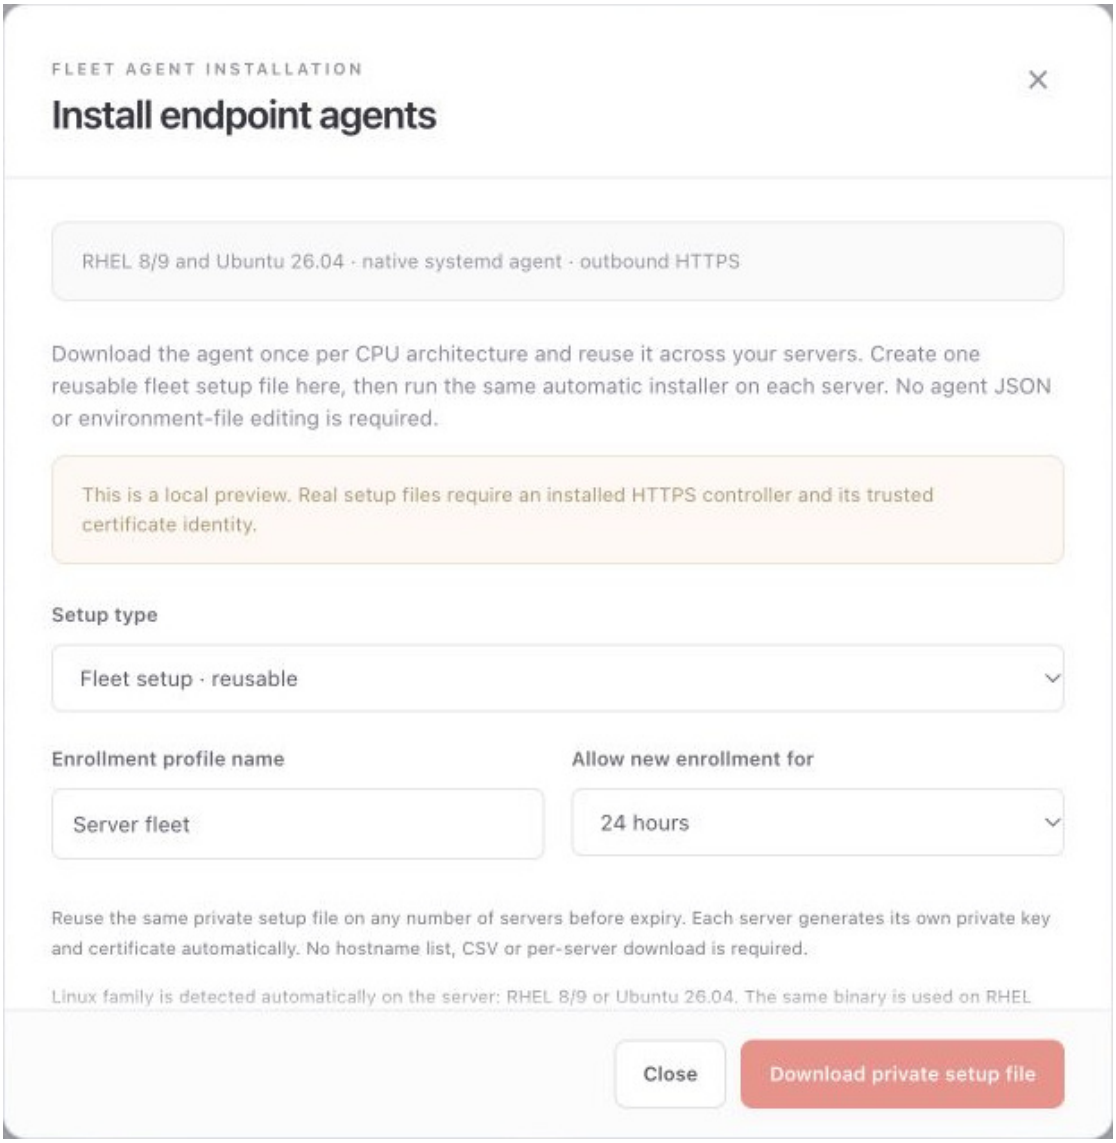

SYNTHETIC PREVIEW · Current synthetic preview. Real setup downloads require the installed HTTPS controller.

Click Install agent. Choose Fleet setup · reusable, enter a profile name and choose how long new enrollment is allowed.


Choose the matching CPU architecture. Linux OS detection is automatic. The release team provides the agent package; the GUI download button supplies only the private setup file. Do not generate 20 different agents.

A fleet setup can be reused until it expires or is revoked. There is no fixed enrollment-count limit.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 3 OF 9

Enter the correct controller addresses

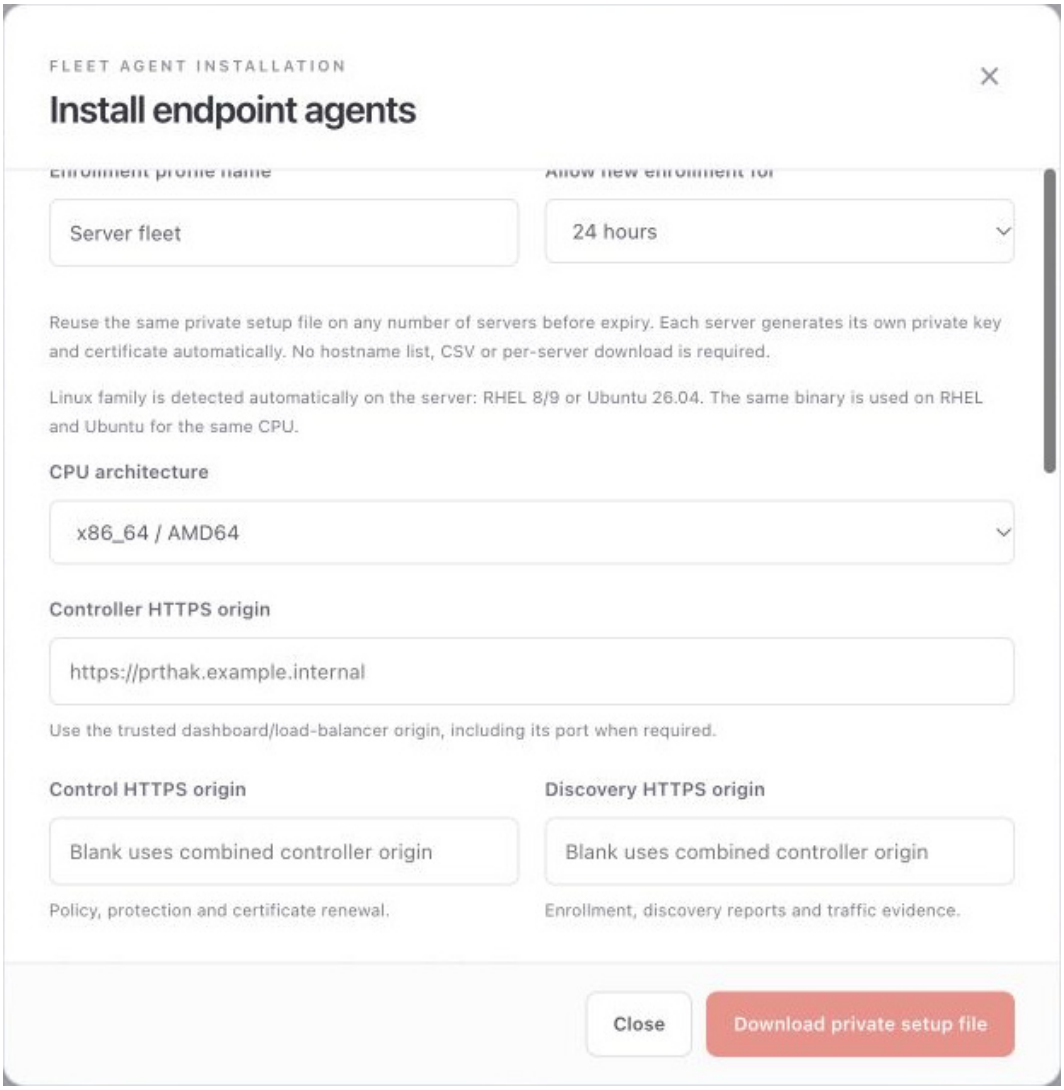

SYNTHETIC PREVIEW · Current synthetic preview. Replace example names with the actual trusted addresses provided by your team.

For a direct default-port installation, use the same trusted name with these ports. The three addresses have different jobs:

Management / Control / Discovery, in that order


```
https://YOUR-CONTROLLER-NAME:8787
https://YOUR-CONTROLLER-NAME:8788
https://YOUR-CONTROLLER-NAME:8789
```

Use your actual LB URLs if they differ. Add the approved public HTTPS CA chain when required. Never upload a private key in the agent CA field.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 4 OF 9

Choose preparation and download

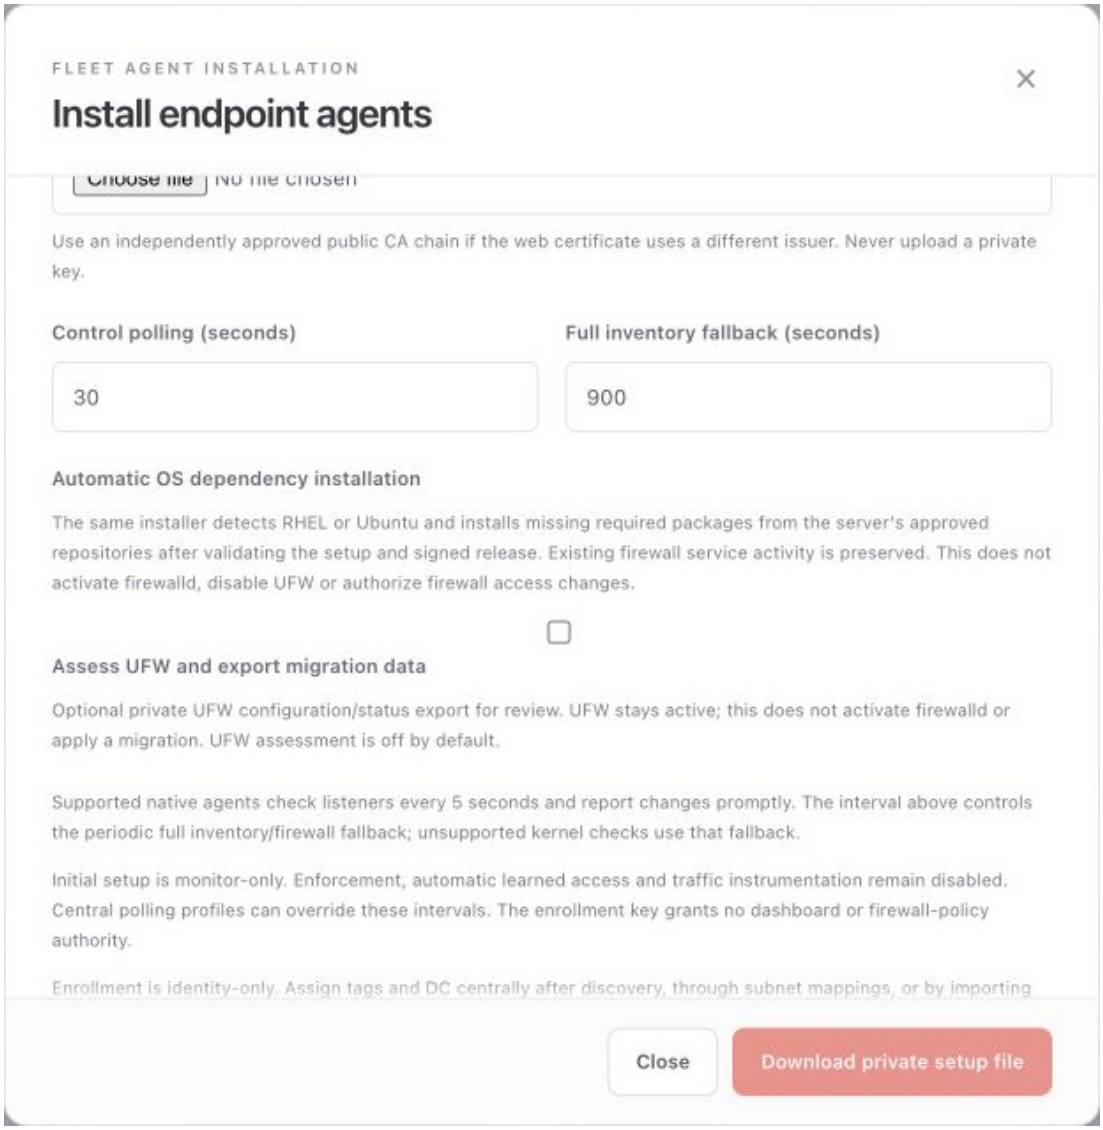

SYNTHETIC PREVIEW · Current synthetic preview. The disabled download is a preview limitation, not the installed workflow.

Keep Control polling = 30 and Full inventory fallback = 900. Dependency preparation is automatic: the installer validates the signed agent and private setup before installing missing OS packages.


If Ubuntu uses UFW, optionally select Assess UFW and export migration data. UFW stays active. Installing missing firewalld packages does not start it or switch firewall managers.

Click Download private setup file. Keep prthak-agent-setup.json private. New installs stay monitor-only; installation does not authorize firewall changes.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 5 OF 9

Copy the two items to each server

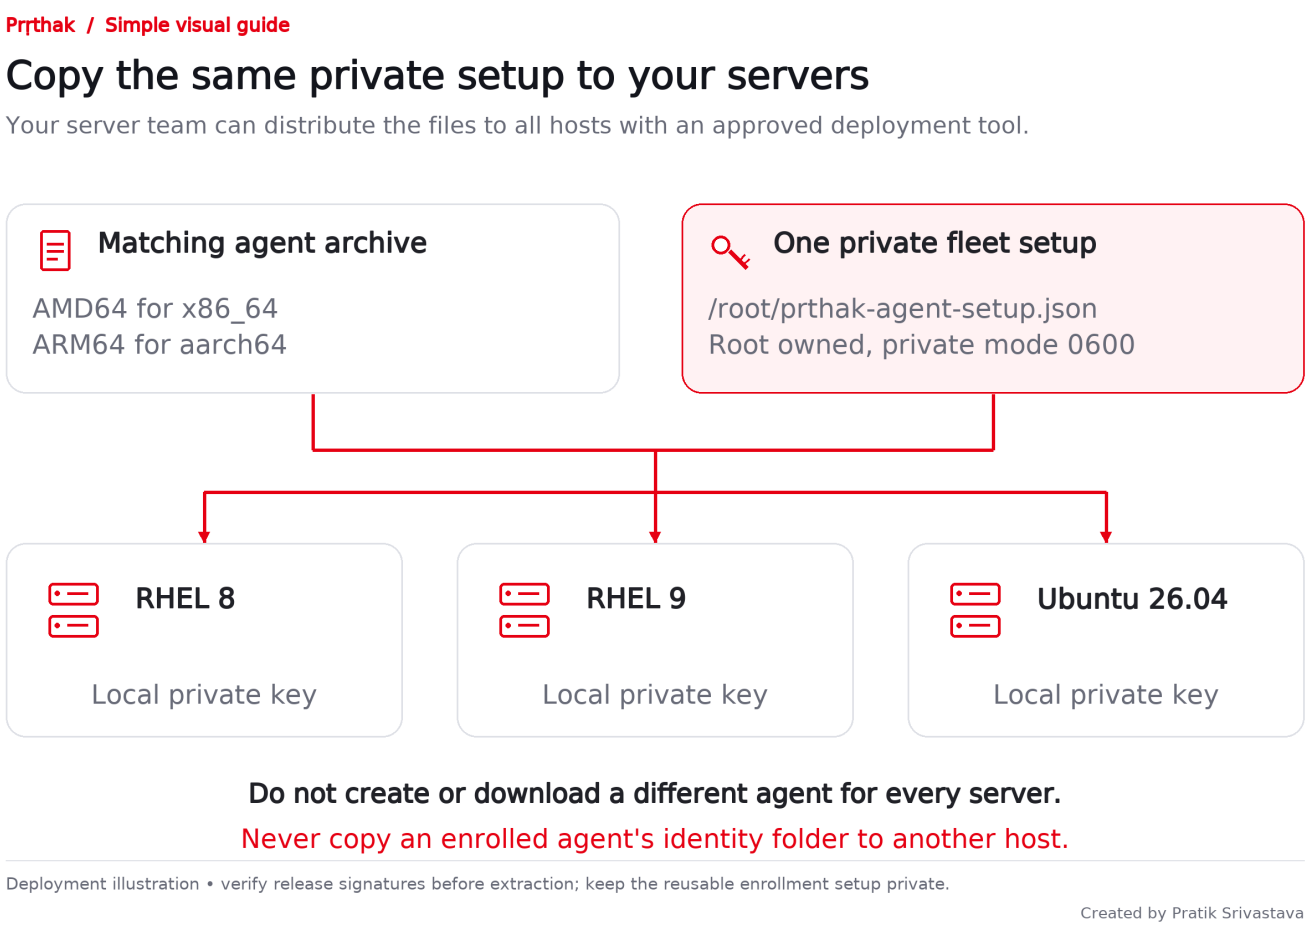

Use your approved private deployment or file-transfer tool. Do not email the enrollment file.

Use your approved file-transfer tool, or the optional transfer sheet on page 10. The installation command on Step 6 is the same on every supported OS.

Ask your release/server team for prthak-agent-0.17.0-linux-amd64.tar.gz or prthak-agent-0.17.0-linux-arm64.tar.gz. They must verify the signature with approved independent trust and extract the matching package into a protected root-owned release folder on each server.


Copy the same private setup to /root/prthak-agent-setup.json, owned by root with permission 0600 (0400 is also accepted). The server team can set this in the transfer tool.

Do not copy another server's existing agent credentials or state. Your deployment tool can repeat the transfer and installation across all 20 hosts.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 6 OF 9

Run one universal installer

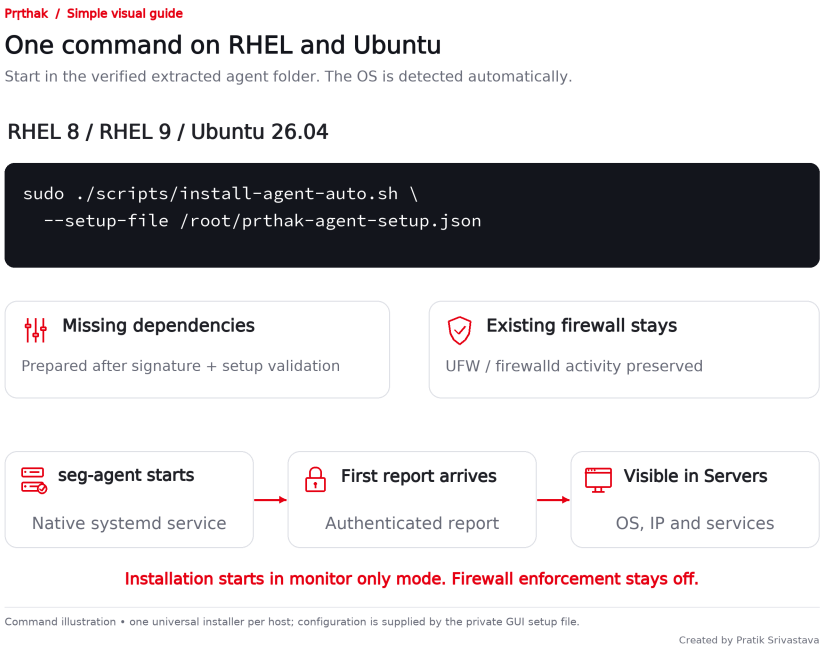

Installation illustration. Run the same command on each server, from its extracted release folder.

Open Terminal in the verified extracted release folder. Paste this command once on each endpoint, or repeat it using your approved fleet deployment tool.

RHEL 8/9 and Ubuntu 26.04 - same command

```
sudo ./scripts/install-agent-auto.sh \
  --setup-file /root/prthak-agent-setup.json
```


The installer detects RHEL or Ubuntu and prepares missing dependencies. It starts the seg-agent systemd service and preserves existing firewalld/UFW activity. No Python, Go or Git installation is needed for the agent.

A successful file install can still be waiting for the first report. Check the dashboard before calling the endpoint connected.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 7 OF 9

Find the server and its services

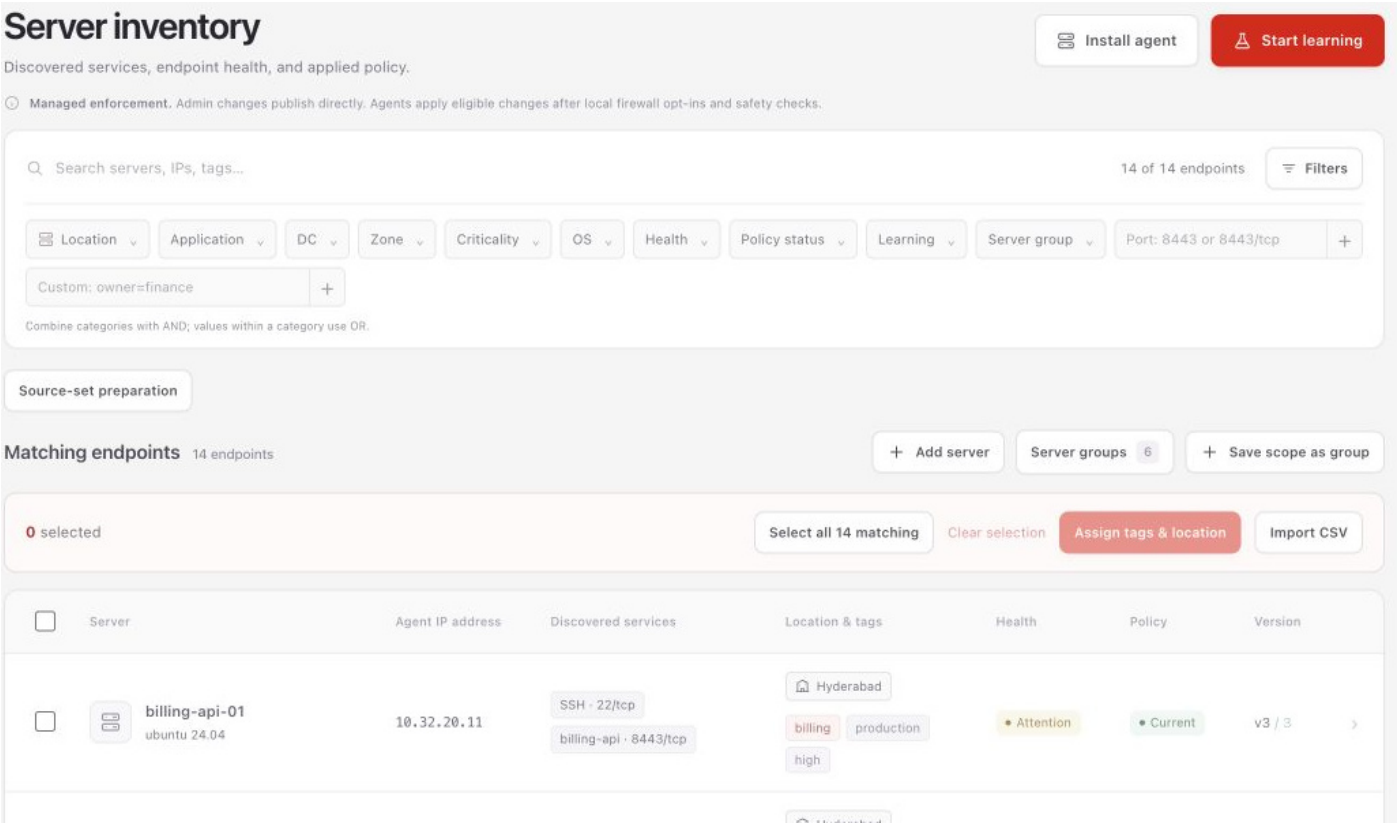

SYNTHETIC PREVIEW · Current synthetic inventory. The example OS versions are fixture data, not additional installer support.

Click Servers. Search for the hostname or its reported IP. Check a fresh heartbeat, correct OS and discovered service ports. Open its row for Services & health and Discovered services.


Example: SSH can be recognised on 2022 from the running process. The agent reports its interface IPs even when the controller connection crosses NAT.

New listener checks run every 5 seconds on supported native agents; full inventory normally refreshes every 15 minutes. A missing heartbeat raises an offline alert.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 8 OF 9

Assign the location and tags

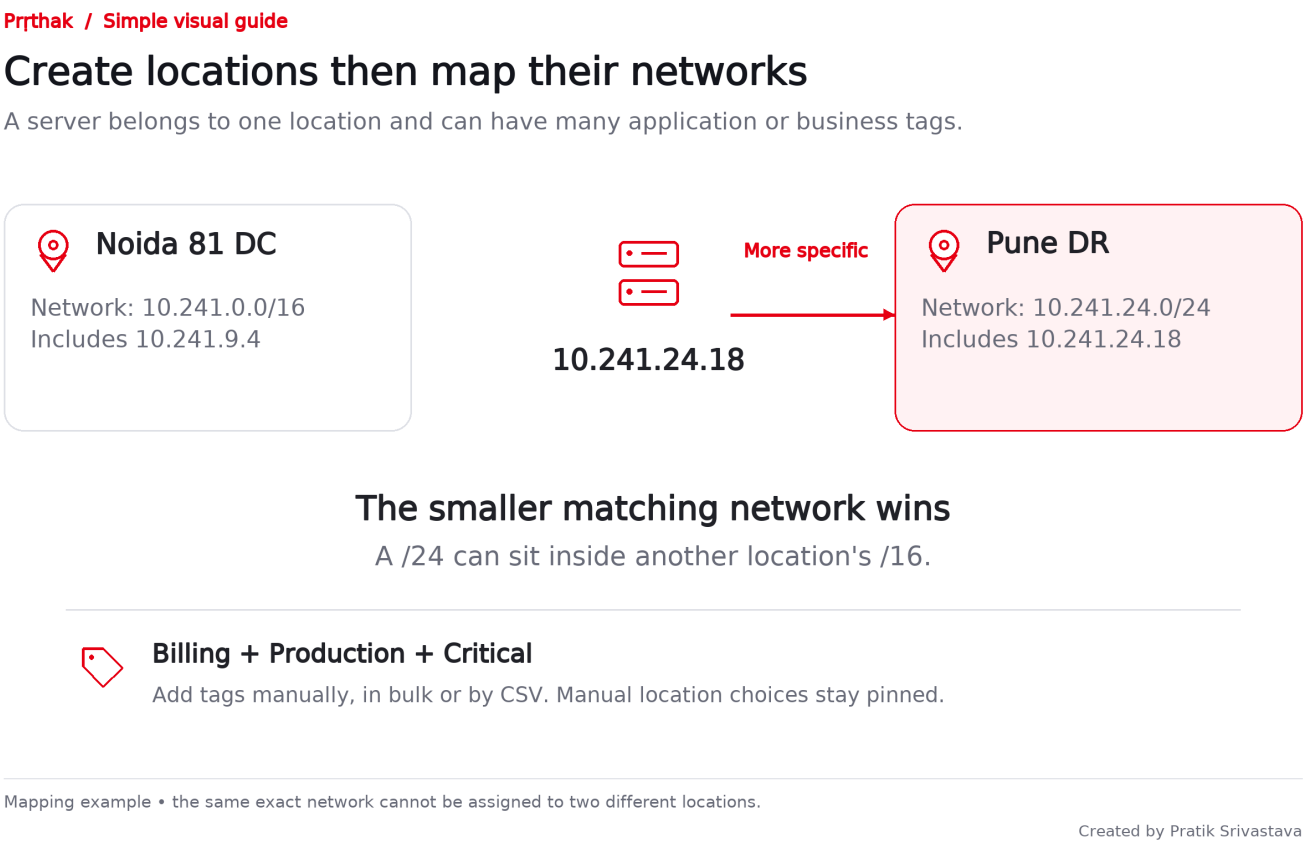

Create location names first. The example network ranges explain automatic assignment.

In Locations, create each real DC/cloud location. In Servers, select one or more hosts and click Assign tags & location. A host has one location and many tags.


For automatic assignment, add a subnet mapping. A /24 can override a larger /16. The same exact network cannot be allocated to two locations. Manual assignments remain in control.

You can also use Import CSV. Business tags and DCs are managed in the dashboard, not sent by the agent.

© 2026 Airtel Payments Bank. All rights reserved.

AGENT GUIDE | STEP 9 OF 9

Start safely and know what to check

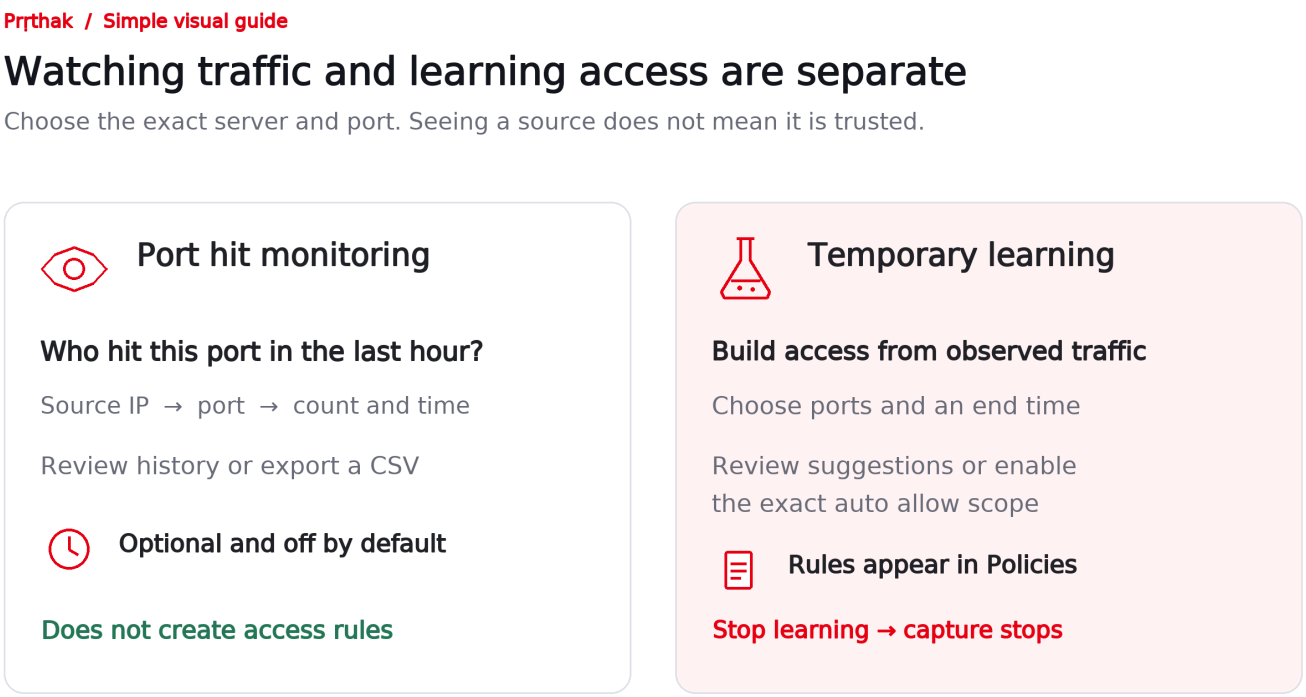

Monitoring records activity. Automatic learned access needs its own explicit authorization and endpoint opt-in.

First check inventory in monitor-only mode. Seeing a server does not mean firewalld enforcement is enabled. Use the reviewed configuration workflow before live policy changes.

Missing server? Ask the server team to check setup-file ownership, expiry, clocks, trusted CA and the exact 8788/8789 URLs. Keep an existing firewall manager running while the issue is reviewed.

No traffic history? Enable temporary learning or optional per-port monitoring separately. Neither is collecting by default. Agent CPU/memory depends on the workload; profile it during the pilot.

Native RHEL/Ubuntu firewall, rollback and DC testing remain to be performed in your environment.

© 2026 Airtel Payments Bank. All rights reserved.

TRANSFER SHEET | BEFORE STEP 6

Optional: copy the package and setup

Your release administrator verifies the signed 0.17.0 agent archive for the CPU. Use amd64 for x86_64 or arm64 for aarch64. The GUI supplies the private prthak-agent-setup.json. Keep it private.

On your laptop - example for AMD64; use arm64 if required

```
scp /PATH/TO/prthak-agent-0.17.0-linux-amd64.tar.gz \
  /PATH/TO/prthak-agent-setup.json YOUR_USER@SERVER_IP:
```

Open the endpoint terminal

```
ssh YOUR_USER@SERVER_IP
```

Protect and extract - AMD64 example; substitute arm64 in both paths

```
sudo install -o root -g root -m 0600 \
  "$HOME/prthak-agent-setup.json" /root/prthak-agent-setup.json
sudo install -d -o root -g root -m 0755 /opt/prthak/agent-releases
sudo tar --no-same-owner --no-same-permissions \
  -xzf "$HOME/prthak-agent-0.17.0-linux-amd64.tar.gz" \
  -C /opt/prthak/agent-releases
cd /opt/prthak/agent-releases/prthak-agent-0.17.0-linux-amd64
```

Then run the one universal command in Step 6. Your minimal OS must already supply tar/file-transfer tools to unpack media; an approved deployment tool can perform that step. Runtime dependencies are installed by Prṛthak. Do not edit the JSON.

© 2026 Airtel Payments Bank. All rights reserved.

REFERENCE SHEET | PACKAGE, CPU AND MEMORY

Agent footprint and completion checks

Package: one static Go binary per CPU, its systemd unit, signed manifests and install scripts. There is no separately installed Go, Python or Git runtime. RPM/DEB packages are optional inert payload delivery; the GUI kit and installer activate the agent.

Planning allowance: start with 128 MiB for ordinary monitoring/helpers or 256 MiB during learning. These are allowances to evaluate, not enforced limits. Current release CPU/memory must be measured in the pilot.

Historical passive baseline: an older Linux ARM64 fixture measured roughly 10-13 MiB agent RSS, about 57 MiB sampled with helper processes, and 0.22% of one core after startup including helpers. This excludes firewalld, kernel sets and capture load; it is not a current-release guarantee.

Optional read-only checks - installation is complete only after review

```
sudo systemctl status seg-agent.service --no-pager
sudo /usr/local/bin/seg-agent \
  --config /etc/seg-agent/config.json --status
```

In Servers, confirm this hostname/IP, fresh heartbeat, OS version and discovered services. A completed file copy does not prove a successful authenticated report. Reuse the same valid fleet setup for the other endpoints; each creates a unique identity.

© 2026 Airtel Payments Bank. All rights reserved.