

Online activity recognition through kernel methods

Evgeni Pavlidis

September 22, 2014

Contents

1	Introduction	2
1.1	Motivation	2
1.1.1	Online (active) learning of human activities	2
1.1.2	Evaluate Gaussian processes against different ml algorithms for activity recognition	2
1.2	Scope	2
1.2.1	The SPENCER project	2
1.3	Notations and conventions	3
1.4	Structure of the thesis	3
2	Basic Concepts	4
2.1	Machine Learning	4
2.1.1	Supervised learning	4
2.1.2	Unsupervised learning	5
2.1.3	Generative models	6
2.1.4	Discriminative models	6
2.1.5	Online learning	6
2.1.6	Active learning	6
2.2	The gaussian distribution	6
2.2.1	Univariate gaussian distribution	6
2.2.2	Multivariate gaussian distribution	7
2.3	Gaussian Processes	7
2.3.1	Regression	7
2.3.2	Learning	8
2.3.3	Classification	8
2.3.4	Advantages	8
2.3.5	Disadvantages	8
2.3.6	Algorithms	8
2.4	GP-LVM	9
2.4.1	PCA	9
2.4.2	Back-constraints GP-LVM	9
2.4.3	Bayesian GP-LVM	10
2.4.4	Discriminative GP-LVM	10
2.4.5	Subspace GP-LVM	10
2.4.6	Manifold Relevance Determination	10
2.4.7	GP-LVM for human motion	10
2.4.8	Advantages	10
2.4.9	Disadvantages	10

3	Related work	12
3.1	Overview	12
3.1.1	a survey on vision based action recognition [11]	12
3.1.2	machine vision for human activities: a survey [17]	12
3.2	Histogram based approaches	12
3.2.1	Motion history image	12
3.2.2	Motion energy image	12
3.3	Sung et al. [14]	12
3.3.1	Features: Skeleton data + HOG features of RGBD image and depth image	12
3.3.2	Naive classification: SVM	12
3.3.3	Maximum entropy markov model	12
3.4	RGB-D Camera-based Daily Living Activity Recognition [22]	12
3.4.1	Bag of Features	12
3.4.2	Features: Structural and Spatial motion	12
3.4.3	Bag of Features approach (histrogram of features)	13
3.4.4	Other: People identification (reidentification)	13
3.5	Learning Human Activities and Object Affordances from RGB-D Videos	13
3.5.1	Learning both: activities and object detection/affordance	13
3.5.2	Using Markov Random Field and SVM for learning	13
3.6	Eigenjoints [21]	13
3.7	Gaussian Process - Latent Conditional Random Field (GP-L CFR)	13
3.8	GPDM	13
3.9	Joint Gait Pose Manifold	13
3.10	Dynamic time warping	13
3.11	See also	13
4	Analysis	14
4.1	Observations	14
4.2	Approaches	14
4.2.1	make the features invariant [15]	14
4.2.2	Discriminative Sequence BCGPLVM	14
4.2.3	Use the Joint Gate and Pose Manifold for age and gender detection	14
4.2.4	GPDM	14
4.2.5	VarGPDS	14
4.2.6	Classify by dynamics of the skeleton (this should bring good classification)	15
4.3	Problems and solutions	15
4.3.1	limited sample data - probabilistic model + discriminative	15
4.3.2	high dimensional - dim reduction(gp-lvm)	15
4.3.3	classification - BC GP-LVM + discriminative	15
4.3.4	time series data - GPDM	15
4.3.5	confidence is important !!!	15
4.3.6	high dim. noise =¿ GP-LVM is very robust because of the nature of optimization (distance is preserved instead of locality)	15
4.4	Assumtpions	15

4.4.1	Skeleton tracking is correct and stable	15
4.4.2	Smooth skeleton transition !!!	16
4.4.3	Correctly labeled samples (no outliers)	16
4.5	Ideas	16
4.5.1	Presentation	16
4.5.2	Model	16
4.5.3	Analogy LVM j - z marionettes	16
5	Approach	17
5.1	Datasets	17
5.1.1	Cornell Activity Dataset	17
5.2	Dynamic time warping with mahalanobis distance	17
5.3	TODO Discriminative Sequence Back-Constrained GP-LVM	17
5.3.1	Advantages	19
5.3.2	Improvements	19
5.3.3	Shortcomings	19
5.4	Extensions:	20
5.4.1	Learn poselets (pose and velocities) to capture dynamics	20
5.4.2	Use mahalanobis for the DTW	20
5.5	GP- Latent Motion Flow Field (based on the gp regreesion flow)	20
5.5.1	Interpretation	22
5.5.2	Advantages	23
5.5.3	Problems	23
5.5.4	Learning the motion flow field	23
5.6	Implementation	24
5.6.1	Finding appropriate kernel function	24
5.6.2	Learning the flow field	24
5.6.3	Software	24
5.7	Bibliography	25
	Bibliography	26

Todo list

cite:software packages and tools used	1
[.	1
Check bibliography style and data!!!	1
Figure: spencer prototype robot (Bender B21)	2
Figure: spencer robot	2
Figure: skeleton representation	2
overview aproaches related work	3
Figure: classification example	4
Figure: regression example	4
Figure: dimensionality reduction example	5
generative model example	6
cite	7
Figure: nice GP regression example	7
{	8
formulas etc.	9
elaborate GP-LVM	9
PCA	9
Figure: example GP-LVM, skeleton	9
Figure: example BCGPLVM	9
explain ARD	10
elaborate GDA	10
explain MRD	10
Figure: example of discriminative and back-constrained latent space	18
expain D GP-LVM properly	19
Figure: example of several flow fields inside latent space	20
active learning - problem ??	23
Figure: latent space (several samples of one activity) with flow field	24
Figure: effect of hyperparameters on the resulting flow field	24
color=red,textsize=large]cite:datasets (mocap, daily activities, ms activities)	

cite:software
 packages
 and tools
 used
 [

Check bib-
 liography
 style and
 data!!!

1 Introduction

1.1 Motivation

1.1.1 Online (active) learning of human activities



Use gaussian processes to learn new activities in real time

1.1.2 Evaluate Gaussian processes against different ml algorithms for activity recognition


Evaluate the performance of GPs in relation to the other solutions

1.2 Scope

1.2.1 The SPENCER project

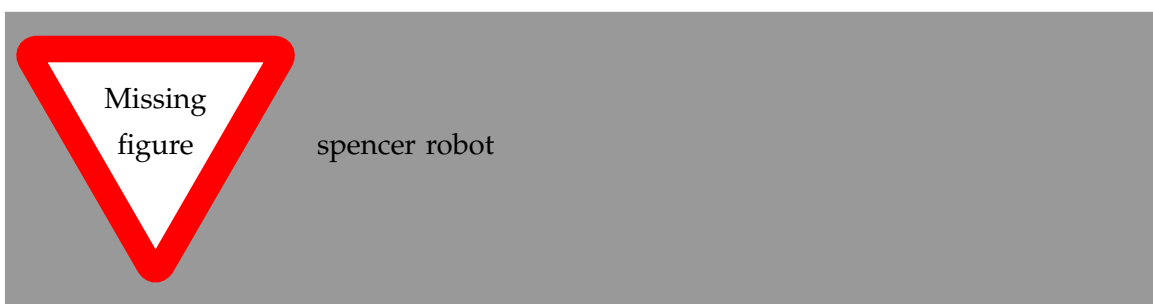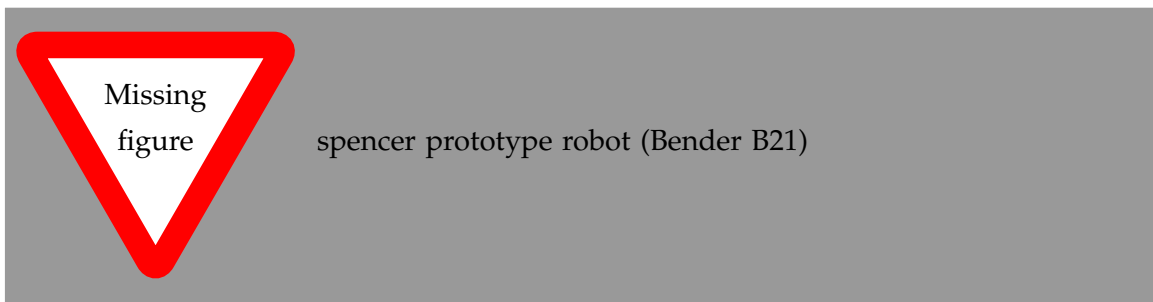

With the modern technologies (ms Kinect SDK, primesense ...) it is possible to decouple skeleton tracking and learning

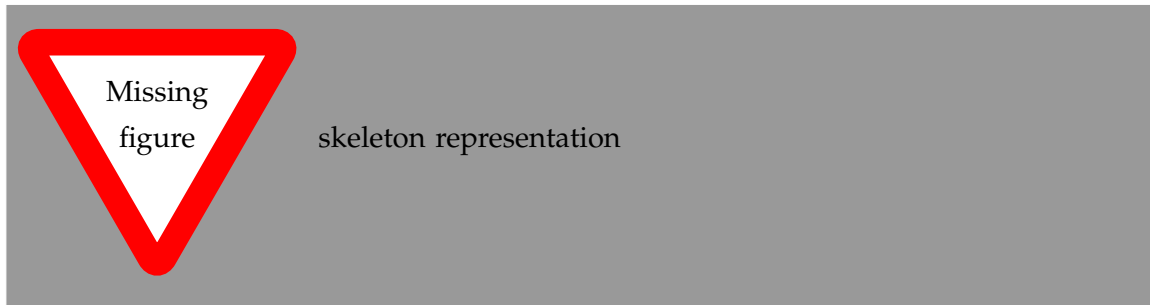

1.3 Notations and conventions

- Matrices uppercase bold
- Vectors lowercase bold
- Constants lowercase
- Parameters lowercase greek letters
- GP notation
- Expectation notation $j \dots i$

1.4 Structure of the thesis

Introduction The first chapter introduced the topic of this work. The motivation and the scope is explained.

Basic Concepts This chapters summarizes some basic concepts and models used in our approach. For the most part Gaussian Process Regression and Gaussian Process - Latent Variable Models are being explained. It also gives an overview of methods used in similar approaches in the related works section, such as

Related Work

Analysis The fourth chapter discusses the advantages and disadvantages of some existing approaches towards online activity recognition.

Approach In the fifth chapter the two approaches are being discussed. The first one is an implementation of "Discriminative Sequence Back-constrained {GP}-{LVM} for {MOCAP} based Action Recognition" [1]. The second one being a novel approach which is learns a motion flow field in the latent space through a Gaussian Process Regression.

Results and Outlook The last chapter summarizes the results of the two approaches and gives a brief outlook of future improvements.

overview
approaches
related
work

2 Basic Concepts

This chapter introduces some basic concepts needed to understand the rest of this work. First an high-level overview is given on machine learning and its terminology. After that the gaussian distribution is presented in its univariate multivariate variants. Following is an explanation of Gaussian Processes, their different interpretations and properties. Last the Gaussian Process - Latent Variable Model is being introduced along with some extensions for learning a backward mapping and optimizing it for discrimination in the case of multiple-classes.


2.1 Machine Learning

2.1.1 Supervised learning

Supervised learning is the task of classification or regression when the data is being labeled. The algorithm then takes the labeled samples (and maybe some confidence values) and infers the model parameters (or hyperparameters) accordingly.


There are two distinct cases:

1. Classification

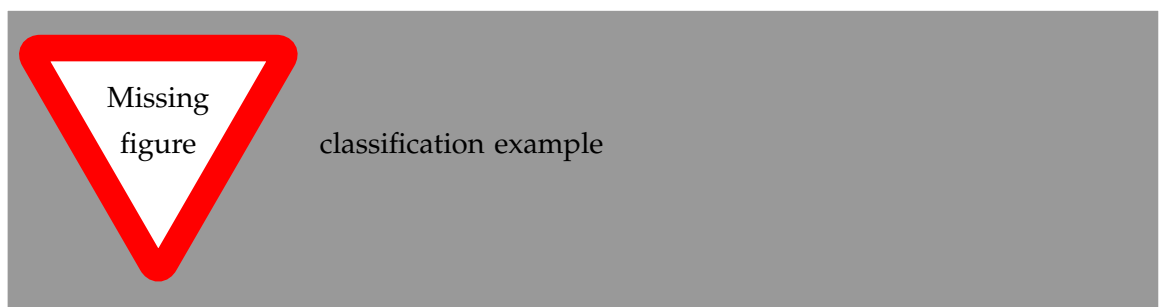

Classification the task of learning which category a sample belongs to. A prominent example is Spam filtering. By taking a large number of emails which are labeled either as spam or as ham (regular email), the algorithm deduces a model which can classify unknown samples into these two categories.

2. Regression

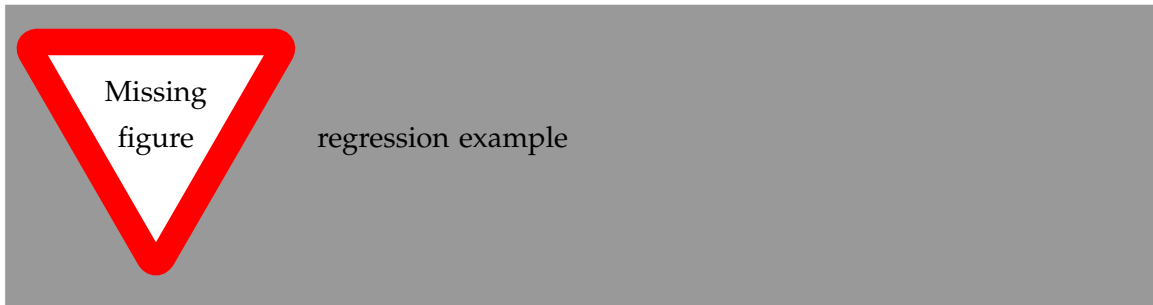

Regression is a terminus in machine learning and means function approximation. Here the domain of the samples label is continuous.

In most cases we search for a good model that explains the data we have. Parametric models, for example, try to learn the ... When searching for an appropriate model it is also important that we try to capture the underlying relationship without compromising the generalization property, which is the ability of the model to correctly predict unseen samples. The case that an algorithm learns the relationship of the data that is used to train the model (training data) but cannot predict new samples is called overfitting. The opposite is called underfitting.


Very often the parameter search is done by maximizing the probability of the data given the model parameters.

$$\arg \max_{\theta} p(\mathbf{X}|\theta) = \arg \max_{\theta} \frac{p(\theta|\mathbf{X}) * p(\mathbf{X})}{p(\theta)}$$

where θ are the model parameters and X is the data.

2.1.2 Unsupervised learning

In contrast to supervised learning in unsupervised learning we have no labeled data i.e. there is no supervisor giving each sample a category (classification) or a value (regression). In this case we can only derive properties of the generation process. Therefore we try to detect patterns in the unlabeled data. These pattern may be clusters of similar samples or a lower dimensional generative manifold from which the samples are generated. The last one is called Dimensionality Reduction which will be also a subject in this work. [2]

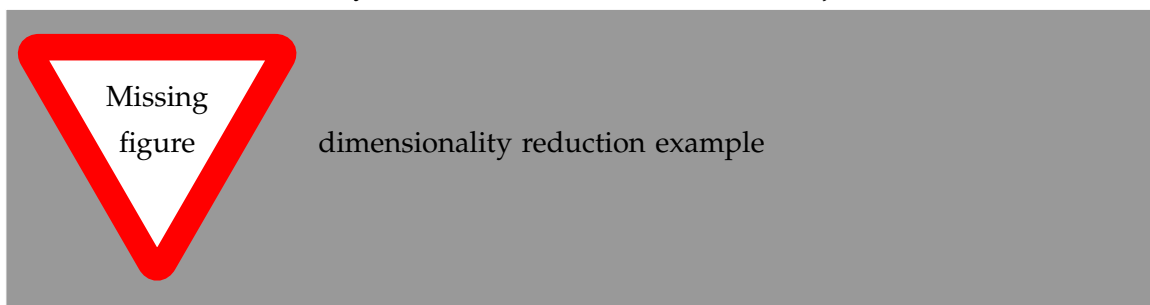

2.1.3 Generative models

Generative methods model the underlying process which generates the data. In Bayesian terms we model the likelihood and the. Thus more data is needed to find an appropriate model. On the other side the model is very flexible and many attributes have a natural interpretation. An example of this is

generative
model ex-
ample

2.1.4 Discriminative models

A discriminative model is only concerned with modeling the actual posterior. This way fewer samples are needed to find the model parameters but by not taking the prior into account the model becomes more generative and is susceptible to overfitting.

2.1.5 Online learning

Algorithms which can be gradually optimized towards a good solution using streaming batches of samples are considered to do online learning.

2.1.6 Active learning

Very often the bottleneck of powerful supervised learning techniques is that they rely on correctly labeled data. Since labeling has to be performed by a human it is very difficult and costly to label large amount of data. By identifying more important samples by their entropy, thus information ability of selecting a good model, it is possible to achieve good results with fewer samples.

Letting the algorithm select such samples and query only their labels from a human, who is now actively participating in the learning loop, is called active learning.

2.2 The gaussian distribution

2.2.1 Univariate gaussian distribution

In the one dimensional case the gaussian distribution is well known and understood. Moreover many processes in nature can be modeled with this distribution and for this reason it is also called the Normal distribution. The probability of an event is very high on a certain "point" (its mean value μ) and it drops quickly on each side with the standard deviation σ .

$$\mathcal{N}(\mu, \sigma^2) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{x-\mu}{2\sigma^2}}$$

One disadvantage of this distribution which we can see from the above formula is that it can model only one hypothesis. This is also the case for the gaussian distributions of multiple (multivariate gaussian distribution) and infinite (gaussian process) dimensions.

2.2.2 Multivariate gaussian distribution

The multivariate gaussian distribution is the generalization of the gaussian distribution in higher dimensions.

$$\mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma}) = \frac{1}{\sqrt{(2\pi)^d |\boldsymbol{\Sigma}|}} e^{-\frac{1}{2}(\mathbf{x}-\boldsymbol{\mu})^T \boldsymbol{\Sigma}^{-1}(\mathbf{x}-\boldsymbol{\mu})}$$

The two parameters of the distribution are:

mean $\boldsymbol{\mu} = E[\mathbf{x}]$ Representing the most probable vector

covariance $\boldsymbol{\Sigma}$ Representing the covariance for each pair of the elements of the random vector: $\Sigma_{ij} = Cov[x_i, x_j]$

The exponent is mahalanobis distance, which measures the distance of a point to the ellipsoid defined by the covariance matrix.

cite

2.3 Gaussian Processes

Consider the multivariate gaussian distribution above. If we want to model the distribution of discrete function defined over a finite interval, we can treat each element of the vector \mathbf{x} as a point of the function. Thus we can view the multivariate gaussian distribution as a probability function over the function space. Letting the dimensionality d go to infinity (the distance between each point goes to zero) we can model continuous functions. ... ueberleitung GPs ...


In this case the mean is a point in the function space, thus a function $E[\mathbf{x}] = f(x)$. And because of the fact that we now have infinite dimensions the covariance can be seen as an "infinite matrix", thus a function of two elements: $Cov(x, y)$.

It can be seen as a gaussian distribution in function space. [12]

A gaussian process can be also seen as the bayesian posterior consisting of the product of the (gaussian) functional prior and the observed samples.??? Another view is a kernelized regression with infinite parameters. [12]

A gaussian process is a non-parametric model and is governed by the hyperparameters of the used kernel. This also means that the model is less prone to overfitting.

2.3.1 Regression

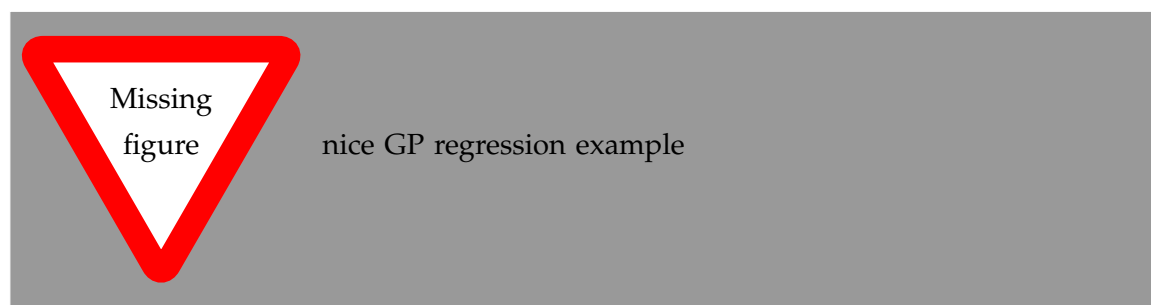

2.3.2 Learning

In the case of a GP the learning phase is different than in parametric models, where the model parameters are inferred from the data. GPs hyperparameter learning by variational optimization (data fit term + cov. regularizer)

In contrast to parametric models gaussian processes are less prone to overfitting because of the covariance regularizer term.

$$E(\theta) = \frac{1}{2} \log(K) - \frac{y^T K^{-1} y}{2}$$

2.3.3 Classification

Classifying with GPs is a little more involved, because of the discriminative function and the fact that the likelihood explain problems of GP classification right} is not a Gaussian. For this reason different models exist which try to approximate this likelihood.

2.3.4 Advantages

1. non parametric Because the model is not parametric it does not suffer from
2. probabilistic The hyperparameters can be interpreted. The lengthscale controls how much neighboring points contribute to the covariance of the function.
3. generative
4. nice for Bayesian
5. linear algebra operations (marginals and conditionals)

2.3.5 Disadvantages

1. Unimodal
2. susceptible to outliers The student-t distribution is robust against outliers but is much harder to deal with.
3. high computational complexity $\mathcal{O}(n^3)$

There are sparse GP methods which approximate the model. An example are the informative vector machines (IVM) which reduce the complexity to $\mathcal{O}(d^2 n)$ where d is a subset of the samples selected by maximum entropy. [9]

4. memory heavy A GP saves all data points...

2.3.6 Algorithms

1. Sparse GPs (IVM)
 - a) IVM for multiple classes [13]

2.4 GP-LVM


The GP-LVM performs a non-linear dimensionality reduction from an observed space X to a latent space Y [8] It does this by maximizing the likelihood

$$p(Y|X) = p(Y|f)p(f|X)$$

using a gaussian prior for the mapping f . Technically it a GP-LVM is a product of Gaussian Processes which model a regression of the mapping from observed space to one latent dimension. The model learns a (non-linear) mapping from latent space to observed space. This means also that if we want to compute the latent position of a new observed sample we have to compute the ... Using a linear kernel the model generalizes to PCA. By using a non linear kernel a non-linear mapping is inferred making it a very strong latent variable model.

formulas
etc.

elaborate
GP-LVM
PCA

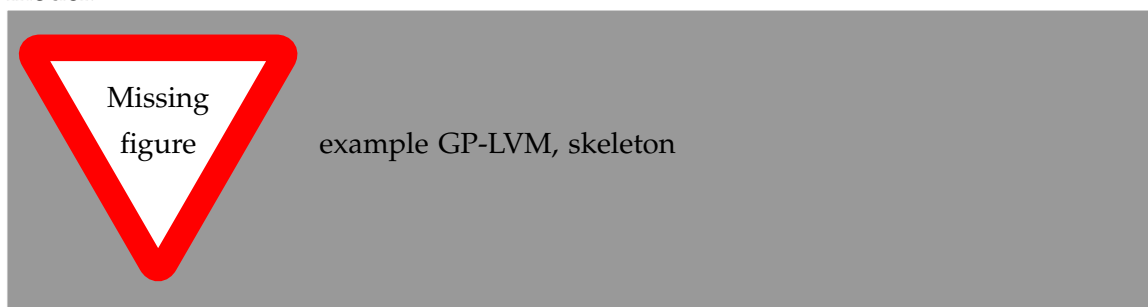


2.4.1 PCA

Tipping and Bishop, Journal of the Royal Statistical Society (1999)

2.4.2 Back-constraints GP-LVM

One problem with this model is that it does not preserve local distances in the latent space. This is because it tries to explain the data by moving distant samples from the observed space also far apart in the latent space. This problem is addressed by Lawrence et al. in the back-constrained GP-LVM [10]. A mapping $g_i(y_i) = x_i$ is introduced which constrains the points in latent space to be more near if they are also near in the observed space. Instead of optimizing directly on X the back-constrained GP-LVM optimizes using the mapping instead.

Having this back-constraints also gives us a mapping from observed space to latent space which can be used to project a new sample into the latent space without costly maximum likelihood estimates.

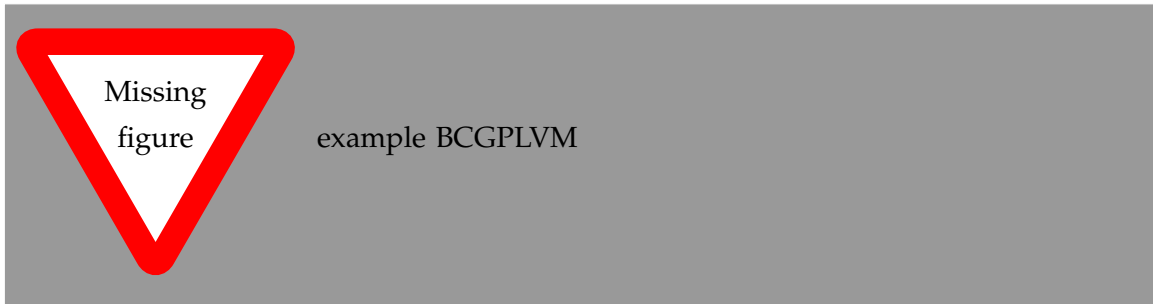

2.4.3 Bayesian GP-LVM

An interesting approach for computing the likelihood of the latent variable mapping was proposed in [16]. By using a variational method it becomes possible to marginalize over \mathbf{X} . Doing so the mapping can be learned together with an ARD kernel. This way the dimensionality of the manifold can be learned from the data.

explain
ARD

2.4.4 Discriminative GP-LVM

Another improvement in the context of classification in latent space is the Discriminative GP-LVM [18]. Using the GDA a prior is being enforced on the LVM which ensures that samples from one class are more clustered and different classes are more separated in the latent space. This is done by maximizing the between-class separability and minimizing the within-class variability while optimizing the log likelihood of the GP-LVM.[18]

elaborate
GDA

2.4.5 Subspace GP-LVM

2.4.6 Manifold Relevance Determination

Combining the Subspace GP-LVM with the variational approach and the ARD kernel it is possible to learn the manifold .[3]

explain
MRD

2.4.7 GP-LVM for human motion

As the space of human motion is high-dimensional (spatio-temporal) dimensionality reduction is crucial for a number of models dealing with human motion (e.g. [?]). The GP-LVM preserve the distances in the mapping and are therefore suitable to model human motion with high noise of the poses see Urtasun DGPLVM Newest addition is [5]

2.4.8 Advantages

2.4.9 Disadvantages

1. The objective function is non-convex This in fact is the biggest problem as it limits its use on real world data, because for more complex data and (latent manifold struc-

tures) there will likely be many local minima. For this reason it is crucial to choose a good initialization. Examples are PCA, Local Linear Embedding or Isomap.

3 Related work

3.1 Overview

3.1.1 a survey on vision based action recognition [11]

3.1.2 machine vision for human activities: a survey [17]

3.2 Histogram based approaches

3.2.1 Motion history image

3.2.2 Motion energy image

3.3 Sung et al. [14]

3.3.1 Features: Skeleton data + HOG features of RGBD image and depth image


3.3.2 Naive classification: SVM

3.3.3 Maximum entropy markov model

Solved via max-flow/min-cut

3.4 RGB-D Camera-based Daily Living Activity Recognition [22]

3.4.1 Bag of Features



See ¹

3.4.2 Features: Structural and Spatial motion

Feature capturing transition between two frames

¹RGB-D Camera-based Daily Living Activity Recognition - Chenyang Zhang, Student Member, IEEE and Yingli Tian, Senior Member, IEEE

3.4.3 Bag of Features approach (histogram of features)

3.4.4 Other: People identification (reidentification)

3.5 Learning Human Activities and Object Affordances from RGB-D Videos

3.5.1 Learning both: activities and object detection/affordance

3.5.2 Using Markov Random Field and SVM for learning

3.6 Eigenjoints [21]

3.7 Gaussian Process - Latent Conditional Random Field (GP-L CFR)

[5] use GP-LVM to reduce dimensionality of human motion. (earlier approach was Gibbs sampling)

3.8 GPDM

In [19] the dynamics of the latent space is being modeled from time series data. In [20] this model is being used to model human motion by applying a GP-LVM to the high-dimensional mocap data and simultaneously learning the dynamic transition in the latent space:

$$x_{t_{k+1}} = f(x_k)$$

$f(x)$ is being modeled by a gaussian process.

This model was applied for activity recognition in [4] where the classification is done through an SVM in the hyperparameter space. (only 2? features)

3.9 Joint Gait Pose Manifold

The JGPM models the activity and the gait in an common latent space. This way several samples from different persons are modeled with the addition with the gait and do not corrupt the class model.

3.10 Dynamic time warping

3.11 See also

A class of space-varying parametric motion fields for human activity recognition

4 Analysis

4.1 Observations

- Person identification through covariance matrix of movement see. [7]
- Difference between activity and action Activities are composed of actions
- Context information can tremendously help in classification of activities (e.g. object detection and human anticipation)
- Skeleton data is sufficient for classification ([?_????) and also robust to changes in appearance (most state-of-the-art methods work with visual features) and also unobtrusive and sensible data doesn't need to be stored (like face features etc.)
- Knowing which activity a human performs helps tremendously in classifying age and gender! (in the case that we do both)

4.2 Approaches

4.2.1 make the features invariant [15]

- view invariant (pos rel to torso)
- scale invariant (normalize length...) ... time ?? invariant

4.2.2 Discriminative Sequence BCGPLVM

Use this to find the activity

1. DTW between walking and walking backwards very big ...
2. not taking temporal dimension into account

4.2.3 Use the Joint Gate and Pose Manifold for age and gender detection

4.2.4 GPDM

1. approach to classify by hyperparameters not optimal

4.2.5 VarGPDS

1. very slow computation

4.2.6 Classify by dynamics of the skeleton (this should bring good classification)

1. GPDM can model the dynamics of the movement
2. has good properties (gaussian processes)
3. has intrinsic dim reduction
4. ?? shared GP-LVM to model different activities in the same latent manifold ??

4.3 Problems and solutions

4.3.1 limited sample data - probabilistic model + discriminative

Probabilistic (and generative ??) models are more accurate using fewer samples, because they model the probability directly ...

4.3.2 high dimensional - dim reduction(gp-lvm)

4.3.3 classification - BC GP-LVM + discriminative

4.3.4 time series data - GPDM

An can be modeled as a sequence of consecutive poses. Hence a dynamical model. By using a dynamical model classification becomes more discriminative.

4.3.5 confidence is important !!!

Using a probabilistic model (especially gaussian processes) we also get a confidence which in turn can be used for active learning

4.3.6 high dim. noise =, GP-LVM is very robust because of the nature of optimization (distance is preserved instead of locality)

4.4 Assumptions

4.4.1 Skeleton tracking is correct and stable

For the algorithm we assume that the skeleton extraction from RGBD data works as expected. This is far from the truth with current skeleton tracking algorithms but we also get confidences of the poses. This way we can prune a large number of incorrect poses and because we model the dynamics and do not compare poses this is not a big problem.

4.4.2 Smooth skeleton transition !!!

4.4.3 Correctly labeled samples (no outliers)

4.5 Ideas

4.5.1 Presentation

1. make clear what is your contribution !!!
2. Black slides (important points)

4.5.2 Model

1. Take best three activities (uncertainty) with threshold
2. SPENCER: can help for (head tracking (bounding box), and pose estimation)
3. Use hand and/or head features
 - a) Head direction is important
 - b) Hand structure is very important for most tasks
 - c) Object interrelation ???
 - d) Use HOG for hand features only
4. Bhattacharyya distance
5. bag of features
 - no time dependency
 - no online capable because of k-means clustering
6. maximum entropy markov model
 - complex, performance not that good
7. GP-LVM
 - good to reduce the dimensionality
 - used in some papers
8. Learn a model of an activity and compare it with the help of a covariance function

4.5.3 Analogy LVM i-ζ marionettes

5 Approach

5.1 Datasets

5.1.1 Cornell Activity Dataset

Active learning using Gaussian Processes. We will use the "Cornell Activity Datasets (CAD-60 & CAD-120)"¹ to learn and evaluate the performance of an implementation of Gaussian Processes.

The data sets consist of a sequence of frames which include:

- Image data
- RGBD data
- Skeleton information: (joint position and orientation)
- annotated meta information (e.g. activity)


5.2 Dynamic time warping with mahalanobis distance

:(exists already Learning Mahalanobis distance for DTW based online signature verification maybe use fisher discriminant analysis as in the discr. seqBCGPLVM

5.3 TODO Discriminative Sequence Back-Constrained GP-LVM

In the paper "Discriminative Sequence Back-Constrained GP-LVM for MOCAP Based Action Recognition"[1] the authors propose a method for classifying MOCAP actions.

¹Human Activity Detection from RGBD Images, Jaeyong Sung, Colin Ponce, Bart Selman, Ashutosh Saxena. In AAAI workshop on Pattern, Activity and Intent Recognition (PAIR), 2011.

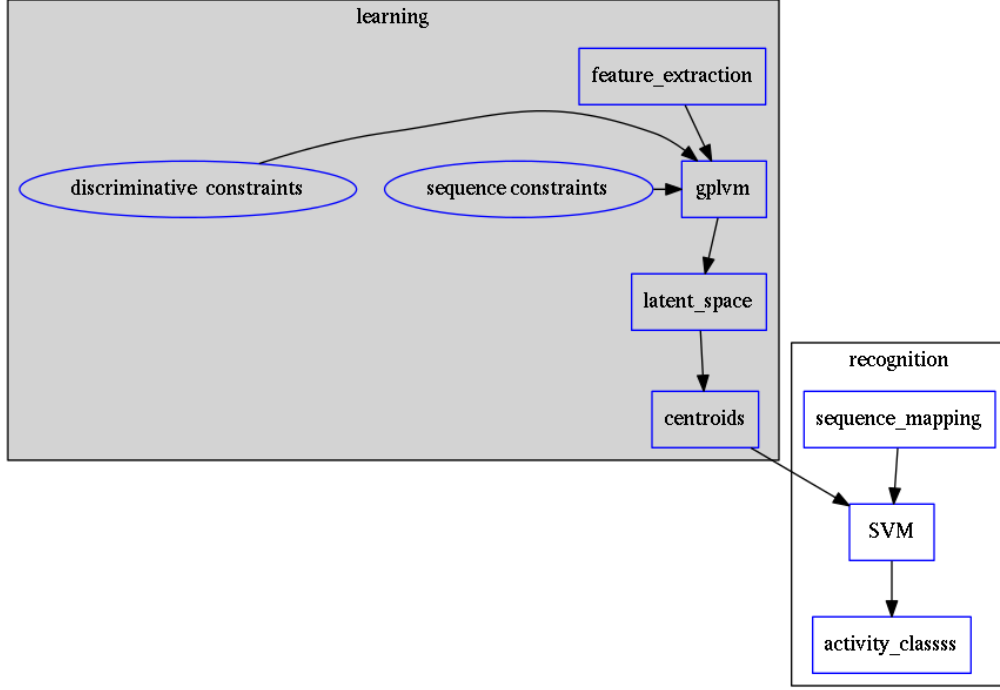

Sequence back-constrained GP-LVM pipeline ... CITATION


By using a similarity feature for the sequences in the observed space and constraining the optimization to preserve this measure the local distances between the sequences are transferred into the latent space. This has two advantages. First of all the sequences have a meaningful clustering in the latent space. Second by also learning the back-constraint it is possible to calculate the centroid of a sequence in the latent space directly without maximizing a likelihood. This in turn is being used to do real-time classification for actions. The mapping is defined as a linear combination of the DTW distance between every other sequence. For every latent dimension q we have:

$$g_q(Y_s) = \sum_{m=1}^S a_{mq} k(Y_s, Y_m)$$

where the similarity measure is $k(Y_s, Y_m) = \gamma e^{DTW(Y_s, Y_m)}$. This measure is to be preserved in the latent spaces.

$$g_q(Y_s) = \mu_{sq} = \frac{1}{L_s} \sum_{n \in J_s} x_{nq}$$

This constraints are being enforced in the optimization by adding Lagrangians to the objective function.

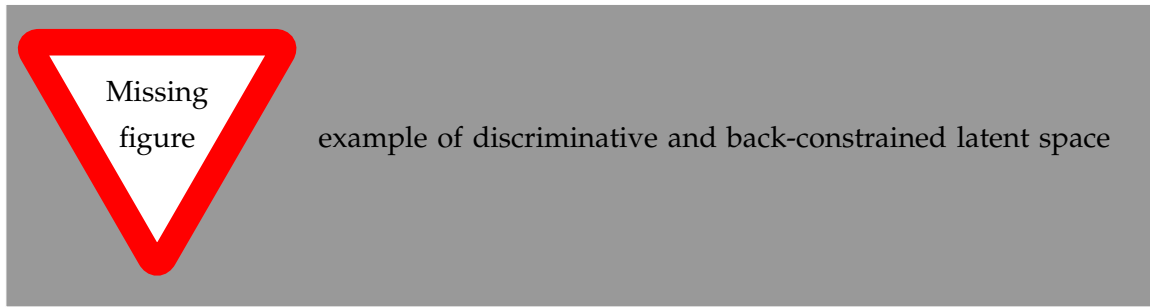

Furthermore, by applying the Discriminative GP-LVM we ensure that poses of different activities are separated from each other and poses from similar activities are located closer together. This ensures that the centroid of an activity is more informative and thus discriminative. The Discriminative GP-LVM works by also maximizing the between class variance and minimizing the in-class similarity [18] Also by applying the Discriminative GP-LVM the clustering of similar actions and the distances of different actions is enhanced which allows for a better classification. Recognition is being done by applying the mapping above to the new sequence and using a SVM in the latent space.

explain D
GP-LVM
properly

5.3.1 Advantages

Recognition can be done in real time by using the learned back constrained. The centroid in the latent space is being calculated for the whole sequence and classified by the SVM.

5.3.2 Improvements

The GP-LVM learns a mapping for each pose but does not consider velocities and accelerations. If we take a pose along with its first and second moments (let us call them poselets) as the high-dimensional space we allow for the temporal displacements to be also modeled. The latent space represents the poselet and the DTW kernel in the constraint captures also the motion of the activity.

5.3.3 Shortcomings

As the optimization for GP-LVM is determined by the above similarity measure and the discriminative criterion online optimization is very difficult. It is thus highly likely that performing a gradient online optimization will be stuck in an local minimum.

Also one problem with the real-time recognition is that determining when a activity has ended/begun is very difficult. Also as we do not know how long a sequence is we have to calculate the centroid for several time frames.

5.4 Extensions:

5.4.1 Learn poselets (pose and velocities) to capture dynamics

5.4.2 Use mahalanobis for the DTW

5.5 GP- Latent Motion Flow Field (based on the gp regression flow)


Many models which use GP-LVM to reduce the high dimensional space into fewer dimension. These approaches make the problem more feasible but the problem remains how to do classification for time-series data. Human motions are mostly characterized by the dynamics of the model (temporal dimension). So we have to compare trajectories in the latent space. One idea is to use GPRF as classification can be done using second order dynamics which should give better results. Going further the activity itself is characterized by the first and second moments of the trajectory function. By explicitly modeling the velocity of the trajectory we can take changes in the joint movement into account.

The Gaussian Process Regression Flow [6] can be used to model the trajectories in the latent space.

The GP-LMF method is inspired by this model. The difference being that in the case of activity recognition we do not know the starting position and also the trajectories can have significantly different lengths. For this reason it is very difficult to normalize with respect to the time dimension. Nevertheless, resulting from the properties of Gaussian Process regression, we have also a dense mean flow field and dense variances. This allows us perform efficient and robust online recognition in the latent space.

This model is attractive for two reasons. First real-time classification of incomplete trajectories is possible. Second it is possible to do online learning by simply adding the new class as a new flow field to the pool of GPs. It is very difficult to adjust the other models for online learning, because of the problem that we can get stuck in a local minimum when optimizing the parameters of the GP.


The idea is to learn a motion field in the latent space for each activity. This can be achieved by learning the velocity function of the latent point just like in the GPRF model presented above. With the difference that we do not use the spatio-temporal domain but learn only the flow in the latent space. The reason being that we do not have starting and ending positions for each activity and also the lengths can be variable. On top of that we also want to recognize an activity which is being interrupted by another activity, so we can't fix the lengths of the trajectories.

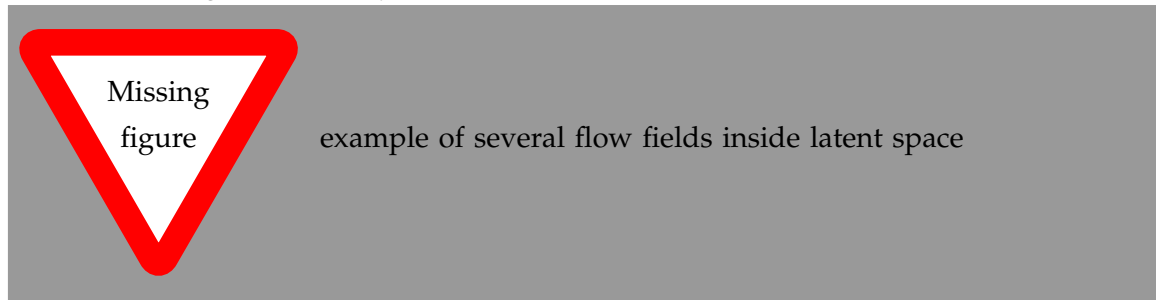

Each activity has its own flow field. Recognition and prediction is done by calculating the energy of the currently moving point with each different field. The field with the minimum energy represents the most probable activity as the point follows more closely its "current" of motion.

Variances in the speed of performing an activity can be modeled by giving the point in the latent space a mass which can be adjusted in real time. When a point has greater mass then it needs more energy to be propagated along the flow field (the overall activity is slower) and vice versa.

An advantage of this method is that activities with repetitive motions, such as walking or running, can be learned without using periodic kernels or other means to model them explicitly. Repetitive motions can be seen as just multiple samples of the same motion which define the flow field.

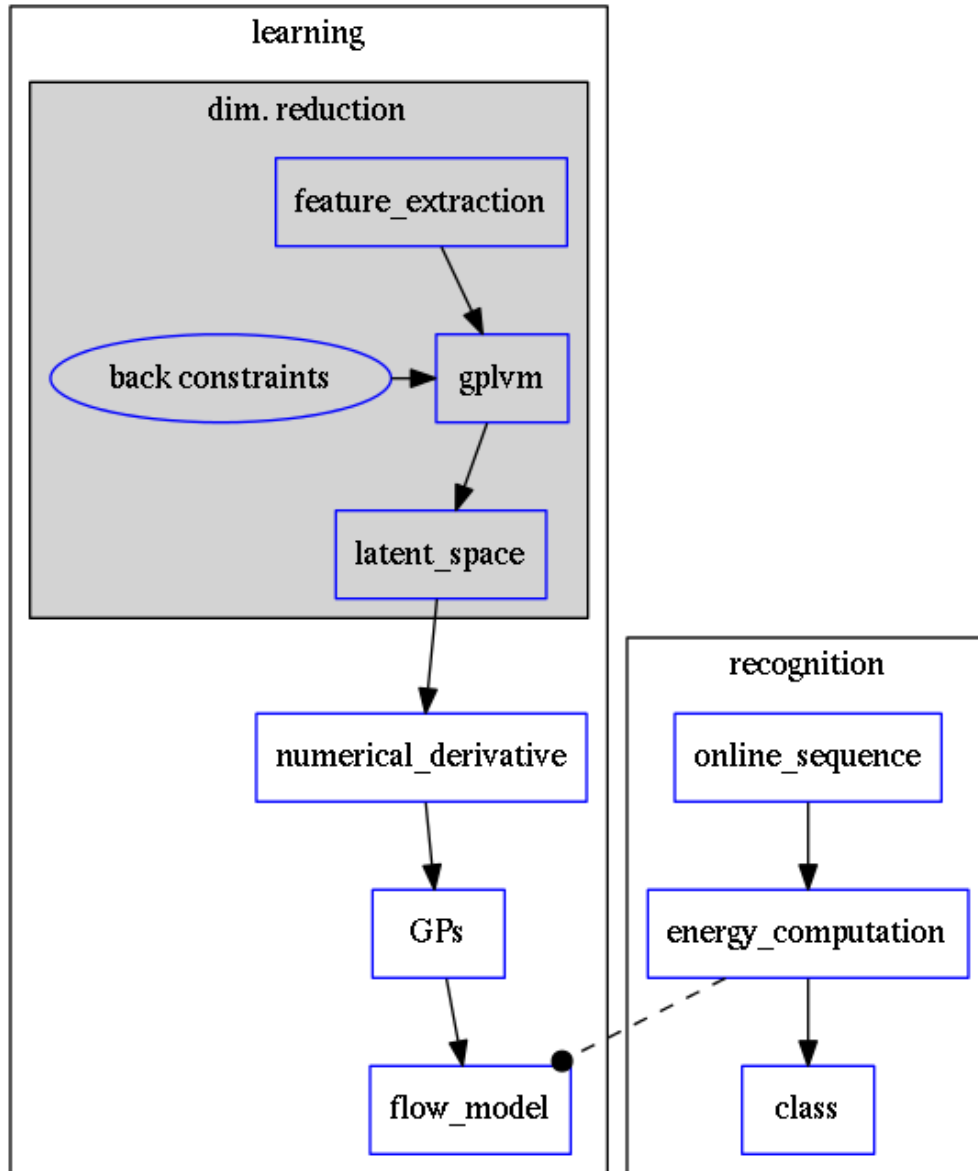

Gaussian Process - Latent Motion Flow

5.5.1 Interpretation

The proposed model has a natural interpretation. A point represents a pose in latent space and an activity is a trajectory in time inside the same space. With the flow field we learn the motion tendencies for each pose. When performing recognition we for each separate flow the energy needed to traverse the flow. If we consider that the point has a mass we can model the speed at which activities are being done. This way we can recognize when a point leaves an activity, which represents a *motion current*, and passes over to some other activity.

5.5.2 Advantages

1. Recognition The current activity is being mapped into the latent space. Through the learned back-constrained. The recognition is being performed solely in the latent space. By propagating the current position by each flow field we can calculate the next possible pose. By comparing the similarity considering the variances we have a measure of how well the current activity resamples each flow field e.g. learned activity.
2. Prediction If we have detected the activity predicting is simply a matter of propagating the pose through the flow field by taking the mean of the GP.
3. Online learning
4. Natural interpretation
5. Novelty detection (anomaly detection) In [6] the authors present the ability of the GPRF model for anomaly detection. This approach is also suitable for finding new classes as the above energy value can be used to recognize novel activities. The reasoning is that if we cannot find a flow field with a small energy the activity has to be unobserved.
6. Active learning
7. Multiple Hypothesis Prediction Since we have a GP representing our flow field we can predict future point positions with the mean value. Moreover also having informative variances we can sample several possible trajectories. This can be accomplished using a particle filter. Hence we can have multi-hypothesis predictions along with their probabilities.

5.5.3 Problems

1. Dimensionality reduction Performing a non-linear dimensionality reduction is no easy task. Testing was done with only two dimensions as it is easier to visualize the latent space and the resulting flow fields. A latent space with higher dimension will naturally make the reduction more robust and the field will have a more natural interpretation....
2. Stable class mean flow field When learning a stable flow field from several samples the field can degenerate with the inclusion of strong variable paths. Therefore it is important to ensure that the algorithm learns stable paths. This can be achieved by sampling uniform random sampling from all samples of the same activity.

5.5.4 Learning the motion flow field

One problem we encounter by learning the motion flow field from several samples is complexity of the Gaussian Process. There are two solutions for this. The first one is to use

active
learning
- problem
??


a sparse GP model. The second one is to sample points from all samples and use only those that are most suitable for the regression. If we take IVM as the sparse GP model both approaches can be seen as equivalent as the IVM will automatically take the most informative samples.

5.6 Implementation

5.6.1 Finding appropriate kernel function

5.6.2 Learning the flow field


We deploy GP for learning the flow field which gives us several advantages.

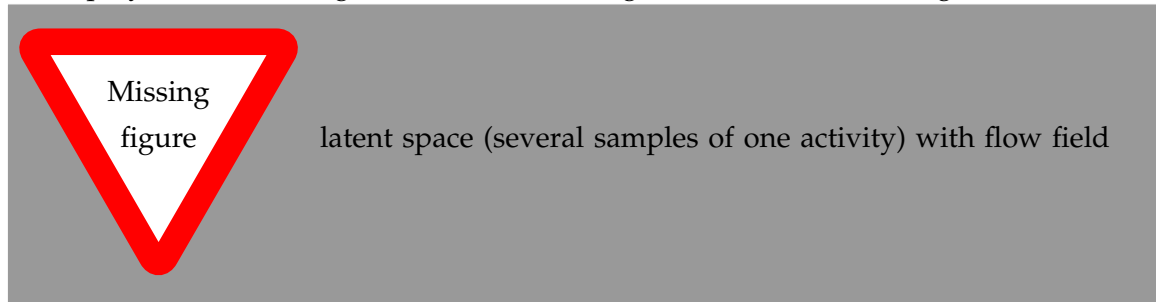

1. Effects of the hyperparameters

Changing the *lengthscale* defines how much each point is contributing to the regression process. It can be interpreted as a smoothness factor which governs how strong the interpolation of the flow field is performed on the latent points.

Changing the signal variance controls how much

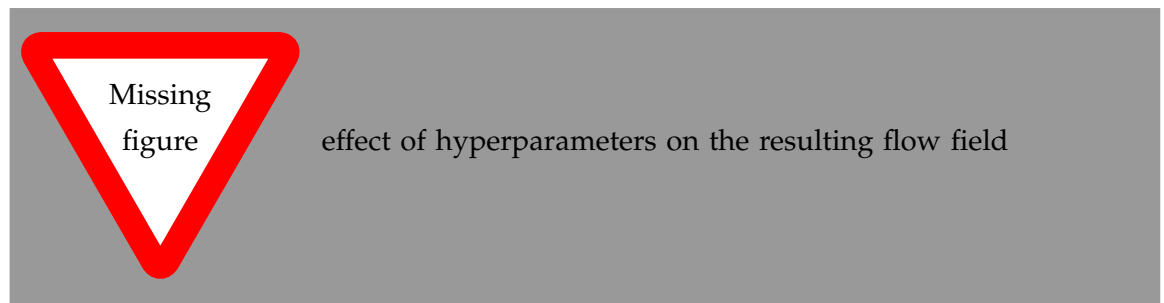

5.6.3 Software

MATLAB - FGPLVM Dataset: CMU Motion capture dataset

- Emacs/Org-mode
- IPython
- SciPy/NumPy
- GPy

- mlp

5.7 Bibliography

Bibliography

- [1] Discriminative sequence back-constrained GP-LVM for MOCAP based action recognition:. pages 87–96. SciTePress - Science and and Technology Publications, 2013.
- [2] Christopher M. Bishop. *Pattern Recognition and Machine Learning*. Springer, August 2006.
- [3] Andreas Damianou, Carl Ek, Michalis Titsias, and Neil Lawrence. Manifold relevance determination. *arXiv preprint arXiv:1206.4610*, 2012.
- [4] Hamed Jamalifar, Vahid Ghadakchi, and Shohreh Kasaei. 3d human action recognition using gaussian processes dynamical models. In *Telecommunications (IST), 2012 Sixth International Symposium on*, pages 1179–1183. IEEE, 2012.
- [5] Yun Jiang and Ashutosh Saxena. Modeling high-dimensional humans for activity anticipation using gaussian process latent crfs. In *Robotics: Science and Systems, RSS*, 2014.
- [6] Kihwan Kim, Dongryeol Lee, and Irfan Essa. Gaussian process regression flow for analysis of motion trajectories. In *Computer Vision (ICCV), 2011 IEEE International Conference on*, pages 1164–1171. IEEE, 2011.
- [7] M. S. Kumar and R. Venkatesh Babu. Human gait recognition using depth camera: a covariance based approach. In *Proceedings of the Eighth Indian Conference on Computer Vision, Graphics and Image Processing*, page 20. ACM, 2012.
- [8] Neil Lawrence. Probabilistic non-linear principal component analysis with gaussian process latent variable models. *The Journal of Machine Learning Research*, 6:1783–1816, 2005.
- [9] Neil Lawrence, Matthias Seeger, and Ralf Herbrich. Fast sparse gaussian process methods: The informative vector machine. *Advances in neural information processing systems*, pages 625–632, 2003.
- [10] Neil D. Lawrence and Joaquin Quiñonero-Candela. Local distance preservation in the GP-LVM through back constraints. In *Proceedings of the 23rd international conference on Machine learning*, pages 513–520. ACM, 2006.
- [11] Ronald Poppe. A survey on vision-based human action recognition. *Image and Vision Computing*, 28(6):976–990, June 2010.
- [12] Carl Edward Rasmussen and Christopher K. I. Williams. *Gaussian Processes for Machine Learning*. University Press Group Limited, January 2006.

- [13] Matthias Seeger and Michael I. Jordan. Sparse gaussian process classification with multiple classes. Technical report, Citeseer, 2004.
- [14] Jaeyong Sung, Colin Ponce, Bart Selman, and Ashutosh Saxena. Unstructured human activity detection from rgbd images. In *Robotics and Automation (ICRA), 2012 IEEE International Conference on*, pages 842–849. IEEE, 2012.
- [15] Ilias Theodorakopoulos, Dimitris Kastaniotis, George Economou, and Spiros Fotopoulos. Pose-based human action recognition via sparse representation in dissimilarity space. *Journal of Visual Communication and Image Representation*, 25(1):12–23, January 2014.
- [16] Michalis Titsias and Neil Lawrence. Bayesian gaussian process latent variable model. 2010.
- [17] Pavan Turaga, Rama Chellappa, Venkatramana S. Subrahmanian, and Octavian Udrea. Machine recognition of human activities: A survey. *Circuits and Systems for Video Technology, IEEE Transactions on*, 18(11):1473–1488, 2008.
- [18] Raquel Urtasun and Trevor Darrell. Discriminative gaussian process latent variable model for classification. In *Proceedings of the 24th international conference on Machine learning*, pages 927–934. ACM, 2007.
- [19] Jack M. Wang, David J. Fleet, and Aaron Hertzmann. Gaussian process dynamical models. In *NIPS*, volume 18, page 3, 2005.
- [20] J.M. Wang, D.J. Fleet, and A. Hertzmann. Gaussian process dynamical models for human motion. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 30(2):283–298, February 2008.
- [21] Xiaodong Yang and YingLi Tian. Effective 3d action recognition using EigenJoints. *Journal of Visual Communication and Image Representation*, 2013.
- [22] Chenyang Zhang and Yingli Tian. RGB-d camera-based daily living activity recognition. *Journal of Computer Vision and Image Processing*, 2(4):12, 2012.