
Offline architecture with D2

This example uses containers, classes, a SQL table, a UML class, and a sequence diagram in one local D2 block. The ELK layout and static light theme use D2's native `vars.d2-config` settings.

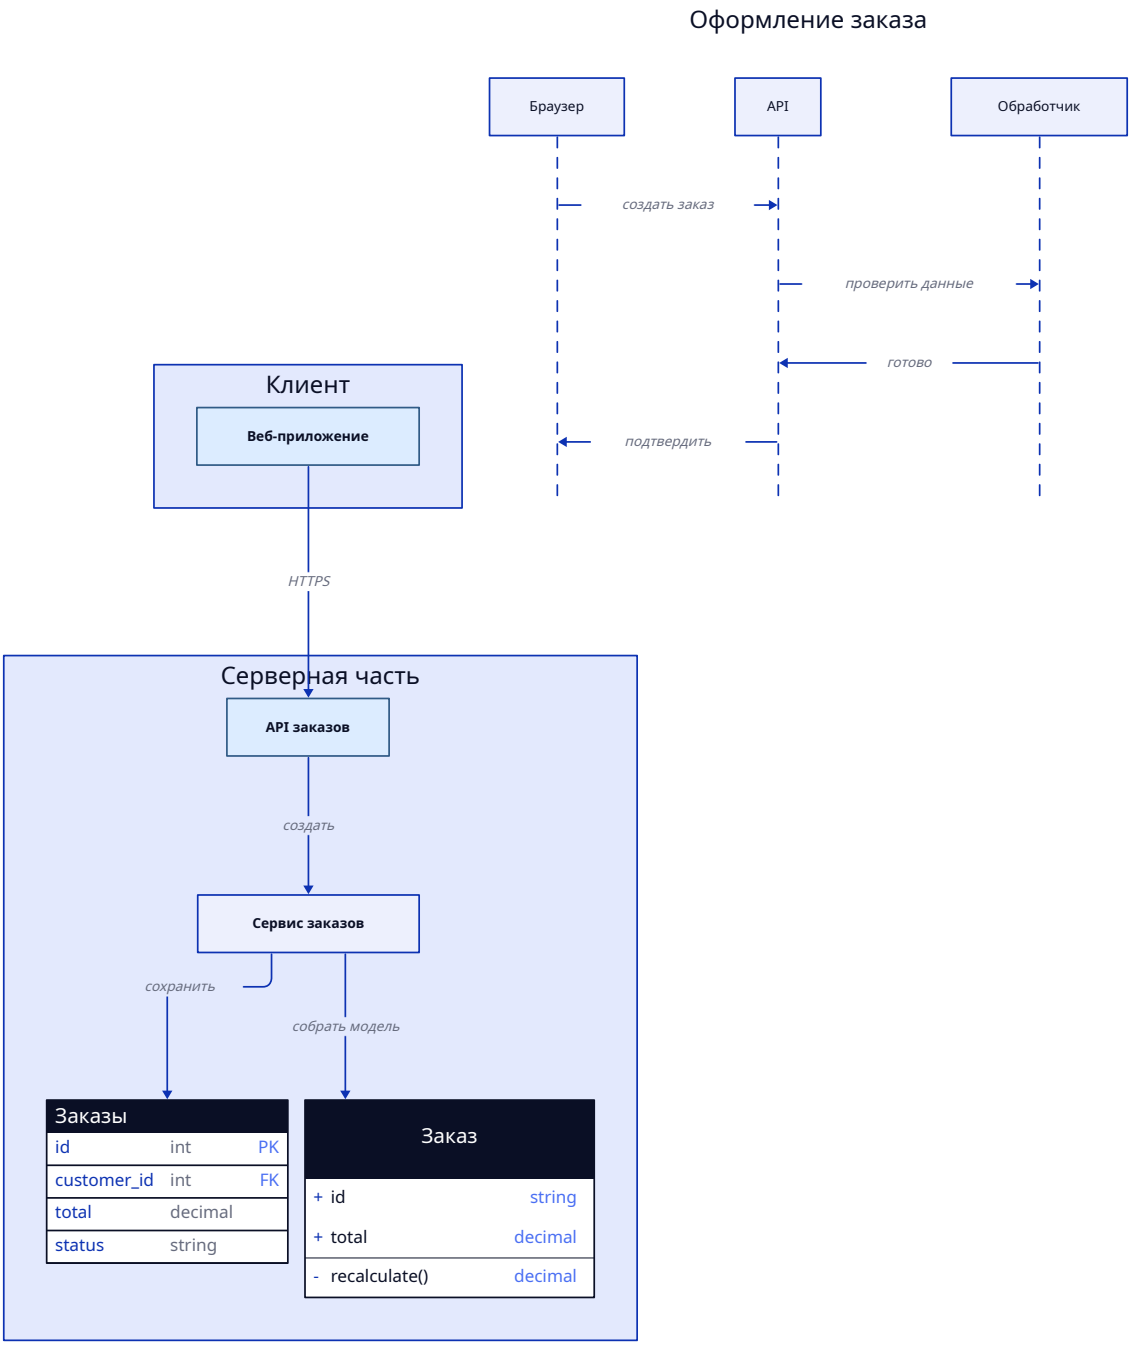

D2 renders offline. This profile rejects imports, external resources, animation, HTML, Markdown, and LaTeX labels.