

XHTONG[®]

Pipe Fittings



WEIFANG XINHUITONG METAL WORK CO.,LTD

公司简介

Company Profile >



丹麦迪砂 (DISA) 自动生产线

潍坊鑫汇通金属制品有限公司是一家集研发、生产、销售、工程服务为一体的综合性高新技术企业，专业从事螺旋管件、沟槽管件的研发与制造，年生产能力5万吨以上，在同行业中名列前茅。

公司位于风景秀丽的世界风筝都—山东潍坊，北临G20济青高速公路，南临309国道，厂房占地面积50000多平方米，地理位置优越，交通十分便利。

公司的球墨铸铁管件完全按照美国ASTM标准生产，先后通过了中国国家型式检验、CCCF认证和美国FM、UL等认证，并由中国人民保险公司承保。产品广泛应用于消防、空调、给水、污水、水泥、低压蒸气、矿坑管路系列及一般管路输送，目前遍布欧洲、美洲等世界各地，深受国内外用户的好评。

公司技术力量雄厚，具备世界一流的设备和工艺，以及完善的质量检测手段。目前拥有世界上最先进的美国应达 (Inductotherm Group) 变频感应电炉、丹麦迪砂 (DISA) 自动生产线、德国爱立许 (EIRICH) 自动浇注机、立式数控加工中心数台、静电喷塑流水线、浸漆流水线条数，拥有标准化型砂实验室、理化实验室，配备进口的光谱分析仪、金相显微镜、拉力试验机、拉伸试验机、橡胶老化箱等先进的检测设备。

公司建立了完善的质量管理体系，先后通过了GB/T19001—2008/ISO9001:2008、GB/T28001—2011/OHSAS18001:2007、GB/T24001—2004/ISO14001:2004认证。坚持以人为本，全员参与，把下道工序当作顾客，保证向顾客提供符合要求的产品和服务，最大限度地提高客户满意度。“以质量求生存，靠信誉求发展”是我们一贯坚持的理念，潍坊鑫汇通金属制品有限公司愿为广大客户提供优质的产品与服务。



金相分析



美国应达 (Inductotherm Group) 变频感应电炉



光谱试验



德国爱立许 (EIRICH) 自动浇注机

Weifang Xinhuitong Metal Work Co.,Ltd. is a high-tech enterprise that integrates R&D, production, marketing, and engineering service. The company specializes in the R&D and manufacturing of threaded fittings and grooved pipe fittings. Its annual production capacity is well above 50,000 tons, which is far ahead of all others in this field.

The company locates in Weifang, Shandong province, a beautiful city known as "the world capital of kites". It is adjacent to the G20 Jinan-Qingdao Highway in the north, and is closed to China National Highway 309 (G309) in the south. The factory and its supporting facilities cover an area of more than 50,000 square meters, enjoying a good geographical location and extremely convenient transportation.

The company's spheroidal graphite cast iron grooved pipe fittings are manufactured in full accordance with the ASTM standards, having successively passed the China national type test and the certification of FM, UL, etc., and are underwritten by PICC property and casualty company limited. The products are widely used in fire fighting, air-conditioning, water supply, sewage, cement, low-pressure steaming, mine piping and ordinary piping delivery, spreading all over the world including Europe and America at present and winning the appreciations from users domestic and overseas.

The company has strong technical strength, and possesses the world's first-class equipment and technology, as well as perfect testing measures. At present, we own the world's most advanced Inductotherm Group frequency converted introduction furnace, Denmark DISA automatic production line, Germany EIRICH automatic pouring machine, several vertical CNC machining centers, electrostatic spray production line, and paint dipping production lines, have the standard molding sand laboratory and the physical & chemical laboratory, and are furnished with the advanced testing equipment like the imported spectrometer, metalloscope, tension tester, cupping machine, rubber aging box, etc..

The company has established a perfect quality management system in compliance with the requirements of GB/T19001-2008 / ISO9001:2008 standard. It insists on the concept of "People-oriented, total-staff participation", treats the next working procedure as customer, ensures to provide customers with satisfactory products and services, and maximize the customers' satisfaction. Adhering to the idea of "Survive on quality, develop on credibility" Xinhuitong Metal Work Co.,Ltd. is willing and always ready to provide our clients with top-quality products and best services.

产品图例

Product Legend >

						
1# Bend 90°, M/F	1#F Bend 90°, M/F	1A Short Bend 90°, M/F	1AF Short Bend 90°, M/F	2# Bend 90°, female	2A Short Bend 90°, female	2AF Short Bend 90°, female
						
3# Bend 90°, male	40 Bend 45°, M/F	40F Bend 45°, M/F	41 Bend 45°, female	85 Crossover	90 Elbow, 90°	90R Reducing Elbow, 90°
						
92 Street Elbow, 90°	92R Reducing Street Elbow, 90°	95 Union Elbow F/F	96 Union Elbow F/F	97 Union Elbow M/F	98 Union Elbow M/F	120 Elbow, 45°
						
121 Street Elbow, 45°	130 Tee	130R Reducing Tee	130R Reducing Tee	130R Reducing Tee	130R Reducing Tee	130R Reducing Tee
						
131 Pitcher Tee	131R Reducing Pitcher Tee	134 Service Tee	134R Reducing Service Tee	165 Lateral Y Branche, 45°	180 Cross	180R Reducing Cross
						
220 Socket	220S Socket R/L	240 Reducing Socket	241 Bushing	241D Bushing	245 Reducing Hexagon Nipple	246 Reducing Socket M/F


Material:GB/T 9440
 Dimensions:GB/T 3287
 Threads:GB/T 7306.1,GB/T 7306.2
 Size Available:1/8"-6"

						
270 Parallel Thread Socket	280 Hexagon Nipple	291 Plain Plug	291LM Plain Plug	291N Countersunk Plug	291S Solid Plug	300 Cap
						
310 Locknut	312 Backnut	321-4 Flange Bs4504	321-6 Flange 1600/4	321-H Flange	321P Flange	321PW Flange
						
321TD Flange	330 Flat Seat Union	330D Flat Seat Union	331 Flat Seat Union M/F	340 Conical Joint Union	340Q Deflection Union	341 Conical Joint Union M/F
						
342 Conical Joint Union	342A Double Bronze Navy Union	526 Long Adapter M/F	529A Long Extension Piece	529X Short Extension Piece	1221 Side Outlet Elbow	1223 Side Outlet Tee
						
1224 Side Outlet Cross	LAA Coupling Luck F/F	LAF Coupling Luck M/F	LCC Long Compression Coupling	SCC Short Compression Coupling	TCC Compression Tee	



1#


Bend 90° ,M/F



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	35	40	48	55	69	85	105
	B	32	36	42	48	60	75	95
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	116	140	176	205	260	365	
	B	105	130	165	190	245	345	

1#F


Bend 90° ,M/F



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	52	65	82	100	115	140
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	175	205	260			

1A

Short Bend 90° ,M/F




Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	30	36	45	50	63	76
Size	Inch	1 1/2	2	2 1/2	3	4	
	mm	40	50	65	80	100	
Dim. (mm)	A	85	102	115	138	167	

1AF


Short Bend 90° ,M/F




Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	30	36	45	50	63	76
Size	Inch	1 1/2	2	2 1/2			
	mm	40	50	65			
Dim. (mm)	A	85	102	115			

2#**Bend 90° ,female**


Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	40	48	55	69	85	105
Size	Inch	1 1/2	2	2 1/2	3	4	
	mm	40	50	65	80	100	
Dim. (mm)	A	116	140	176	205	260	

2A**Short Bend 90° ,female**

Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	45	50	63	76	85	102
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	115	138	167			

2AF**Short Bend 90° ,female**


Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	30	36	45	50	63	76
Size	Inch	1 1/2	2	2 1/2	3		
	mm	40	50	65	80		
Dim. (mm)	A	85	102	113	138		

3#**Bend 90° ,male**

Size	Inch	3/8	1/2	3/4	1	1 1/4	1 1/2
	mm	10	15	20	25	32	40
Dim. (mm)	A	42	48	60	75	95	105
Size	Inch	2	2 1/2	3	4		
	mm	50	65	80	100		
Dim. (mm)	A	130	165	190	245		

40


Bend 45° ,M/F



Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	26	30	36	43	51	64
	B	21	24	30	36	42	54
Size	Inch	1 1/2	2	2 1/2	3	4	6
	mm	40	50	65	80	100	150
Dim. (mm)	A	68	81	99	113	142	197
	B	58	70	86	100	126	176

40F


Bend 45° ,M/F



Size	Inch	3/4	1	1 1/4	1 1/2	2	2 1/2
	mm	20	25	32	40	50	65
Dim. (mm)	A	45	55	68	70	85	100
	B						
Size	Inch	3	4				
	mm	80	100				
Dim. (mm)	A	115	145				
	B						

41


Bend 45° ,female




Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	26	30	36	43	51	64
	B						
Size	Inch	1 1/2	2	2 1/2	3	4	6
	mm	40	50	65	80	100	150
Dim. (mm)	A	68	81	99	113	142	197
	B						

85


Crossover




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	45	54	70	91	100.5	115
	B						
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

90**Elbow, 90°**


Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	19	21	25	28	33	38	45
Size	Inch	1 1/2	2	2 1/2	3	4	5	6
	mm	40	50	65	80	100	125	150
Dim. (mm)	A	50	58	69	78	96	115	131

90R**Reducing Elbow, 90°**

Size	Inch	4 x 1 1/4	4 x 1 1/2	4 x 2	4 x 2 1/2	4 x 3
	mm	100 x 32	100 x 40	100 x 50	100 x 65	100 x 80
Dim. (mm)	A	60	62	68	77	82
	B	85	85	86	89	90
Size	Inch	3/4 x 1/2	1 x 1/4	1 x 3/8	1 x 1/2	1 x 3/4
	mm	20 x 15	25 x 8	25 x 10	25 x 15	25 x 20
Dim. (mm)	A	30	27	30	32	35
	B	31	31	32	34	36

90R**Reducing Elbow, 90°**


Size	Inch	3/8 x 1/8	3/8 x 1/4	6 x 4	1 1/2 x 1/4	1 1/2 x 3/8
	mm	10 x 6	10 x 8	150 x 100	15 x 8	15 x 10
Dim. (mm)	A	20.5	23	102	24	26
	B	21.5	23	125	24	26
Size	Inch	1 1/4 x 3/8	1 1/4 x 1/2	1 1/4 x 3/4	1 1/4 x 1	1 1/2 x 1/2
	mm	32 x 10	32 x 15	32 x 20	32 x 25	40 x 15
Dim. (mm)	A	32	32	36	40	34
	B	36.5	37	41	42	41

90R**Reducing Elbow, 90°**

Size	Inch	3/4 x 1/4	3/4 x 3/8	1 1/2 x 1 1/4	2 x 1/2	2 x 3/4
	mm	20 x 8	20 x 10	40 x 32	50 x 15	50 x 20
Dim. (mm)	A	26	28	46	35	40
	B	27	28	48	47	48
Size	Inch	1 1/2 x 3/4	1 1/2 x 1	3 x 1	3 x 1 1/4	3 x 1 1/2
	mm	40 x 20	40 x 25	80 x 25	80 x 32	80 x 40
Dim. (mm)	A	37	42	50	53.5	56
	B	42	46	68	68	69

90R


Reducing Elbow, 90°



Size	Inch	2 × 1	2 × 1 1/4	2 × 1 1/2	2 1/2 × 3/4	2 1/2 × 1	2 1/2 × 2
	mm	50 × 25	50 × 32	50 × 40	65 × 20	65 × 25	65 × 50
Dim. (mm)	A	43	47	52	42.5	46.5	61
	B	50	53	56	57	58.5	66
Size/	Inch	3 × 2	3 × 2 1/2	1 1/4 × 1 1/8	2 1/2 × 1 1/4	2 1/2 × 1 1/2	3 × 3/4
	mm	80 × 50	80 × 65	8 × 6	65 × 32	65 × 40	80 × 20
Dim. (mm)	A	60.5	71	18.5	50.5	53.5	45
	B	71	74	19	60	61	65

92


Street Elbow, 90°



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	19	21	25	28	33	38	45
	B	25	28	32	37	43	52	60
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	50	58	69	78	96	127.5	
	B	65	74	88	98	118	202	

92R


Reducing Street Elbow, 90°




Size	Inch	3/4 × 1/2	1 × 3/4				
	mm	20 × 15	25 × 20				
Dim. (mm)	A	30	35				
	B	65.4	46				
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

95


Union Elbow F/F




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	28	33	38	45	50	58
	B	58	62	72	82	90	100
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

96
Union Elbow F/F



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	58	62	72	82	90	100
	B	28	33	38	45	50	58
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

97
Union Elbow F/F


Size	Inch	1 1/2					
	mm	40					
Dim. (mm)	A	128					
	B	58					
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

98
Union Elbow F/F



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	
	mm	15	20	25	32	40	
Dim. (mm)	A	76	82	94	107	115	
	B	28	33	38	45	50	
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

120
Elbow, 45°


Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	16	18.5	20	22	25	28	33
	B							
Size	Inch	1 1/2	2	2 1/2	3	4	5	6
	mm	40	50	65	80	100	125	150
Dim. (mm)	A	50	58	69	78	96	77.5	86
	B							

121


Street Elbow, 45°



Size	Inch	1/8	1/4	3/8	1/2	3/4	1
	mm	6	8	10	15	20	25
Dim. (mm)	A	16	18.5	20	22	25	28
	B	21	24	25	28	32	37
Size	Inch	1 1/4	1 1/2	2	2 1/2	3	4
	mm	32	40	50	65	80	100
Dim. (mm)	A	33	36	43	49.5	55	66
	B	43	46	55	65	76	94

130


Tee



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	19	21	25	28	33	38	45
	B	21	24	25	28	32	37	43
Size	Inch	1 1/2	2	2 1/2	3	4	5	6
	mm	40	50	65	80	100	125	150
Dim. (mm)	A	50	58	69	78	96	115	131
	B	50	58	69	78	96	115	131

130R


Reducing Tee




Size	Inch	4 x 1/2	4 x 3/4	4 x 1	4 x 1 1/4	4 x 1 1/2
	mm	100 x 15	100 x 20	100 x 25	100 x 32	100 x 40
Dim. (mm)	A	50	53	56	60	61
	B	79	79	81	84	84
Size	Inch	1/2 x 1/8	1/2 x 1/4	1/2 x 3/8	3/4 x 1/4	3/4 x 3/8
	mm	15 x 6	15 x 8	15 x 10	20 x 8	20 x 10
Dim. (mm)	A	22	24	26	26	28
	B	23	24	26	27	28

130R


Reducing Tee




Size	Inch	4 x 2	4 x 2 1/2	4 x 3	3/8 x 1/4	6 x 4
	mm	100 x 50	100 x 65	100 x 80	10 x 8	150 x 100
Dim. (mm)	A	70	84	82	22	105
	B	86	92	90	22.5	125.5
Size	Inch	3/4 x 1/2	1 x 1/4	1 x 3/8	1 x 1/2	1 x 3/4
	mm	20 x 15	25 x 8	25 x 10	25 x 15	25 x 20
Dim. (mm)	A	30	28	30	32	35
	B	31	31	32	34	36

130R**Reducing Tee**


Size	Inch	6 × 2	6 × 3	11/4 × 3/4	11/4 × 1	11/2 × 3/8
	mm	150 × 50	150 × 80	32 × 20	32 × 25	40 × 10
Dim. (mm)	A	75	92.5	36	40	34
	B	115	120.5	41	42	39
Size	Inch	11/4 × 3/8	11/4 × 1/2	2 × 11/2	21/2 × 1/2	21/2 × 3/4
	mm	32 × 10	32 × 15	50 × 40	65 × 15	65 × 20
Dim. (mm)	A	32	34	52	40	43
	B	36	38	55	56	57

130R**Reducing Tee**

Size	Inch	11/2 × 1/2	11/2 × 3/4	11/2 × 1	11/2 × 11/4	2 × 3/8
	mm	40 × 15	40 × 20	40 × 25	40 × 32	50 × 10
Dim. (mm)	A	36	38	42	46	36
	B	42	44	46	48	46
Size	Inch	21/2 × 1	21/2 × 11/4	21/2 × 11/2	21/2 × 2	3 × 1/2
	mm	65 × 25	65 × 32	65 × 40	65 × 50	80 × 15
Dim. (mm)	A	47	52	55	61	42
	B	60	62	63	66	64

130R**Reducing Tee**


Size	Inch	2 × 1/2	2 × 3/4	2 × 1	2 × 11/4	3 × 2	3 × 3/4
	mm	50 × 15	50 × 20	50 × 25	50 × 32	80 × 50	80 × 20
Dim. (mm)	A	38	40	44	48	64	45
	B	48	50	52	54	73	65
Size	Inch	3 × 1	3 × 11/4	3 × 11/2	3 × 21/2	1/4 × 1/8	
	mm	80 × 25	80 × 32	80 × 40	80 × 65	8 × 6	
Dim. (mm)	A	51	55	58	72	18.5	
	B	67	70	71	76	19	

130R**Reducing Tee**

Size	Inch	1/2 × 1/2 × 3/4	1/2 × 1/2 × 1	3/4 × 3/4 × 1	3/4 × 3/4 × 11/4
	mm	15 × 15 × 20	15 × 15 × 25	20 × 20 × 25	20 × 20 × 32
Dim. (mm)	A	31	34	36	41
	B	30	32	35	36
Size	Inch	1 × 1 × 2	1 × 1 × 21/2	11/4 × 11/4 × 11/2	11/4 × 11/4 × 2
	mm	25 × 25 × 50	25 × 25 × 65	32 × 32 × 40	32 × 32 × 50
Dim. (mm)	A	51	60	48	54
	B	48.5	48	46	48

130R


Reducing Tee



Size	Inch	1 × 1 × 1 1/4	1 × 1 × 1 1/2	2 × 2 × 2 1/2	2 1/2 × 2 1/2 × 3
	mm	25 × 25 × 32	25 × 25 × 40	50 × 50 × 65	65 × 65 × 80
Dim. (mm)	A	42	46	64	75
	B	40	42	59	72
Size	Inch	1 1/2 × 1 1/2 × 2	1 1/2 × 1 1/2 × 2 1/2	2 1/2 × 2 1/2 × 4	
	mm	40 × 40 × 50	40 × 40 × 65	65 × 65 × 100	
Dim. (mm)	A	55	65	90	
	B	52	55	78	

130R


Reducing Tee



Size	Inch	3/4 × 1/2 × 1/2	1 × 1/2 × 1/2	1 × 3/4 × 3/4
	mm	20 × 15 × 15	25 × 15 × 15	25 × 20 × 20
Dim. (mm)	A	30	32	35
	B	31	34	36
	C	28	28	33
Size	Inch	1 1/2 × 3/4 × 3/4	1 1/2 × 1 × 1	1 1/2 × 1 1/4 × 1 1/4
	mm	40 × 20 × 20	40 × 25 × 25	40 × 32 × 32
Dim. (mm)	A	38	42	46
	B	43	46	48
	C	32	38	45

130R


Reducing Tee




Size	Inch	1 1/4 × 1/2 × 1/2	1 1/4 × 3/4 × 3/4	1 1/4 × 1 × 1	2 × 1 × 1
	mm	32 × 15 × 15	32 × 20 × 20	32 × 25 × 25	50 × 25 × 25
Dim. (mm)	A	34	36	40	44
	B	38	41	42	51
	C	27	33	38	38
Size	Inch	2 × 1 1/4 × 1 1/4	2 × 1 1/2 × 1 1/2	2 1/2 × 2 × 2	3 × 2 × 2
	mm	50 × 32 × 32	50 × 40 × 40	65 × 50 × 50	80 × 50 × 50
Dim. (mm)	A	48	52	60.5	64
	B	54	55	66	73
	C	45	50	57	57

130R


Reducing Tee




Size	Inch	3/4 × 1/2 × 3/4	1 × 1/4 × 1	1 × 1/2 × 1	1 1/4 × 1 × 1 1/4	1 1/2 × 1 1/2 × 1 1/2
	mm	20 × 15 × 20	25 × 8 × 25	25 × 15 × 25	32 × 25 × 32	40 × 15 × 40
Dim. (mm)	A	33	38	38	45	50
	B	33	38	38	45	50
	C	31	30	34	42	42
Size	Inch	1 1/2 × 3/4 × 1 1/2	1 × 3/4 × 1	1 1/4 × 1/2 × 1 1/4	1 1/4 × 3/4 × 1 1/4	1 1/2 × 1 × 1 1/2
	mm	40 × 20 × 40	25 × 20 × 25	32 × 15 × 32	32 × 20 × 32	40 × 25 × 40
Dim. (mm)	A	50	38	45	45	50
	B	50	38	45	45	50
	C	44	36	38	41	46

130R**Reducing Tee**


Size	Inch	1 1/2 x 1 1/4 x 1 1/2	2 x 1 1/2 x 2	2 x 3/4 x 2	2 x 1 x 2
	mm	40 x 32 x 40	50 x 15 x 50	50 x 20 x 50	50 x 25 x 50
Dim. (mm)	A	50	57	58	58
	B	50	57	58	58
	C	48	47.5	50	52
Size	Inch	2 x 1 1/4 x 2	2 x 1 1/2 x 2	2 1/2 x 1 1/2 x 2 1/2	2 1/2 x 2 x 2 1/2
	mm	50 x 32 x 50	50 x 40 x 50	65 x 40 x 65	65 x 50 x 65
Dim. (mm)	A	58	58	68.5	67
	B	58	58	68.5	67
	C	54	55	63.5	65

130R**Reducing Tee**

Size	Inch	4 x 3 x 2	1 x 3/4 x 1/2	1 x 1/2 x 3/4	1 1/4 x 3/4 x 1
	mm	100 x 80 x 50	25 x 20 x 15	25 x 15 x 20	32 x 20 x 25
Dim. (mm)	A	67	38	35	40
	B	83.5	34	36	42
	C	60	33	31	36
Size	Inch	1 1/4 x 1 x 1/2	1 1/4 x 1 x 3/4	1 1/4 x 1/2 x 3/4	1 1/4 x 1/2 x 1 1/4
	mm	32 x 25 x 15	32 x 25 x 20	32 x 15 x 20	32 x 15 x 25
Dim. (mm)	A	34	36	35	39
	B	38	41	38	41.5
	C	32	35	29	34

130R**Reducing Tee**


Size	Inch	1 1/4 x 3/4 x 1/2	1 1/2 x 1/2 x 1	1 1/2 x 3/4 x 1	1 1/2 x 3/4 x 1 1/4
	mm	32 x 20 x 15	40 x 15 x 25	40 x 20 x 25	40 x 20 x 32
Dim. (mm)	A	40	44	44	46
	B	42.5	46	46	48
	C	37	34	35	41
Size	Inch	1 1/2 x 1 x 1/2	1 1/2 x 3/4 x 1 1/4	1 1/2 x 1 1/4 x 1/2	2 x 1 x 1 1/2
	mm	40 x 25 x 15	40 x 25 x 32	40 x 32 x 15	50 x 25 x 40
Dim. (mm)	A	37	45	36	51
	B	41	47	42	55
	C	32	41.5	34	45.5

130R**Reducing Tee**

Size	Inch	2 x 1 1/4 x 1	2 x 1 1/4 x 1 1/2	1 1/2 x 1 1/4 x 3/4	1 1/2 x 1 1/4 x 1
	mm	50 x 32 x 25	50 x 32 x 40	40 x 32 x 20	40 x 32 x 25
Dim. (mm)	A	40	52	38	42
	B	51	55	44	46
	C	44	48	36	40
Size	Inch	1 1/2 x 1 1/4 x 2	2 x 1 1/2 x 1/2	2 x 1 1/2 x 3/4	2 x 1 1/2 x 1
	mm	40 x 32 x 50	50 x 40 x 15	50 x 40 x 20	50 x 40 x 25
Dim. (mm)	A	55	38	40	44
	B	51.5	48	50	52
	C	53.5	36	39	42

130R


Reducing Tee



Size	Inch	2 × 1 1/2 × 1 1/4	2 1/1 × 2 × 1/2	2 1/2 × 2 × 1
	mm	50 × 40 × 32	65 × 50 × 15	65 × 50 × 25
Dim. (mm)	A	48	57	53
	B	54	64	60
	C	46	52	53
Size	Inch	2 1/2 × 2 × 1 1/4	3 × 2 1/2 × 2	
	mm	65 × 50 × 32	80 × 65 × 50	
Dim. (mm)	A	57	67	
	B	64	74.5	
	C	52	64	

131


Pitcher Tee



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	45	50	63	76	85	102
	B	24	28	33	40	43	53
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

131R


Reducing Pitcher Tee



Size	Inch	3/4 × 1/2	1 × 1/2	1 × 3/4	1 × 3/4 × 3/4
	mm	20 × 15	25 × 15	25 × 20	25 × 20 × 20
Dim. (mm)	A	47	49	53	53
	B	48	51	54	54
	C	25	28	30	28
Size	Inch	1 1/4 × 1/2	1 1/4 × 3/4	1 1/2 × 3/4	1 1/2 × 1
	mm	32 × 15	32 × 20	40 × 20	40 × 25
Dim. (mm)	A	51	55	55	66
	B	56	58	61	71
	C	30	33	33	36

134


Service Tee



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	28.5	33.5	38	44.5	49.5	57
	B	41.5	48	54.5	62	68.5	83
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

134R


Reducing Service Tee



Size	Inch	2 × 1 1/4	2 1/2 × 2	3 × 2 1/2			
	mm	50 × 40	65 × 50	80 × 65			
Dim. (mm)	A	57	69	78			
	B	75	88	106			
Size	Inch						
	mm						
Dim. (mm)	A						
	B						

165


Lateral Y Branche 45°



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	15.5	18.3	21.6	26	27.9	31.5
	B	43.4	52	61.7	74.2	83.3	99.8
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	38.6	43.4	51			
	B	120	141	177			

180


Cross



Size	Inch	1/8	1/4	3/8	1/2	3/4	1
	mm	6	8	10	15	20	25
Dim. (mm)	A	19	21	25	28	33	38
	B						
Size	Inch	1 1/4	1 1/2	2	2 1/2	3	4
	mm	32	40	50	65	80	100
Dim. (mm)	A	45	50	58	69	78	96
	B						

180R


Reducing Cross



Size	Inch	4 × 1	4 × 1 1/4	4 × 1 1/2	4 × 2	4 × 2 1/2
	mm	100 × 25	100 × 32	100 × 40	100 × 50	100 × 65
Dim. (mm)	A	56	60	61	70	84
	B	81	84	84	86	92
Size	Inch	1 1/2 × 1/2	1 1/2 × 3/4	1 1/2 × 1	1 1/2 × 1 1/4	2 × 3/4
	mm	40 × 15	40 × 20	40 × 25	40 × 32	50 × 20
Dim. (mm)	A	36	38	42	46	40
	B	42	44	46	48	50

180R


Reducing Cross



Size	Inch	4 × 3	3/4 × 1/2	1 × 1/2	1 × 3/4	1 1/4 × 1/2
	mm	100 × 80	20 × 15	25 × 15	25 × 20	32 × 15
Dim. (mm)	A	82	30	32	35	34
	B	90	31	34	36	38
Size	Inch	2 × 1	2 × 1 1/4	2 × 1 1/2	2 1/2 × 3/4	2 1/2 × 1
	mm	50 × 25	50 × 32	50 × 40	65 × 20	65 × 25
Dim. (mm)	A	44	48	52	43	47
	B	52	54	55	57	60

180R


Reducing Cross



Size	Inch	1 1/4 × 3/4	1 1/4 × 1	2 1/2 × 2	3 × 3/4	3 × 1	2 1/2 × 1 1/4
	mm	32 × 20	32 × 25	65 × 50	80 × 20	80 × 25	65 × 32
Dim. (mm)	A	36	40	61	45	51	52
	B	41	42	66	65	67	62
Size	Inch	2 1/2 × 1 1/2	3 × 1 1/4	3 × 1 1/2	3 × 2	3 × 2 1/2	
	mm	65 × 40	80 × 32	80 × 40	80 × 50	80 × 65	
Dim. (mm)	A	55	55	58	64	72	
	B	63	70	71	73	76	

220


Socket




Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	25	27	30	36	39	45	50
Size	Inch	1 1/2	2	2 1/2	3	4	5	6
	mm	40	50	65	80	100	125	150
Dim. (mm)	A	55	65	74	80	94	95	105

220S


Socket R/L




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	36	39	45	50	55	65
Size	Inch						
	mm						
Dim. (mm)	A						

240**Reducing Socket**


Size	Inch	4 × 1	4 × 1 1/4	4 × 1 1/2	4 × 2	4 × 2 1/2
	mm	100 × 25	100 × 32	100 × 40	100 × 50	100 × 65
Dim. (mm)	A	94	94	94	94	94
Size	Inch	1/2 × 1/8	1/2 × 1/4	1/2 × 3/8	3/4 × 1/8	3/4 × 1/4
	mm	15 × 6	15 × 8	15 × 10	20 × 6	20 × 8
Dim. (mm)	A	36	36	36	39	39

240**Reducing Socket**

Size	Inch	4 × 3	3/8 × 1/8	3/8 × 1/4	5 × 4	6 × 4
	mm	100 × 80	10 × 6	10 × 8	125 × 100	150 × 100
Dim. (mm)	A	94	30	30	122	105
Size	Inch	3/4 × 3/8	3/4 × 1/2	1 × 1/4	1 × 3/8	1 × 1/2
	mm	20 × 10	20 × 15	25 × 8	25 × 10	25 × 15
Dim. (mm)	A	39	39	45	45	45

240**Reducing Socket**


Size	Inch	6 × 2	6 × 3	1 1/4 × 3/8	1 1/4 × 1/2	1 1/4 × 3/4
	mm	150 × 50	150 × 80	32 × 10	32 × 15	32 × 20
Dim. (mm)	A	105	105	50	50	50
Size	Inch	1 × 3/4	1 1/4 × 1/4	2 × 1	2 × 1 1/4	2 × 1 1/2
	mm	25 × 20	32 × 8	50 × 25	50 × 32	50 × 40
Dim. (mm)	A	45	50	65	65	74

240**Reducing Socket**

Size	Inch	6 × 2	6 × 3	1 1/4 × 3/8	1 1/4 × 1/2	1 1/4 × 3/4	1 × 3/4
	mm	150 × 50	150 × 80	32 × 10	32 × 15	32 × 20	25 × 20
Dim. (mm)	A	105	105	50	50	50	45
Size	Inch	1 1/4 × 1/4	2 × 1	2 × 1 1/4	2 × 1 1/2	1 1/4 × 1	1 1/2 × 1/4
	mm	32 × 8	50 × 25	50 × 32	50 × 40	32 × 25	40 × 8
Dim. (mm)	A	50	65	65	74	50	55

240


Reducing Socket



Size	Inch	1 1/2 x 3/8	1 1/2 x 1/2	1 1/2 x 3/4	2 1/2 x 1/2	2 1/2 x 3/4	2 1/2 x 1
	mm	40 x 10	40 x 15	40 x 20	65 x 15	65 x 20	65 x 25
Dim. (mm)	A	55	55	55	74	74	74
Size	Inch	2 1/2 x 1 1/4	2 1/2 x 1 1/2	1 1/2 x 1	1 1/2 x 1 1/4	2 x 1/2	2 x 3/4
	mm	65 x 32	65 x 40	40 x 25	40 x 32	50 x 15	50 x 20
Dim. (mm)	A	74	74	55	55	65	65

240


Reducing Socket



Size	Inch	3 x 1 1/4	2 1/2 x 2	3 x 1/2	3 x 3/4	3 x 1	3 x 1 1/2
	mm	80 x 32	65 x 50	80 x 15	80 x 20	80 x 25	80 x 40
Dim. (mm)	A	80	74	80	80	80	80
Size	Inch	3 x 2	3 x 2 1/2	1 1/4 x 1/8			
	mm	80 x 50	80 x 65	8 x 6			
Dim. (mm)	A	80	80	27			

241


Bushing




Size	Inch	4 x 3/4	4 x 1	4 x 1 1/4	4 x 1 1/2	4 x 3
	mm	100 x 20	100 x 25	100 x 32	100 x 40	100 x 80
Dim. (mm)	A	51	51	51	51	51
Size	Inch	1/2 x 3/8	3/4 x 1/8	3/4 x 1/4	3/4 x 3/8	3/4 x 1/2
	mm	15 x 10	20 x 6	20 x 8	20 x 10	20 x 15
Dim. (mm)	A	24	26	26	26	26

241


Bushing




Size	Inch	3/8 x 1/8	3/8 x 1/4	5 x 4	6 x 5	6 x 2 1/2
	mm	10 x 6	10 x 8	125 x 100	150 x 125	150 x 65
Dim. (mm)	A	20	20	47	69	69
Size	Inch	1 x 1/4	1 x 3/8	1 x 1/2	1 x 3/4	1 1/4 x 3/8
	mm	25 x 8	25 x 10	25 x 15	25 x 20	32 x 10
Dim. (mm)	A	29	29	29	29	31

241**Bushing**


Size	Inch	1/2 × 1/8	1/2 × 1/4	11/4 × 1	11/2 × 1/4	11/2 × 3/8
	mm	15 × 6	15 × 8	32 × 25	40 × 8	40 × 10
Dim. (mm)	A	24	24	31	31	31
Size	Inch	11/4 × 1/2	11/4 × 3/4	21/2 × 11/2	21/2 × 2	3 × 2
	mm	32 × 15	32 × 20	65 × 40	65 × 50	80 × 50
Dim. (mm)	A	31	31	40	40	44

241**Bushing**

Size	Inch	11/2 × 1/2	11/2 × 3/4	11/2 × 1	1 1/2 × 11/4	2 × 1	3 × 21/2
	mm	40 × 15	40 × 20	40 × 25	40 × 32	50 × 25	80 × 65
Dim. (mm)	A	31	31	31	31	35	44
Size	Inch	1/4 × 1/8	2 × 11/4	2 × 11/2	21/2 × 1/2	21/2 × 3/4	
	mm	8 × 6	50 × 32	50 × 40	65 × 15	65 × 20	
Dim. (mm)	A	20	35	35	40	40	

241D**Bushing**


Size	Inch	2 × 1/2	2 × 3/4	21/2 × 1	21/2 × 11/4	3 × 1/2
	mm	50 × 15	50 × 20	65 × 25	65 × 32	80 × 15
Dim. (mm)	A	35	35	40	40	44
	B	48	48	54	54	59
Size	Inch	6 × 4	3 × 3/4	3 × 1	3 × 11/4	3 × 11/2
	mm	150 × 100	80 × 20	80 × 25	80 × 32	80 × 40
Dim. (mm)	A	63	44	44	44	44
	B	86	59	59	59	59

241D**Bushing**

Size	Inch	4 × 2	4 × 21/2	6 × 3		
	mm	100 × 50	100 × 65	150 × 80		
Dim. (mm)	A	51	51	63		
	B	69	69	86		
Size	Inch					
	mm					
Dim. (mm)	A					
	B					

245


Reducing Hexagon Nipple



Size	Inch	4 × 2	4 × 2 1/2	4 × 3	3/8 × 1/4	1/2 × 1/4
	mm	100 × 50	100 × 65	100 × 80	10 × 8	15 × 8
Dim. (mm)	A	87	87	87	38	44
Size	Inch	1 1/4 × 3/4	1 1/4 × 1	1 1/2 × 1/2	1 1/2 × 3/4	1 1/2 × 1
	mm	32 × 20	32 × 25	40 × 15	40 × 20	40 × 25
Dim. (mm)	A	57	57	59	59	59

245


Reducing Hexagon Nipple



Size	Inch	1/2 × 3/8	3/4 × 1/4	3/4 × 3/8	3/4 × 1/2	1 × 1/2
	mm	15 × 10	20 × 8	20 × 10	20 × 15	25 × 15
Dim. (mm)	A	44	47	47	47	53
Size	Inch	1 1/2 × 1 1/4	2 × 1/2	2 × 3/4	2 × 1	2 × 1 1/4
	mm	40 × 32	50 × 15	50 × 20	50 × 25	50 × 32
Dim. (mm)	A	59	68	68	68	68

245


Reducing Hexagon Nipple




Size	Inch	1 × 3/4	1 1/4 × 1/2	2 1/2 × 1 1/4	2 1/2 × 1 1/2	2 1/2 × 2	2 × 1 1/2
	mm	25 × 20	32 × 15	65 × 32	65 × 40	65 × 50	50 × 40
Dim. (mm)	A	53	57	75	75	75	68
Size	Inch	1/4 × 1/8	2 1/2 × 1	3 × 1 1/2	3 × 2	3 × 2 1/2	
	mm	8 × 6	65 × 25	80 × 40	80 × 50	80 × 65	
Dim. (mm)	A	31	75	83	83	83	

246


Reducing Socket M/F




Size	Inch	3/8 × 1/4	1/2 × 1/4	1/2 × 3/8	3/4 × 3/8	3/4 × 1/2
	mm	10 × 8	15 × 8	15 × 10	20 × 10	20 × 15
Dim. (mm)	A	35	43	43	48	48
Size	Inch	1 1/2 × 1 1/4	2 × 1	2 × 1 1/4	2 × 1 1/2	1 × 1/2
	mm	40 × 32	50 × 25	50 × 32	50 × 40	25 × 15
Dim. (mm)	A	63	70	70	70	55

246**Reducing Socket M/F**


Size	Inch	1 × 3/4	1 1/4 × 1/2	1 1/4 × 3/4	1 1/4 × 1	1 1/2 × 3/4
	mm	25 × 20	32 × 15	32 × 20	32 × 25	40 × 20
Dim. (mm)	A	55	60	60	60	63
Size	Inch	1 1/2 × 1				
	mm	40 × 25				
Dim. (mm)	A	63				

270**Parallel Thread Socket**

Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	25	27	30	36	39	45	50
Size	Inch	6	1 1/2	2	2 1/2	3	4	
	mm	150	40	50	65	80	100	
Dim. (mm)	A	120	55	65	74	80	94	

280**Hexagon Nipple**



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	29	36	38	44	47	53	57
Size	Inch	5	6	1 1/2	2	2 1/2	3	4
	mm	125	150	40	50	65	80	100
Dim. (mm)	A	103	110	59	68	75	83	95

291**Plain Plug**

Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	11	14	15	18	20	23	29
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	30	36	39	44	58	71.5	

291LM

Plain Plug



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	25	28.5	32.5	35.1	37.6	40.1
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	46	50	64.5			

291N


Countersunk Plug



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	14.2	16	19	20.3	21.1	22.4
Size	Inch	2 1/2	3				
	mm	65	80				
Dim. (mm)	A	27.2	38.7				

291S


Solid Plug




Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	14	15	18	20	23	29
Size	Inch	1 1/2	2	2 1/2	3		
	mm	40	50	65	80		
Dim. (mm)	A	30	36	39	44		

300


Cap



Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	13	15	17	19	22	24	27
Size	Inch	1 1/2	2	2 1/2	3	4	5	6
	mm	40	50	65	80	100	125	150
Dim. (mm)	A	27	32	35	38	45	54	61

310**Locknut**


Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	6	7	8	9	10	11
Size	Inch	1 1/2	2	2 1/2	3	4	
	mm	40	50	65	80	100	
Dim. (mm)	A	12	13	16	19	23	

312**Backnut**

Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2	4
	mm	15	20	25	32	40	50	100
Dim. (mm)	A Min	7.9	8.6	9.7	10.7	11.9	13.5	20.3
	F Min	24.6	31.2	38.1	47.2	53.9	66.8	127
	K	1.5	1.5	1.5	1.5	1.5	2.3	3.3


321-4**Flange Bs4504**

Size	Inch	1 1/4	1 1/2	2	2 1/2	3	4
	mm	32	40	50	65	80	100
Dim. (mm)	A	23	23	28	35	38	38
Size	Inch	6					
	mm	150					
Dim. (mm)	A	46					

321-6**Flange 1600/4**


Size	Inch	1 1/4	1 1/2	2	2 1/2	3	4
	mm	32	40	50	65	80	100
Dim. (mm)	A	20	20	22	26	28	34
Size	Inch	6					
	mm	150					
Dim. (mm)	A	40					

321-H Flange




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	15	16	19	21	21	26
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	30	33	39			

321P Flange




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	15	16	19	21	21	26
Size	Inch	2 1/2	3	4	5	6	
	mm	65	80	100	125	150	
Dim. (mm)	A	30	33	39	40	40	

321PW Flange




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	15	16	19	21	21	26
Size	Inch	2 1/2	3	4	5	6	
	mm	65	80	100	125	150	
Dim. (mm)	A	30	33	39	40	40	


321TD Flange




Size	Inch	1	1 1/4	1 1/2	2	2 1/2	3
	mm	25	32	40	50	65	80
Dim. (mm)	A	16	17.4	23	25	25	26.8
Size	Inch	4	6				
	mm	100	150				
Dim. (mm)	A	31.5	35				

330**Flat Seat Union**


Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	38	42	45	48	52	58	65
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	70	78	85	95	100	144	

330D**Flat Seat Union**

Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	38	42	45	48	52	58	65
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	70	78	85	95	100	144	

331**Flat Seat Union M/F**


Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	66	72	80	90	95	106
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	118	130	133			

340**Conical Joint Union**

Size	Inch	1/8	1/4	3/8	1/2	3/4	1
	mm	6	8	10	15	20	25
Dim. (mm)	A	38	42	45	48	52	58
Size	Inch	1 1/4	1 1/2	2	2 1/2	3	4
	mm	32	40	50	65	80	100
Dim. (mm)	A	65	70	78	85	95	110

340Q


Deflection Union



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	46	49	55	64	74.5	83
Size	Inch						
	mm						
Dim. (mm)	A						

341


Conical Joint Union M/F



Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	55	55	66	72	80	90
Size	Inch	1 1/2	2	2 1/2	3	4	
	mm	40	50	65	80	100	
Dim. (mm)	A	95	106	118	130	133	

342


Conical Joint Union




Size	Inch	1/8	1/4	3/8	1/2	3/4	1	1 1/4
	mm	6	8	10	15	20	25	32
Dim. (mm)	A	32	36.5	41	43.5	49.5	52.5	57.5
Size	Inch	1 1/2	2	2 1/2	3	4	6	
	mm	40	50	65	80	100	150	
Dim. (mm)	A	61	70	82	89	98	147	

342A


Double Bronze Navy Union




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	48	52	58	65	70	78
Size	Inch						
	mm						
Dim. (mm)	A						

526**Long Adapter M/F**


Size	Inch	1/2 × 30	1/2 × 40	1/2 × 50	1/2 × 60	1/2 × 100
	mm	15 × 30	15 × 40	15 × 50	15 × 60	15 × 100
Dim. (mm)	A	30	40	50	60	100
Size	Inch	1/2 × 30	1/2 × 40	1/2 × 50	1/2 × 60	1/2 × 100
	mm	15 × 30	15 × 40	15 × 50	15 × 60	15 × 100
Dim. (mm)	A	30	40	50	60	100

529A**Long Extension Piece**

Size	Inch	1/4	3/8	1/2	3/4	1	1 1/4
	mm	8	10	15	20	25	32
Dim. (mm)	A	33	35	43	48	55	60
Size	Inch	1 1/2	2	2 1/2	3	4	
	mm	40	50	65	80	100	
Dim. (mm)	A	61.5	68	76	83	97	

529X**Short Extension Piece**


Size	Inch	1/2					
	mm	15					
Dim. (mm)	A	32					
Size	Inch						
	mm						
Dim. (mm)	A						

1221**Side Outlet Elbow**

Size	Inch	1/2	3/4	1	1 1/2	2	
	mm	15	20	25	40	50	
Dim. (mm)	A	28	33	38	50	58	
Size	Inch						
	mm						
Dim. (mm)	A						

1223


Side Outlet Tee



Size	Inch	1/2	3/4	1	1 1/4		
	mm	15	20	25	32		
Dim. (mm)	A	28	33	38	45		
Size	Inch						
	mm						
Dim. (mm)	A						

1224


Side Outlet Cross



Size/	Inch	1 1/4	1 1/2				
	mm	32	40				
Dim. (mm)	A	45	50				
Size	Inch						
	mm						
Dim. (mm)	A						

LAA


Coupling Luck F/F



Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	95	104	110	114	122	129
Size	Inch						
	mm						
Dim. (mm)	A						

LAF


Coupling Luck M/F




Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	59	63	65	69	71	79
Size	Inch						
	mm						
Dim. (mm)	A						

LCC**Long Compression Coupling**

Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	93	101	109	114	118	121
Size	Inch	2 1/2	3	4			
	mm	65	80	100			
Dim. (mm)	A	137	145	155			

SCC**Short Compression Coupling**

Size	Inch	1/2	3/4	1	1 1/4	1 1/2	2
	mm	15	20	25	32	40	50
Dim. (mm)	A	62	69	73	79	79	84
Size	Inch	2 1/2	3				
	mm	65	80				
Dim. (mm)	A	100	110				

TCC**Compression Tee**

Size	Inch	1/2	3/4				
	mm	15	20				
Dim. (mm)	A	80	88				
Size	Inch						
	mm						
Dim. (mm)	A						

Basic Dimension for British and Din Standard Pipe Threads



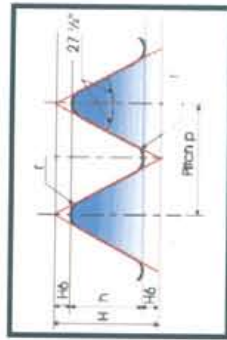


Fig 1-Parallel thread
H=0.960491 p
h=0.640327 p
r=0.137329 p

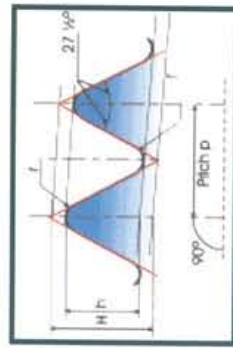

Taper 2-Thread
H=0.960237 p
h=0.640327 p
r=0.137278 p

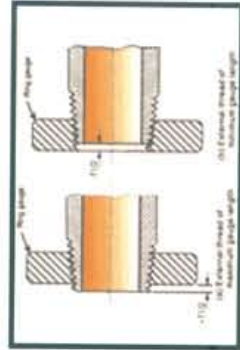

(a) External thread of maximum gauge length
(b) External thread of minimum gauge length

International Standard ISO7/1, Pipe Threads Dimensions

Designations of thread size	Number of threads in 25.4 mm	Pitch P	Height of thread h	Diameters at gauge plane				Gauge Length (external thread)				Tolerance on position of gauge				Dimensions in millimeters		
				Major (gauge diameter) d	Pitch d2	Minor d1	Nominal	Tolerance ± T/2	Maximum	Minimum	Tolerance ± T/2	For Nominal gauge length	For maximum gauge length	For minimum gauge length	Length of useful external thread not less than			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17		
1/8	28	0.907	0.581	9.278	9.147	8.566	4	0.9	1	4.9	3.1	1.1	11/4	6.5	7.4	5.6		
1/4	19	1.337	0.856	13.157	12.301	11.445	6	1.3	1	7.3	4.7	1.7	11/4	9.7	11	8.4		
3/8	19	1.337	0.856	16.662	15.806	14.95	6.4	1.3	1	7.7	5.1	1.7	11/4	10.1	11.4	8.8		
1/2	14	1.814	1.162	20.955	19.783	18.631	8.2	1.8	1	10	6.4	2.3	11/4	13.2	15	11.4		
3/4	14	1.814	1.162	26.441	25.279	24.117	9.5	1.8	1	10	7.7	2.3	11/4	14.5	16.3	12.7		
1	11	2.309	1.479	33.249	31.77	30.291	10.4	2.3	1	12.7	8.1	2.9	11/4	16.9	19.1	14.5		
1 1/4	11	2.309	1.479	41.91	40.431	38.952	12.7	2.3	1	15	10.4	2.9	11/4	19.1	21.4	16.8		
1 1/2	11	2.309	1.479	47.833	46.353	44.865	12.7	2.3	1	15	10.4	2.9	11/4	19.1	21.4	16.8		
2	11	2.309	1.479	59.614	58.135	56.656	15.9	2.3	1	18.2	13.6	2.9	11/4	23	25.7	21.1		
2 1/2	11	2.309	1.479	73.184	71.705	70.226	17.5	3.5	11/2	21	14	3.5	11/2	26.7	30.2	23.2		
3	11	2.309	1.479	87.884	86.405	84.926	20.6	3.5	11/2	24.1	17.1	3.5	11/2	29.8	33.3	26.3		
4	11	2.309	1.479	113.03	111.551	110.072	25.4	3.5	11/2	28.9	21.9	3.5	11/2	35.8	39.3	32.3		
5	11	2.309	1.479	136.43	134.951	133.472	28.6	3.5	11/2	32.1	25.1	3.5	11/2	40.1	43.6	36.6		
6	11	2.309	1.479	163.83	162.351	160.872	28.6	3.5	11/2	32.1	25.1	3.5	11/2	40.1	43.6	36.6		

Note: This information is selected from the International Standard ISO7/1:2000: Pipe threads where pressure - tight joints, Table 1



WEIFANG XINHUITONG METAL WORK CO.,LTD

Address : Southwest of the Cross Section of Yuqing Street and Tengfei Road, Weicheng Economic Development Zone, Weifang City, Shandong Province, P.R.China

Telephone: : 86-536-8160728

Fax : 86-536-8167079 8166258

Web site : www.xhtong.com

E-mail : vip@xhtong.com

©XHTONG-201801