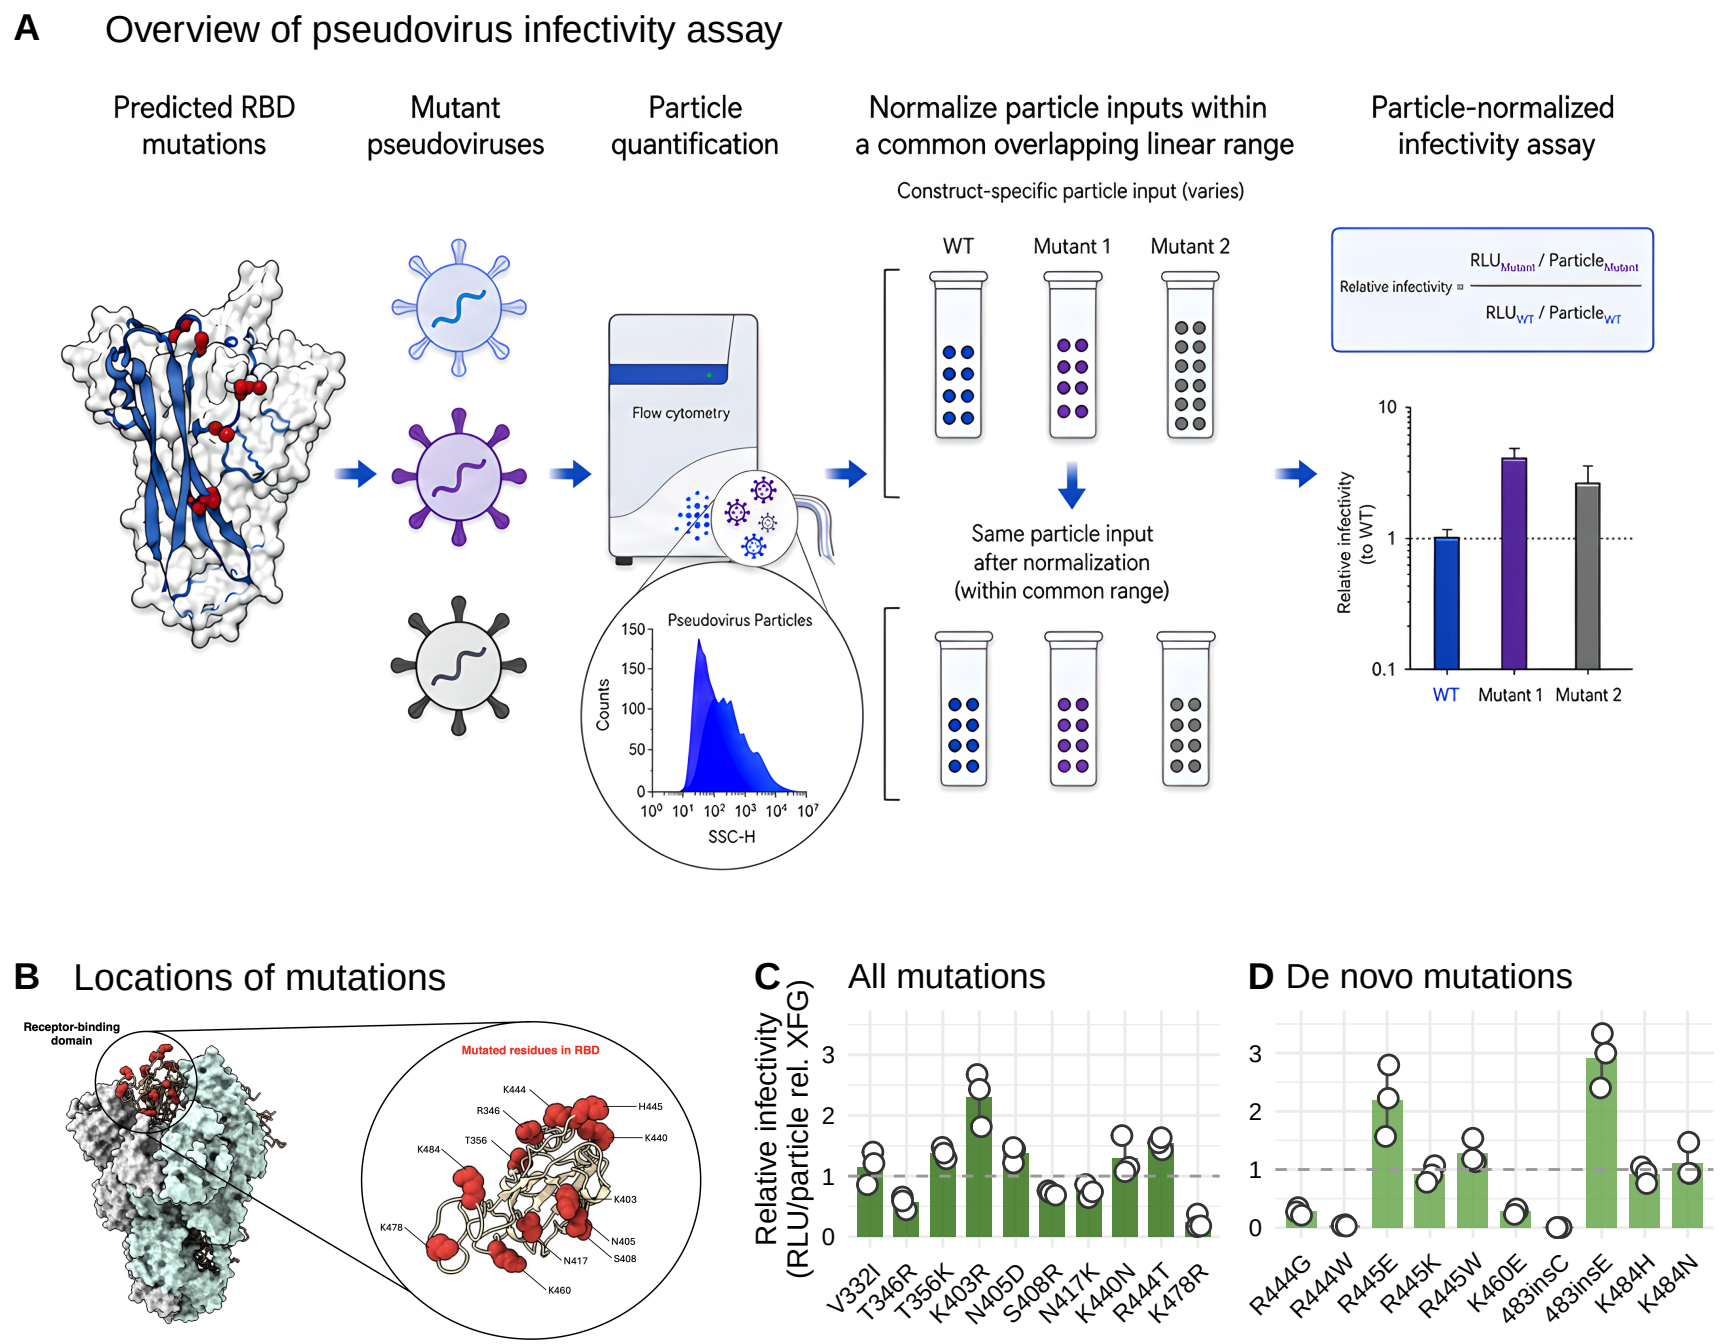

A
Overview of pseudovirus infectivity assay
Predicted RBD mutations
Mutant pseudoviruses
Particle quantification
Normalize particle inputs within a common overlapping linear range
Particle-normalized infectivity assay
Construct-specific particle input (varies)
WT
Mutant 1
Mutant 2
Flow cytometry
Pseudovirus Particles
Counts
SSC-H
Same particle input after normalization (within common range)
Relative infectivity = RLU_Mutant / Particle_Mutant / RLU_WT / Particle_WT
Relative infectivity (to WT)
B
Locations of mutations
Receptor-binding domain
Mutated residues in RBD
C
All mutations
Relative infectivity (RLU/particle rel. XFG)
V332I
T346R
T356K
K403R
N405D
S408R
N417K
K440N
R444T
K478R
D
De novo mutations
R444G
R444W
R445E
R445K
R445W
K460E
483insC
483insE
K484H
K484N