

morning API Documentation (2.0.0)

Getting Started

Welcome to the morning API.

About morning

Morning is a business management platform that helps companies manage invoicing, accounting, payments, and their overall financial operations.

The Morning API provides programmatic access to the platform, enabling you to automate workflows and seamlessly integrate Morning's capabilities into your own applications.

The API is built around REST principles and uses standard HTTP methods and status codes.

All API communication is conducted over HTTPS, and all request and response bodies are JSON-encoded.

Authentication is implemented using OAuth 2.0, providing secure, token-based authorization.

Applications obtain access tokens that must be included in API requests to securely access Morning resources according to granted permissions.

Environments

We provide two environments for API development:

Production - Live operations with real data.

Sandbox - Testing and development. No real data is affected.

Each environment requires its own set of API keys.

We recommend building and testing your integration in the sandbox environment before switching to production.

Base URLs:

Authentication

Our APIs use the **OAuth 2.0 protocol** for authentication and authorization.

To get started:

1. Obtain your API keys (OAuth 2.0 client credentials) for your relevant business as explained [here](#) (Hebrew).
2. Request an access token from our authentication server using the endpoint below.
3. Include the returned `accessToken` as a `Bearer` token in the `Authorization` header of all subsequent API requests:

```
Authorization: Bearer <accessToken>
```

Obtain an Access Token

POST `/idp/v1/oauth/token`

PRODUCTION <https://api.morning.co/idp/v1/oauth/token>  ▼

This endpoint returns an access token (issued as a signed JWT) in the response body as

`accessToken`.

NOTES:

- Please be advised that **the `accessToken` is valid for 1 hour**. Once a token becomes invalid, requests to protected endpoints will return a `401 Unauthorized` error, and you will need to request a new token.
- The access token is scoped to the business associated with your API keys.
- Error Handling - All error responses follow the OAuth 2.0 error format (RFC 6749):

Status	Error	Description
400	<code>invalid_request</code>	Missing <code>grant_type</code> parameter
400	<code>unsupported_grant_type</code>	<code>grant_type</code> is not <code>client_credentials</code>
400	<code>invalid_grant</code>	API key privilege is expired, revoked, or pending
400	<code>unauthorized_client</code>	No active subscription, or subscription does not include API access
401	<code>invalid_client</code>	Missing or incorrect <code>client_id</code> / <code>client_secret</code> , or application/account is blocked

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes

REQUEST BODY SCHEMA: `application/json`
required

<code>grant_type</code> required	<code>string</code> Value: <code>"client_credentials"</code> OAuth 2.0 grant type. Must be <code>client_credentials</code>
<code>client_id</code> required	<code>string</code> API Key Client ID
<code>client_secret</code> required	<code>string</code> API Key Client Secret

Responses

✓ **200** Access token successfully generated

accessToken required	string The access token to use as Authorization: Bearer <token> header
tokenType required	string Value: "Bearer" The token type
expiresAt required	integer <int64> Unix timestamp when this token expires and becomes invalid

- > 400 Bad request — invalid or missing parameters, expired/revoked privileges, or insufficient subscription
- > 401 Unauthorized — client authentication failed

Request samples

Payload

Content type
application/json

Copy

```
{
  "grant_type": "client_credentials",
  "client_id": "26095b33-ed64-17f4-65d8-fd5630c7502e",
  "client_secret": "pWhZNaF3KSW7-q7XR9GQvQ"
}
```

Response samples

200400401

Content type
application/json

```
{
  "accessToken":
    "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpc3MiOiJtb3JuaW5nIiwiaWF0IjoxNzcwM
    "tokenType": "Bearer",
    "expiresAt": 1771317327
}
```

Documents

Create and manage business documents such as invoices, receipts, quotes, credit notes, and more.

Each document is associated with a specific business and includes income rows, payment rows, and client information.

Add Document

POST /documents

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents>  

Add a document to the current business.

The document will be generated based on the default business and document settings, and by any overriding request attributes received in this endpoint.

Notes:

- **VAT Configuration** — When declaring your `vatType`, you can define the general VAT type of the entire document, as well as the `vatType` for each individual income row.
- **Document Linking** — Use `linkedDocumentIds` to state the related documents. For example, when creating a receipt, include the original invoice document ID in this array. This linkage enables the system to automatically mark the original invoice as closed.
- **Payment Association** — The `linkedPaymentId` field allows you to define the payment ID that the document is relevant to. This can be attached only to invoice documents (type

305).

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

type

required

integer (DocumentType)

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש

Code	Type
600	קבלת פיקדון
610	משיכת פיקדון

lang
required

string (Lang)

Enum: "he" "en"

Content language

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני

Code	Name
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

vatType
required

integer (DocumentVatType)
Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

income >
required

Array of objects (IncomeRowRequest)
Income rows

description

string
Document description. For example: `Just an order`.

remarks	string Document remarks. For example: <code>Some remarks</code>.
footer	string Document footer text. For example: <code>Texts in footer</code>.
emailContent	string Custom extra text appearing in the email sent to the customer. For example: <code>Email content</code>.
date	string Document date in the format <code>YYYY-MM-DD</code>. Defaults to today. For example: <code>2026-05-12</code>.
dueDate	string Document payment due date in the format <code>YYYY-MM-DD</code>. For example: <code>2026-05-31</code>.
discount >	object (DiscountRequest)
rounding	boolean Default: <code>false</code> Round the amounts. Defaults to <code>false</code>.
signed	boolean Default: <code>true</code> Digitally sign the document. Defaults to <code>true</code>.
attachment	boolean Default: <code>false</code> Attach the document in the email sent to the recipient. Defaults to <code>false</code>.
paymentRequestData >	object Payment request configuration
client >	object Client information

payment >

Array of objects (PaymentRowRequest)

Payment rows

linkedDocumentIds

Array of strings

Linked document IDs. When creating a receipt, include the original invoice document ID — this will automatically close the original invoice if needed. For example: `["031e827a-c664-c1e4-d231-a80027271123"]`.

linkedPaymentId

string

Linked payment ID. Can only be attached to invoice documents (type `305`). For example: `031e827a-c664-c1e4-d231-a80027271123`.

linkType

string

Reference type (applicable only when using `linkedDocumentIds`).

Value	Meaning
<code>link</code>	Document is related to another
<code>cancel</code>	Document cancels another

Responses

> **201** Document created successfully

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "description": "Just an order",
  "remarks": "Some remarks",
  "footer": "Texts in footer",
  "emailContent": "Email content",
  "type": 305,
  "date": "2026-05-12",
  "dueDate": "2026-05-31",
  "lang": "he",
  "currency": "ILS",
  "vatType": 0,
-  "discount": {
    "amount": 1,
    "type": "sum"
  },
  "rounding": false,
  "signed": true,
  "attachment": false,
-  "paymentRequestData": {
    -  "plugins": [
      +  { ... }
    ],
    "maxPayments": 1
  },
}
```

```
- "client": {
  "id": "7944827a-c664-11e4-8231-080027271114",
  "name": "John Doe",
  - "emails": [
    "email1@example.com",
    "email2@example.com"
  ],
  "taxId": "0123456789",
  "address": "1 Luria St",
  "city": "Tel Aviv",
  "zip": "1234567",
  "country": "IL",
  "phone": "+972-54-1234567",
  "fax": "+972-54-1234567",
  "mobile": "+972-54-1234567",
  "add": false,
  "self": false
},
- "income": [
  - {
    "catalogNum": "MXDFSDD",
    "description": "Item description",
    "quantity": 1,
    "price": 300,
    "currency": "ILS",
    "currencyRate": 1,
    "vatRate": 0.18,
    "itemId": "8b338c95-095e-46d4-b2c6-331747508759",
    "vatType": 1
  }
],
```

```
- "payment": [  
  - {  
    "date": "2026-05-21",  
    "type": 3,  
    "price": 300,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "bankName": "My Bank",  
    "bankBranch": "198",  
    "bankAccount": "212435",  
    "chequeNum": "10002",  
    "accountId": "TFGFFGSYYE",  
    "transactionId": "TGBBBXNLKS75SKJS",  
    "appType": 1,  
    "subType": 1,  
    "cardType": 2,  
    "cardNum": "8765",  
    "dealType": 1,  
    "numPayments": 1,  
    "firstPayment": 10  
  }  
],  
- "linkedDocumentIds": [  
  "031e827a-c664-c1e4-d231-a80027271123"  
],  
"linkedPaymentId": "031e827a-c664-c1e4-d231-a80027271123",  
"linkType": "link"  
}
```

Response samples

201

Content type

application/json

Copy Expand all Collapse all

```
{  
  "id": "57ae2ff9-0c24-43e8-b39c-a5bdcc05573d",
```

```
"number": 40034,
"dueDate": "2026-05-31",
"type": 305,
"signed": true,
"lang": "he",
- "client": {
    "id": "7944827a-c664-11e4-8231-080027271114"
  },
"taxAuthorityConfirmationInitiated": false,
- "url": {
    "origin": "string",
    "he": "string",
    "en": "string"
  },
"taxAuthorityConfirmationLastError": 0,
"vatRate": 0.18
}
```

Search Documents

POST /documents/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/search>  

Search the documents of the current business using any combination of the filters in the request body. All filters are optional; omitting the body returns the most recent documents. Results are paginated.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS: > *bearerAuth*

page integer

Default: 1

Page number to retrieve. Defaults to 1.

pageSize integer

Default: 25

Number of results per page. Defaults to 25.

number integer

Filter by document serial number. For example: 12001.

type Array of integers (DocumentType)

Filter by document type(s).

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש

Code	Type
600	קבלת פיקדון
610	משיכת פיקדון

status

Array of integers (DocumentStatus)

Filter by document status(es).

Code	Status
0	מסמך פתוח
1	מסמך סגור
2	מסמך סומן ידנית כסגור
3	מסמך מבטל
4	מסמך שבוטל

paymentTypes

Array of integers (PaymentGroup)

Filter by payment type(s) used in the document.

Code	Method
0	ניכוי במקור
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

fromDate string

Return documents whose document date from this date, in the format `YYYY-MM-DD`. For example: `2016-01-01`.

toDate string

Return documents whose document date to this date, in the format `YYYY-MM-DD`. For example: `2016-01-31`.

clientId string

Filter by client ID. For example: `28fa4c1d-a29b-11e4-963c-18002725111e`.

clientName string

Filter by client name. For example: `John`.

description string

Filter by document description. For example: `Any text`.

download boolean

Filter by whether the document was downloaded by the client. For example: `true`.

sort string

Field to sort the result set by.

Value	Sorts by
<code>documentDate</code>	Document (issue) date
<code>dueDate</code>	Due date
<code>client</code>	Client name

Responses

✓ **200** Paginated list of documents matching the search

total required	integer Total number of documents matching the search
page required	integer The requested page number
pageSize required	integer The requested page size
from required	integer Index of the first item in the current page
to required	integer Index of the last item in the current page
pages required	integer Total number of pages available
items > required	Array of objects (SearchDocument) The documents matching the search

Request samples

Payload

Content type
application/json

Copy Expand all Collapse all

```
{
  "page": 1,
  "pageSize": 25,
  "number": 12001,
```

```
- "type": [  
    305  
  ],  
- "status": [  
    0  
  ],  
- "paymentTypes": [  
    3  
  ],  
  "fromDate": "2016-01-01",  
  "toDate": "2016-01-31",  
  "clientId": "28fa4c1d-a29b-11e4-963c-18002725111e",  
  "clientName": "John",  
  "description": "Any text",  
  "download": true,  
  "sort": "documentDate"  
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
  "total": 25,  
  "page": 1,  
  "pageSize": 25,  
  "from": 1,  
  "to": 25,  
  "pages": 2,
```

```

- "items": [
  - {
    "id": "73aedef13-0263-4399-95b8-2261e1c89e68",
    "type": 305,
    "number": "80010",
    "status": 0,
    "documentDate": "2026-01-19",
    "creationDate": 1768829547,
    "lang": "he",
    "description": "Just an order",
    "remarks": "Some remarks",
    "amount": 354,
    "amountLocal": 354,
    "amountDueVat": 300,
    "amountExemptVat": 0,
    "amountExcludeVat": 0,
    "amountOpened": 0,
    "vat": 54,
    "vatType": 0,
    "vatRate": 0.18,
    "currency": "ILS",
    "currencyRate": 1,
+   "client": { ... },
+   "business": { ... },
+   "data": { ... },
+   "income": [ ... ],
+   "payment": [ ... ],
    "signed": true,
    "cancellable": true,
    "downloaded": false,
    "reverseCharge": false,
    "rounding": false,
    "taxConfirmationEligible": false,
+   "url": { ... }
  }
]
}

```

Search Payments in Documents

POST /documents/payments/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/payments/search>  

Search the payments recorded across the current business's documents, using any combination of the filters in the request body. Each result is the document that contains the matching payment(s), with the payments in its `payment` array. All filters are optional. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json
optional

page *integer*
Default: 1
Page number to retrieve. Defaults to 1.

pageSize *integer*
Default: 25
Number of results per page. Defaults to 25.

type *Array of integers* (PaymentSearchDocumentType)
Filter by document type(s).

Code	Type
320	חשבונית מס / קבלה

Code	Type
400	קבלה
405	קבלה על תרומה
600	קבלת פיקדון
610	משיכת פיקדון

paymentTypes

Array of integers (PaymentGroup)

Filter by payment type(s) used in the document.

Code	Method
0	ניכוי במקור
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

fromDate

string

Return payments dated on or after this date, in the format `YYYY-MM-DD`. For example: `2016-01-01`.

toDate

string

Return payments dated on or before this date, in the format `YYYY-MM-DD`. For example: `2016-01-31`.

paymentId

string

Payment identifier, such as a cheque number or PayPal transaction ID.
For example: `427547`.

sort

string

Field and direction to sort the result set by.

Value	Sorts by
<code>date:desc</code>	Payment date, descending
<code>date:asc</code>	Payment date, ascending

Responses

✓ **200** Paginated list of documents whose payments matched the search

RESPONSE SCHEMA: application/json

total required	integer	Total number of documents matching the search
page required	integer	The requested page number
pageSize required	integer	The requested page size
from required	integer	Index of the first item in the current page
to required	integer	Index of the last item in the current page
pages required	integer	Total number of pages available
items > required	Array of objects	(DocumentPayment)

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "page": 1,
  "pageSize": 25,
  - "type": [
    320
  ],
  - "paymentTypes": [
    3
  ],
  "fromDate": "2016-01-01",
  "toDate": "2016-01-31",
  "paymentId": "427547",
  "sort": "date:desc"
}
```

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "total": 25,
  "page": 1,
  "pageSize": 25,
  "from": 1,
```



```
"to": 25,
"pages": 2,
- "items": [
  - {
    "id": "7af2e6e7-6551-4691-9e80-a5e6172e81cc",
    "type": 305,
    "number": 60005,
    "status": 0,
    "documentDate": "2025-12-14T00:00:00",
    "creationDate": "2025-12-14T09:39:03",
    "lang": "he",
    "amount": 354,
    "amountLocal": 354,
    "amountDueVat": 300,
    "amountExemptVat": 0,
    "amountExcludeVat": 0,
    "vat": 54,
    "currency": "ILS",
    "currencyRate": 1,
+ "client": { ... },
+ "business": { ... },
+ "income": [ ... ],
+ "payment": [ ... ],
    "signed": true,
    "cancellable": true,
    "downloaded": false,
    "reverseCharge": false,
    "rounding": false,
    "taxConfirmationEligible": false,
+ "url": { ... }
  }
]
}
```

Get a Preview Document

POST /documents/preview

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/preview>  

Previews a document before the actual generation.

This endpoint returns a file in Base64 format (you can read more about Base64 [here](#)).

If you would like to view the file on your website there are built-in plugins to display PDF, other than that - if you would like to have a consistent user experience through all browsers (including mobile browsers) we would suggest using [PDF.js](#) (an amazing Mozilla library), which can view PDF from Base64 format.

If you would like to add a download button for the preview in your website, here is a simple script to do that (do not forget to switch the {base64string} with the Base64 file that you received from the result):

```
<a download="preview-document.pdf" href="data:application/pdf;base64,{base64string}">Download Preview</a>
```

NOTE: If you would like just to check how a preview file looks, use the string that was given in the `file` property from our server response, put it in the following website:

<https://www.freeformatter.com/base64-encoder.html> and click `DECODE AND DOWNLOAD`. This will download the base64 string as a PDF file into your computer so that you can view it.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS:  `bearerAuth`

REQUEST BODY SCHEMA: `application/json`

required

type
required
`integer` (DocumentType)
Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

lang
required

string (Lang)

Enum: "he" "en"

Content language

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר

Code	Name
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ

Code	Name
HRK	קונה

vatType
required

integer (DocumentVatType)
Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

income >
required

Array of objects (IncomeRowRequest)
Income rows

description

string
Document description. For example: `Just an order`.

remarks

string
Document remarks. For example: `Some remarks`.

footer

string
Document footer text. For example: `Texts in footer`.

emailContent

string
Custom extra text appearing in the email sent to the customer. For example: `Email content`.

date

string
Document date in the format `YYYY-MM-DD`. Defaults to today. For example: `2026-05-12`.

dueDate	string Document payment due date in the format <code>YYYY-MM-DD</code>. For example: <code>2026-05-31</code>.
discount >	object (DiscountRequest)
rounding	boolean Default: <code>false</code> Round the amounts. Defaults to <code>false</code>.
signed	boolean Default: <code>true</code> Digitally sign the document. Defaults to <code>true</code>.
attachment	boolean Default: <code>false</code> Attach the document in the email sent to the recipient. Defaults to <code>false</code>.
paymentRequestData >	object Payment request configuration
client >	object Client information
payment >	Array of objects (PaymentRowRequest) Payment rows
linkedDocumentIds	Array of strings Linked document IDs. When creating a receipt, include the original invoice document ID — this will automatically close the original invoice if needed. For example: <code>["031e827a-c664-c1e4-d231-a80027271123"]</code>.
linkedPaymentId	string Linked payment ID. Can only be attached to invoice documents (type <code>305</code>). For example: <code>031e827a-c664-c1e4-d231-a80027271123</code>.

linkTypestring

Reference type (applicable only when using linkedDocumentIds).

Value	Meaning
link	Document is related to another
cancel	Document cancels another

Responses

✓ 200 Preview document generated successfully

RESPONSE SCHEMA: application/json

filestring <byte>
required

The generated preview document as a Base64-encoded PDF string. See the endpoint description for guidance on decoding and rendering.

Request samples

Payload

Content type
application/json

CopyExpand allCollapse all

```
{
  "description": "Just an order",
  "remarks": "Some remarks",
  "footer": "Texts in footer",
  "emailContent": "Email content",
  "type": 305,
  "date": "2026-05-12",
```

```
    "dueDate": "2026-05-31",
    "lang": "he",
    "currency": "ILS",
    "vatType": 0,
  -  "discount": {
        "amount": 1,
        "type": "sum"
    },
    "rounding": false,
    "signed": true,
    "attachment": false,
  -  "paymentRequestData": {
        -  "plugins": [
            +  { ... }
        ],
        "maxPayments": 1
    },
  -  "client": {
        "id": "7944827a-c664-11e4-8231-080027271114",
        "name": "John Doe",
        -  "emails": [
            "email1@example.com",
            "email2@example.com"
        ],
        "taxId": "0123456789",
        "address": "1 Luria St",
        "city": "Tel Aviv",
        "zip": "1234567",
        "country": "IL",
        "phone": "+972-54-1234567",
        "fax": "+972-54-1234567",
        "mobile": "+972-54-1234567",
        "add": false,
        "self": false
    },
  },
```



```
- "income": [  
  - {  
    "catalogNum": "MXDFSDD",  
    "description": "Item description",  
    "quantity": 1,  
    "price": 300,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "vatRate": 0.18,  
    "itemId": "8b338c95-095e-46d4-b2c6-331747508759",  
    "vatType": 1  
  }  
,  
- "payment": [  
  - {  
    "date": "2026-05-21",  
    "type": 3,  
    "price": 300,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "bankName": "My Bank",  
    "bankBranch": "198",  
    "bankAccount": "212435",  
    "chequeNum": "10002",  
    "accountId": "TFGFFGSYYE",  
    "transactionId": "TGBBBXNLKS75SKJS",  
    "appType": 1,  
    "subType": 1,  
    "cardType": 2,  
    "cardNum": "8765",  
    "dealType": 1,  
    "numPayments": 1,  
    "firstPayment": 10  
  }  
,  
- "linkedDocumentIds": [  
  "031e827a-c664-c1e4-d231-a80027271123"  
,  
]
```

```
"linkedPaymentId": "031e827a-c664-c1e4-d231-a80027271123",  
"linkType": "link"  
}
```

Response samples

200

Content type

application/json

Copy

```
{  
  "file":  
    "JVBERi0xLjcKJeLjz9MKMyAwIG9iago8PC9UeXB1IC9QYWdlCi9QYXJlbnQgMSAwIFIK..."  
}
```

Get Document Information

GET /documents/info

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/info?type={type}>  

Retrieve metadata about a specific document type – the next document number to assign, supported features (income rows, payment rows, self-invoicing, linked-document flows), default business settings that apply when creating documents of this type, and the payment plugins active on this business.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

QUERY PARAMETERS

type
required

integer (DocumentType)

Example: type=305

Document type to retrieve information for

Responses

✓ 200 Document type information retrieved successfully

RESPONSE SCHEMA: application/json

type
required

integer (DocumentType)

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון

Code	Type
610	משיכת פיקדון

number
required

integer

Next document number that will be assigned to a new document of this `type` in the business's series

footer >
required

object

Document footer text, keyed by language. Either or both keys may be present depending on the business's configuration.

remark >
required

object

Document remark text, keyed by language. Either or both keys may be present depending on the business's configuration.

used
required

boolean

Whether the business has previously issued at least one document of this `type`

first
required

boolean

Whether this would be the first document of this `type` for the business

lastDocumentDate
required

string

Date of the most recent document of this `type` issued by the business, in the format `YYYY-MM-DD`

today
required

string

Today's date in the business's timezone, in the format `YYYY-MM-DD`

settings >
required

object

Business-level defaults that apply when creating a new document of this `type`

selfInvoiceEnabled
required

boolean

Whether the business may issue self-invoices for this document type

incomeRowsEnabled
required

boolean

Whether income rows are supported on this document type

incomeRowsRequired
required

boolean

Whether income rows are required on this document type

paymentRowsEnabled
required

boolean

Whether payment rows are supported on this document type

reverseCharge
required

boolean

Whether reverse-charge VAT applies to this document

payable
required

boolean

Whether this document type accepts payments

exemption
required

boolean

Whether the business is exempt from VAT

vatRate
required

number

VAT rate that will apply to a new document, expressed as a decimal fraction (e.g. 0.18 for 18%)

vatTypes
required

Array of integers (DocumentVatType)

VAT types available for use on this document

paymentPlugins >
required

Array of objects (Plugin)

Active payment plugins available to this business for documents of this type

hasTaxAuthorityConfirmation
required

boolean

Whether this document type requires Tax Authority confirmation in this business's type

linkedDocumentIds

Array of strings <uuid> [items <uuid >]

Returned only when the request is part of a linked-document flow (e.g. creating a receipt from an invoice). The IDs of the documents being linked.

linkedPaymentId

string <uuid>

Returned only when the request is part of a linked-document flow. The ID of the payment being linked.

linkType

string (DocumentLinkType)

Enum: "copy" "link" "cancel"

Relationship type between a document and its linked documents.

Value	Meaning
copy	A new document duplicating an existing document's contents
link	A reference to a related document (e.g. an invoice → receipt link)
cancel	A document that cancels or credits an existing document

Response samples

200

Content type

application/json

```
{
  "type": 305,
  "number": 50041,
  - "footer": {
    "he": "string",
    "en": "string"
  },
  - "remark": {
    "he": "string",
    "en": "string"
  },
  "used": true,
  "first": false,
  "lastDocumentDate": "2026-05-18",
  "today": "2026-06-04",
  - "settings": {
    "documentCurrency": "ILS",
    "documentLang": "he",
    "documentRounding": false,
    "documentVatType": 0,
    "rowVatType": 1,
    "mixedVatEnabled": true,
    "receiptIncomeEnabled": false,
    "unsignedEnabled": false,
    "attachmentEnabled": true,
    - "selectedPaymentChannels": [
      100,
      120,
      150,
      160
    ],
    "taxAuthorityProformaInvoiceEnabled": true,
    "taxAuthorityConnected": false
  },
  "selfInvoiceEnabled": true,
  "incomeRowsEnabled": true,
  "incomeRowsRequired": true,
  "paymentRowsEnabled": false,
```

```
"reverseCharge": false,
"payable": true,
"exemption": false,
"vatRate": 0.18,
- "vatTypes": [
    0,
    1,
    2
],
- "paymentPlugins": [
    - {
        "id": "9aa1a2ef-3efb-4566-b59a-54c233e81557",
        "description": "קארדקום",
        "friendlyName": "מסוף בדיקות (סליקה במערכת)",
        "active": true,
        "type": 12100,
        "maxPayments": 36,
        "creationDate": 1766492513,
        "lastUpdateDate": 1766492514
    }
],
- "linkedDocumentIds": [
    "497f6eca-6276-4993-bfeb-53cbbbba6f08"
],
"linkedPaymentId": "87314ac7-43f8-4e28-a371-6cca884d2972",
"linkType": "copy",
"hasTaxAuthorityConfirmation": false
}
```

Get Document Templates

GET /documents/templates

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/templates>



Retrieve information about the available document templates and their corresponding colour skins. Templates are global to the system; every business sees the same list.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

Responses

✓ 200 List of available document templates

RESPONSE SCHEMA: application/json

Array [

id required	integer The template ID
name required	string The name of the template
description required	string A description of the template – typically usage notes or recommended logo size
defaultSkinId required	integer The default skin ID for this template
skins > required	Array of objects (TemplateSkin) Available skins (colour variants) for this template

]

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
[
  - {
    "id": 6,
    "name": "דריי מרטיני",
    "description": "כדי שהלוגו לא ייראה מפוקסל, מומלץ להעלות קובץ בגודל מינימלי של 450x300 פיקסלים.",
    "defaultSkinId": 8,
    - "skins": [
      + { ... }
    ]
  }
]
```

Get Document Types

GET /documents/types

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/types?lang={lan...>  

Retrieve the available document types as a list of `{ id, name }` pairs. Names are localised by the `lang` query parameter.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

QUERY PARAMETERS

lang string (Lang)

Enum: "he" "en"

Example: lang=he

Content language for the localised **name** field. Defaults to **he** (Hebrew) if omitted or unsupported.

Responses

✓ **200** List of available document types with localised names

RESPONSE SCHEMA: application/json

Array [

id integer (DocumentType)
required

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה

Code	Type
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

name
required

string

Localised name of the document type, in the language indicated by the `lang` query parameter

]

Response samples

200

Content type
application/json

Copy Expand all Collapse all

```
[
  - {
    "id": 305,
    "name": "הצעת מחיר"
  }
]
```

Get Document Statuses

GET /documents/statuses

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/statuses?lang={...}>  

Retrieve the available document statuses as a list of `{ id, name }` pairs. Names are localised by the `lang` query parameter.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS:  `bearerAuth`

QUERY PARAMETERS

`lang` `string` (Lang)
Enum: `"he"` `"en"`
Example: `lang=he`
Content language for the localised `name` field. Defaults to `he` (Hebrew) if omitted or unsupported.

Responses

✓ **200** List of available document statuses with localised names

RESPONSE SCHEMA: `application/json`

Array [

`id` `integer` (DocumentStatus)
required Document status.

Code	Status
0	מסמך פתוח
1	מסמך סגור

Code	Status
2	מסמך סומן ידנית כסגור
3	מסמך מבטל
4	מסמך שבוטל

name
required

string
Localised name of the document status, in the language indicated by the `lang` query parameter

]

Response samples

200

Content type
application/json

Copy Expand all Collapse all

```
[
-  {
    "id": 0,
    "name": "מסמך פתוח"
  },
-  {
    "id": 1,
    "name": "מסמך סגור"
  },
-  {
    "id": 2,
    "name": "מסמך סומן ידנית כסגור"
  },
]
```

```
- {
  "id": 3,
  "name": "מסמך מבטל"
},
- {
  "id": 4,
  "name": "מסמך שבוטל"
}
]
```

Get Document

GET /documents/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/{id}>  

Retrieve a single document by its ID.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

PATH PARAMETERS

id required string <uuid>

Example: 57ae2ff9-0c24-43e8-b39c-a5bdcc05573d

Document ID

Responses

✓ 200 Document retrieved successfully

id
required

string
The document unique ID

type
required

integer (DocumentType)
Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

number
required

integer
Document serial number

documentDate
required

string

Document reference date in the format YYYY-MM-DD

status
required

integer (DocumentStatus)

Document status.

Code	Status
0	מסמך פתוח
1	מסמך סגור
2	מסמך סומן ידנית כסגור
3	מסמך מבטל
4	מסמך שבוטל

lang
required

string (Lang)

Enum: "he" "en"

Content language

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי

Code	Name
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

amount
required

number

Total amount, in requested currency (including the VAT, Discount & Rounding)

description	string	Document description
creationDate	integer <int64>	Creation date Unix timestamp (in seconds)
footer	string	Document footer text
remarks	string	Document remarks
amountLocal	number	Total amount in local currency, including VAT, discount, and rounding
amountOpened	number	The amount that is still left to be paid, exists only in payment request documents
amountDueVat	number	Amount due VAT - Amount before VAT, and before rounding & discount (if requested)
amountExemptVat	number	Amount exempt VAT - 0 unless there's one or more items that are excluded of VAT such as mixed documents (that have both VAT excluded & included items)
amountExcludeVat	number	Amount excluded from VAT
vat	number	VAT amount
vatRate	number	VAT rate applied to the document

currencyRate **number**

Currency rate relative to ILS

vatType **integer** (DocumentVatType)

Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

client > **object**

Client linked to the document

business > **object**

Business that issued the document

data > **object**

Tax Authority confirmation data

income > **Array of objects** (IncomeRow)

Income rows

payment > **Array of objects** (DocumentPaymentRow)

Payment rows

linkedDocuments > **Array of objects** (LinkedDocument)

Documents linked to this one

ref **Array of integers** (DocumentType)

The referred document types.

Code	Type
10	הצעת מחיר

Code	Type
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

signed	<code>boolean</code> Is this document digitally signed
cancellable	<code>boolean</code> Is this document cancellable
rounding	<code>boolean</code> Whether the sum was rounded or not
discount >	<code>object</code> (DiscountResponse)
url >	<code>object</code> Document download URLs
paymentUrl	<code>string</code>

URL of the hosted payment (bill) page for this document, where the client can pay it online. Returned only when the document was issued with a payment button (i.e. it has an associated payment request).

allocationNumber

string

Allocation Number issued by the Israeli Tax Authority

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "57ae2ff9-0c24-43e8-b39c-a5bdcc05573d",
  "description": "Just an order",
  "type": 305,
  "number": 40034,
  "documentDate": "2026-05-12",
  "creationDate": 1718049888,
  "status": 0,
  "lang": "he",
  "footer": "Texts in footer",
  "remarks": "Some remarks",
  "amount": 354,
  "amountLocal": 354,
  "amountOpened": 0,
  "amountDueVat": 300,
  "amountExemptVat": 0,
  "amountExcludeVat": 0,
  "vat": 54,
  "vatRate": 0.18,
  "currency": "ILS",
```

```
"currencyRate": 1,
"vatType": 0,
- "client": {
    "id": "7944827a-c664-11e4-8231-080027271114",
    "name": "John Doe",
    "taxId": "0123456789",
    "department": "Sales",
    "address": "1 Luria St",
    "city": "Tel Aviv",
    "zip": "1234567",
    "country": "IL",
    "phone": "+972-54-1234567",
    "fax": "+972-54-1234567",
    "mobile": "+972-54-1234567",
    - "emails": [
        "email1@example.com"
    ],
    "self": false
},
```

```
- "business": {
  "type": 1,
  "taxId": "123456789",
  "name": "עסק לדוגמה",
  "title": "כותרת לעסק",
  "address": "רחוב סוקולוב 15",
  "city": "תל אביב-יפו",
  "zip": "6291790",
  "phone": "054-1234567",
  "fax": "054-1234567",
  "mobile": "054-1234567",
  "website": "https://www.greeninvoice.co.il",
  "email": "john@gmail.com",
  "bankName": "לאומי",
  "bankBranch": "44",
  "bankAccount": "565656565656",
  "bankSwift": "FIRBILIT",
  "bankAba": "04064927",
  "bankIban": "IL170108000000012612345",
  "bankBeneficiary": "יעקב כהן",
  "exemption": false
},
- "data": {
  "taxAuthorityConfirmationNumber": "202411041000000000000001",
  "taxAuthorityConfirmationInitiated": true,
  "taxAuthorityConfirmationLastError": 0
},
```



```
- "income": [  
  - {  
    "catalogNum": "MXDFSDD",  
    "description": "Item description",  
    "quantity": 1,  
    "price": 300,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "vatType": 1,  
    "vatRate": 0.18,  
    "amount": 300,  
    "vat": 54,  
    "amountTotal": 354,  
    "itemId": "8b338c95-095e-46d4-b2c6-331747508759"  
  }  
,  
- "payment": [  
  - {  
    "name": "כרטיס אשראי",  
    "type": 3,  
    "subType": 1,  
    "appType": 1,  
    "price": 300,  
    "currency": "ILS",  
    + "ref": [ ... ],  
    "cancellable": false  
  }  
,  
]
```

```
- "linkedDocuments": [  
  - {  
    "id": "a8804e5b-1031-4868-8332-76efb328961f",  
    "type": 305,  
    "number": 12323,  
    "documentDate": "2026-05-12",  
    "amount": 354,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "status": 0  
  }  
,  
- "ref": [  
  305  
,  
  "signed": true,  
  "cancellable": false,  
  "rounding": false,  
- "discount": {  
  "amount": 10,  
  "type": "sum",  
  "total": -22  
},  
- "url": {  
  "he": "string",  
  "origin": "string",  
  "en": "string"  
},  
  "paymentUrl": "https://pages.greeninvoice.co.il/payments/bills/3fa85f64-5717-4562-b3fc-2c963f66afa6",  
  "allocationNumber": "20220101163314614014050888"  
}
```

Get Linked Documents

GET /documents/{id}/linked

PRODUCTION

<https://api.greeninvoice.co.il/api/v1/documents/{id}/linked>

Get information about linked / related documents to a specific document.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id**required**

string <uuid>

Example: 57ae2ff9-0c24-43e8-b39c-a5bdcc05573d

Document ID

Responses

✓ **200** Linked documents retrieved successfully

RESPONSE SCHEMA: application/json

Array [

id**required**

string

Linked document ID

currency**required**

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר

Code	Name
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונגי
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ

Code	Name
HRK	קונה

type

integer (DocumentType)

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

number

integer

Document serial number

documentDate

string

	Document date in the format YYYY-MM-DD												
amount	number Document amount												
currencyRate	number Currency rate relative to ILS												
status	integer (DocumentStatus) Document status. <table><tr><th>Code</th><th>Status</th></tr><tr><td>0</td><td>מסמך פתוח</td></tr><tr><td>1</td><td>מסמך סגור</td></tr><tr><td>2</td><td>מסמך סומן ידנית כסגור</td></tr><tr><td>3</td><td>מסמך מבטל</td></tr><tr><td>4</td><td>מסמך שבוטל</td></tr></table>	Code	Status	0	מסמך פתוח	1	מסמך סגור	2	מסמך סומן ידנית כסגור	3	מסמך מבטל	4	מסמך שבוטל
Code	Status												
0	מסמך פתוח												
1	מסמך סגור												
2	מסמך סומן ידנית כסגור												
3	מסמך מבטל												
4	מסמך שבוטל												

]

Response samples

200

Content type
application/json

```
[
  - {
    "id": "a8804e5b-1031-4868-8332-76efb328961f",
    "type": 305,
    "number": 12323,
    "documentDate": "2026-05-12",
    "amount": 354,
    "currency": "ILS",
    "currencyRate": 1,
    "status": 0
  }
]
```

Get Document Download Links

GET /documents/{id}/download/links

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/{id}/download/1...>  

Retrieve download links for a given document. The response includes the original copy plus any localised copies; the `en` link is returned only when an English copy exists.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: 57ae2ff9-0c24-43e8-b39c-a5bdcc05573d

Document ID

Responses

✓ **200** Download links retrieved successfully

RESPONSE SCHEMA: application/json

he	string
	Copy link in Hebrew
en	string
	Copy link in English (if applicable)
origin	string
	Original document

Response samples

200

Content type

application/json

Copy

```
{
  "he": "string",
  "en": "string",
  "origin": "string"
}
```

Close Document

POST /documents/{id}/close

PRODUCTION

<https://api.greeninvoice.co.il/api/v1/documents/{id}/close>

Manually close a document. The status will be set to `Manually closed`.

Note: Only documents currently in `Open` status can be closed via this endpoint. Attempting to close a document in any other status will return a validation error.

The response is the updated document.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS: `bearerAuth`

PATH PARAMETERS

`id`

required

`string <uuid>`

Example: `57ae2ff9-0c24-43e8-b39c-a5bdcc05573d`

Document ID

Responses

200 Document closed successfully

RESPONSE SCHEMA: `application/json`

`id`

required

`string`

The document unique ID

`type`

required

`integer (DocumentType)`

Document type code.

Code	Type
10	הצעת מחיר

Code	Type
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

number
required

integer
Document serial number

documentDate
required

string
Document reference date in the format YYYY-MM-DD

status
required

integer (DocumentStatus)
Document status.

Code	Status
0	מסמך פתוח
1	מסמך סגור

Code	Status
2	מסמך סומן ידנית כסגור
3	מסמך מבטל
4	מסמך שבוטל

lang
required

string (Lang)

Enum: "he" "en"

Content language

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי

Code	Name
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

amount
required

number
Total amount, in requested currency (including the VAT, Discount & Rounding)

description

string
Document description

creationDate

integer <int64>
Creation date Unix timestamp (in seconds)

footer

string
Document footer text

remarks

string
Document remarks

amountLocal	number	Total amount in local currency, including VAT, discount, and rounding
-------------	--------	---

amountOpened	number	The amount that is still left to be paid, exists only in payment request documents
--------------	--------	--

amountDueVat	number	Amount due VAT - Amount before VAT, and before rounding & discount (if requested)
--------------	--------	---

amountExemptVat	number	Amount exempt VAT - 0 unless there's one or more items that are excluded of VAT such as mixed documents (that have both VAT excluded & included items)
-----------------	--------	--

amountExcludeVat	number	Amount excluded from VAT
------------------	--------	--------------------------

vat	number	VAT amount
-----	--------	------------

vatRate	number	VAT rate applied to the document
---------	--------	----------------------------------

currencyRate	number	Currency rate relative to ILS
--------------	--------	-------------------------------

vatType integer (DocumentVatType)
Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

client > object
Client linked to the document

data > object
Tax Authority confirmation data

income > Array of objects (IncomeRow)
Income rows

payment > Array of objects (DocumentPaymentRow)
Payment rows

linkedDocuments > Array of objects (LinkedDocument)
Documents linked to this one

ref Array of integers (DocumentType)
The referred document types.

Code	Type
10	הצעת מחיר
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה

Code	Type
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

signed

boolean

Is this document digitally signed

cancellable

boolean

Is this document cancellable

rounding

boolean

Whether the sum was rounded or not

discount >

object (DiscountResponse)

url >

object

Document download URLs

allocationNumber

string

Allocation Number issued by the Israeli Tax Authority

Response samples

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "57ae2ff9-0c24-43e8-b39c-a5bdcc05573d",
  "description": "Just an order",
  "type": 305,
  "number": 40034,
  "documentDate": "2026-05-12",
  "creationDate": 1718049888,
  "status": 0,
  "lang": "he",
  "footer": "Texts in footer",
  "remarks": "Some remarks",
  "amount": 354,
  "amountLocal": 354,
  "amountOpened": 0,
  "amountDueVat": 300,
  "amountExemptVat": 0,
  "amountExcludeVat": 0,
  "vat": 54,
  "vatRate": 0.18,
  "currency": "ILS",
  "currencyRate": 1,
  "vatType": 0,
```



```
- "client": {
  "id": "7944827a-c664-11e4-8231-080027271114",
  "name": "John Doe",
  "taxId": "0123456789",
  "department": "Sales",
  "address": "1 Luria St",
  "city": "Tel Aviv",
  "zip": "1234567",
  "country": "IL",
  "phone": "+972-54-1234567",
  "fax": "+972-54-1234567",
  "mobile": "+972-54-1234567",
  - "emails": [
    "email1@example.com"
  ],
  "self": false
},
- "data": {
  "taxAuthorityConfirmationNumber": "202411041000000000000001",
  "taxAuthorityConfirmationInitiated": true,
  "taxAuthorityConfirmationLastError": 0
},
- "income": [
  - {
    "catalogNum": "MXDFSDD",
    "description": "Item description",
    "quantity": 1,
    "price": 300,
    "currency": "ILS",
    "currencyRate": 1,
    "vatType": 1,
    "vatRate": 0.18,
    "amount": 300,
    "vat": 54,
    "amountTotal": 354,
    "itemId": "8b338c95-095e-46d4-b2c6-331747508759"
  }
],
```

```
- "payment": [  
  - {  
    "name": "כרטיס אשראי",  
    "type": 3,  
    "subType": 1,  
    "appType": 1,  
    "price": 300,  
    "currency": "ILS",  
    + "ref": [ ... ],  
    "cancellable": false  
  }  
],  
- "linkedDocuments": [  
  - {  
    "id": "a8804e5b-1031-4868-8332-76efb328961f",  
    "type": 305,  
    "number": 12323,  
    "documentDate": "2026-05-12",  
    "amount": 354,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "status": 0  
  }  
],  
- "ref": [  
  305  
],  
  "signed": true,  
  "cancellable": false,  
  "rounding": false,  
- "discount": {  
  "amount": 10,  
  "type": "sum",  
  "total": -22  
},
```

```
- "url": {
  "he": "string",
  "origin": "string",
  "en": "string"
},
"allocationNumber": "20220101163314614014050888"
}
```

Open Document

POST /documents/{id}/open

PRODUCTION <https://api.greeninvoice.co.il/api/v1/documents/{id}/open>  

Re-open a document that was previously manually closed. The status will be set to **Open**.

Note: Only documents currently in **Manually closed** status can be re-opened via this endpoint. Documents in **Closed** status (closed automatically by the system) or any other status cannot be re-opened and will return a validation error.

The response is the updated document.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: 57ae2ff9-0c24-43e8-b39c-a5bdcc05573d

Document ID

Responses

✓ 200 Document re-opened successfully

RESPONSE SCHEMA: application/json

id
required

string

The document unique ID

type
required

integer (DocumentType)

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

number
required

integer

Document serial number

documentDate
required

string

Document reference date in the format

status
required

integer (DocumentStatus)

Document status.

Code	Status
0	מסמך פתוח
1	מסמך סגור
2	מסמך סומן ידנית כסגור
3	מסמך מבטל
4	מסמך שבוטל

lang
required

string (Lang)

Enum:

Content language

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני

Code	Name
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

amount
required

number

Total amount, in requested currency (including the VAT, Discount & Rounding)

description	string	Document description
creationDate	integer <int64>	Creation date Unix timestamp (in seconds)
footer	string	Document footer text
remarks	string	Document remarks
amountLocal	number	Total amount in local currency, including VAT, discount, and rounding
amountOpened	number	The amount that is still left to be paid, exists only in payment request documents
amountDueVat	number	Amount due VAT - Amount before VAT, and before rounding & discount (if requested)
amountExemptVat	number	Amount exempt VAT - 0 unless there's one or more items that are excluded of VAT such as mixed documents (that have both VAT excluded & included items)
amountExcludeVat	number	Amount excluded from VAT
vat	number	VAT amount
vatRate	number	VAT rate applied to the document

currencyRate **number**

Currency rate relative to ILS

vatType **integer** (DocumentVatType)

Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

client > **object**

Client linked to the document

data > **object**

Tax Authority confirmation data

income > **Array of objects** (IncomeRow)

Income rows

payment > **Array of objects** (DocumentPaymentRow)

Payment rows

linkedDocuments > **Array of objects** (LinkedDocument)

Documents linked to this one

ref **Array of integers** (DocumentType)

The referred document types.

Code	Type
10	הצעת מחיר
100	הזמנה
200	תעודת משלוח

Code	Type
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

signed	boolean Is this document digitally signed
cancellable	boolean Is this document cancellable
rounding	boolean Whether the sum was rounded or not
discount >	object (DiscountResponse)
url >	object Document download URLs
allocationNumber	string Allocation Number issued by the Israeli Tax Authority

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "57ae2ff9-0c24-43e8-b39c-a5bdcc05573d",
  "description": "Just an order",
  "type": 305,
  "number": 40034,
  "documentDate": "2026-05-12",
  "creationDate": 1718049888,
  "status": 0,
  "lang": "he",
  "footer": "Texts in footer",
  "remarks": "Some remarks",
  "amount": 354,
  "amountLocal": 354,
  "amountOpened": 0,
  "amountDueVat": 300,
  "amountExemptVat": 0,
  "amountExcludeVat": 0,
  "vat": 54,
  "vatRate": 0.18,
  "currency": "ILS",
  "currencyRate": 1,
  "vatType": 0,
```

```
- "client": {
  "id": "7944827a-c664-11e4-8231-080027271114",
  "name": "John Doe",
  "taxId": "0123456789",
  "department": "Sales",
  "address": "1 Luria St",
  "city": "Tel Aviv",
  "zip": "1234567",
  "country": "IL",
  "phone": "+972-54-1234567",
  "fax": "+972-54-1234567",
  "mobile": "+972-54-1234567",
  - "emails": [
    "email1@example.com"
  ],
  "self": false
},
- "data": {
  "taxAuthorityConfirmationNumber": "202411041000000000000001",
  "taxAuthorityConfirmationInitiated": true,
  "taxAuthorityConfirmationLastError": 0
},
- "income": [
  - {
    "catalogNum": "MXDFSDD",
    "description": "Item description",
    "quantity": 1,
    "price": 300,
    "currency": "ILS",
    "currencyRate": 1,
    "vatType": 1,
    "vatRate": 0.18,
    "amount": 300,
    "vat": 54,
    "amountTotal": 354,
    "itemId": "8b338c95-095e-46d4-b2c6-331747508759"
  }
],
```

```
- "payment": [  
  - {  
    "name": "כרטיס אשראי",  
    "type": 3,  
    "subType": 1,  
    "appType": 1,  
    "price": 300,  
    "currency": "ILS",  
    + "ref": [ ... ],  
    "cancellable": false  
  }  
],  
- "linkedDocuments": [  
  - {  
    "id": "a8804e5b-1031-4868-8332-76efb328961f",  
    "type": 305,  
    "number": 12323,  
    "documentDate": "2026-05-12",  
    "amount": 354,  
    "currency": "ILS",  
    "currencyRate": 1,  
    "status": 0  
  }  
],  
- "ref": [  
  305  
],  
  "signed": true,  
  "cancellable": false,  
  "rounding": false,  
- "discount": {  
  "amount": 10,  
  "type": "sum",  
  "total": -22  
},
```

```
- "url": {
  "he": "string",
  "origin": "string",
  "en": "string"
},
"allocationNumber": "20220101163314614014050888"
}
```

Items

While generating documents you are usually requested to add items.

Items are products that are bought from you, it can be either a real product (such as electronic device, restaurant dish) or a virtual service (such as a programmer hour).

To ease the process of entering the same item on multiple documents you are able to create an item once and use it various times later while creating a document.

Add Item

POST /items

PRODUCTION <https://api.greeninvoice.co.il/api/v1/items>  

Create a new catalog item for the current business.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json
required

name
required

string <= 32 characters
The item name. For example: גבינייה מפוארת.

description
required

string
The item description. For example: מאפה גבינייה אישי ומפואר.

price
required

number
The item price. For example: 5.

currency
required

string (Currency)
3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפור
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית

Code	Name
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

Responses

> **201** Item created successfully

Request samples

Payload

Content type

application/json

Copy

```
{
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינייה אישי ומפואר",
  "price": 5,
```

```
"currency": "ILS"
}
```

Response samples

201

Content type

application/json

Copy

```
{
  "id": "ff27e4fe-29d9-4f6f-b6a0-f43cdf635702",
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינייה אישי ומפואר",
  "price": 5,
  "currency": "ILS",
  "creationDate": 1780836793,
  "lastUpdateDate": 1780836793
}
```

Get Item

GET /items/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/items/{id}>  

Retrieve a single item by its ID.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

id
required

string <uuid>

Example: `ff27e4fe-29d9-4f6f-b6a0-f43cdf635702`

Item ID

Responses

✓ 200 Item retrieved successfully

RESPONSE SCHEMA: application/json

id
required

string

The item ID

name
required

string

The item name

price
required

number

The item price

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי

Code	Name
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונגי
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

creationDate
required

integer <int64>
Creation date Unix timestamp (in seconds)

lastUpdateDate
required

integer <int64>
Last update date Unix timestamp (in seconds)

description

string

The item description

Response samples

200

Content type

application/json

Copy

```
{
  "id": "ff27e4fe-29d9-4f6f-b6a0-f43cdf635702",
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינייה אישי ומפואר",
  "price": 5,
  "currency": "ILS",
  "creationDate": 1780836793,
  "lastUpdateDate": 1780836793
}
```

Update Item

PUT /items/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/items/{id}>  

Update an existing item by its ID. This is a partial update: include only the fields you want to change — any field you omit keeps its current value.

Request headers

Header	Value	Required
Content-Type	application/json	Yes

Header	Value	Required
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: ff27e4fe-29d9-4f6f-b6a0-f43cdf635702

Item ID

REQUEST BODY SCHEMA: application/json
required

name

string <= 32 characters>

The item name. For example: גבינייה מפוארת

description

string <= 500 characters>

The item description. For example: מאפה גבינה ודובדני אמרנה אישי ומפואר

price

number

The item price. For example: 4.

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני

Code	Name
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

Responses

✓ 200 Item updated successfully

id
required

string

The item ID

name
required

string

The item name

price
required

number

The item price

currency
required

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונגי
SGD	דולר סינגפורי
THB	באט תאילנדי

Code	Name
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

creationDate
required

integer <int64>
Creation date Unix timestamp (in seconds)

lastUpdateDate
required

integer <int64>
Last update date Unix timestamp (in seconds)

description

string
The item description

Request samples

Payload

Content type

application/json

Copy

```
{
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינה ודובדני אמרנה אישי ומפואר",
  "price": 4,
  "currency": "ILS"
}
```

Response samples

200

Content type

application/json

Copy

```
{
  "id": "ff27e4fe-29d9-4f6f-b6a0-f43cdf635702",
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינה ודובדני אמרנה אישי ומפואר",
  "price": 4,
  "currency": "ILS",
  "creationDate": 1780836793,
  "lastUpdateDate": 1780839374
}
```

Delete Item

DELETE /items/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/items/{id}>  

Delete an item by its ID. The response body is an empty object.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: `ff27e4fe-29d9-4f6f-b6a0-f43cdf635702`

Item ID

Responses

✓ 200 Item deleted successfully

RESPONSE SCHEMA: application/json

object

Response samples

200

Content type

application/json

Copy

{ }

Search Items

POST /items/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/items/search>  

Search the catalog items of the current business using any combination of the filters in the request body. All filters are optional; omitting the body returns the most recent items. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

REQUEST BODY SCHEMA: application/json
optional

page integer
Default: 1
Page number to retrieve. Defaults to 1.

pageSize integer
Default: 25
Number of results per page. Defaults to 25.

name string
Filter by item name. For example: גבינייה מפוארת.

description string
Filter by item description. For example: מאפה גבינה.

currency string (Currency)
3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי

Code	Name
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

Responses

✓ **200** Paginated list of items matching the search

RESPONSE SCHEMA: application/json

total required	integer Total number of items matching the search
page required	integer The requested page number
pageSize required	integer The requested page size
from required	integer Index of the first item in the current page
to required	integer Index of the last item in the current page
pages required	integer Total number of pages available
items > required	Array of objects (SearchItem) The items matching the search

Request samples

Payload

Content type

application/json

Copy

```
{
  "page": 1,
  "pageSize": 25,
  "name": "גבינייה מפוארת",
  "description": "מאפה גבינה",
  "currency": "ILS"
}
```

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "total": 1,
  "page": 1,
  "pageSize": 25,
  "from": 1,
  "to": 1,
  "pages": 1,
}
```

```
- "items": [  
  - {  
    "id": "df700df9-27d2-4b03-aa8d-d65a63e37542",  
    "name": "גבינייה מפוארת",  
    "description": "מאפה גבינה ודובדני אמרנה אישי ומפואר",  
    "price": 5,  
    "currency": "ILS",  
    "creationDate": 1780910969  
  }  
]  
}
```

Clients

Create and manage clients — the customers you sell to and invoice.

Add Client

POST /clients

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients>  

Create a new client for the current business.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

name
required

string

The client name. For example: יעקב יעקבי .

active

boolean

Is the client currently active or not. Defaults to true .

send

boolean

Whether to automatically send emails to the client when assigning them to a document. Defaults to true when the client has at least one email address.

department

string

The client department. For example: מחלקת כספים .

taxId

string

The client tax ID. For example: 999152580 .

accountingKey

string

The client accounting key. Generated automatically if omitted. For example: b6230777 .

paymentTerms

integer (PaymentTerm)

Payment term.

Code	Term
-1	מייד
0	שוט
10	10+ שוט
15	15+ שוט
30	30+ שוט
45	45+ שוט
60	60+ שוט
75	75+ שוט

Code	Term
90	שׁוּטָף 90+
120	שׁוּטָף 120+

bankName

string

The client bank name. For example: `12`.

bankBranch

string

The client bank branch number. For example: `450`.

bankAccount

string

The client bank account number. For example: `1111`.

address

string

The client address. For example: `הרצל 5`.

city

string

The client city. For example: `תל אביב`.

zip

string

The client ZIP code. For example: `5555`.

country

string

2-letter ISO 3166-1 alpha-2 country code. Defaults to `IL` (Israel). Use the [Get Supported Countries](#) endpoint to retrieve the full list. For example: `IL`.

category

integer

The business category code this client is related to. Use the [Get Supported Business Categories](#) endpoint to retrieve the full list. For example: 4.

subCategory

integer

The business sub-category code this client is related to. Use the [Get Supported Business Categories](#) endpoint to retrieve the full list. For example: 406.

phone

string

The client phone number. For example: 0505555555.

fax

string

The client fax number. For example: 0333333333.

mobile

string

The client mobile number. For example: 0333333333.

remarks

string

Client remarks for internal use. For example: לקוח קבוע.

contactPerson

string

The client contact person name. For example: יעקב.

emails

Array of strings <= 5 items

The client email addresses (up to 5). For example: ["test@test-yakov.com"].

labels

Array of strings <= 3 items

Label IDs to assign to the client (up to 3). For example: ["3777a6ef-fac3-4b2e-a296-238d5dcd6450"].

balance

number

Opening balance for the client. This value is primarily computed by the system from the client's documents and payments; provide it only to set an initial balance. For example: 0.

Responses

> **201** Client created successfully

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "name": "יעקב יעקבי",
  "active": true,
  "send": true,
  "department": "מחלקת כספים",
  "taxId": "999152580",
  "accountingKey": "b6230777",
  "paymentTerms": 0,
  "bankName": "12",
  "bankBranch": "450",
  "bankAccount": "1111",
  "address": "הרצל 5",
  "city": "תל אביב",
  "zip": "5555",
  "country": "IL",
  "category": 4,
  "subCategory": 406,
  "phone": "0505555555",
  "fax": "033333333",
  "mobile": "033333333",
  "remarks": "לקוח קבוע",
  "contactPerson": "יעקב",
  - "emails": [
    "test@test-yakov.com"
  ],
  - "labels": [
    "3777a6ef-fac3-4b2e-a296-238d5dcd6450"
  ],
  "balance": 0
}
```

Response samples

201

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "42aa171f-d031-4f3f-bec4-ff60c04eeafc",
  "name": "יעקב יעקבי",
  "active": true,
  "send": true,
  "department": "מחלקת כספים",
  "taxId": "999152580",
  "accountingKey": "b6230777",
  "paymentTerms": 0,
  "bankName": "12",
  "bankBranch": "450",
  "bankAccount": "1111",
  "address": "הרצל 5",
  "city": "תל אביב",
  "zip": "5555",
  "country": "IL",
  "category": 4,
  "subCategory": 406,
  "phone": "0505555555",
  "fax": "033333333",
  "mobile": "033333333",
  - "emails": [
    "test@test-yakov.com"
  ],
  - "labels": [
    "7bd2d410-74fe-47e1-b5a3-3e544cbe2a71"
  ],
  "remarks": "",
  "contactPerson": "יעקב",
  "incomeAmount": 0,
  "paymentAmount": 0,
  "creationDate": 1781422213,
  "lastUpdateDate": 1781422213,
  "balanceAmount": 0
}
```

}

Get Client

GET /clients/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients/{id}>  

Retrieve a single client by its ID.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

PATH PARAMETERS

id
required string <uuid>
Example: `42aa171f-d031-4f3f-bec4-ff60c04eeafc`
Client ID

Responses

 **200** Client retrieved successfully

RESPONSE SCHEMA: `application/json`

id
required string
The client ID

name
required

string

The client name

active
required

boolean

Is the client currently active or not

send
required

boolean

Whether emails are automatically sent to the client when assigning them to a document. Set automatically on creation based on whether the client has any email addresses.

paymentTerms
required

integer (PaymentTerm)

Payment term.

Code	Term
-1	מיידי
0	שוט
10	10+ שוט
15	15+ שוט
30	30+ שוט
45	45+ שוט
60	60+ שוט
75	75+ שוט
90	90+ שוט
120	120+ שוט

incomeAmount
required

number

Total income recorded from the client. Computed by the system.

paymentAmount
required

number

Total payments received from the client. Computed by the system.

balanceAmount required	number	The client balance amount. Computed as paymentAmount minus incomeAmount.
creationDate required	integer <int64>	Creation date Unix timestamp (in seconds)
lastUpdateDate required	integer <int64>	Last update date Unix timestamp (in seconds)
department	string	The client department
taxId	string	The client tax ID
accountingKey	string	The client accounting key
bankName	string	The client bank name
bankBranch	string	The client bank branch number
bankAccount	string	The client bank account number
address	string	The client address
city	string	The client city
zip	string	The client ZIP code

country	string	2-letter ISO 3166-1 alpha-2 country code
category	integer	The business category code this client is related to. Use the Get Supported Business Categories endpoint to retrieve the full list.
subCategory	integer	The business sub-category code this client is related to. Use the Get Supported Business Categories endpoint to retrieve the full list.
phone	string	The client phone number
fax	string	The client fax number
mobile	string	The client mobile number
emails	Array of strings	The client email addresses
labels	Array of strings	IDs of the labels assigned to the client
remarks	string	Client remarks for internal use
contactPerson	string	The client contact person name

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "42aa171f-d031-4f3f-bec4-ff60c04eeafc",
  "name": "יעקב יעקבי",
  "active": true,
  "send": true,
  "department": "מחלקת כספים",
  "taxId": "999152580",
  "accountingKey": "b6230777",
  "paymentTerms": 0,
  "bankName": "12",
  "bankBranch": "450",
  "bankAccount": "1111",
  "address": "הרצל 5",
  "city": "תל אביב",
  "zip": "5555",
  "country": "IL",
  "category": 4,
  "subCategory": 406,
  "phone": "0505555555",
  "fax": "033333333",
  "mobile": "033333333",
  - "emails": [
    "test@test-yakov.com"
  ],
  - "labels": [
    "7bd2d410-74fe-47e1-b5a3-3e544cbe2a71"
  ],
  "remarks": "",
  "contactPerson": "יעקב",
  "incomeAmount": 0,
  "paymentAmount": 0,
  "creationDate": 1781422213,
  "lastUpdateDate": 1781422213,
  "balanceAmount": 0
}
```


}

Update Client

PUT /clients/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients/{id}>  

Update an existing client by its ID. Only the fields you send are applied.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

PATH PARAMETERS

id
required string <uuid>
Example: `42aa171f-d031-4f3f-bec4-ff60c04eeafc`
Client ID

REQUEST BODY SCHEMA: application/json
required

name
string
The client name. For example: `יעקב יעקבי`.

active
boolean
Whether the client is currently active. For example: `true`.

send
boolean
Whether emails are automatically sent to the client when assigning them to a document. For example: `true`.

department

string

The client department. For example: מחלקת כספים.

taxId

string

The client tax ID. For example: 999152580.

accountingKey

string

The client accounting key. For example: b6230777.

paymentTerms

integer (PaymentTerm)

Payment term.

Code	Term
-1	מייד
0	שוטף
10	שוטף 10+
15	שוטף 15+
30	שוטף 30+
45	שוטף 45+
60	שוטף 60+
75	שוטף 75+
90	שוטף 90+
120	שוטף 120+

bankName

string

The client bank name. For example: 12.

bankBranch

string

The client bank branch number. For example: 450.

bankAccount

string

The client bank account number. For example: 1111.

address

string

The client address. For example: 5 הרצל.

city

string

The client city. For example: ראשון לציון.

zip

string

The client ZIP code. For example: 4444.

country

string

2-letter ISO 3166-1 alpha-2 country code. Use the [Get Supported Countries](#) endpoint to retrieve the full list. For example: IL.

category

integer

The business category code this client is related to. Use the [Get Supported Business Categories](#) endpoint to retrieve the full list. For example: 4.

subCategory

integer

The business sub-category code this client is related to. Use the [Get Supported Business Categories](#) endpoint to retrieve the full list. For example: 406.

phone

string

The client phone number. For example: 0505555555.

fax

string

The client fax number. For example: 033333333.

mobile

string

The client mobile number. For example: 033333333.

remarks

string

Client remarks for internal use. For example: לקוח קבוע.

contactPerson

string

The client contact person name. For example: יעקב.

emails

Array of strings <= 5 items

The client email addresses (up to 5). For example: ["test@test-yakov.com"].

labels

Array of strings <= 3 items

Label IDs to assign to the client (up to 3). For example: ["3777a6ef-fac3-4b2e-a296-238d5dcd6450"].

Responses

✓ **200** Client updated successfully

RESPONSE SCHEMA: application/json

id

required

string

The client ID

name

required

string

The client name

active

required

boolean

Is the client currently active or not

send

required

boolean

Whether emails are automatically sent to the client when assigning them to a document. Set automatically on creation based on whether the client has any email addresses.

paymentTerms

required

integer (PaymentTerm)

Payment term.

Code	Term
-1	מיידי

Code	Term
0	קטש
10	10+ קטש
15	15+ קטש
30	30+ קטש
45	45+ קטש
60	60+ קטש
75	75+ קטש
90	90+ קטש
120	120+ קטש

incomeAmount required	number Total income recorded from the client. Computed by the system.
paymentAmount required	number Total payments received from the client. Computed by the system.
balanceAmount required	number The client balance amount. Computed as paymentAmount minus incomeAmount.
creationDate required	integer <int64> Creation date Unix timestamp (in seconds)
lastUpdateDate required	integer <int64> Last update date Unix timestamp (in seconds)
department	string The client department
taxId	string The client tax ID

accountingKey	string	The client accounting key
bankName	string	The client bank name
bankBranch	string	The client bank branch number
bankAccount	string	The client bank account number
address	string	The client address
city	string	The client city
zip	string	The client ZIP code
country	string	2-letter ISO 3166-1 alpha-2 country code
category	integer	The business category code this client is related to. Use the Get Supported Business Categories endpoint to retrieve the full list.
subCategory	integer	The business sub-category code this client is related to. Use the Get Supported Business Categories endpoint to retrieve the full list.
phone	string	The client phone number
fax	string	The client fax number
mobile	string	

	The client mobile number
emails	Array of strings The client email addresses
labels	Array of strings IDs of the labels assigned to the client
remarks	string Client remarks for internal use
contactPerson	string The client contact person name

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "name": "יעקב יעקבי",
  "active": true,
  "send": true,
  "department": "מחלקת כספים",
  "taxId": "999152580",
  "accountingKey": "b6230777",
  "paymentTerms": 0,
  "bankName": "12",
  "bankBranch": "450",
  "bankAccount": "1111",
  "address": "הרצל 5",
  "city": "ראשון לציון",
  "zip": "4444",
  "country": "IL",
```

```
{
  "category": 4,
  "subCategory": 406,
  "phone": "0505555555",
  "fax": "0333333333",
  "mobile": "0333333333",
  "remarks": "לקוח קבוע",
  "contactPerson": "יעקב",
  - "emails": [
    "test@test-yakov.com"
  ],
  - "labels": [
    "3777a6ef-fac3-4b2e-a296-238d5dcd6450"
  ]
}
```

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "42aa171f-d031-4f3f-bec4-ff60c04eeafc",
  "name": "יעקב יעקבי",
  "active": true,
  "send": true,
  "department": "מחלקת כספים",
  "taxId": "999152580",
  "accountingKey": "b6230777",
  "paymentTerms": 0,
  "bankName": "12",
  "bankBranch": "450",
  "bankAccount": "1111",
  "address": "הרצל 5",
  "city": "תל אביב",
  "zip": "5555",
  "country": "IL",

```



```
"category": 4,
"subCategory": 406,
"phone": "0505555555",
"fax": "0333333333",
"mobile": "0333333333",
- "emails": [
    "test@test-yakov.com"
],
- "labels": [
    "7bd2d410-74fe-47e1-b5a3-3e544cbe2a71"
],
"remarks": "",
"contactPerson": "יעקב",
"incomeAmount": 0,
"paymentAmount": 0,
"creationDate": 1781422213,
"lastUpdateDate": 1781422213,
"balanceAmount": 0
}
```

Delete Client

DELETE /clients/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients/{id}>  

Delete a client by its ID. A client can be deleted only when it is inactive and has no associated documents, no active payment tokens, and no recurring charges. The response body is empty.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required string <uuid>

Example: 42aa171f-d031-4f3f-bec4-ff60c04eeafc

Client ID

Responses

✓ 200 Client deleted successfully

RESPONSE SCHEMA: application/json

object

Response samples

200

Content type

application/json

Copy

{ }

Search Clients

POST /clients/search

PRODUCTION https://api.greeninvoice.co.il/api/v1/clients/search  

Search the current business's clients with optional filters. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

name	string	Filter by client name. For example: יעקב .
active	boolean	Filter by active state. When omitted, both active and inactive clients are returned. For example: true .
email	string	Filter by client email address. For example: test@test-yakov.com .
contactPerson	string	Filter by contact person name. For example: יעקב .
labels	Array of strings	Filter by label IDs. For example: ["3777a6ef-fac3-4b2e-a296-238d5dcd6450"] .
page	integer	Page number to retrieve (1-based). Defaults to 1.
pageSize	integer	Number of results per page. Defaults to 25.

Responses

✓ 200 Paginated list of clients matching the search

RESPONSE SCHEMA: application/json

total	integer	Total number of clients matching the search.
page	integer	The page number returned.
pageSize	integer	The number of results per page.
pages	integer	The total number of pages available.
from	integer	1-based index of the first item on this page.
to	integer	1-based index of the last item on this page.
items >	Array of objects (SearchClient)	The clients matching the search.

Request samples

Payload

Content type
application/json

Copy Expand all Collapse all

```
{
  "name": "יעקב",
  "active": true,
  "email": "test@test-yakov.com",
  "contactPerson": "יעקב",
  - "labels": [
    "3777a6ef-fac3-4b2e-a296-238d5dcd6450"
  ],
```

```
"page": 1,  
"pageSize": 25  
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
  "total": 1,  
  "page": 1,  
  "pageSize": 25,  
  "pages": 1,  
  "from": 1,  
  "to": 1,  
}
```

```
- "items": [  
  - {  
    "id": "42aa171f-d031-4f3f-bec4-ff60c04eeafc",  
    "name": "יעקב יעקבי",  
    "active": true,  
    "send": true,  
    "department": "מחלקת כספים",  
    "taxId": "999152580",  
    "accountingKey": "b6230777",  
    "paymentTerms": 0,  
    "bankName": "12",  
    "bankBranch": "450",  
    "bankAccount": "1111",  
    "address": "5 הרצל",  
    "city": "ראשון לציון",  
    "zip": "4444",  
    "country": "IL",  
    "phone": "0505555555",  
    "fax": "0333333333",  
    "mobile": "0333333333",  
    + "emails": [ ... ],  
    + "labels": [ ... ],  
    "remarks": "",  
    "contactPerson": "יעקב",  
    "incomeAmount": 0,  
    "paymentAmount": 0,  
    "creationDate": 1781422213,  
    "lastUpdateDate": 1781525122,  
    "balanceAmount": 0  
  }  
]  
}
```

Associate Documents to a Client

POST /clients/{id}/assoc

PRODUCTION

<https://api.greeninvoice.co.il/api/v1/clients/{id}/assoc>

Associate one or more existing documents with a client. Used when a document was issued to a one-time client and needs to be associated with an existing client record.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id**required**

string <uuid>

Example: `b0077e19-977b-4389-a2e1-f84fa0527d23`

Client ID

REQUEST BODY SCHEMA: application/json

required**id****required**

string <uuid>

The ID of the client to associate the documents with. For example:

`b0077e19-977b-4389-a2e1-f84fa0527d23`.**ids****required**

Array of strings

IDs of the existing documents to associate with the client. For

example: `["85d1f759-88bb-4617-b4ae-d138582370b8"]`.

Responses

✓ **200** Documents associated successfully

RESPONSE SCHEMA: application/json

object

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "b0077e19-977b-4389-a2e1-f84fa0527d23",
  - "ids": [
    "85d1f759-88bb-4617-b4ae-d138582370b8"
  ]
}
```

Response samples

200

Content type

application/json

Copy

```
{ }
```

Update Client Balance

POST /clients/{id}/balance

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients/{id}/balance>  

Update a client's balance. Recalculates the client's payment amount so that the balance equals the requested value; send to reset it to zero. The response body is empty.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required string <uuid>
Example: 42aa171f-d031-4f3f-bec4-ff60c04eeafc
Client ID

REQUEST BODY SCHEMA: application/json
required

balance
required number
The client's new balance. The endpoint recalculates the client's payment amount so the balance equals this value. Send 0 to reset the balance. For example: 30.

Responses

✓ 200 Client balance updated successfully

RESPONSE SCHEMA: application/json

object

Request samples

Payload

Content type
application/json

```
{
  "balance": 30
}
```

Response samples

200

Content type

application/json

Copy

```
{ }
```

Merge Clients

POST /clients/{id}/merge

PRODUCTION <https://api.greeninvoice.co.il/api/v1/clients/{id}/merge>  

Merge one client into another. The inactive client identified by `mergeId` (in the body) is merged into the active client identified by `id` (in the path): the inactive client's documents and balance are transferred to the active client, and the inactive client is then deleted. One of the two clients must be inactive. The response body is empty.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

`id`
required

string <uuid>

Example: `42aa171f-d031-4f3f-bec4-ff60c04eeafc`

The ID of the active client to merge into (the surviving client).

REQUEST BODY SCHEMA: application/json

required

mergeId
required

string <uuid>

The ID of the inactive client to merge from. Its documents and balance are transferred to the active client (the path `id`), and the inactive client is then deleted. For example: `ba76e441-9266-40e5-9857-f0ca646f6bc1`.

Responses

✓ **200** Clients merged successfully

RESPONSE SCHEMA: application/json

object

Request samples

Payload

Content type

application/json

Copy

```
{
  "mergeId": "ba76e441-9266-40e5-9857-f0ca646f6bc1"
}
```

Response samples

200

Content type

application/json

{ }

Suppliers

Create and manage suppliers — the businesses and individuals you buy from.

Add Supplier

POST /suppliers

PRODUCTION <https://api.greeninvoice.co.il/api/v1/suppliers>  

Create a new supplier for the current business.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

name
required

string

The supplier name. For example: `ישראל ישראלי`.

active

boolean

Is the supplier currently active or not. Defaults to `true`.

department

string

The supplier department. For example: `Sales`.

taxId string

The supplier tax ID. For example: `999317746`.

accountingKey string

The supplier accounting key. For example: `31653639`.

paymentTerms integer (PaymentTerm)

Payment term.

Code	Term
-1	מיידי
0	שוטף
10	10+ שוטף
15	15+ שוטף
30	30+ שוטף
45	45+ שוטף
60	60+ שוטף
75	75+ שוטף
90	90+ שוטף
120	120+ שוטף

bankName string

The supplier bank name. For example: `פועלים`.

bankBranch string

The supplier bank branch number. For example: `123`.

bankAccount string

The supplier bank account number. For example: `123456`.

address	string	The supplier address. For example: <code>הרצל 12</code> .
city	string	The supplier city. For example: <code>תל אביב</code> .
zip	string	The supplier ZIP code. For example: <code>6688320</code> .
country	string	2-letter ISO 3166-1 alpha-2 country code. Defaults to <code>IL</code> (Israel). Use the Get Supported Countries endpoint to retrieve the full list. For example: <code>IL</code> .
phone	string	The supplier phone number. For example: <code>0505555555</code> .
fax	string	The supplier fax number. For example: <code>0504444444</code> .
mobile	string	The supplier mobile number. For example: <code>0504444444</code> .
remarks	string	Supplier remarks for internal use. For example: <code>ספק קבוע</code> .
contactPerson	string	The supplier contact person name. For example: <code>ישראל ישראלי</code> .
emails	Array of strings <code><= 3 items</code>	The supplier email addresses (up to 3). For example: <code>["test_test@test.com"]</code> .
labels	Array of strings <code><= 3 items</code>	Label names to assign to the supplier (up to 3). For example: <code>["אינסטלטורים"]</code> .
balanceAmount	number	

Opening balance for the supplier. This value is primarily computed by the system from the supplier's documents and payments; provide it only to set an initial balance. For example: 0.

Responses

> **201** Supplier created successfully

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "name": "ישראל ישראלי",
  "active": true,
  "department": "Sales",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": 0,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "12 הרצל",
  "city": "תל אביב",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0504444444",
  "remarks": "ספק קבוע",
  "contactPerson": "ישראל ישראלי",
```

```
- "emails": [  
    "test_test@test.com"  
  ],  
- "labels": [  
    "אינסטלטורים"  
  ],  
  "balanceAmount": 0  
}
```

Response samples

201

Content type

application/json

Copy

Expand all

Collapse all

```
{  
  "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",  
  "name": "ישראל ישראלי",  
  "active": true,  
  "department": "",  
  "taxId": "999317746",  
  "accountingKey": "31653639",  
  "paymentTerms": 0,  
  "bankName": "פועלים",  
  "bankBranch": "123",  
  "bankAccount": "123456",  
  "address": "12 הרצל",  
  "city": "תל אביב",  
  "zip": "6688320",  
  "country": "IL",  
  "phone": "0505555555",  
  "fax": "0504444444",  
  "mobile": "0504444444",  
- "emails": [  
    "test_test@test.com"  
  ],  
}
```



```
- "labels": [  
  "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"  
],  
"remarks": "",  
"contactPerson": "ישראל ישראלי",  
"incomeAmount": 0,  
"paymentAmount": 0,  
"creationDate": 1780919300,  
"lastUpdateDate": 1780919300,  
"balanceAmount": 0  
}
```

Get Supplier

GET /suppliers/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/suppliers/{id}>  

Retrieve a single supplier by its ID.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: 32770ce2-ca0f-469f-87cf-8d92c7826e9b

Supplier ID

Responses

✓ 200 Supplier retrieved successfully

RESPONSE SCHEMA: application/json

id
required string
The supplier ID

name
required string
The supplier name

active
required boolean
Is the supplier currently active or not

paymentTerms
required integer (PaymentTerm)
Payment term.

Code	Term
-1	מיידי
0	שוט
10	10+ שוט
15	15+ שוט
30	30+ שוט
45	45+ שוט
60	60+ שוט
75	75+ שוט
90	90+ שוט
120	120+ שוט

incomeAmount
required number
Total income recorded from the supplier

paymentAmount
required number
Total amount paid to the supplier so far

balanceAmount
required number
The supplier balance amount

creationDate
required integer <int64>
Creation date Unix timestamp (in seconds)

lastUpdateDate
required integer <int64>
Last update date Unix timestamp (in seconds)

department string
The supplier department

taxId string
The supplier tax ID

accountingKey string
The supplier accounting key

bankName string
The supplier bank name

bankBranch string
The supplier bank branch number

bankAccount string
The supplier bank account number

address string
The supplier address

city string
The supplier city

zip string
The supplier ZIP code

country	string	2-letter ISO 3166-1 alpha-2 country code
phone	string	The supplier phone number
fax	string	The supplier fax number
mobile	string	The supplier mobile number
emails	Array of strings	The supplier email addresses
labels	Array of strings	IDs of the labels assigned to the supplier
remarks	string	Supplier remarks for internal use
contactPerson	string	The supplier contact person name

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
  "name": "ישראל ישראלי",
  "active": true,
  "department": "",
```

```
"taxId": "999317746",
"accountingKey": "31653639",
"paymentTerms": 0,
"bankName": "פועלים",
"bankBranch": "123",
"bankAccount": "123456",
"address": "12 הרצל",
"city": "תל אביב",
"zip": "6688320",
"country": "IL",
"phone": "0505555555",
"fax": "0504444444",
"mobile": "0504444444",
- "emails": [
    "test_test@test.com"
],
- "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
],
"remarks": "",
"contactPerson": "ישראל ישראלי",
"incomeAmount": 0,
"paymentAmount": 0,
"creationDate": 1780919300,
"lastUpdateDate": 1780919300,
"balanceAmount": 0
}
```

Update Supplier

PUT /suppliers/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/suppliers/{id}>  

Update an existing supplier by its ID. This is a partial update: include only the fields you want to change — any field you omit keeps its current value.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required
string <uuid>
Example: 32770ce2-ca0f-469f-87cf-8d92c7826e9b
Supplier ID

REQUEST BODY SCHEMA: application/json
required

name
string
The supplier name. For example: ישראל ישראלי.

active
boolean
Is the supplier currently active or not. For example: true.

department
string
The supplier department. For example: Sales.

taxId
string
The supplier tax ID. For example: 999317746.

accountingKey
string
The supplier accounting key. For example: 31653639.

paymentTerms
integer (PaymentTerm)
Payment term.

Code	Term
-1	מיידי

Code	Term
0	שוטף
10	שוטף 10+
15	שוטף 15+
30	שוטף 30+
45	שוטף 45+
60	שוטף 60+
75	שוטף 75+
90	שוטף 90+
120	שוטף 120+

bankName

string

The supplier bank name. For example: `פועלים`.

bankBranch

string

The supplier bank branch number. For example: `123`.

bankAccount

string

The supplier bank account number. For example: `123456`.

address

string

The supplier address. For example: `הרצל 12`.

city

string

The supplier city. For example: `תל אביב`.

zip

string

The supplier ZIP code. For example: `6688320`.

country

string

2-letter ISO 3166-1 alpha-2 country code. Defaults to `IL` (Israel). Use the [Get Supported Countries](#) endpoint to retrieve the full list. For

example: `IL` .

phone

string

The supplier phone number. For example: `0505555555` .

fax

string

The supplier fax number. For example: `0504444444` .

mobile

string

The supplier mobile number. For example: `0504444444` .

remarks

string

Supplier remarks for internal use. For example: `ספק קבוע` .

contactPerson

string

The supplier contact person name. For example: `ישראל ישראלי` .

emails

Array of strings `<= 3 items`

The supplier email addresses (up to 3). For example:

`["test_test@test.com"]` .

labels

Array of strings `<= 3 items`

Label names to assign to the supplier (up to 3). For example:

`["אינסטלטורים"]` .

Responses

✓ **200** Supplier updated successfully

RESPONSE SCHEMA: `application/json`

id

required

string

The supplier ID

name

required

string

The supplier name

active

required

boolean

Is the supplier currently active or not

paymentTerms
required

integer (PaymentTerm)

Payment term.

Code	Term
-1	מיידי
0	שוט
10	10+ שוט
15	15+ שוט
30	30+ שוט
45	45+ שוט
60	60+ שוט
75	75+ שוט
90	90+ שוט
120	120+ שוט

incomeAmount
required

number

Total income recorded from the supplier

paymentAmount
required

number

Total amount paid to the supplier so far

balanceAmount
required

number

The supplier balance amount

creationDate
required

integer <int64>

Creation date Unix timestamp (in seconds)

lastUpdateDate
required

integer <int64>

Last update date Unix timestamp (in seconds)

department	string	The supplier department
taxId	string	The supplier tax ID
accountingKey	string	The supplier accounting key
bankName	string	The supplier bank name
bankBranch	string	The supplier bank branch number
bankAccount	string	The supplier bank account number
address	string	The supplier address
city	string	The supplier city
zip	string	The supplier ZIP code
country	string	2-letter ISO 3166-1 alpha-2 country code
phone	string	The supplier phone number
fax	string	The supplier fax number
mobile	string	The supplier mobile number

emails	Array of strings The supplier email addresses
labels	Array of strings IDs of the labels assigned to the supplier
remarks	string Supplier remarks for internal use
contactPerson	string The supplier contact person name

Request samples

Payload

Content type
application/json

Copy Expand all Collapse all

```
{
  "name": "ישראל ישראלי",
  "active": true,
  "department": "Sales",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": 0,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "12 הרצל",
  "city": "תל אביב",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
```

```
{
  "mobile": "0504444444",
  "remarks": "ספק קבוע",
  "contactPerson": "ישראל ישראלי",
  - "emails": [
    "test_test@test.com"
  ],
  - "labels": [
    "אינסטלטורים"
  ]
}
```

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
  "name": "ישראל ישראלי",
  "active": true,
  "department": "",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": -1,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "13 הרצל",
  "city": "ראשון לציון",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0502222222",
}
```

```
- "emails": [  
  "test_test@test.com"  
],  
- "labels": [  
  "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"  
],  
"remarks": "",  
"contactPerson": "ישראל ישראלי",  
"incomeAmount": 0,  
"paymentAmount": 0,  
"creationDate": 1780919300,  
"lastUpdateDate": 1780923638,  
"balanceAmount": 0  
}
```

Delete Supplier

DELETE /suppliers/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/suppliers/{id}>  

Delete a supplier by its ID. The response is the deleted supplier.

Note: The supplier must be **inactive** (`active: false`) before it can be deleted — deactivate it first via [Update Supplier](#). A supplier that has linked expenses cannot be deleted.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string <uuid>

Example: 32770ce2-ca0f-469f-87cf-8d92c7826e9b

Supplier ID

Responses

✓ 200 Supplier deleted successfully

RESPONSE SCHEMA: application/json

id
required

string

The supplier ID

name
required

string

The supplier name

active
required

boolean

Is the supplier currently active or not

paymentTerms
required

integer (PaymentTerm)

Payment term.

Code	Term
-1	כתידי
0	שוט
10	10+ שוט
15	15+ שוט
30	30+ שוט
45	45+ שוט
60	60+ שוט
75	75+ שוט
90	90+ שוט

Code	Term
120	120+ ღებუ

incomeAmount
required

number
Total income recorded from the supplier

paymentAmount
required

number
Total amount paid to the supplier so far

balanceAmount
required

number
The supplier balance amount

creationDate
required

integer <int64>
Creation date Unix timestamp (in seconds)

lastUpdateDate
required

integer <int64>
Last update date Unix timestamp (in seconds)

department

string
The supplier department

taxId

string
The supplier tax ID

accountingKey

string
The supplier accounting key

bankName

string
The supplier bank name

bankBranch

string
The supplier bank branch number

bankAccount

string
The supplier bank account number

address

string

	The supplier address
city	string The supplier city
zip	string The supplier ZIP code
country	string 2-letter ISO 3166-1 alpha-2 country code
phone	string The supplier phone number
fax	string The supplier fax number
mobile	string The supplier mobile number
emails	Array of strings The supplier email addresses
labels	Array of strings IDs of the labels assigned to the supplier
remarks	string Supplier remarks for internal use
contactPerson	string The supplier contact person name

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
  "name": "ישראל ישראלי",
  "active": false,
  "department": "",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": -1,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "13 הרצל",
  "city": "ראשון לציון",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0502222222",
  - "emails": [
    "test_test@test.com"
  ],
  - "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
  ],
  "remarks": "",
  "contactPerson": "ישראל ישראלי",
  "incomeAmount": 0,
  "paymentAmount": 0,
  "creationDate": 1780919300,
  "lastUpdateDate": 1780928006,
  "balanceAmount": 0
}
```

Search Suppliers

POST /suppliers/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/suppliers/search>  

Search the suppliers of the current business using any combination of the filters in the request body. All filters are optional; omitting the body returns the most recent suppliers. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

REQUEST BODY SCHEMA: application/json
optional

page *integer*
Default: 1
Page number to retrieve. Defaults to 1.

pageSize *integer*
Default: 25
Number of results per page. Defaults to 25.

name *string*
Filter by supplier name. For example: `ישראל ישראלי`.

active *boolean*
Filter by active state. Omit to return both active and inactive suppliers.
For example: `true`.

email *string*

	Filter by supplier email. For example: <code>test_test@test.com</code> .
contactPerson	<code>string</code> Filter by supplier contact person. For example: <code>ישראל ישראלי</code> .
taxId	<code>string</code> Filter by supplier tax ID. For example: <code>999317746</code> .
labels	<code>Array of strings</code> Filter by label IDs. For example: <code>["775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"]</code> .

Responses

✓ **200** Paginated list of suppliers matching the search

RESPONSE SCHEMA: `application/json`

total required	<code>integer</code> Total number of suppliers matching the search
page required	<code>integer</code> The requested page number
pageSize required	<code>integer</code> The requested page size
from required	<code>integer</code> Index of the first supplier in the current page
to required	<code>integer</code> Index of the last supplier in the current page
pages required	<code>integer</code> Total number of pages available

items >
required

Array of objects (Supplier)

The suppliers matching the search

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "page": 1,
  "pageSize": 25,
  "name": "ישראל ישראלי",
  "active": true,
  "email": "test_test@test.com",
  "contactPerson": "ישראל ישראלי",
  "taxId": "999317746",
  - "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
  ]
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "total": 1,
  "page": 1,
  "pageSize": 25,
  "from": 1,
```

```

    "to": 1,
    "pages": 1,
  -  "items": [
        -  {
            "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
            "name": "ישראל ישראלי",
            "active": true,
            "department": "",
            "taxId": "999317746",
            "accountingKey": "31653639",
            "paymentTerms": 0,
            "bankName": "פועלים",
            "bankBranch": "123",
            "bankAccount": "123456",
            "address": "12 הרצל",
            "city": "תל אביב",
            "zip": "6688320",
            "country": "IL",
            "phone": "0505555555",
            "fax": "0504444444",
            "mobile": "0504444444",
        +  "emails": [ ... ],
        +  "labels": [ ... ],
            "remarks": "",
            "contactPerson": "ישראל ישראלי",
            "incomeAmount": 0,
            "paymentAmount": 0,
            "creationDate": 1780919300,
            "lastUpdateDate": 1780919300,
            "balanceAmount": 0
        }
    ]
}

```

Merge Suppliers

POST /suppliers/{id}/merge

PRODUCTION https://api.greeninvoice.co.il/api/v1/suppliers/{id}/merge

Merge one supplier into another. The supplier identified by the path `id` is the **target** that data is merged into; the `mergeId` in the request body is the **source** supplier that data is merged from.

Note: One of the two suppliers must be inactive — specifically the source (`mergeId`). After the merge the source supplier is deleted and all of its documents are reassigned to the target supplier. The response body is an empty object.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > bearerAuth

PATH PARAMETERS

id
required
string <uuid>
Example: fa12ede8-6b22-4566-abfd-5a801e6b0fb4
The target supplier ID (the supplier that data is merged into)

REQUEST BODY SCHEMA: application/json
required

mergeId
required
string <uuid>
The ID of the supplier to merge data from. Must be an inactive supplier — after the merge it is deleted and all of its documents are reassigned to the target supplier. For example: 6e8f79d3-ed3e-4940-ad95-94c5416e9b19 .

Responses

✓ **200** Suppliers merged successfully

RESPONSE SCHEMA: application/json

object

Request samples

Payload

Content type

application/json

Copy

```
{
  "mergeId": "6e8f79d3-ed3e-4940-ad95-94c5416e9b19"
}
```

Response samples

200

Content type

application/json

Copy

```
{ }
```

Expenses

Track and manage your business expenses — the money your business spends on purchases and services.

You can create an expense in two ways:

- **Without a file** — the expense is created immediately and is ready to use.

- **With a file** (such as a receipt or invoice) — the upload first becomes an **expense draft**.

Review the draft, then approve it to turn it into a regular expense.

A draft is simply a pending expense waiting for your approval; until then, it isn't counted as an actual expense.

Add Expense

POST /expenses

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses>  

Add an expense to the current business.

The expense is generated from the business and document default settings, overridden by any attributes provided in the request.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

documentType
required

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי

Code	Type
400	קבלה
405	קבלה על תרומה

number
required

string

The supplier's document number. For example: 100.

date
required

string

Date of the expense, formatted YYYY-MM-DD. Must be 2010-01-01 or later and not in the future. For example: 2026-05-06.

reportingDate
required

string

VAT reporting date. Must be the first day of the month, formatted YYYY-MM-01. For example: 2026-05-01.

supplier >
required

object (ExpenseSupplierRequest)

accountingClassification >
required

object (AccountingClassification)

Accounting classification (expense category). On the request, send an existing classification's id (from the Get Accounting Classifications endpoint), or the details (irsCode, title, income, vat) to classify inline.

paymentType

integer (ExpensePaymentType)

Expense payment method.

Code	Method
-1	לא שולם
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית

Code	Method
5	פייפאל
10	אפליקציית תשלום
11	אחר

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונגי
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי

Code	Name
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

currencyRate

number

Exchange rate relative to ILS. Defaults to 1.

amount

number

Total amount of the expense, including VAT. For example: 472.

vat

number

VAT portion of the amount. May not exceed `amount`. For example: 72.

description

string

Description of the expense. For example: `אינסטלטור`.

remarks

string

Free-text remarks. For example: `אינסטלטור - שולם`.

labels

Array of strings

Labels used to identify the expense. For example: `["דחוף"]`.

allocationNumber

string

Tax Authority Allocation Number, when applicable. For example: 166056573 .

pcnClassification

string (ExpensePcnClassifications)

PCN874 input classification (for the Israeli Tax Authority PCN874 report).

Value	Meaning
T	תשומה רגילה
R	רשומון יבוא
K	ספק קופה קטנה
P	ספק רשות פלסטינית
C	תשומה חשבונית עצמית
H	מסמך אחר

active

boolean

Whether the expense is active. Defaults to true.

Responses

> 201 Expense created successfully

Request samples

Payload

Content type

application/json

```
{
  "documentType": 320,
  "number": "100",
  "date": "2026-05-06",
  "reportingDate": "2026-05-01",
  "paymentType": 3,
  "currency": "ILS",
  "currencyRate": 1,
  "amount": 472,
  "vat": 72,
  "description": "אינסטלטור",
  "remarks": "אינסטלטור-שולם",
  - "labels": [
    "דחוף"
  ],
  "allocationNumber": "166056573",
  "pcnClassification": "T",
```

```
- "supplier": {
  "name": "ישראל ישראלי",
  "active": true,
  "department": "Sales",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": 0,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "12 הרצל",
  "city": "תל אביב",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0504444444",
  "remarks": "ספק קבוע",
  "contactPerson": "ישראל ישראלי",
- "emails": [
  "test_test@test.com"
],
- "labels": [
  "אינסטלטורים"
],
  "balanceAmount": 0,
  "add": true
},
```

```
- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"active": true
}
```

Response samples

201

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "b22f10a6-85f3-4374-b563-e1e039d5528c",
  "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
  "businessType": 1,
  "documentType": 320,
  "status": 10,
  "paymentType": 3,
  "currency": "ILS",
  "currencyRate": 1,
  "amount": 472,
  "vat": 72,
  "amountExcludeVat": 400,
  "amountLocal": 472,
  "deductibleAmount": 400,
  "deductibleVat": 72,
```

```
"date": "2026-05-06",
"reportingDate": "2026-05-01",
"number": "100",
"description": "אינסטלטור",
"remarks": "אינסטלטור-שולם",
"allocationNumber": "166056573",
- "supplier": {
    "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
    "name": "ישראל ישראלי",
    "active": true,
    "department": "",
    "taxId": "999317746",
    "accountingKey": "31653639",
    "paymentTerms": 0,
    "bankName": "פועלים",
    "bankBranch": "123",
    "bankAccount": "123456",
    "address": "12 הרצל",
    "city": "תל אביב",
    "zip": "6688320",
    "country": "IL",
    "phone": "0505555555",
    "fax": "0504444444",
    "mobile": "0504444444",
- "emails": [
    "test_test@test.com"
],
- "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
],
    "remarks": "",
    "contactPerson": "ישראל ישראלי",
    "incomeAmount": 0,
    "paymentAmount": 0,
    "creationDate": 1780919300,
    "lastUpdateDate": 1780919300,
    "balanceAmount": 0
},
```



```
- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"url": "string",
- "data": {
  - "labels": [
    "string"
  ],
  "pcnClassification": "T",
  "pcnTaxId": "990000002"
},
"creationDate": 1780991238,
"lastUpdateDate": 1780991238
}
```

Search Expenses

POST /expenses/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/search>  

Search the current business's expenses with optional filters. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json
required

fromDate	string Start of the reporting-date range to filter by. Filters on the expense's reporting date (the VAT reporting period), not its document date. Must be the first day of the month, formatted YYYY-MM-01. For example: 2025-06-01 .
toDate	string End of the reporting-date range to filter by. Filters on the expense's reporting date (the VAT reporting period), not its document date. Must be the first day of the month, formatted YYYY-MM-01. For example: 2026-06-01 .
description	string Filter by expense description. For example: אינסטלטור .
supplierId	string Filter by supplier ID. For example: 28fa4c1d-a29b-11e4-963c-18002725111e .
supplierName	string Filter by supplier name. For example: אינסטלטור .
number	string Filter by the expense (supplier document) number. For example: 100 .
paid	boolean

	Filter by payment state. When omitted, both paid and unpaid expenses are returned. For example: <code>true</code> .
minAmount	number Minimum expense amount. For example: 100.
maxAmount	number Maximum expense amount. For example: 5000.
documentType	Array of integers (ExpenseDocumentType) Filter by one or more expense document types. For example: <code>[320]</code>.
paymentType	Array of integers (ExpensePaymentType) Filter by one or more payment methods. For example: <code>[3]</code>.
status	Array of integers (ExpenseStatus) Filter by one or more expense statuses. For example: <code>[10]</code>.
page	integer Page number to retrieve (1-based). Defaults to 1.
pageSize	integer Number of results per page. Defaults to 25.

Responses

✓ **200** Paginated list of expenses matching the search

RESPONSE SCHEMA: application/json

total	integer Total number of expenses matching the search.
page	integer The page number returned.
pageSize	integer The number of results per page.

pages	integer	Total number of pages available.
from	integer	1-based index of the first item on this page.
to	integer	1-based index of the last item on this page.
items >	Array of objects (Expense)	The expenses matching the search.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "fromDate": "2025-06-01",
  "toDate": "2026-06-01",
  "description": "אינסטלטור",
  "supplierId": "28fa4c1d-a29b-11e4-963c-18002725111e",
  "supplierName": "אינסטלטור",
  "number": "100",
  "paid": true,
  "minAmount": 100,
  "maxAmount": 5000,
  - "documentType": [
    320
  ],
  - "paymentType": [
    3
  ],
}
```

```
- "status": [  
  10  
],  
"page": 1,  
"pageSize": 25  
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{  
  "total": 3,  
  "page": 1,  
  "pageSize": 25,  
  "pages": 1,  
  "from": 1,  
  "to": 3,  
}
```

```

- "items": [
  - {
    "id": "b22f10a6-85f3-4374-b563-e1e039d5528c",
    "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
    "businessType": 1,
    "documentType": 320,
    "status": 10,
    "paymentType": 3,
    "currency": "ILS",
    "currencyRate": 1,
    "amount": 472,
    "vat": 72,
    "amountExcludeVat": 400,
    "amountLocal": 472,
    "deductibleAmount": 400,
    "deductibleVat": 72,
    "date": "2026-05-06",
    "reportingDate": "2026-05-01",
    "number": "100",
    "description": "אינסטלטור",
    "remarks": "אינסטלטור-שולם",
    "allocationNumber": "166056573",
    + "supplier": { ... },
    + "accountingClassification": { ... },
    "url": "string",
    + "data": { ... },
    "creationDate": 1780991238,
    "lastUpdateDate": 1780991238
  }
]
}

```

Get Expense

GET /expenses/{id}

PRODUCTION

<https://api.greeninvoice.co.il/api/v1/expenses/{id}>

Retrieve a single expense by its ID.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id**required**

string <uuid>

Example: `b22f10a6-85f3-4374-b563-e1e039d5528c`

Expense ID

Responses

✓ **200** Expense retrieved successfully

RESPONSE SCHEMA: application/json

id

string

The expense ID.

businessId

string

The ID of the business the expense belongs to.

businessType

integer (BusinessType)

Business type.

Code	Type
1	עוסק מורשה

Code	Type
2	חברה בע"מ
3	עוסק פטור
4	עמותה
5	חברה לתועלת הציבור
6	שותפות

documentType

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

status

integer (ExpenseStatus)

Expense status.

Code	Status
10	הוצאה אושרה לדו"ח
20	הוצאה נכללת בדו"ח
30	הוצאה שנערכה מחדש
40	הוצאה אושרה ע"י מייצג

Code	Status
100	הוצאה מחוקה

paymentType

integer (ExpensePaymentType)

Expense payment method.

Code	Method
-1	לא שולם
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי

Code	Name
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאיני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

currencyRate

number

Exchange rate relative to ILS.

amount	number	Total amount of the expense, including VAT.
vat	number	VAT portion of the amount.
amountExcludeVat	number	Amount excluding VAT (<code>amount</code> minus <code>vat</code>).
amountLocal	number	Total amount converted to local currency (ILS).
deductibleAmount	number	Tax-deductible amount, in local currency (ILS).
deductibleVat	number	Recoverable (input) VAT, in local currency (ILS).
date	string	Date of the expense, formatted YYYY-MM-DD.
reportingDate	string	VAT reporting date. Always the first day of the month, formatted YYYY-MM-01. For example: <code>2026-05-01</code> .
number	string	The supplier's document number.
description	string	Description of the expense.
remarks	string	Free-text remarks.
allocationNumber	string	Tax Authority Allocation Number, when applicable. For example: <code>166056573</code> .

supplier >	object (Supplier)
accountingClassification >	object (AccountingClassification) Accounting classification (expense category). On the request, send an existing classification's <code>id</code> (from the Get Accounting Classifications endpoint), or the details (<code>irsCode</code> , <code>title</code> , <code>income</code> , <code>vat</code>) to classify inline.
url	string Download URL for the attached file. Present only when the expense has an attached file.
data >	object Additional expense details.
creationDate	integer Creation date, as a Unix timestamp in seconds.
lastUpdateDate	integer Last update date, as a Unix timestamp in seconds.

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "b22f10a6-85f3-4374-b563-e1e039d5528c",
  "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
  "businessType": 1,
  "documentType": 320,
  "status": 10,
  "paymentType": 3,
  "currency": "ILS",
```

```
"currencyRate": 1,  
"amount": 472,  
"vat": 72,  
"amountExcludeVat": 400,  
"amountLocal": 472,  
"deductibleAmount": 400,  
"deductibleVat": 72,  
"date": "2026-05-06",  
"reportingDate": "2026-05-01",  
"number": "100",  
"description": "אינסטלטור",  
"remarks": "אינסטלטור-שולם",  
"allocationNumber": "166056573",
```

```
- "supplier": {
  "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
  "name": "ישראל ישראלי",
  "active": true,
  "department": "",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": 0,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "12 הרצל",
  "city": "תל אביב",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0504444444",
- "emails": [
  "test_test@test.com"
],
- "labels": [
  "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
],
  "remarks": "",
  "contactPerson": "ישראל ישראלי",
  "incomeAmount": 0,
  "paymentAmount": 0,
  "creationDate": 1780919300,
  "lastUpdateDate": 1780919300,
  "balanceAmount": 0
},
```

```
- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"url": "string",
- "data": {
  - "labels": [
    "string"
  ],
  "pcnClassification": "T",
  "pcnTaxId": "990000002"
},
"creationDate": 1780991238,
"lastUpdateDate": 1780991238
}
```

Update Expense

PUT /expenses/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/{id}>  

Update an existing expense by its ID. Only the fields you send are applied.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required string <uuid>
Example: 206e85f0-1606-4310-86d8-3a6736a41158
Expense ID

REQUEST BODY SCHEMA: application/json
required

documentType integer (ExpenseDocumentType)
Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

number string
The supplier's document number. For example: 111.

date string
Date of the expense, formatted YYYY-MM-DD. Must be 2010-01-01 or later and not in the future. For example: 2026-06-09.

reportingDate

string

VAT reporting date. Must be the first day of the month, formatted YYYY-MM-01. For example: 2026-06-01.

paymentType

integer (ExpensePaymentType)

Expense payment method.

Code	Method
-1	לא שולם
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני

Code	Name
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

currencyRate

number

Exchange rate relative to ILS. For example: 1.

amount

number

Total amount of the expense, including VAT. For example: 2360.

vat

number

VAT portion of the amount. May not exceed `amount`. For example: 360.

description

string

Description of the expense. For example: `מאתר נזילות`.

remarks

string

Free-text remarks. For example: `מאתר נזילות - שולם`.

labels

Array of strings

Labels used to identify the expense. For example: `["דחוף"]`.

allocationNumber

string

Tax Authority Allocation Number, when applicable. For example: `166056573`.

pcnClassification

string (ExpensePcnClassifications)

PCN874 input classification (for the Israeli Tax Authority PCN874 report).

Value	Meaning
T	תשומה רגילה
R	רשומון יבוא
K	ספק קופה קטנה
P	ספק רשות פלסטינית
C	תשומה חשבונית עצמית
H	מסמך אחר

supplier >

object (ExpenseSupplierRequest)

accountingClassification > **object** (AccountingClassification)

Accounting classification (expense category). On the request, send an existing classification's `id` (from the Get Accounting Classifications endpoint), or the details (`irsCode`, `title`, `income`, `vat`) to classify inline.

active

boolean

Whether the expense is active. For example: `true`.

Responses

✓ **200** Expense updated successfully

RESPONSE SCHEMA: `application/json`

`id`

string

The expense ID.

`businessId`

string

The ID of the business the expense belongs to.

`businessType`

integer (BusinessType)

Business type.

Code	Type
1	עוסק מורשה
2	חברה בע"מ
3	עוסק פטור
4	עמותה
5	חברה לתועלת הציבור
6	שותפות

documentType

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

status

integer (ExpenseStatus)

Expense status.

Code	Status
10	הוצאה אושרה לדו"ח
20	הוצאה נכללת בדו"ח
30	הוצאה שנערכה מחדש
40	הוצאה אושרה ע"י מייצג
100	הוצאה מחוקה

paymentType

integer (ExpensePaymentType)

Expense payment method.

Code	Method
-1	לא שולם
1	מזומן

Code	Method
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

currency

string (Currency)
3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפור
THB	באט תאילנדי

Code	Name
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

currencyRate

number

Exchange rate relative to ILS.

amount

number

Total amount of the expense, including VAT.

vat

number

VAT portion of the amount.

amountExcludeVat

number

Amount excluding VAT (`amount` minus `vat`).

amountLocal

number

Total amount converted to local currency (ILS).

deductibleAmount	number	Tax-deductible amount, in local currency (ILS).
deductibleVat	number	Recoverable (input) VAT, in local currency (ILS).
date	string	Date of the expense, formatted YYYY-MM-DD.
reportingDate	string	VAT reporting date. Always the first day of the month, formatted YYYY-MM-01. For example: <code>2026-05-01</code> .
number	string	The supplier's document number.
description	string	Description of the expense.
remarks	string	Free-text remarks.
allocationNumber	string	Tax Authority Allocation Number, when applicable. For example: <code>166056573</code> .
supplier >	object (Supplier)	
accountingClassification >	object (AccountingClassification)	Accounting classification (expense category). On the request, send an existing classification's <code>id</code> (from the Get Accounting Classifications endpoint), or the details (<code>irsCode</code> , <code>title</code> , <code>income</code> , <code>vat</code>) to classify inline.
url	string	Download URL for the attached file. Present only when the expense has an attached file.

data >

object

Additional expense details.

creationDate

integer

Creation date, as a Unix timestamp in seconds.

lastUpdateDate

integer

Last update date, as a Unix timestamp in seconds.

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "documentType": 320,
  "number": "111",
  "date": "2026-06-09",
  "reportingDate": "2026-06-01",
  "paymentType": 3,
  "currency": "ILS",
  "currencyRate": 1,
  "amount": 2360,
  "vat": 360,
  "description": "מאתר נזילות",
  "remarks": "מאתר נזילות - שולם",
  "labels": [
    "דוחף"
  ],
  "allocationNumber": "166056573",
  "pcnClassification": "T",
```

```
- "supplier": {
  "name": "ישראל ישראלי",
  "active": true,
  "department": "Sales",
  "taxId": "999317746",
  "accountingKey": "31653639",
  "paymentTerms": 0,
  "bankName": "פועלים",
  "bankBranch": "123",
  "bankAccount": "123456",
  "address": "12 הרצל",
  "city": "תל אביב",
  "zip": "6688320",
  "country": "IL",
  "phone": "0505555555",
  "fax": "0504444444",
  "mobile": "0504444444",
  "remarks": "ספק קבוע",
  "contactPerson": "ישראל ישראלי",
- "emails": [
  "test_test@test.com"
],
- "labels": [
  "אינסטלטורים"
],
  "balanceAmount": 0,
  "add": true
},
```

```
- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"active": true
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "b22f10a6-85f3-4374-b563-e1e039d5528c",
  "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
  "businessType": 1,
  "documentType": 320,
  "status": 10,
  "paymentType": 3,
  "currency": "ILS",
  "currencyRate": 1,
  "amount": 472,
  "vat": 72,
  "amountExcludeVat": 400,
  "amountLocal": 472,
  "deductibleAmount": 400,
  "deductibleVat": 72,
```

```
"date": "2026-05-06",
"reportingDate": "2026-05-01",
"number": "100",
"description": "אינסטלטור",
"remarks": "אינסטלטור-שולם",
"allocationNumber": "166056573",
- "supplier": {
    "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
    "name": "ישראל ישראלי",
    "active": true,
    "department": "",
    "taxId": "999317746",
    "accountingKey": "31653639",
    "paymentTerms": 0,
    "bankName": "פועלים",
    "bankBranch": "123",
    "bankAccount": "123456",
    "address": "12 הרצל",
    "city": "תל אביב",
    "zip": "6688320",
    "country": "IL",
    "phone": "0505555555",
    "fax": "0504444444",
    "mobile": "0504444444",
- "emails": [
    "test_test@test.com"
],
- "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
],
    "remarks": "",
    "contactPerson": "ישראל ישראלי",
    "incomeAmount": 0,
    "paymentAmount": 0,
    "creationDate": 1780919300,
    "lastUpdateDate": 1780919300,
    "balanceAmount": 0
},
```

```
- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"url": "string",
- "data": {
  - "labels": [
    "string"
  ],
  "pcnClassification": "T",
  "pcnTaxId": "990000002"
},
"creationDate": 1780991238,
"lastUpdateDate": 1780991238
}
```

Delete Expense

DELETE /expenses/{id}

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/{id}>  

Delete an expense by its ID. Returns the deleted expense.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id	string <uuid>
required	Example: b22f10a6-85f3-4374-b563-e1e039d5528c
	Expense ID

Responses

✓ 200 Expense deleted successfully

RESPONSE SCHEMA: application/json

id	string	The expense ID.
businessId	string	The ID of the business the expense belongs to.
businessType	integer (BusinessType)	Business type.

Code	Type
1	עוסק מורשה
2	חברה בע"מ
3	עוסק פטור
4	עמותה
5	חברה לתועלת הציבור

Code	Type
6	שותפות

documentType

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

status

integer (ExpenseStatus)

Expense status.

Code	Status
10	הוצאה אושרה לדו"ח
20	הוצאה נכללת בדו"ח
30	הוצאה שנערכה מחדש
40	הוצאה אושרה ע"י מייצג
100	הוצאה מחוקה

paymentType

integer (ExpensePaymentType)

Expense payment method.

Code	Method
-1	לא שולם
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

currency

string (Currency)
3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג

Code	Name
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

currencyRate

number

Exchange rate relative to ILS.

amount

number

Total amount of the expense, including VAT.

vat

number

VAT portion of the amount.

amountExcludeVat

number

Amount excluding VAT (`amount` minus `vat`).

amountLocal	number	Total amount converted to local currency (ILS).
deductibleAmount	number	Tax-deductible amount, in local currency (ILS).
deductibleVat	number	Recoverable (input) VAT, in local currency (ILS).
date	string	Date of the expense, formatted YYYY-MM-DD.
reportingDate	string	VAT reporting date. Always the first day of the month, formatted YYYY-MM-01. For example: <code>2026-05-01</code> .
number	string	The supplier's document number.
description	string	Description of the expense.
remarks	string	Free-text remarks.
allocationNumber	string	Tax Authority Allocation Number, when applicable. For example: <code>166056573</code> .
supplier >	object (Supplier)	
accountingClassification >	object (AccountingClassification)	Accounting classification (expense category). On the request, send an existing classification's <code>id</code> (from the Get Accounting Classifications endpoint), or the details (<code>irsCode</code> , <code>title</code> , <code>income</code> , <code>vat</code>) to classify inline.
url	string	

	Download URL for the attached file. Present only when the expense has an attached file.
data >	object Additional expense details.
creationDate	integer Creation date, as a Unix timestamp in seconds.
lastUpdateDate	integer Last update date, as a Unix timestamp in seconds.

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "b22f10a6-85f3-4374-b563-e1e039d5528c",
  "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
  "businessType": 1,
  "documentType": 320,
  "status": 10,
  "paymentType": 3,
  "currency": "ILS",
  "currencyRate": 1,
  "amount": 472,
  "vat": 72,
  "amountExcludeVat": 400,
  "amountLocal": 472,
  "deductibleAmount": 400,
  "deductibleVat": 72,
  "date": "2026-05-06",
  "reportingDate": "2026-05-01",
```

```
"number": "100",
"description": "אינסטלטור",
"remarks": "אינסטלטור-שולם",
"allocationNumber": "166056573",
- "supplier": {
    "id": "32770ce2-ca0f-469f-87cf-8d92c7826e9b",
    "name": "ישראל ישראלי",
    "active": true,
    "department": "",
    "taxId": "999317746",
    "accountingKey": "31653639",
    "paymentTerms": 0,
    "bankName": "פועלים",
    "bankBranch": "123",
    "bankAccount": "123456",
    "address": "12 הרצל",
    "city": "תל אביב",
    "zip": "6688320",
    "country": "IL",
    "phone": "0505555555",
    "fax": "0504444444",
    "mobile": "0504444444",
- "emails": [
    "test_test@test.com"
],
- "labels": [
    "775c188f-33a1-4d39-a5f2-cf7b82dd5bd5"
],
    "remarks": "",
    "contactPerson": "ישראל ישראלי",
    "incomeAmount": 0,
    "paymentAmount": 0,
    "creationDate": 1780919300,
    "lastUpdateDate": 1780919300,
    "balanceAmount": 0
},
```

```

- "accountingClassification": {
  "id": "451b3028-68b7-4d1a-bf63-9bb8be24ca9d",
  "key": "1310",
  "code": "1300",
  "title": "עבודות חוץ וקבלני משנה",
  "irsCode": 1310,
  "type": 20,
  "income": 100,
  "vat": 100,
  "mixed": 100,
  "creationDate": 1771231523,
  "lastUpdateDate": 1779287537
},
"url": "string",
- "data": {
  - "labels": [
    "string"
  ],
  "pcnClassification": "T",
  "pcnTaxId": "990000002"
},
"creationDate": 1780991238,
"lastUpdateDate": 1780991238
}

```

Get Allowed Expenses Statuses

GET /expenses/statuses

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/statuses?lang={1...>  

Retrieve the available expense statuses as a list of `{ id, name }` pairs. Names are localised by the `lang` query parameter.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

QUERY PARAMETERS

lang string (Lang)
Enum: "he" "en"
Example: lang=he
Content language for the localised name field. Defaults to he (Hebrew) if omitted or unsupported.

Responses

✓ 200 List of available expense statuses with localised names

RESPONSE SCHEMA: application/json

Array [

id integer (ExpenseStatus)
required Expense status.

Code	Status
10	הוצאה אושרה לדו"ח
20	הוצאה נכללת בדו"ח
30	הוצאה שנערכה מחדש
40	הוצאה אושרה ע"י מייצג
100	הוצאה מחוקה

name string
required

Localised name of the expense status, in the language indicated by the `lang` query parameter.

]

Response samples

200

Content type
application/json

Copy Expand all Collapse all

```
[
  - {
    "id": 10,
    "name": "הוצאה אושרה לדו"ח"
  },
  - {
    "id": 20,
    "name": "הוצאה נכללת בדו"ח"
  },
  - {
    "id": 30,
    "name": "הוצאה שנערכה מחדש"
  },
  - {
    "id": 100,
    "name": "הוצאה מחוקה"
  },
  - {
    "id": 40,
    "name": "הוצאה אושרה ע"י מייצג"
  }
]
```

Close Expense

POST /expenses/{id}/close

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/{id}/close>  

Close an expense by its ID. No request body is required, and the response returns an empty body.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS:  *bearerAuth*

PATH PARAMETERS

id
required string <uuid>
Example: `b22f10a6-85f3-4374-b563-e1e039d5528c`
Expense ID

Responses

 **200** Expense closed successfully

RESPONSE SCHEMA: `application/json`

`object`

Response samples

200

Content type
application/json

Copy

{ }

Open Expense

POST /expenses/{id}/open

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/{id}/open>  

Open an expense by its ID. No request body is required, and the response returns an empty body.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required
string <uuid>
Example: `b22f10a6-85f3-4374-b563-e1e039d5528c`
Expense ID

Responses

✓ 200 Expense opened successfully

RESPONSE SCHEMA: application/json

object

Response samples

200

Content type

application/json

Copy

```
{ }
```

Upload Expense File · Step 1: Get Upload URL

GET /file-upload/v1/url

PRODUCTION <https://apigw.greeninvoice.co.il/file-upload/v1/url?context={co...>  

Step 1 of the expense file-upload flow. Returns a pre-signed S3 POST (`url` + `fields`) that you use in Step 2 to upload the file. Uploading a file always creates an **expense draft** (which becomes a real expense only after approval).

Note: The pre-signed POST is valid for **60 seconds**. Complete Step 2 within 60 seconds of this request — after that the URL expires and you must request a new one.

- To create a new draft, send `data={"source":5}`.
- To attach a file to an existing expense, send `data={"id":"<expenseId>","source":5,"state":"expense"}`.

The upload is processed **asynchronously**; track the outcome via webhooks (`expense-draft/parsed` , `expense-file/updated` , `expense-draft/declined` , `file/infected`).

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes

Header	Value	Required
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

QUERY PARAMETERS

context
required

string

Example: context=expense

Upload context. Must be expense for the expense file-upload flow.

data
required

string

Example: data={"source":5}

JSON string describing the upload. source must be 5. New draft: {"source":5}. Attach to an existing expense: {"id": "<expenseId>", "source":5, "state":"expense"}.

Responses

> 201 Pre-signed S3 upload details

Response samples

201

Content type
application/json

Copy Expand all Collapse all

```
{
  "url": "https://s3.eu-west-1.amazonaws.com/string",
```

```
- "fields": {
  "x-amz-meta-account-id": "string",
  "x-amz-meta-user-id": "string",
  "x-amz-meta-business-id": "string",
  "x-amz-meta-file-context": "expense",
  "x-amz-meta-file-data": "{\"source\":5}",
  "bucket": "string",
  "X-Amz-Algorithm": "AWS4-HMAC-SHA256",
  "X-Amz-Credential": "string",
  "X-Amz-Date": "string",
  "X-Amz-Security-Token": "string",
  "key": "2026/06/09/<businessId>/${filename}",
  "Policy": "string",
  "X-Amz-Signature": "string"
},
"maxFileSize": 20971520
}
```

Upload Expense File • Step 2: Send the File

POST /

PRODUCTION <https://s3.eu-west-1.amazonaws.com/file-upload-service-uploaded/>  

Step 2 of the expense file-upload flow. Upload the file directly to the `url` returned by [Step 1: Get Upload URL](#), sending every field from that response's `fields` object as `multipart/form-data` alongside the `file`.

Important: Add the `file` field **last** in the `multipart/form-data` body — after all the other fields. The upload fails if `file` is not the final field.

Note: The pre-signed POST returned in Step 1 is valid for only **60 seconds**. Upload the file within that window, or it expires and you'll need to request a new URL.

Whether this **creates a new expense draft** or **updates an existing expense's file** is determined by the `data` you sent in Step 1. Processing is **asynchronous** — the response is

`204 No Content` ; track the outcome via webhooks. An expense cannot be updated once it has been reported.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>multipart/form-data</code>	Yes

REQUEST BODY SCHEMA: `multipart/form-data`
required

key required	string
Policy required	string
X-Amz-Algorithm required	string
X-Amz-Credential required	string
X-Amz-Date required	string
X-Amz-Security-Token required	string
X-Amz-Signature required	string
bucket required	string
file required	string <binary> The file to upload.

Responses

— **204** File accepted for processing

Request samples

Payload**Helper Script**

Content type

multipart/form-data

Copy

```
{
  "key": "2026/06/09/c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e/${filename}",
  "Policy": "string",
  "X-Amz-Algorithm": "AWS4-HMAC-SHA256",
  "X-Amz-Credential": "string",
  "X-Amz-Date": "20260609T130133Z",
  "X-Amz-Security-Token": "string",
  "X-Amz-Signature": "string",
  "bucket": "string",
  "file": "<the file to upload>"
}
```

Search Expense Drafts

POST /expenses/drafts/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/expenses/drafts/search>  

Search the current business's expense drafts with optional filters. Results are paginated.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: application/json

required

fromDate	string	Start of the creation date range to filter by, formatted YYYY-MM-DD.
toDate	string	End of the creation date range to filter by, formatted YYYY-MM-DD.
description	string	Filter by expense draft description.
supplierId	string	Filter by supplier ID.
supplierName	string	Filter by supplier name. For example: שפע .
page	integer	Page number to retrieve (1-based). Defaults to 1.
pageSize	integer	Number of results per page.

Responses

✓ **200** Paginated list of expense drafts matching the search

RESPONSE SCHEMA: application/json

total	integer	Total number of expense drafts matching the search.
page	integer	The page number returned.
pageSize	integer	The number of results per page.

pages	integer	Total number of pages available.
from	integer	1-based index of the first item on this page.
to	integer	1-based index of the last item on this page.
items >	Array of objects (ExpenseDraft)	The expense drafts matching the search.

Request samples

Payload

Content type

application/json

Copy

```
{
  "fromDate": "2026-03-01",
  "toDate": "2026-06-30",
  "description": "string",
  "supplierId": "string",
  "supplierName": "שפּע",
  "page": 1,
  "pageSize": 20
}
```

Response samples

200

Content type

application/json


```

{
  "total": 1,
  "page": 1,
  "pageSize": 20,
  "pages": 1,
  "from": 1,
  "to": 1,
  - "items": [
    - {
      "id": "315fd195-8703-486d-a883-88adfd434429",
      "businessId": "c1e4a7b2-8d3f-4a9c-b5e6-3f4a5b6c7d8e",
      "status": 10,
      + "expense": { ... },
      "reportingPeriod": "03-04/2026",
      "url": "string",
      "creationDate": 1781013227,
      "lastUpdateDate": 1781015771
    }
  ]
}

```

Payments

Collect payments from your customers — generate a hosted payment form to share with a customer, and manage and charge saved credit-card tokens.

Get Payment Form

POST /payments/form

PRODUCTION <https://api.greeninvoice.co.il/api/v1/payments/form>  

Create a payment request and return a payment form URL you can present to the customer — as an iframe or a redirect — to collect a payment. Once the customer pays, the configured document is created automatically.

The `group` field is required only when using the Digital Payments (Grow) plugin. If no `pluginId` is provided, the business's default payment plugin is used.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: `application/json`
required

`description`
required

string

Description of the document created for this payment. For example:
`Payment for order #1024`.

`type`
required

integer (PaidDocumentType)

Document type that can be created through a payment.

Code	Type
320	חשבונית מס / קבלה
400	קבלה
405	קבלה על תרומה
600	קבלת פיקדון

`amount`
required

number

The amount the customer needs to pay. Must be greater than 0. For example: 20.

`currency`
required

string (PaidCurrency)

3-letter ISO currency code supported for payments.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט

vatType
required

integer (DocumentVatType)
Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

lang
required

string (Lang)
Enum: "he" "en"
Content language

client >
required

object
Client information

maxPayments

integer
Number of credit-card installments, between 1 and 36. Defaults to 1.

pluginId

string
The clearing plugin ID to use. If omitted, the business's default payment plugin is used. For example: 7944827a-c664-11e4-8231-080027271115.

group

integer (PaymentFormGroup)
Payment method offered on the payment form.

Code	Group
100	Credit Card
110	PayPal
120	Bit
150	Google Pay
160	Apple Pay

income >

[Array of objects](#) (MinimalIncomeRowRequest)

Income (line-item) rows. If no rows are provided, a single row is created from the request's `description` and `amount`.

remarks

[string](#)

Remarks shown on the created document. For example: `Some remarks`.

successUrl

[string](#)

HTTPS URL the customer is redirected to after a successful payment. For example: `https://example.com/success`.

failureUrl

[string](#)

HTTPS URL the customer is redirected to after a failed payment. For example: `https://example.com/failure`.

notifyUrl

[string](#)

HTTPS URL notified (POST) once the payment succeeds and the document is created. For example: `https://example.com/notify`.

custom

[string](#)

Custom data echoed back to your success / failure / notify URLs, such as an internal order ID. For example: `order-1024`.

Responses

> **201** Payment form URL created successfully

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "description": "Payment for order #1024",
  "type": 320,
  "amount": 20,
  "currency": "ILS",
  "vatType": 0,
  "lang": "he",
  "maxPayments": 1,
  "pluginId": "7944827a-c664-11e4-8231-080027271115",
  "group": 100,
  - "client": {
    "id": "7944827a-c664-11e4-8231-080027271114",
    "name": "John Doe",
    - "emails": [
      "email1@example.com",
      "email2@example.com"
    ],
    "taxId": "0123456789",
    "address": "1 Luria St",
    "city": "Tel Aviv",
    "zip": "1234567",
    "country": "IL",
    "phone": "+972-54-1234567",
    "fax": "+972-54-1234567",
    "mobile": "+972-54-1234567",
    "add": false
  },
}
```

```
- "income": [  
  - {  
    "catalogNum": "MXDFSDD",  
    "description": "Item description",  
    "quantity": 1,  
    "price": 20,  
    "currency": "ILS",  
    "vatType": 1  
  }  
],  
"remarks": "Some remarks",  
"successUrl": "https://example.com/success",  
"failureUrl": "https://example.com/failure",  
"notifyUrl": "https://example.com/notify",  
"custom": "order-1024"  
}
```

Response samples

201

Content type

application/json

Copy

```
{  
  "success": true,  
  "errorCode": 0,  
  "errorDescription": "string",  
  "url": "https://payments.example.com/checkout/1a2b3c4d"  
}
```

Search Credit Card Tokens

POST /payments/tokens/search

PRODUCTION <https://api.greeninvoice.co.il/api/v1/payments/tokens/search>  

Search the saved credit-card tokens of the current business using any combination of the filters in the request body. All filters are optional; omitting the body returns the most recent tokens. Results are paginated.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Bearer <accessToken></code>	Yes

AUTHORIZATIONS: > *bearerAuth*

REQUEST BODY SCHEMA: `application/json`
optional

`page` `integer`
Default: `1`
Page number to retrieve. Defaults to 1.

`pageSize` `integer`
Default: `25`
Number of results per page. Defaults to 25.

`paymentNumber` `string`
Filter by the card's last 4 digits. For example: `0000`.

`cardHolder` `string`
Filter by card holder name. For example: `John Doe`.

`externalKey` `string`
Filter by the client ID the token is associated with. For example:
`b0077e19-977b-4389-a2e1-f84fa0527d23`.

`cardType` `Array of integers` (`CreditCardType`)
Filter by credit card brand(s).

Code	Brand
0	Unknown
1	Isracard
2	Visa
3	Mastercard
4	American Express
5	Diners

Responses

✓ **200** Paginated list of credit-card tokens matching the search

RESPONSE SCHEMA: application/json

total required	integer Total number of tokens matching the search
page required	integer The requested page number
pageSize required	integer The requested page size
from required	integer Index of the first token in the current page
to required	integer Index of the last token in the current page
pages required	integer Total number of pages available
items > required	Array of objects (CreditCardToken)

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "page": 1,
  "pageSize": 25,
  "paymentNumber": "0000",
  "cardHolder": "John Doe",
  "externalKey": "b0077e19-977b-4389-a2e1-f84fa0527d23",
  - "cardType": [
    2
  ]
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "total": 1,
  "page": 1,
  "pageSize": 25,
  "from": 1,
  "to": 1,
  "pages": 1,
```

```
- "items": [  
  - {  
    "id": "46e78fc4-9d8c-4429-9748-454947be39cb",  
    "externalKey": "b0077e19-977b-4389-a2e1-f84fa0527d23",  
    "clientName": "John Doe",  
    "status": 1,  
    "cardType": 2,  
    "number": "0000",  
    "expires": "0129",  
    "holderName": "John Doe",  
    "pluginType": 12100,  
    + "currencies": [ ... ],  
    "creationDate": 1765186595,  
    "lastUpdateDate": 1765186595  
  }  
]  
}
```

Charge Credit Card Token

POST /payments/tokens/{id}/charge

PRODUCTION [https://api.greeninvoice.co.il/api/v1/payments/tokens/{id}/charge...](https://api.greeninvoice.co.il/api/v1/payments/tokens/{id}/charge)  

Charge a saved credit-card token. A document of the requested type is created and returned once the charge succeeds.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Bearer <accessToken>	Yes

AUTHORIZATIONS: > *bearerAuth*

PATH PARAMETERS

id
required

string

Example: 8b338c95-095e-46d4-b2c6-331747508759

The credit-card token ID to charge.

REQUEST BODY SCHEMA: application/json
required

type
required

integer (PaidDocumentType)

Document type that can be created through a payment.

Code	Type
320	חשבונית מס / קבלה
400	קבלה
405	קבלה על תרומה
600	קבלת פיקדון

amount
required

number

The amount to charge. Must be greater than 0. For example: 20.

currency
required

string (PaidCurrency)

3-letter ISO currency code supported for payments.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט

vatType
required

integer (DocumentVatType)

Document-level VAT type.

Value	Meaning
0	Default (based on business type)
1	Exempt (VAT-free)
2	Mixed (contains both exempt and taxable rows)

lang
required

string (Lang)

Enum: "he" "en"

Content language

description

string

Description of the document created for this charge. For example:

Transaction description .

maxPayments

integer

Number of credit-card installments, between 1 and 36. Defaults to 1.

income >

Array of objects (MinimalIncomeRowRequest)

Income (line-item) rows. If no rows are provided, a single row is created from the request's description and amount .

remarks

string

Remarks shown on the created document. For example: Some remarks .

notifyUrl

string

HTTPS URL notified (POST) once the payment succeeds and the document is created. For example: https://example.com/notify .

Responses

✓ 200 The document created by the charge

RESPONSE SCHEMA: application/json

id

string

required

Document unique ID

number
required

integer

Document serial number

type
required

integer (DocumentType)

Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

signed
required

boolean

Whether the document was digitally signed

lang
required

string (Lang)

	Enum: <code>"he"</code> <code>"en"</code>
	Content language
<code>client</code> > <code>required</code>	<code>object</code> Client linked to the document
<code>url</code> > <code>required</code>	<code>object</code> Document download URLs
<code>taxAuthorityConfirmationInitiated</code>	<code>boolean</code> Whether tax authority confirmation was initiated for the document
<code>taxAuthorityConfirmationLastError</code>	<code>integer</code> Error code from the most recent tax authority confirmation attempt. <code>0</code> indicates no error; a non-zero value (for example <code>400</code> or <code>406</code>) indicates a failure.
<code>vatRate</code>	<code>number</code> VAT rate applied to the document
<code>transactionId</code>	<code>string</code> The payment transaction ID.

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "description": "Transaction description",
  "type": 320,
  "amount": 20,
```

```
"currency": "ILS",
"vatType": 0,
"lang": "he",
"maxPayments": 1,
- "income": [
  - {
    "catalogNum": "MXDFSDD",
    "description": "Item description",
    "quantity": 1,
    "price": 20,
    "currency": "ILS",
    "vatType": 1
  }
],
"remarks": "Some remarks",
"notifyUrl": "https://example.com/notify"
}
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "57ae2ff9-0c24-43e8-b39c-a5bdcc05573d",
  "number": 40034,
  "type": 305,
  "signed": true,
  "lang": "he",
- "client": {
  "id": "7944827a-c664-11e4-8231-080027271114"
},
  "taxAuthorityConfirmationInitiated": false,
```

```
- "url": {
  "origin": "string",
  "he": "string",
  "en": "string"
},
"taxAuthorityConfirmationLastError": 0,
"vatRate": 0.18,
"transactionId": "feac32ae-cfda-422c-8502-3adc2cd2e261"
}
```

Partners

- Performing actions in user accounts is restricted to **existing users in morning with a `Best` subscription plan or higher**.
- Currently, partners are unable to create new user accounts.

To use the Partners endpoints you must be a Green Invoice partner. Contact Green Invoice to obtain your partner authorization code.


A Green Invoice partner can connect third-party applications to Green Invoice and control connected users through their application.

How it works — 3 steps:

1. **Request authorization** from an existing morning by Green Invoice user. Call `POST /partners/users/connection` — the user receives an email with a connection approval link valid for 3 days. Once approved, Green Invoice sends a `POST` request to the `url` you specified. Its body contains the connected user's `id`, `email`, and a `key` object holding the business's newly created API key (its `id` and `secret`) — store the key securely, as you exchange it for an access token in step 2.
2. **Obtain a JWT** for the user by calling `POST /idp/v1/oauth/token` with the user's API key ID as `client_id` and the secret as `client_secret`.
3. **Control the user** by using the returned `accessToken` as a `Bearer` token in the `Authorization` header of any subsequent API request.

Security note: The approval callback includes an `X-Data-Signature` header — the SHA-256 HMAC of the request body, signed with your partner authorization code as the key. Compare

it against your own HMAC computation to verify the callback's authenticity. This step is optional but recommended.

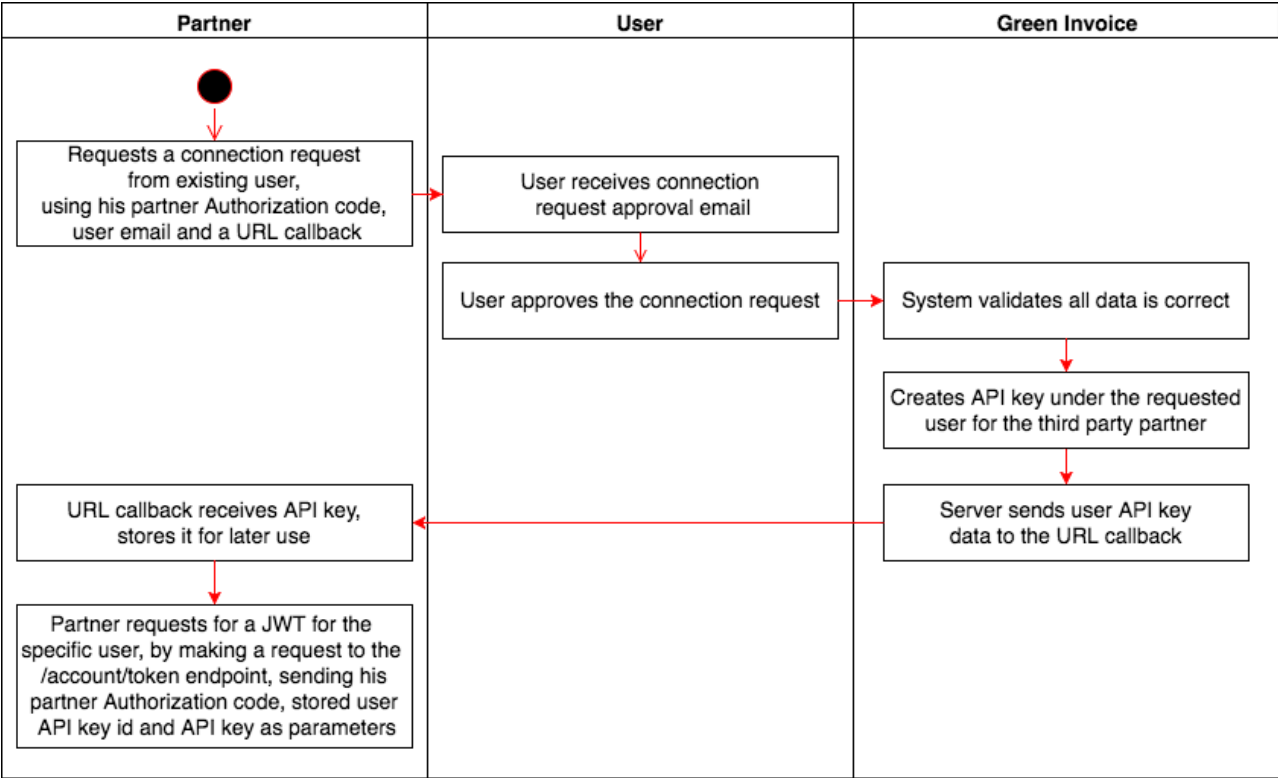

Note: An inactive partner account will result in a `403 Forbidden` response.

Get Connected Users

GET `/partners/users`

PRODUCTION <https://api.greeninvoice.co.il/api/v1/partners/users>  

Returns all connected and approved users for your partner account.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Basic <credentials></code>	Yes

AUTHORIZATIONS:  `basicAuth`

Responses

✓ **200** Connected users retrieved successfully

RESPONSE SCHEMA: application/json

Array [

id

string

The connected user's masked identifier.

email

string

The connected user's email address.

]

Response samples

200

Content type

application/json

Copy

Expand all

Collapse all

```
[
  - {
    "id": "a1b2c3d4e5f6a1b2c3d4e5f6a1b2c3d4",
    "email": "user@example.com"
  }
]
```

Request User Approval

POST /partners/users/connection

PRODUCTION <https://api.greeninvoice.co.il/api/v1/partners/users/connection...>



Sends a connection request to an existing morning by Green Invoice user.

The user receives an email with a link to approve the connection. The link expires after 3 days — if it is not approved in time, a new request must be initiated.

Once the user approves, Green Invoice sends a `POST` request to the `url` you specified. The body contains the connected user's `id`, `email`, and a `key` object holding the business's newly created API key — including its `id` and `secret`. An `X-Data-Signature` header is also included — the SHA-256 HMAC of the body using your partner authorization code as the key — which you can use to verify the callback's authenticity.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes
<code>Authorization</code>	<code>Basic <credentials></code>	Yes

AUTHORIZATIONS: > *basicAuth*

REQUEST BODY SCHEMA: `application/json`
required

<code>email</code> <i>required</i>	<code>string</code> The email address of the morning user to invite. For example: <code>user@example.com</code> .
<code>url</code> <i>required</i>	<code>string</code> The callback URL where Green Invoice will send the connection approval notification. For example: <code>https://example.com/callback</code> .

Responses

— **200** Connection request sent successfully

Request samples

Payload

Content type
application/json

Copy

```
{
  "email": "user@example.com",
  "url": "https://example.com/callback"
}
```

Disconnect Partner User

DELETE /partners/users/connection

PRODUCTION <https://api.greeninvoice.co.il/api/v1/partners/users/connection...>  

Removes a connected user from your partner account.

All partner-related API keys for the user's businesses are revoked and you will no longer be able to access their resources. If the user is billed through your partner account, billing stops immediately for future documents.

The user receives a notification email upon disconnection. A disconnected user may reconnect at any time.

Note: All businesses of the specified user that are associated with your partner will be disconnected.

Request headers

Header	Value	Required
Content-Type	application/json	Yes
Authorization	Basic <credentials>	Yes

AUTHORIZATIONS: > *basicAuth*

QUERY PARAMETERS

email
required

string

Example: `email=user@example.com`

The email address of the connected user to disconnect. For example:

`user@example.com` .

Responses

— **200** User disconnected successfully

Webhooks

Webhooks let your application receive real-time notifications when events happen in morning — for example, when a document is created.

Unlike the rest of the API, webhooks are **configured in the morning interface**, not through an API call:

1. In morning, open [Developer Tools → Webhooks](#).
2. Click **Add Webhook**, give it a name, and enter the **URL** on your server that should receive the notifications.
3. Choose one or more **events** to subscribe to. Optionally, set a **secret** used to sign every delivery so you can verify it came from morning (see **Verifying deliveries** below). Then save.

Once saved, every subscribed event triggers an HTTP `POST` to your URL with a JSON body describing the event.

Delivery headers

Every delivery includes the following headers:

Header	Description
<code>x-webhook-topic</code>	The event type, e.g. <code>document/created</code> .
<code>x-webhook-id</code>	Identifier of the webhook configuration that produced the delivery.
<code>x-webhook-delivery-id</code>	Unique identifier of this specific delivery.
<code>x-webhook-timestamp</code>	Time the event was emitted, in ISO 8601 format.
<code>x-correlation-id</code>	Correlation identifier, useful for support and debugging.
<code>user-agent</code>	Always <code>morning webhooks</code> followed by the version, e.g. <code>morning webhooks 2.1</code> .
<code>x-webhook-signature</code>	Present only when the webhook is configured with a secret — an HMAC-SHA256 signature of the delivered body. See Verifying deliveries below.

Verifying deliveries

When a webhook has a **secret**, every delivery carries an `x-webhook-signature` header — the HMAC-SHA256 of the raw request body, keyed with your secret, hex-encoded.

To verify, compute the same HMAC over the **raw** received bytes and compare with a constant-time comparison. Capture the raw body before any JSON parsing — re-serializing parsed JSON changes the bytes and breaks the signature.

Example (Node.js / Express):

```
const crypto = require('crypto');
const express = require('express');
const app = express();

// Capture the raw body exactly as received — do NOT let a JSON parser re-serialize
app.use(express.raw({ type: 'application/json' }));

app.post('/webhook', (req, res) => {
```

```

const rawBody = req.body; // Buffer of the exact bytes received
const signature = req.get('x-webhook-signature');
const expected = crypto.createHmac('sha256', secret).update(rawBody).digest('hex');

const isValid = signature &&
  crypto.timingSafeEqual(Buffer.from(expected), Buffer.from(signature));
if (!isValid) return res.status(401).send('invalid signature');

const event = JSON.parse(rawBody.toString('utf8'));
// ... handle the event
res.sendStatus(200);
});

```

Delivery failures

Acknowledge each delivery by responding with one of `200`, `201`, `202`, or `204`. Any other response — including `3xx` redirects and other status codes — is treated as a failed delivery, as are timeouts and connection errors.

Failed deliveries are counted; after 15 failures the webhook becomes inactive and stops receiving events.

Available events

Event	Triggered when
<code>document/created</code>	A document is created.
<code>client/created</code>	A client is created.
<code>supplier/created</code>	A supplier is created.
<code>payment/received</code>	A payment is received.
<code>sale-pages/page-contacted</code>	A visitor submits their contact details on a sale page.
<code>sale-pages/order-paid</code>	An order is paid on a sale page.
<code>expense-draft/parsed</code>	An uploaded expense draft finishes parsing.
<code>expense-draft/declined</code>	An uploaded expense draft is declined.
<code>expense/file-updated</code>	An expense's file is updated.

Event	Triggered when
<code>file/infected</code>	An uploaded file is found to be infected and quarantined.

Document Created Webhook

Sent to your configured webhook URL whenever a document is created in a subscribed business.

The `x-webhook-topic` header on this delivery is `document/created`.

REQUEST BODY SCHEMA: `application/json`
required

`id` *string*
Unique identifier of the created document.

`type` *integer (DocumentType)*
Document type code.

Code	Type
10	הצעת מחיר
20	חשבון / אישור תשלום
100	הזמנה
200	תעודת משלוח
210	תעודת החזרה
300	חשבון עסקה
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה

Code	Type
405	קבלה על תרומה
410	ביטול תרומה
500	הזמנת רכש
600	קבלת פיקדון
610	משיכת פיקדון

number

integer

Document serial number.

businessId

string

Unique identifier of the business that issued the document.

businessType

integer (BusinessType)

Business type.

Code	Type
1	עוסק מורשה
2	חברה בע"מ
3	עוסק פטור
4	עמותה
5	חברה לתועלת הציבור
6	שותפות

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל

Code	Name
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני

Code	Name
ZAR	ראנד דרא"פ
HRK	קונה

country	string 2-letter ISO 3166-1 alpha-2 country code of the issuing business. See the Get Supported Countries endpoint for the full list.
date	string <date> Document date, in <code>YYYY-MM-DD</code> format.
createdAt	integer <int64> Unix timestamp in milliseconds of when the document was created.
subtotal	number Document total before VAT.
taxableTotal	number Total amount subject to VAT.
vatTaxableTotal	number Total amount subject to VAT (currently identical to <code>taxableTotal</code>).
revenueTaxableTotal	number Total revenue subject to income tax.
exemptTotal	number Total of the VAT-exempt amounts.
rounding	boolean Whether the document amounts are rounded.
custom >	object Custom data attached to the document. Omitted when no custom data was set.

bill >	object Present when the document is linked to a payment request; omitted otherwise.
discount >	object Document-level discount. Omitted when no discount was applied.
tax >	Array of objects Tax breakdown lines. Contains a VAT line when VAT applies.
total	number Document total, including VAT.
description	string Document title.
remarks	string Free-text remarks shown on the document.
reverseCharge	boolean Whether reverse-charge VAT applies to the document.
recipient >	object The party the document was issued to.
items >	Array of objects The document line items.
transactionId	string Identifier of the source transaction that triggered the document. Omitted when the document was not generated from a transaction.
transactions >	Array of objects Payment transactions recorded on the document. Empty when the document has no payments.

files >

object

The document's generated files.

allocationNumber

string

Israeli Tax Authority allocation (confirmation) number, when one was assigned to the document. Omitted otherwise.

foreignCurrencyRate >

object

Exchange rate from the document currency to the local currency (ILS), keyed by the 3-letter local currency code. Present only when the document currency is not ILS.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "type": 320,
  "number": 60873,
  "businessId": "9b7c1e42-8d3a-4f16-b0c5-1e2d3a4b5c6d",
  "businessType": 2,
  "currency": "ILS",
  "country": "IL",
  "date": "2026-07-01",
  "createdAt": 1782893748000,
  "subtotal": 300,
  "taxableTotal": 300,
```

```
"vatTaxableTotal": 300,
"revenueTaxableTotal": 300,
"exemptTotal": 0,
"rounding": false,
- "tax": [
  - {
    "name": "VAT",
    "rate": 0.18,
    "total": 54
  }
],
"total": 354,
"description": "",
"remarks": "Tax invoice / receipt for transaction invoice 40000468",
"reverseCharge": false,
- "recipient": {
  "id": "5c1f2e3d-4b5a-4c6d-9e8f-0a1b2c3d4e5f",
  "name": "David Levi",
  "taxId": "514987326",
  "department": "",
  "address": "1 Main St",
  "city": "Nahariya",
  "zip": "18555",
  "country": "IL",
  "phone": "03-1234567",
  "mobile": "",
  - "emails": [
    "david@example.com"
  ]
},
```

```

- "items": [
  - {
    "description": "UI design hour",
    "sku": "UI-001",
    "quantity": 1,
    "price": 300,
    "currency": "ILS",
    "taxIncludedInPrice": false,
    + "tax": [ ... ]
  }
],
"transactionId": "7e8d9c0b-1a2f-4e3d-8c5b-6a7f8e9d0c1b",
- "transactions": [
  - {
    "id": "2b3c4d5e-6f70-4819-a2b3-c4d5e6f70819",
    "price": 354,
    "currency": "ILS",
    "date": "2026-07-01",
    + "paymentMethod": { ... }
  }
],
- "files": {
  "signed": true,
  - "downloadLinks": {
    "he": "https://www.greeninvoice.co.il/api/v1/documents/download?d=...",
    "en": "https://www.greeninvoice.co.il/api/v1/documents/download?d=...",
    "origin":
      "https://www.greeninvoice.co.il/api/v1/documents/download?d=..."
  }
}
}

```

Client Created Webhook

Sent to your configured webhook URL whenever a client is created in a subscribed business.

The `x-webhook-topic` header on this delivery is `client/created`.

REQUEST BODY SCHEMA: `application/json`

required

id	string	Unique identifier of the client.
name	string	Client name.
taxId	string	Client tax ID.
department	string	Client department.
address	string	Street address.
city	string	City.
zip	string	Postal code.
country	string	2-letter ISO 3166-1 alpha-2 country code. See the Get Supported Countries endpoint for the full list.
phone	string	Phone number.
mobile	string	Mobile number.
emails	Array of strings	Client email addresses.
contact	string	

	Contact person name.
createdAt	<code>integer <int64></code> Unix timestamp in milliseconds of when the client was created.
updatedAt	<code>integer <int64></code> Unix timestamp in milliseconds of when the client was last updated.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "8a1b2c3d-4e5f-4061-9273-8495a6b7c8d9",
  "name": "Dana Cohen",
  "taxId": "512345678",
  "department": "Finance",
  "address": "1 Main St",
  "city": "Tel Aviv",
  "zip": "6120101",
  "country": "IL",
  "phone": "03-0000000",
  "mobile": "050-0000000",
  "emails": [
    "client@example.com"
  ],
  "contact": "Dana",
  "createdAt": 1782896238000,
```

```
"updatedAt": 1782896238000
}
```

Supplier Created Webhook

Sent to your configured webhook URL whenever a supplier is created in a subscribed business.

The `x-webhook-topic` header on this delivery is `supplier/created`.

REQUEST BODY SCHEMA: `application/json`
required

id	string	Unique identifier of the supplier.
name	string	Supplier name.
taxId	string	Supplier tax ID.
department	string	Supplier department.
address	string	Street address.
city	string	City.
zip	string	Postal code.
country	string	2-letter ISO 3166-1 alpha-2 country code. See the Get Supported Countries endpoint for the full list.
phone	string	

	Phone number.
mobile	<code>string</code> Mobile number.
emails	<code>Array of strings</code> Supplier email addresses.
contact	<code>string</code> Contact person name.
createdAt	<code>integer <int64></code> Unix timestamp in milliseconds of when the supplier was created.
updatedAt	<code>integer <int64></code> Unix timestamp in milliseconds of when the supplier was last updated.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type
application/json

Copy Expand all Collapse all

```
{
  "id": "4d5e6f70-8192-4a3b-b5c6-d7e8f9012345",
  "name": "Global Supplies Ltd",
  "taxId": "515263748",
  "department": "Finance",
  "address": "10 Trade Ave",
  "city": "Kyiv",
```

```
"zip": "01001",
"country": "UA",
"phone": "03-0000000",
"mobile": "050-0000000",
- "emails": [
    "supplier@example.com"
],
"contact": "Alex",
"createdAt": 1782896493000,
"updatedAt": 1782896493000
}
```

Payment Received Webhook

Sent to your configured webhook URL whenever a payment is received in a subscribed business.

The `x-webhook-topic` header on this delivery is `payment/received`.

REQUEST BODY SCHEMA: `application/json`
required

id	string	Unique identifier of the payment request.
channel	string	The channel the payment was made through, e.g. <code>sale-page</code> .
productId	string	External product identifier associated with the payment, when applicable.
description	string	Description of the payment request.
total	number	Total amount paid.

custom >	object Custom data attached to the payment request. Omitted when none was set.
payer >	object The party that made the payment.
transactions >	Array of objects The payment transactions that make up this payment.

Responses

— **200** Return any **2xx** status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "6f708192-a3b4-4c5d-9e6f-708192a3b4c5",
  "channel": "sale-page",
  "description": "Purchase from sale page",
  "total": 210,
  - "payer": {
    "name": "Dana Cohen",
    "email": "payer@example.com"
  },
}
```

```
- "transactions": [  
  - {  
    "id": "0c1b2a3d-4e5f-4607-8918-2a3b4c5d6e7f",  
    "createdAt": 1782896958000,  
    "currency": "ILS",  
    "gateway": "cardcom",  
    "gatewayTransactionId": "900112233",  
    "installments": 1,  
    "total": 210,  
    "authorizationCode": "12345",  
    + "payer": { ... },  
    + "paymentMethod": { ... }  
  }  
]  
}
```

Sale Page Contacted Webhook

Sent to your configured webhook URL whenever a visitor submits their details on a sale page in a subscribed business. This covers both sale-page blocks that collect visitor details – the **contact** block and the **newsletter-signup** block – which share the same payload. Which fields are populated depends on the block and its configuration; `newsletter` indicates whether the visitor opted into the mailing list.

The `x-webhook-topic` header on this delivery is `sale-pages/page-contacted`.

REQUEST BODY SCHEMA: `application/json`

required

firstName	string
	First name entered in the contact form.

lastName	string
	Last name entered in the contact form.

email	string
	Email address entered in the contact form.

phone	string	Phone number entered in the contact form.
newsletter	boolean	Whether the visitor opted in to the business's mailing list, consenting to receive marketing content by email and/or SMS.
message	string	Free-text message entered by the visitor. Present only when the block includes a message field.
pageName	string	Name of the sale page the contact request was submitted from.
streams	Array of integers	Integration (plugin) type codes the contact request was forwarded to. Empty when none are configured.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "firstName": "Dana",
  "lastName": "Cohen",
  "email": "dana@example.com",
  "phone": "050-0000000",
  "newsletter": true,
```

```
"message": "What are your opening hours?",
"pageName": "My Store",
"streams": [ ]
}
```

Sale Page Order Paid Webhook

Sent to your configured webhook URL whenever an order is paid on a sale page in a subscribed business.

The `x-webhook-topic` header on this delivery is `sale-pages/order-paid`.

REQUEST BODY SCHEMA: `application/json`
required

businessId	string	Unique identifier of the business that owns the sale page.
pageId	string	Unique identifier of the sale page.
documentId	string	Unique identifier of the document created for the order, when one was created.
orderNumber	integer	Sequential order number.
description	string	Order description.
billing >	object	The customer's billing details.
shipping >	object	The shipping details, when the order includes shipping.

tax >	Array of objects VAT breakdown for the order.
transactions >	object The payment recorded for the order.
items >	Array of objects The ordered line items.
discount >	object Order-level coupon discount. Present only when a coupon was applied.
createdAt	integer <int64> Unix timestamp in milliseconds of when the order was created.
paidAt	integer <int64> Unix timestamp in milliseconds of when the order was paid.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type
application/json

Copy Expand all Collapse all

```
{
  "businessId": "a1c2e3f4-5b6d-4e7f-8a9b-0c1d2e3f4a5b",
  "pageId": "b2d3f4a5-6c7e-4f8a-9b0c-1d2e3f4a5b6c",
  "documentId": "c3e4a5b6-7d8f-4a9b-8c0d-2e3f4a5b6c7d",
  "orderNumber": 7708,
```

```
    "description": "Purchase from sale page",
  -  "billing": {
      "name": "Dana Cohen",
      "email": "dana@example.com",
      "taxId": "514987326",
      "nameOnInvoice": "Dana Cohen",
      "notes": "Please gift-wrap"
    },
  -  "shipping": {
      "name": "Dana Cohen",
      "phone": "050-0000000",
      -  "address": {
          "formatted": "12 Herzl St, Tel Aviv, 6120101, Israel",
          "city": "Tel Aviv",
          "country": "IL",
          "street": "Herzl",
          "streetNumber": 12,
          "entrance": "A",
          "postalCode": "6120101",
          "apartmentNumber": 5
        },
      "method": "Israel Post",
      "price": 10,
      "currency": "ILS",
      "notes": "Leave at the door"
    },
  -  "tax": [
      -  {
          "name": "VAT",
          "rate": 0.18
        }
    ],
  -  "transactions": {
      "price": 210,
      "currency": "ILS",
      "paymentMethod": "credit-card"
    },
```

```
- "items": [  
  - {  
    "name": "Sample product 1",  
    "description": "Product item",  
    "quantity": 2,  
    "price": 100,  
    "currency": "ILS",  
    + "discount": { ... }  
  }  
],  
"createdAt": 1782896952762,  
"paidAt": 1782896953000  
}
```

Expense Draft Parsed Webhook

Sent to your configured webhook URL whenever an uploaded expense draft finishes parsing in a subscribed business.

The `x-webhook-topic` header on this delivery is `expense-draft/parsed`.

REQUEST BODY SCHEMA: `application/json`

required

<code>id</code>	<code>string</code> Unique identifier of the expense draft.
<code>createdAt</code>	<code>integer <int64></code> Unix timestamp in milliseconds of when the draft was created.
<code>updatedAt</code>	<code>integer <int64></code> Unix timestamp in milliseconds of when the draft was last updated.
<code>status</code>	<code>integer (ExpenseDraftStatus)</code> Expense draft status.

Code	Status
10	חדש
50	נכשל
200	נדחה

recognized	boolean Whether the draft was recognized and populated with default values from parsing.
thumbnail	string URL of the draft's thumbnail image.
url	string URL to download the draft's source file.
subtotal	number Expense total before VAT.
total	number Expense total, including VAT.
number	string Expense document number.
source	integer Expense source code.
description	string Expense description.
remarks	string Free-text remarks on the expense.
classification >	object The accounting classification assigned to the expense.

prediction >

object

The parsing (OCR) prediction result.

documentType

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

uploadTrackingId

string

Identifier correlating the draft with the original upload.

tax >

Array of objects

VAT breakdown for the expense.

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי

Code	Name
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

country

string

2-letter ISO 3166-1 alpha-2 country code. See the [Get Supported Countries](#) endpoint for the full list.

foreignCurrencyRate > **object**

Exchange rate from the expense currency to the local currency (ILS), keyed by the 3-letter local currency code. Present only when the expense currency is not ILS.

date **string <date>**

Expense date, in `YYYY-MM-DD` format.

recipient > **object**

The supplier the expense was issued by.

reportingPeriod **string**

The reporting period the expense is associated with, in `YYYY-MM` format.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy Expand all Collapse all

```
{
  "id": "d1e2f3a4-5b6c-4d7e-8f90-1a2b3c4d5e6f",
  "createdAt": 1782900153000,
  "updatedAt": 1782900153000,
  "status": 10,
  "recognized": true,
```

```
"thumbnail": "https://www.greeninvoice.co.il/api/v1/expenses/thumbnail?d=...",
"url": "https://www.greeninvoice.co.il/api/v1/expenses/download?d=...&ft=1",
"subtotal": 1,
"total": 1.18,
"number": "50002",
"source": 1,
"description": "",
- "classification": {
    "type": 20,
    "irsCode": 1390,
    "title": "Other costs",
    "code": "1300",
    "key": "1390",
    "income": 100,
    "vat": 100
  },
- "prediction": {
    "origin": "ocr",
    - "fields": [
        + { ... },
        + { ... },
        + { ... }
      ]
  },
"documentType": 305,
"uploadTrackingId": "e2f3a4b5-6c7d-4e8f-9a0b-1c2d3e4f5a6b",
- "tax": [
    - {
        "name": "VAT",
        "rate": 0.18,
        "total": 0.18
      }
  ],
"currency": "USD",
"country": "IL",
```



```
- "foreignCurrencyRate": {  
  "ILS": 3.65  
},  
"date": "2026-06-26",  
- "recipient": {  
  "id": "f0e1d2c3-b4a5-4968-8778-6a5b4c3d2e1f",  
  "name": "Acme Supplies Ltd.",  
  "country": "IL",  
  "emails": [ ]  
},  
"reportingPeriod": "2026-06"  
}
```

Expense Draft Declined Webhook

Sent to your configured webhook URL whenever an accountant declines an uploaded expense draft — i.e. does not approve it for intake — in a subscribed business.

The `x-webhook-topic` header on this delivery is `expense-draft/declined`.

REQUEST BODY SCHEMA: `application/json`
required

hash	<code>string</code> Hash of the uploaded file.
format	<code>string</code> File format / extension of the uploaded file.
mimeType	<code>string</code> MIME type of the uploaded file.
size	<code>integer</code> Size of the uploaded file, in bytes.
errorCode	<code>integer</code> Numeric code associated with the decline.
reason	<code>string</code>

	Short machine-readable token for the decline.
referenceId	<code>string</code> Human-readable text describing why the accountant declined the draft.
uploadTrackingId	<code>string</code> Identifier correlating the draft with the original upload.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type
application/json

Copy

```
{
  "hash": "9f8e7d6c5b4a3210fedcba9876543210",
  "format": "pdf",
  "mimeType": "application/pdf",
  "size": 190519,
  "errorCode": 3308,
  "reason": "",
  "referenceId": "Invalid expense document type",
  "uploadTrackingId": "a2b3c4d5-e6f7-4809-9a1b-2c3d4e5f6a7b"
}
```

Sent to your configured webhook URL whenever the file of an **already-approved expense** is updated in a subscribed business. This fires only for an approved expense — updating the file of an expense **draft** does not trigger it.

The `x-webhook-topic` header on this delivery is `expense/file-updated`.

REQUEST BODY SCHEMA: application/json

required

`id` `string`
Unique identifier of the expense.

`number` `string`
Expense document number.

`businessId` `string`
Unique identifier of the business that owns the expense.

`businessType` `integer (BusinessType)`
Business type.

Code	Type
1	עוסק מורשה
2	חברה בע"מ
3	עוסק פטור
4	עמותה
5	חברה לתועלת הציבור
6	שותפות

`createdAt` `integer <int64>`
Unix timestamp in milliseconds of when the expense was created.

`updatedAt` `integer <int64>`
Unix timestamp in milliseconds of when the expense was last updated.

active

boolean

Whether the expense is active.

status

integer (ExpenseStatus)

Expense status.

Code	Status
10	הוצאה אושרה לדו"ח
20	הוצאה נכללת בדו"ח
30	הוצאה שנערכה מחדש
40	הוצאה אושרה ע"י מייצג
100	הוצאה מחוקה

documentType

integer (ExpenseDocumentType)

Expense document type code.

Code	Type
20	חשבון / אישור תשלום
305	חשבונית מס
320	חשבונית מס / קבלה
330	חשבונית זיכוי
400	קבלה
405	קבלה על תרומה

thumbnail

string

URL of the expense's thumbnail image.

url

string

URL to download the expense's source file.

subtotal

number

Expense total before VAT.

total

number

Expense total, including VAT.

classification >

object

The accounting classification assigned to the expense.

currency

string (Currency)

3-letter ISO currency code.

Code	Name
ILS	שקל
USD	דולר
EUR	אירו
GBP	ליש"ט
JPY	יין יפני
CHF	פרנק שוויצרי
CNY	יואן סיני
AUD	דולר אוסטרלי
CAD	דולר קנדי
RUB	רובל
BRL	ריאל ברזילאי
HKD	דולר הונג קונג
SGD	דולר סינגפורי
THB	באט תאילנדי
MXN	פזו מקסיקני
TRY	לירה טורקית

Code	Name
NZD	דולר ניו זילנדי
SEK	כתר שבדי
NOK	כתר נורבגי
DKK	כתר דני
KRW	וון דרום קוריאני
INR	רופי הודי
IDR	רופי אינדונזי
PLN	זלוטי
RON	לאו רומני
ZAR	ראנד דרא"פ
HRK	קונה

country	string 2-letter ISO 3166-1 alpha-2 country code. See the Get Supported Countries endpoint for the full list.
tax >	Array of objects VAT breakdown for the expense.
date	string <date> Expense date, in <code>YYYY-MM-DD</code> format.
recipient >	object The supplier the expense was issued by.
paymentType	integer (ExpensePaymentType) Expense payment method.

Code	Method
-1	לא שולם
1	מזומן
2	צ'ק
3	כרטיס אשראי
4	העברה בנקאית
5	פייפאל
10	אפליקציית תשלום
11	אחר

allocationNumber

string

Israeli Tax Authority allocation (confirmation) number assigned to the expense.

transactionId

string

Identifier of the transaction associated with the expense, when applicable.

description

string

Expense description.

foreignCurrencyRate >

object

Exchange rate from the expense currency to the local currency (ILS), keyed by the 3-letter local currency code. Present only when the expense currency is not ILS.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy

Expand all

Collapse all

```
{
  "id": "aa11bb22-cc33-4d44-8e55-6f778899aabb",
  "number": "5001",
  "businessId": "9b7c1e42-8d3a-4f16-b0c5-1e2d3a4b5c6d",
  "businessType": 2,
  "createdAt": 1778148284000,
  "updatedAt": 1780417007000,
  "active": true,
  "status": 20,
  "documentType": 20,
  "thumbnail": "https://www.greeninvoice.co.il/api/v1/expenses/thumbnail?d=...",
  "url": "https://www.greeninvoice.co.il/api/v1/expenses/download?d=...&ft=2",
  "subtotal": 100,
  "total": 100,
  - "classification": {
    "id": "c1d2e3f4-a5b6-4c7d-8e9f-0a1b2c3d4e5f",
    "irsCode": 1306,
    "title": "Domestic purchases",
    "code": "200",
    "key": "200",
    "income": 100,
    "vat": 66.67,
    "mixed": 100
  },
  "currency": "ILS",
  "country": "IL",
```



```
- "tax": [  
  - {  
    "name": "VAT",  
    "rate": 0.18,  
    "total": 0  
  }  
,  
  "date": "2026-05-06",  
  - "recipient": {  
    "id": "d4e5f6a7-b8c9-4d0e-8f1a-2b3c4d5e6f70",  
    "name": "ACME Ltd",  
    "taxId": "",  
    "department": "",  
    "address": "",  
    "city": "",  
    "zip": "",  
    "country": "IL",  
    "mobile": "",  
    "emails": [ ],  
    "contact": "",  
    "createdAt": 1770296985000,  
    "updatedAt": 1778148616000  
  },  
  "allocationNumber": "",  
  "description": ""  
}
```

File Infected Webhook

Sent to your configured webhook URL whenever an uploaded file is found to be infected and quarantined in a subscribed business.

The `x-webhook-topic` header on this delivery is `file/infected`.

REQUEST BODY SCHEMA: `application/json`

required

name	string
------	--------

Storage key of the quarantined file (URL-encoded); the path segments include the date and business identifier.

key

string

Storage key of the quarantined file (identical to `name`).

data

string

A JSON-encoded string of file metadata, e.g.

`{"source":1,"uploadTrackingId":"..."}`. Parse it to read fields such as `source` and `uploadTrackingId`.

Responses

— **200** Return any `2xx` status code to acknowledge that your endpoint received the event.

Request samples

Payload

Content type

application/json

Copy

```
{
  "name": "2026/07/01/9b7c1e42-8d3a-4f16-b0c5-1e2d3a4b5c6d/receipt.pdf",
  "key": "2026/07/01/9b7c1e42-8d3a-4f16-b0c5-1e2d3a4b5c6d/receipt.pdf",
  "data": "{\"source\":1,\"uploadTrackingId\":\"a1b2c3d4-e5f6-4708-9192-a3b4c5d6e7f8\"}"
}
```

Reference

Reference data endpoints — lookup values such as supported countries, currencies, and business categories.

Note: All endpoints under **Reference** are served from the shared cache host (`cache.greeninvoice.co.il`), which is the same across all environments — there is no separate sandbox host. Authentication is not required.

Get Supported Business Categories

GET `/businesses/v1/occupations`

CACHE API `https://cache.greeninvoice.co.il/businesses/v1/occupations?locale...`  

Get all supported business categories and their sub-categories, ordered alphabetically by the localized name.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes

QUERY PARAMETERS

`locale`
required `string`
Enum: `"en_US"` `"he_IL"`
Example: `locale=he_IL`
Content language for the localized `name` and `keywords` fields

Responses

✓ **200** List of supported business categories

RESPONSE SCHEMA: `application/json`

Array [

`id`
required `integer`

The business category code (also used as the sub-category code for nested entries)

updatedAt required	integer <int64> Unix timestamp in milliseconds of when the category was last updated
name required	string The localized category name
keywords	Array of strings Localized search keywords associated with the category. Omitted when the category has none.
children	Array of objects (BusinessCategory) Sub-categories of this category. Present only on top-level categories that have sub-categories; sub-categories themselves have no children.

]

Response samples

200

Content type
application/json

Copy Expand all Collapse all

```
[
  - {
    "id": 22,
    "updatedAt": 1718054936930,
    "name": "אבטחה וחקירות",
    - "keywords": [
      "חוקר"
    ],
    - "children": [
      + { ... },
      + { ... }
    ]
  }
]
```

Get Supported Countries

GET /geo-location/v1/countries

CACHE API <https://cache.greeninvoice.co.il/geo-location/v1/countries?locale...>  

Get all supported countries, ordered alphabetically by the localized country name.

Request headers

Header	Value	Required
Content-Type	application/json	Yes

QUERY PARAMETERS

locale
required

string

Enum: "en_US" "he_IL"

Example: locale=he_IL

Content language for the localized `name` field

Responses

RESPONSE SCHEMA: application/json

Array [	
alpha2code required	string 2-letter ISO 3166-1 alpha-2 country code
alpha3code required	string 3-letter ISO 3166-1 alpha-3 country code
name required	string The country full name in the requested language
callingCode	integer International dialing code
updatedAt	integer <int64> Unix timestamp in milliseconds of the last update to this record
]	

Response samples

200

Content type

application/json

```
[
  - {
    "alpha2code": "IL",
    "alpha3code": "ISR",
    "callingCode": 972,
    "name": "ישראל",
    "updatedAt": 1718049888858
  }
]
```

Get Supported Cities

GET /geo-location/v1/cities

CACHE API <https://cache.greeninvoice.co.il/geo-location/v1/cities?locale={1...>  

Get all supported cities for a given country, ordered alphabetically by the localized city name.

Request headers

Header	Value	Required
Content-Type	application/json	Yes

QUERY PARAMETERS

locale
required
string
Enum: "en_US" "he_IL"
Example: locale=he_IL
Content language for the localized `name` field

country
required
string
Value: "IL"
Example: country=IL
2-letter ISO 3166-1 alpha-2 country code. Currently only `IL` (Israel) is supported.

Responses

✓ **200** List of supported cities

RESPONSE SCHEMA: application/json

Array [

country required	string The 2-letter code of the country
id required	integer The ID of the city object
name required	string The name of the city in the specified locale
updatedAt required	integer <int64> Unix timestamp in milliseconds of the last update to this record

]

Response samples

200

Content type

application/json

Copy Expand all Collapse all


```
[
  - {
    "country": "IL",
    "id": 284,
    "updatedAt": 1718052025380,
    "name": "שדה ורבורג"
  }
]
```

Get Supported Currencies

GET /currency-exchange/v1/latest

CACHE API <https://cache.greeninvoice.co.il/currency-exchange/v1/latest?base...>  

Get the latest and previous-day exchange rates for supported currencies, relative to a specified base currency.

Request headers

Header	Value	Required
<code>Content-Type</code>	<code>application/json</code>	Yes

QUERY PARAMETERS

base
required `string`
Example: `base=ILS`
3-letter currency code of the base currency

Responses

✓ **200** Latest exchange rates for the supported currencies

RESPONSE SCHEMA: `application/json`

Array [

base required	string The base currency code
code required	string The currency code
symbol required	string The currency symbol
updatedAt required	integer <int64> Unix timestamp in milliseconds of the last update to this record
rates > required	object Exchange rate information for this currency

]

Response samples

200

Content type
application/json

Copy Expand all Collapse all

```
[
  - {
    "base": "ILS",
    "code": "USD",
    "symbol": "$",
    "updatedAt": 1720265835875,
    - "rates": {
      + "spot": { ... },
      + "closing": { ... }
    }
  }
]
```

Errors

Green Invoice system is in Hebrew language and therefore the errors you will receive are in Hebrew.

We have added a list for you to view of the error code numbers and their descriptions (the descriptions are in Hebrew).

Error Code	Description
401	גישה נדחתה, נא להתחבר מחדש.
1002	שדה שם ריק.
1003	לא נמצא עסק פעיל בחשבון.
1004	Empty request body or invalid JSON.
1005	שגיאה במהלך שמירה.
1006	נא לחדש את המינוי.
1007	חסרה הרשאה מתאימה.
403	גישה אסורה.

Error Code	Description
404	פריט לא נמצא.
405	Method Not Allowed.
1008	פריט לא עודכן, כיוון שלא בוצעו שינויים.
1009	יש לבחור כתובות מייל.
1010	קיימת כבר בקשה עם נתונים זהים.
1011	שפה לא נתמכת.
1012	פעולה זו נתמכת במיניו גבוה יותר.
1013	קובץ ריק או לא תקין.
1014	סוג קובץ לא נתמך.
1015	יש להסדיר את החוב בחשבון על מנת לבצע את הפעולה.
1016	שגיאה בעדכון בסיס נתונים.
1017	שגיאה כללית.
1018	שגיאה בשליחת מייל. יתכן וכתובת המייל חסומה או לא תקינה.
1019	כתובת המייל של הנמען חסומה לשליחה.
1020	שגיאת הצפנה.
1100	לא תקין {id} שדה
1101	לא נשלחו שדות לעדכון.
1102	כתובת מייל לא תקינה.
1103	כתובת אתר לא תקינה.
1104	קוד מדינה לא תקין.
1105	ערך תנאי תשלום לא תקין.
1106	ערך קוד מטבע לא תקין.
1107	שער המרה לא תקין, ערך צריך להיות גדול מאפס.

Error Code	Description
1108	שיעור מע"מ לא תקין. צריך להיות בין 0-1
1109	קיימת שורה עם מע"מ במסמך ללא מע"מ
1110	מחיר לא תקין
2000	החשבון עדיין לא פעיל
2001	משתמש חסום
2002	מייל או סיסמה לא נכונים
2003	משתמש לא קיים
2004	נא למלא שם פרטי
2005	נא למלא שם משפחה
2006	סיסמה לא תקינה. צריכה להיות 8-16 ספרות או תווים
2007	מייל תפוס
2008	סיסמה נוכחית לא נכונה
2009	מספר ת.ז. לא תקין
2010	החשבון כבר הופעל
2012	לא תקין id ערך
2013	לא תקין type ערך
2014	נתוני מפתח לא נכונים
1111	מספר עוסק / ח.פ אינו תקין
1112	לא ניתן להוסיף מסמכים. בחודש זה הופקה כמות המסמכים המירבית לחשבון
1113	שדה תקבול לא נשלח
1114	תאריך התחלה לא תקין
1115	תאריך סיום לא תקין
1116	סכום מע"מ לא תקין

Error Code	Description
1117	תאריך לא תקין.
1118	לא ניתן לרכוש שירותים נוספים ללא מסלול פעיל בתשלום.
1119	גודל עמוד צריך להיות לכל היותר 100.
1120	כתובת הדומיין של המייל לא תקינה.
2100	סוג עוסק לא תקין.
2101	שם העסק לא יכול להיות ריק.
2102	לא ניתן להוסיף עוד עסקים במסגרת המינוי.
2103	נא למלא כתובת עסק.
2104	נא למלא עיר.
2105	M.קובץ לא תקין או גדול מ 5.
2106	סוג קובץ לא נתמך.
2107	מספר תבנית עיצוב לא תקין.
2125	מספר סקין בתבנית עיצוב לא תקין.
2126	אחוז מקדמות אינו תקין. ערך תקין הוא מספר בין 0-35.
2127	ערך תחום עיסוק לא תקין.
2128	ערך מקצוע לא תקין.
2129	ערך סדר עיצוב שדות תקבולים במסמך לא תקין.
2108	לא נמצא עסק.
2109	מספר סניף בנק יכול להכיל עד 5 תווים.
2110	עסק עם שם זהה כבר רשום בחשבון.
2111	מספר עוסק / ח.פ כבר קיים בחשבון.
2112	מספר עוסק / ח.פ כבר קיים במערכת תחת חשבון אחר.

Error Code	Description
2113	מספר עוסק / ח.פ. כבר רשום בחשבון פעמיים. ניתן עד להקים עד 2 עסקים עם אותו מספר עוסק.
2114	מספר תיק ניכויים אינו תקין.
2115	אחוז ניכוי במקור אינו תקין. ערך תקין הוא מספר בין 0-35.
2116	ערך שיטת דיווח לא תקין.
2117	ניתן להוסיף עד 3 כתובות מייל להנהלת חשבונות.
2118	חלק מההשדות לא עודכנו. קיים עסק נוסף עם מספר עוסק זהה ולכן חייב להישמר ביניהם טווח הפרש של לפחות 8,000.
2119	מספור מסמך לא תקין. ערכים תקינים בין 1-999999999.
2120	לא נשלח {types} שדה.
2121	לא ניתן לעדכן מספור זה מאחר וכבר הופקו מסמכים בשנה זו.
2122	לא ניתן לבצע פעולה זו בעסק מוקפא.
2123	לא תקין של העסק {id} ערך
2124	תוכן בתחתית המסמך מוגבל ל-2000 תווים.
2200	ניתן להוסיף עד 3 כתובות מייל ללקוח.
2201	נא למלא שם לקוח.
2202	לא ניתן לאחד לקוח פעיל.
2203	לא ניתן למחוק לקוח שהופקו עבורו מסמכים.
2204	של לקוח מטרה לא נשלח {id} שדה.
2205	לא נמצאו לקוחות חדשים או שהקובץ המיובא אינו תקין.
2206	ניתן להוסיף עד 3 תגיות ללקוח.
2207	M.קובץ לא תקין או גדול מ 5.
2208	יתרה לא תקינה.

Error Code	Description
2209	הכנסות לא תקינות.
2210	לא ניתן למחוק לקוח בעל כרטיסי אשראי שמורים.
2250	ניתן להוסיף עד 3 כתובות מייל לספק.
2251	נא למלא שם ספק.
2252	לא ניתן לאחד ספק פעיל.
2253	לא ניתן למחוק ספק ששויכו אליו הוצאות.
2254	של ספק מטרה לא נשלח {id} שדה.
2255	לא נמצאו ספקים חדשים ותקינים בקובץ היבוא.
2256	ניתן להוסיף עד 3 תגיות ללקוח.
2257	M.קובץ לא תקין או גדול מ 5
2258	יתרה לא תקינה.
2259	הכנסות לא תקינות.
2300	נא למלא שם פריט.
2301	נא למלא תיאור פריט.
2302	לא נמצאו פריטים חדשים ותקינים בקובץ היבוא.
2305	M.קובץ לא תקין או גדול מ 5
2400	לא ניתן לסגור מסמך שאינו פתוח.
2401	לא ניתן לפתוח מסמך שאינו סגור ידנית.
2402	לא נשלח או לא תקין {ids} שדה.
2403	סוג מסמך לא נשלח או אינו נתמך עבור סוג עסק זה.
2404	Invalid or missing {linkType} field. Can be only (copy cancel link).
2405	התאריך שנבחר עתידי או מוקדם מדי לסוג מסמך זה.
2406	ערך שפה לא תקין.

Error Code	Description
2407	ערך קוד מטבע לא תקין.
2408	תאריך לתשלום עד לא תקין.
2409	סוג מע"מ לא תקין.
2410	חסר {client} שדה לקוח.
2411	לקוח לא קיים.
2412	חשבונית עצמית יכולה להיות מופקת רק עם סוג חשבונית מס.
2413	נא למלא לפחות שירות או פריט אחד.
2414	סכום תשלום לא תקין. צריך להיות מספר עשרוני.
2415	תיאור שורה לא יכול להיות ריק.
2416	סכום מסמך לא תקין. צריך להיות שונה מאפס.
2417	סכום מסמך לא תקין. צריך להיות גדול מאפס.
2418	סכום מסמך לא תקין. צריך להיות גדול או שווה לאפס.
2419	נא למלא לפחות שורת תקבולים אחת.
2420	Invalid discount type. Can be 'sum' or 'percentage'.
2421	קוד סוג תשלום לא תקין.
2422	קיים חוסר התאמה בין סכום התקבולים לסכום התשלומים.
2423	סוג כרטיס אשראי לא תקין.
2424	קוד סוג עסקה לא תקין.
2425	מספר תשלומים יכול להיות רק 1-36.
2426	תאריך תקבול ריק, עתידי או לא תקין.
2427	לא ניתן לשלוח במייל מסמך שלא נחתם דיגיטלית.
2428	נא למלא שורת תקבולים אחת לפחות בנוסף לניכוי במקור.
2429	מסמך מקושר לא נמצא.

Error Code	Description
2430	ערך כמות צריך להיות גדול מ 1.
2431	כמות מירבית מותרת של שורות הכנסה / תשלום היא 200 למסמך.
2432	סוג עותק מסמך לא נתמך.
2433	סוג סטטוס הפצת מייל לא נתמך.
2434	ערך סכום תקבול צריך להיות שונה מ 0.
2435	ערך טקסט הערות לא תקין.
2436	ערך טקסט תחתון לא תקין.
2437	ערך שליחת מסמך במייל לא תקין.
2500	כתובת לא תקינה.
2501	קטגוריה חסרה.
2502	כותרת חסרה.
2503	כתובת חסרה.
2504	רשימת מיון ריקה.
2600	לא נמצא מסוף סליקה פעיל.
2601	קיימת בעיה בחיוב אשראי, נא ליצור קשר עם התמיכה.
2602	שגיאה בחיבור תוסף.
2603	שגיאה בחיוב כרטיס אשראי.
2604	לא תקין flow ערך.
2605	לא נשלח תוכן מסמך.
2606	שגיאה בשינוי סטטוס מסוף.
2607	סוג טוקן לא תקין.
2608	ספרות של כרטיס אשראי אינם תקינים 4.
2609	סוג מזהה עסקה לא תקין.

Error Code	Description
2610	סכום תשלום לא תקין. צריך להיות גדול מאפס.
2611	שגיאת אשראי.
2612	מזהה עסקה לא תקין.
2613	סוג סטטוס עסקה לא תקין.
2614	שדה מותאם אישית לא תקין.
2615	לא ניתן לבטל עסקה שבוטלה.
2616	לא ניתן לבטל עסקה, נא לבצע זיכוי.
2617	לא ניתן לזכות עסקה.
2618	לא ניתן לבטל עסקה שבוטלה.
2619	שדה סוג חיוב לא תקין.
2620	בקשה הושלמה בעבר.
2621	לא ניתן לבטל או לזכות עסקה.
2622	שם בעל כרטיס לא תקין.
2623	תוקף כרטיס לא תקין.
2624	לא ניתן לזכות עסקה בסכום גדול מהסכום המקורי.
2625	לתוסף שנבחר אין הרשאה לשמירת כרטיסי אשראי.
2626	שם משלם לא תקין.
2627	כרטיס אשראי שמור לא קיים או לא פעיל.
2700	לא תקין API מפתח.
2701	לא תקין API מצב מפתח.
2702	סוג מפתח דורש הזדהות נוספת.
2800	קוד חשבון ריק.
2801	סוג ממשק לא ניתן לסנכרון.

Error Code	Description
2802	סוג ממשק חיצוני לא תקין.
2803	שגיאת התחברות לממשק חיצוני.
2804	שגיאת תוסף.
2805	תוסף לא פעיל.
2900	תאריך התחלה לא תקין.
2901	תאריך סיום לא תקין או שאינו מאפשר לפחות הפקת מסמך אחד.
2902	תקופת חזרה לא תקינה.
2903	סטטוס ריטיינר לא תקין.
2904	תאריך ריטיינר לא תקין.
3000	שגיאה כללית.
3001	לא קיים כרטיס אשראי בחשבון.
3002	סוג המינוי שגשגלח לא קיים.
4000	סוג נתונים לא תקין.
3003	סוג פעולה לא נתמך.
3004	שדה אחד או יותר חסרים.
3005	מינוי זהה קיים בחשבון.
3006	מכסת ההרשמות היומית הסתיימה. נסו שוב מחר או פנו למנהל תיק הלקוח שלכם להגדלת המכסה היומית.
3007	מכסת החיבורים היומית הסתיימה. נסו שוב מחר או פנו למנהל תיק הלקוח שלכם להגדלת המכסה היומית.
3008	לא ניתן להפעיל את החיבור.
3009	סוג טרנזאקציה לא נתמכת.
3010	קיים חוב בחשבון. נא להסדיר את החוב לפני רכישת מינוי חדש.

Error Code	Description
3100	שם תגית ריק.
3101	אורך מקסימלי של תגית אפשרי עד 30 תווים.
3200	סוג משימה לא נתמך.
3300	סוג סטטוס הוצאה לא נתמך.
3301	סכום הוצאה לא תקין.
3302	סכום מע"מ בהוצאה לא תקין.
3303	נא לצרף קובץ עבור ההוצאה.
3304	סוג טיוטת הוצאה לא נתמך.
3305	טיוטת הוצאה מקושרת לא נמצאה.
3306	מספר מסמך הוצאה לא תקין.
3307	תאריך מסמך הוצאה לא תקין.
3308	סוג מסמך הוצאה לא תקין.
3309	לא ניתן לסווג מסמכי הכנסה של העסק כהוצאה.
3310	חודש דיווח לא תקין.
3311	נא למלא פרטי ספק.
3312	נא למלא פרטי סוג הוצאה.
3313	לא תקין expenselds שדה.
3314	לא ניתן לעדכן הוצאה לאחר שדווחה.
3315	לא ניתן לפתוח הוצאה שלא דווחה.
3316	לא ניתן לסגור הוצאה שאינה פתוחה.
3317	סוג אמצעי התשלום של ההוצאה לא תקין.
3318	מיקום משרד לא תקין.
3319	מספר חדרים לא תקין.

Error Code	Description
3320	מספר רכב לא תקין
3400	נא למלא כותרת לחשבון
3401	שיעור הוצאה מוכרת לא תקין
3402	שיעור מע"מ מוכר לא תקין
3403	סוג ההוצאה לא תקין
3404	קוד 6111 לא תקין
3405	לא ניתן למחוק סוג הוצאה ששויכו אליו הוצאות