


Luthetus.CompilerServices.
CSharp.BinderCase.CSharpBinder.
GetTypeDefinitionNodesByScope

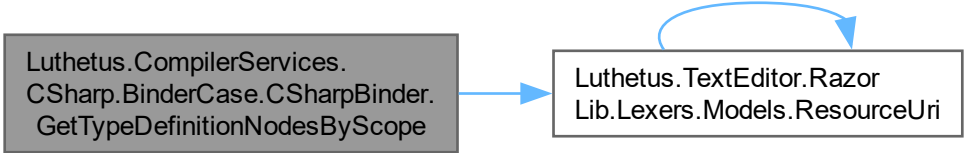

```
graph LR; A["Luthetus.CompilerServices.CSharp.BinderCase.CSharpBinder.GetTypeDefinitionNodesByScope"] --> B["Luthetus.TextEditor.RazorLib.Lexers.Models.ResourceUri"]; B --> B;
```

The diagram illustrates a call from the `GetTypeDefinitionNodesByScope` method in the `Luthetus.CompilerServices.CSharp.BinderCase.CSharpBinder` class to the `RazorLib.Lexers.Models.ResourceUri` property in the `Luthetus.TextEditor.RazorLib.Lexers.Models` class. A straight blue arrow points from the left box to the right box, and a curved blue arrow points from the right box back to itself, indicating a self-call or a recursive relationship.

Luthetus.TextEditor.Razor
Lib.Lexers.Models.ResourceUri