Barista Widget

1. Introduction

You can embed a Barista widget on any portal or web page. This widget allows you to launch a Barista chat window by simply clicking on the Barista icon and restarting the conversation by clicking the Restart button. To hide Barista chat, click on the **X** button.

We currently are required to safelist domains where the embedded script is going to be hosted. We already have **servicenow.com** and **jira.com**. For other domains, please inform your Customer Success representative so we can proceed accordingly.

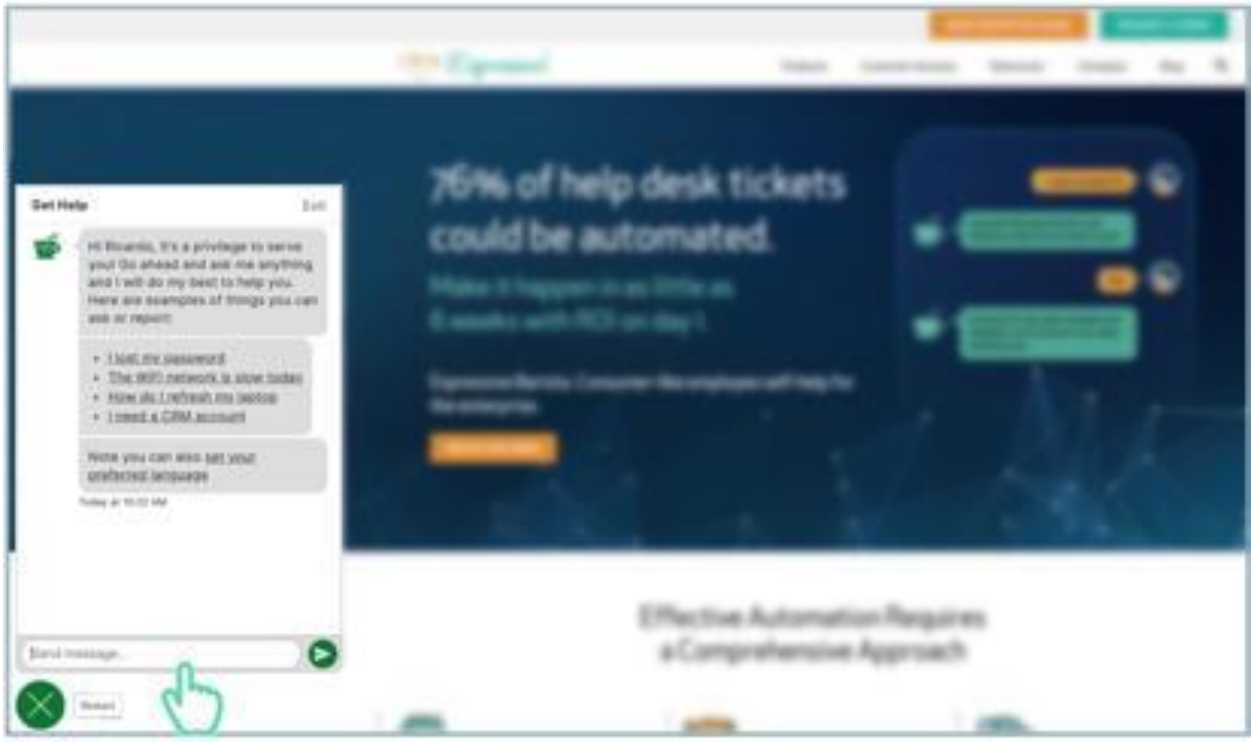

2. Sample Code

In this section, you will find the sample codes required to add the Barista widget and a description of the values involved. When you embed this script on your web page, it will load all the Barista chat components, including the avatar image, and load all the Barista chat behavior.

The snippet needs to be placed before the closing body tag </body> of your html document.

Configuration values

Any installation method can receive parameters according to the table below:

Element	Values	Description
`data-color`	`#0082C8`	Establishes the color of the Barista icon in hexadecimal format.

`data-position`	`top left`
	
	`top right`
	
	`bottom left`
	
	`bottom right`
	
	`bottom`
	
	`right`
		Indicates the locations of the Barista widget on the webpage.

`src`	`https://{tenant}.espressive.com/embed/index.js`	Replace the placeholder `{tenant}` with your tenant's name.
`data-message`	`''`(leave empty for no message) `"Custom Message"`	indicates the message to add. Replace the placeholder Custom Message with any message you want the bot to convey. If the `data-message` value is not defined, the script will show a default message.

`data-bot-name`	`"CustomBot"`	Replace the placeholder `CustomBot` with the name you want for the bot.
`window.baristaWidget.open();`		This element is used to open the Barista widget by default when the user lands on the page
`data-button-behavior`	`"minimize"`	This will change the behavior of the widget icon to allow users to minimize the widget
`data-version`	“2”	The widget will load the new V2 version of the Barista UI
Custom properties: `data-widget-property`	“<text_value>“	You can pass custom properties from the widget to Doppio and this value can be used in Doppio conversation flow

2.1 ServiceNow installation

To install in ServiceNow use the update set Barista Chat Widget —it will install a ServiceNow Widget that can be used in a page template. Either dragging and drop “Barista Chat Widget” or using declarative syntax:

```
<sp-widget widget="data.barista_chat_widget" />
```

For Widget customization go to Widgets table > “Barista Chat Widget” and modify `script.setAttribute()` properties according to the values documented in the previous section

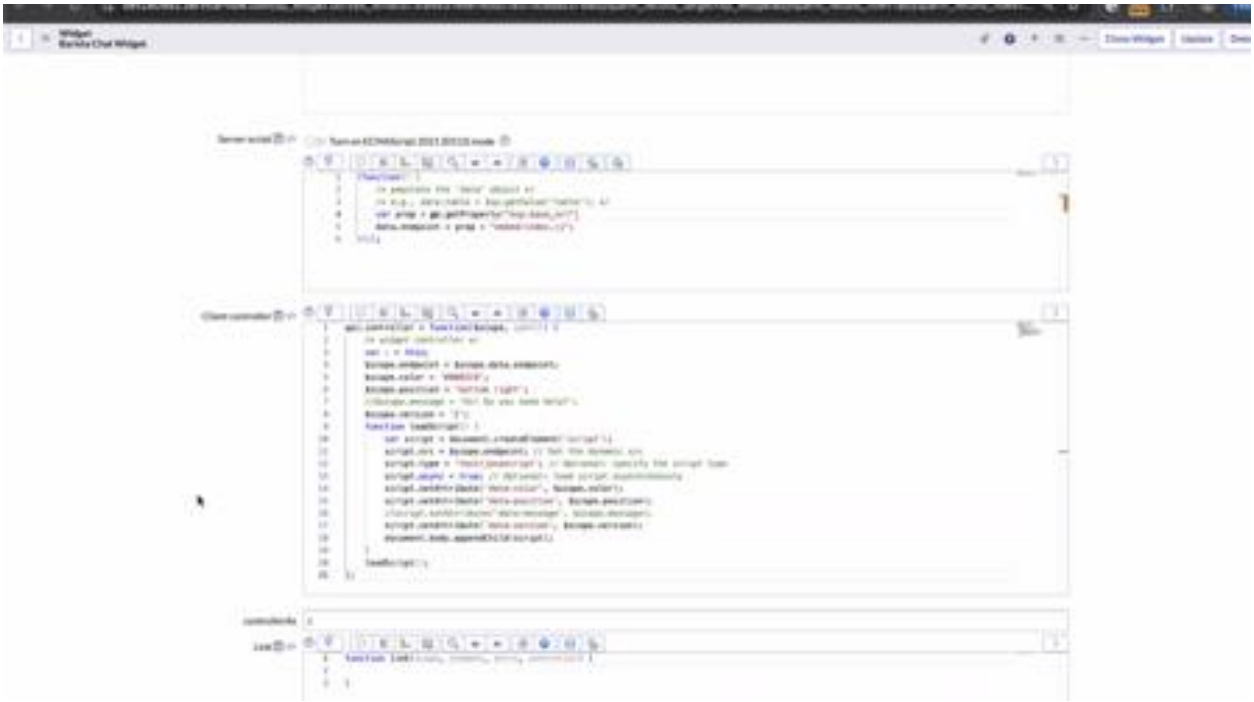

2.2 Installation using HTML

2.2.1 Sample code with default settings

This code allows the Barista widget to display the default configuration and chatbot message on HTML pages:

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   src="https://{tenant}.espressive.com/embed/index.js"
 >
 </script>
```

https://share.getcloudapp.com/lluoBGDE

2.2.2 Sample code with no message

This code allows the Barista widget to show the default configurations and no chatbot message to aid as to the chatbot's purpose:

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   src="https://{tenant}.espressive.com/embed/index.js"
   data-message=''
  ></script>
```

https://share.getcloudapp.com/lluoBG91

2.2.3 Sample code with custom message and bot-name

This code allows the Barista widget to customize both the message and bot-name:

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   data-message="Hi! Do you need help?"
   data-bot-name='CustomBot'
   src="https://{tenant}.espressive.com/embed/index.js"

 >
 </script
```

https://share.getcloudapp.com/v1u0dw2G

2.2.4 Sample Code with Barista Widget Opened by Default

```
    <script
      data-color="#a0a"
      data-position="bottom right"
      src="/embed/index.js"
    >
      window.baristaWidget.open();
    </script>
```

2.2.5 Sample Code with Barista Widget Opened by Default In SERVICENOW

Don't use `window.baristaWidget.open();` directly and instead add the following code as a Client Script:

```
function initBaristaWidget ($scope, $http, spUtil) {
        try{
                window.setTimeout(checkForWindow, 5000);
        }catch(error){
                console.log("Error from initBaristaWidget
function"+error.message);
        }
```

```
        function checkForWindow () {
                if(window.baristaWidget){
                        window.baristaWidget.open()
                        //console.log("window "+ JSON.parse(window));
                }else{
                        console.log("window.baristaWidget doesn't exist.")
                }
        }
}
```

2.2.6 Sample Code with Barista Widget Minimize behavior

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   src="https://{tenant}.espressive.com/embed/index.js"
   data-button-behavior="minimize"
 >
</script>
```

2.2.7 Sample Code with Barista Widget with V2 chat

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   src="https://{tenant}.espressive.com/embed/index.js"
   data-version="2"
 >
</script>
```

2.2.8 Sample Code with Barista Widget with V2 chat and Custom Property

```
<script
   data-color="#0082C8"
   data-position="bottom left"
   src="https://{tenant}.espressive.com/embed/index.js"
   data-version="2"
   data-domain="espressive"
 >
</script>
```

The property will be available in the channel as `widget.data-domain` with a value of "espressive"

Web Widget iFrame Security