

---

*dedication (optional)*

---

---

---

---

# **Abstract**

This report describes a software development project completed by seven students in the IT2901 Informatics Project II course at Norwegian University of Science and Technology (NTNU), the spring of 2015. The task was given by SINTEF, and it consisted of creating a mobile app which should recommend the user cultural heritage stories from the existing Digitalt fortalt platform. Stories from this platform are recommended to end users based on personalization techniques, which is about taking in context information and feedback from the users in order to make informed choices about what content to present. The report contains a thorough pre-study of other projects based on similar subjects. A full documentation of the development process from beginning to end, including all aspects such as project planning, product specification, implementation, testing, and customer relations can also be found in the report.

---

---

---

# Preface

Write your preface here...

---

---

# Table of Contents

<b>Abstract</b>	<b>3</b>
<b>Preface</b>	<b>5</b>
<b>Table of Contents</b>	<b>9</b>
<b>List of Tables</b>	<b>12</b>
<b>List of Figures</b>	<b>13</b>
<b>Abbreviations</b>	<b>14</b>
<b>1 Intro</b>	<b>1</b>
1.1 Stakeholders . . . . .	1
1.1.1 Customer . . . . .	1
1.1.2 Team . . . . .	1
1.2 Project description . . . . .	2
1.3 Problem description . . . . .	2
<b>2 Pre-study</b>	<b>3</b>
2.1 Project assumptions and constraints . . . . .	3
2.2 Choice of framework . . . . .	4
2.2.1 PhoneGap . . . . .	4
2.2.2 Ionic . . . . .	4
2.2.3 Appcelerator Titanium . . . . .	5
2.2.4 Sencha touch . . . . .	5
2.2.5 Conclusion . . . . .	6
2.3 Software development process . . . . .	6
2.3.1 Waterfall model . . . . .	6
2.3.2 Extreme programming . . . . .	7
2.3.3 Scrum . . . . .	7
2.3.4 Conclusion . . . . .	7

---

2.4	Back end . . . . .	7
2.4.1	Docker . . . . .	7
2.4.2	Language . . . . .	8
2.5	Personalization algorithms . . . . .	8
2.5.1	Recommender systems . . . . .	8
2.5.2	Content-based filtering . . . . .	8
2.5.3	Collaborative filtering . . . . .	9
2.6	Existing solutions . . . . .	9
2.6.1	stedr . . . . .	9
2.6.2	Cooltura . . . . .	11
2.6.3	Magic Tate Ball . . . . .	13
<b>3</b>	<b>Project management</b>	<b>15</b>
3.1	Scrum team and roles . . . . .	15
3.2	Work breakdown structure . . . . .	15
3.3	Project milestone plan . . . . .	17
3.4	Quality assurance . . . . .	18
3.4.1	Group interaction . . . . .	18
3.4.2	Git and version controlling . . . . .	19
3.4.3	Customer interaction . . . . .	19
<b>4</b>	<b>Risk management</b>	<b>21</b>
<b>5</b>	<b>Requirements specification</b>	<b>27</b>
5.1	Functional requirements . . . . .	27
5.1.1	Summary of the functional requirements . . . . .	27
5.1.2	Use cases . . . . .	28
5.2	Non-functional requirements . . . . .	29
<b>6</b>	<b>Design and architecture</b>	<b>41</b>
6.1	Architecture . . . . .	41
6.2	Database design . . . . .	41
6.3	User interface . . . . .	44
6.4	Category mapping . . . . .	46
6.5	Personalization . . . . .	48
6.5.1	Content-based filtering . . . . .	49
6.5.2	Collaborative filtering . . . . .	49
6.6	Reuse of code . . . . .	50
6.6.1	Digital museum's application programming interface . . . . .	50
<b>7</b>	<b>Tools</b>	<b>51</b>
7.1	Development tools . . . . .	51
7.1.1	Front end . . . . .	51
7.1.2	Back end . . . . .	52

---

---

7.2	Communication tools . . . . .	53
7.3	Additional tools . . . . .	53
<b>8</b>	<b>Implementation</b>	<b>55</b>
8.1	Front end . . . . .	55
8.1.1	AngularJS system structure . . . . .	55
8.1.2	User interface . . . . .	56
8.1.3	Prototype . . . . .	57
8.2	Back end . . . . .	57
8.2.1	Database . . . . .	57
8.2.2	Personalization . . . . .	59
8.2.3	Front end - back end communication . . . . .	59
<b>9</b>	<b>Testing</b>	<b>61</b>
9.1	Unit testing . . . . .	61
9.2	Integration test . . . . .	67
9.3	System testing . . . . .	72
9.4	Customer acceptance test . . . . .	74
9.5	Usability testing . . . . .	78
<b>10</b>	<b>Evaluation</b>	<b>79</b>
10.1	Product quality . . . . .	79
10.2	Development process . . . . .	79
10.3	Project management . . . . .	79
10.4	Team . . . . .	79
10.5	Customer interaction . . . . .	79
<b>11</b>	<b>Conclusion and future outlook</b>	<b>81</b>
<b>12</b>	<b>Bibliography</b>	<b>83</b>
	<b>Bibliography</b>	<b>85</b>
<b>Appendix</b>		<b>87</b>
12.1	Appendix A: Functional requirements . . . . .	87
12.2	Appendix B: Status report example . . . . .	93
12.2.1	Status report example . . . . .	93
12.3	Appendix C: System test cases . . . . .	95

---

---

---

# List of Tables

1.1	Team description . . . . .	1
2.1	Framework comparison . . . . .	5
2.2	Development process comparison . . . . .	6
3.1	Role delegation . . . . .	16
4.1	Risk list . . . . .	21
4.1	Risk list . . . . .	22
4.1	Risk list . . . . .	23
4.1	Risk list . . . . .	24
4.1	Risk list . . . . .	25
5.1	U1. Create profile . . . . .	30
5.2	U2. Sign in . . . . .	30
5.3	U3. Set initial settings . . . . .	31
5.4	U4. Browse recommended stories . . . . .	32
5.5	U5. Add story to list . . . . .	33
5.6	U6. View story . . . . .	34
5.7	U7. Rate story . . . . .	35
5.8	U8. View list . . . . .	36
5.9	U9. Specify settings . . . . .	37
5.10	U10. Read about app . . . . .	38
6.1	Category mapping performed to facilitate, and simplify content based filtering. Each category is assigned to one or more interests. . . . .	48
9.1	shows the delegated responsibilities in testing the back end part of the system. . . . .	62
9.2	shows the delegated responsibilities for testing the user interface. . . . .	62
9.3	Unit Test cases . . . . .	62
9.4	Integration Test Cases . . . . .	68
9.5	Customer Acceptance test . . . . .	74

---

9.6	Customer Acceptance test . . . . .	75
9.7	Customer Acceptance test . . . . .	75
9.8	Customer Acceptance test . . . . .	76
9.9	Customer Acceptance test . . . . .	77
12.1	Functional requirements . . . . .	87
12.2	System test case for creating a recoverable profile. . . . .	95
12.3	System test case for login with email registration . . . . .	96
12.4	System test case of performing the initial settings . . . . .	97
12.5	. . . . .	98
12.6	. . . . .	99
12.7	System test case for giving rating . . . . .	100
12.8	. . . . .	101

# List of Figures

2.1	A screenshot from stedr showing the available options for one place . . . . .	11
2.2	Cooltura . . . . .	12
2.3	A screenshot of the main view of Magic Tate Ball . . . . .	14
3.1	Work breakdown structure . . . . .	17
6.1	Diagram of the overall system structure for this project. . . . .	42
6.2	Diagram of the architecture for this project. . . . .	43
6.3	ER-diagram showing the data model. . . . .	44
6.4	Diagram of the flow between views in the user interface. . . . .	45
6.5	Recommendation view . . . . .	46
6.6	Story view . . . . .	47
8.1	Comparison of the story view in the first and second version of the prototype. . . . .	58

---

# **Abbreviations**

Symbol = definition

# Intro

This chapter introduces the customer, the team, and the project's definition and purpose.

## 1.1 Stakeholders

### 1.1.1 Customer

The employer for this research project was SINTEF, in this case represented by Jacqueline Floch and Shanshan Jiang. SINTEF is an independent multidisciplinary research organization within technology, science, social science and medicine. The organization has also provided assignments for the course IT2901 in the past.

### 1.1.2 Team

**Table 1.1** lists the persons in charge of developing the project in this report, and some of their background competencies.

Name	Competencies
Kjersti Fagerholt	HTML, CSS, Javascript, Java, PHP, SQL, Python.
Roar Gjøvaag	.
Ragnhild Krogh	HTML, CSS, Javascript, Java, Python, responsive web design
Espen Strømjordet	HTML, CSS, Javascript, Java, UI Design experience
Audun A Sæther	HTML, CSS, Javascript, Java, PHP, SQL
Hanne Marie Trelease	Java, PHP, Javascript, HTML, CSS, SQL
Eivind Halmøy Wolden	CSS, Javascript, Java, HTML, PHP, SQL

**Table 1.1:** Team description

Within the team there was a good amount of general experience with web design and computer application design. Some members had experience with making databases, resulting in not having

to dedicate extra time for researching this topic. There was a mix of valuable experience between front end and back end development, as well as knowledge about project management and how to relate to various actors such as users and other stakeholders.

## 1.2 Project description

In the course IT2901 [es20], Informatics Project II, at Norwegian University of Science and Technology (NTNU), the main assignment was to develop a software project for a customer, and was completed during the spring semester of 2015. The goal of the course was to gain practical experience with the development of a software process for a customer, covering the whole life-cycle of the software project.

The project in this report is named Personalized storytelling. The purpose of this project was to create a cross-platform application (iOS and Android) which would allow users to discover personalized cultural and historical stories based on context-sensitive information and personal interests. The application is a part of the TagCloud [es21] project, which is a project whose aim is enriching cultural and historical experiences through innovative mobile applications. There have been similar projects worked on in the past, one example being stedr, which is an application based on discovering and sharing stories about locations around you (see **Section 2.6.1** for details about stedr). This project was different in the way that it was directly connected to the personalization of stories, and as such, multiple ways of personalization had to be integrated to find a good recommendation for the user.

## 1.3 Problem description

Even though there is a rich cultural heritage in Norway, many people do not participate in cultural activities. Museums and other cultural institutions have tried to increase interest with innovative exhibitions and tools, but with little luck. The motivation behind this project was to find out how effective personalization is in engaging more people in their cultural heritage. This was done by creating an application that picks out personalized stories based on the user's interests and context, and will thus encourage exploration and find relevant and interesting stories to the user.

The target audience for the application included both those who have an interest in cultural activities, and also those who do not have any interest or experience about this, so as to encourage more of the general population to discover an interest in the subject. A specific target audience of 16-19 year old teenagers were promoted as a possible focus, because of the possibility of encouraging a young audience to develop an interest in cultural heritage.

To summarize, this report details the entire development process of a mobile application, developed for Android and iOS. The application will provide its users with cultural stories in a personalized manner, with the goal of generating more interest in cultural heritage. In the next chapter, a thorough pre-study of all the relevant technologies and methodologies that were considered to accomplish this task will be presented.

# Chapter 2

## Pre-study

This chapter discusses the research that had to be done, and the choices that the team made in relation to choosing development frameworks and technologies, as well as a development process for the project. The chapter also describes some already existing applications within the same subject as this one, and a study about personalization which was a key aspect for this project.

### 2.1 Project assumptions and constraints

In this section, assumptions and known constraints for the project are addressed. The list of assumptions are details assumed ahead of the documented project requirements, while the constraints specifies matters which would impact the project.

Assumptions on which the planning of the project was based:

- Access to an API for Digitalt fortalt would be provided by the customer.
- The customer would give access to a server to deploy the back end of the application on.
- The frameworks chosen for development had the features needed.
- The customer would be available for weekly meetings
- Each member of the team would be able to work about 20 hours a week.
- Team would meet at least three times a week.
- Team would follow the set ground rules.

Constraints which the team had to work within throughout the project:

- The deadline for delivering the project was May 30th, and there was no possibility to extend it.
- The front end should be developed for both the iOS and Android platforms.

- The team consisted of 7 people, with little previous experience in mobile app development and no knowledge of personalization algorithms.
- The application is under the Apache license version 2.0 [HM7]. In summary, this grants copyright and patent rights for users to further distribute it, or distribute a modified version using the same license. It should be clear what the eventual modifications are. The source code can also be used as a part of a closed source project.
- No budget to pay for software tools.

## 2.2 Choice of framework

As one of the requirements from the customer was that the application should be cross-platform (Android and iOS), a hybrid app was found to be the best option. The alternative would have been to create two separate native apps for both platforms. However, this would have been too much work to complete within the deadline, especially as the team had little experience with developing for either of the platforms. A hybrid app is a web app made with HTML and JavaScript wrapped in a native shell so that it can be run like a normal native app. This was a big advantage, as the team already had experience with web design. It also makes it possible to make use of the many tools available for web development, and most of the code can be reused for multiple platforms. Bad performance used to be a disadvantage to the hybrid approach, however mobile hardware has improved significantly in the last few years, so this is not a large issue any longer. The following sections will discuss the advantages and disadvantages of different frameworks that were considered, and explain the final choice for this project.

**Table 2.1** below summarizes some of the capabilities and limitations of the various frameworks that were under consideration.

### 2.2.1 PhoneGap

PhoneGap is an open-source mobile app framework for native packaging [RA2]. What it does is take in a mobile app consisting of HTML, CSS and JavaScript files, and wrap it in a native shell. It can then be deployed to iOS, Android and Windows 8. It also gives easy access to the native features of the phones (geolocation, notifications, storage, etc.) through different APIs. It is not necessary to think about the native SDKs, as the app will be compiled and built with the newest SDK for the platform. It is a very popular framework, and there are many plugins created for it that provide additional functionality.

### 2.2.2 Ionic

Ionic is an open-source UI framework focused on making it easier to create hybrid mobile apps with a native feel [RA1]. It accomplishes this by offering a foundation to build on and UI components based on design patterns and best practices found in native apps. The foundation can be built on

	<b>PhoneGap w/ Ionic</b>	<b>Appcelerator Titanium</b>	<b>PhoneGap w/ Sencha Touch</b>
<b>Can write a single code that runs on both iOS and Android?</b>	Yes	No	Yes
<b>Access to native components</b>	Yes	Yes	Yes
<b>Expected ease of learning and use</b>	Relatively easy	Difficult	Somewhat difficult
<b>Performance of created application</b>	Good, AngularJS also provides a performance boost	Very good, as it provides direct access to native components	Acceptable, but not as performance-focused as Ionic.
<b>Debugging</b>	Easy	Difficult	Easy
<b>Programming language used</b>	HTML5, CSS, Javascript with AngularJS	Javascript	HTML5, CSS, Javascript

**Table 2.1:** Framework comparison

and customized with additional HTML, CSS and JavaScript. Part of the foundation is AngularJS, which is a JavaScript framework that extends HTML to make dynamic views in web applications. It gives the app a modular architecture, which means that code can more easily be reused for both iOS and Android. A disadvantage is that it is necessary to take time to learn AngularJS in order to take full advantage of Ionic. As Ionic is one of the most popular hybrid mobile frameworks, there exists more learning material about it, and it also has an active user community. Performance is not quite as good on older devices, especially if using large amounts of animations or media.

### 2.2.3 Appcelerator Titanium

Titanium is a cross-platform Javascript runtime and API framework [RA3]. It currently supports iOS and Android. It offers a JavaScript API which gives access to native UI components and features for the specific platforms, instead of trying to replicate it with CSS or JavaScript like other frameworks. This gives the app a performance advantage, and it is easier to make the interface and interactions feel native. Because the APIs are platform-specific you have to write separate versions of your app for the different platforms. Another disadvantage is that it is difficult to debug as there is no good debugger and Titanium projects cannot be run in Xcode. There would also have been more to learn to be able to use it, as it doesn't use HTML/CSS.

### 2.2.4 Sencha touch

Sencha touch is a mobile framework with a large number of UI components and an architecture for the front end [RA4]. Instead of enhancing a HTML file, it generates the DOM with JavaScript. It can be used with PhoneGap, but Sencha also has its own native packager. It is harder to learn than Ionic, and the performance is not as good. It supports the platforms iOS, Android, BlackBerry, and Windows Phone.

### 2.2.5 Conclusion

The framework combination chosen for this project was Ionic and PhoneGap, as this seemed to fit this project's properties and requirements the best. They are both some of the most popular hybrid frameworks and they are a common combination to use. A prototype can quickly be set up with Ionic, and then iteratively customize it to fit the requirements and create a good user experience. One of the non-functional requirements was that it should be easy to extend the app and to reuse parts of it for other apps. This is fulfilled by Ionic's modular structure. PhoneGap makes it easier to wrap the code in a native iOS and Android shell. This process could also have been done manually, but it requires some knowledge about the native code languages and SDKs. The many plugins available for PhoneGap should also cover the need for use of native features.

## 2.3 Software development process

The choice of which development process to use in the project was a central decision to be made. The following sections describe the different models that were under consideration by the team, as well as some advantages and disadvantages of each, which influenced the decision of which one to be used for the project. **Table ??** below gives a comparison of some aspects of the various processes that were considered relevant for the project.

	Scrum	Extreme Programming	Waterfall
<b>Type of methodology</b>	Agile	Agile	Plan-driven
<b>Responds well to changes in requirements?</b>	Yes	Yes	No
<b>Amount of planning needed</b>	Moderate	Very little	Very much
<b>Level of detail for project plan</b>	Moderate	Low	High
<b>Customer involvement</b>	High	High	Low
<b>Frequency of testing</b>	Continuously	Continuously	Only near the end
<b>Iteration length</b>	Short	Short	Long

**Table 2.2:** Development process comparison

### 2.3.1 Waterfall model

The waterfall model is a plan-driven process with well-defined phases. These phases normally include requirement analysis, system design, implementation, testing, and maintenance [1, p.30-32]. It is necessary to finish one phase before starting the next, and due to this, most planning and decisions need to be made at an early stage in the development. As such it is difficult to respond to changes in the requirements. Another issue with this model is that iterations often involve a significant amount of rework and it is normal to postpone some parts of the iterations in order to continue with the later stages of development. This can lead to errors in the system as well as bad design choices.

### 2.3.2 Extreme programming

Extreme programming is an agile method focused on pushing out new system versions and functionalities rapidly [es16 P.64-72]. All requirements are written as user scenarios, and before writing the code it is necessary to develop tests for the task. Team members program in pairs and when the code passes all the tests, it can be integrated into the system. It is common for a customer representative to take part in the development and make acceptance tests. New system releases are regularly presented to the customer, and this way it becomes easier to cope with changing requirements. Some of the drawbacks of extreme programming include the lack of overall plans for the project. Several documents such as design details and overall report are left out, and it lacks a solid plan for when to implement the various functionalities.

### 2.3.3 Scrum

Scrum is a general agile method with focus on managing iterative development rather than specific technical engineering approaches [es16 P.72-74]. It also allows for a rapidly changing development environment and close collaboration between the members of a team. To provide this, scrum makes use of phases called sprints, daily scrum meetings, and several types of charts and logs. One of the main challenges for a scrum team is to choose the right amount of work per sprint so that they don't end up with too little or too much work. Scrum has several similarities with extreme programming, such as high involvement of the customer in the development, as well as continuous testing while implementing new functionality.

### 2.3.4 Conclusion

For this project, the agile software development methodology scrum was used. The project was not very well defined from the beginning, because the customer was not entirely sure of exactly what they wanted. The team also became more productive, as the deadlines were short and so it was possible to quickly make a simple application which could be tested by users/customer. Also, an agile process was beneficial as it allowed the team to be flexible and rapidly respond to changes in requirements. The customer requested weekly meetings, and it became a logical decision to make use of scrum to have 1-week sprints, so there would be definite progress to show between each customer meeting. Since the team was a group of seven, it was impossible to always work together. Because of this, the regular scrum meetings were beneficial to share and discuss progress.

## 2.4 Back end

### 2.4.1 Docker

Docker[EHW2] was made to help automation of application deployment. This happens by providing a virtual operative-system-level abstraction. This means that on a server, it is possible to run several virtual operative systems called docker images, which can easily be deployed to another server. This is beneficial for software development, because it means it is easy to setup identical

back ends. The customer used this on their servers, which made using it during development as well, a good choice. A benefit of using docker, is that it can directly access repositories on git. This means that the latest revision is guaranteed to run when starting the back end. However, there are also drawbacks. It is not possible to update files within the docker image currently running without rebuilding it. This means that to update a single line of code, the whole image needs to be rebuilt. This means that while the newest revision is guaranteed to be running, any changes made to the application after the start of that docker image requires manually stopping, rebuilding, and starting the docker image.

## 2.4.2 Language

# 2.5 Personalization algorithms

To provide story recommendations in accordance with each user's interests the content needs to be personalized. Personalization involves using technology to tailor content, to individual users' characteristics or preferences, and to accommodate the differences between individuals. It is a way of meeting the user's needs by making interactions faster and easier, which will hopefully increase customer satisfaction and the likelihood of repeat visits. Personalization may be achieved using recommender systems.

## 2.5.1 Recommender systems

Recommender systems are software tools and techniques that attempts to provide recommendations of items [HM4]. Such systems are simply information filtering systems with the goal of providing suggestions for items to be of use or interest to a user. A few examples of items used in this context are movies, music, books and products in general. Recommender systems typically produce a list of recommendations. The two most common approaches to produce such a list are content-based filtering and collaborative filtering.

## 2.5.2 Content-based filtering

Content-based filtering methods are used to find similarities between a user's preferences and the description of an item [HM5]. These algorithms try to recommend items that are similar to items a user has liked in the past or is looking at in the present. Items that a user likes or has interacted with can be seen as a part of the user's profile. Content-based filtering depends on there being much descriptive data available on the items. To find items to recommend, items are compared against a user's profile, and recommendations are given based on how well they match the profile. User feedback, usually in the form of rating or a like or dislike button, can be used to assign weights to certain attributes. By using user feedback and weighting it is possible to give more accurate recommendations. [HM4]

### 2.5.3 Collaborative filtering

Collaborative filtering is based on collecting and comparing information on users' behavior, activities or preferences and to recommend items based on a user's similarity to other users [HM6]. This approach tries to predict what a user will like based on what similar users have liked. Collaborative filtering assumes that users who have agreed in the past will agree in the future, and that they will like similar items as they liked in the past. These methods often suffer from the problems cold start and sparsity. Collaborative filtering often requires a large amount of existing data on users to be able to make accurate recommendations. The cold start problem is the absence of such data at the beginning of a project. The sparsity problem is that collaborative systems are dependent on having many active users to properly distribute ratings across all the items in the system. However, most active users have only rated a few items in the overall database, which means that even the most popular items have very few ratings. The greatest strength of these techniques is that they are independent of any documented representation, e.g. textual descriptions and subject-tags, of the objects being recommended and work well for objects that are difficult to define such as music and movies. [HM4]

## 2.6 Existing solutions

Among the previous work there has been developed applications through the TagCloud project. This section evaluate two of those applications, namely stedr and Cooltura. Both of these applications presents stories regarding cultural heritage. Since this project also included personalization, an evaluation was additionally performed on the application Magic Tate Ball. This application was chosen because the customer mentioned this as a possible inspiration for the current project.

These three applications were evaluated using the following criteria:

- Content. Does the application provide satisfying content or is something lacking?
- Usability. Usability concerns how easy it is for the user to accomplish a task. (see **Section 5.2** (non-functional requirements) for a more elaborate definition). The evaluation here draw on Jacob Nielsen's ten usability heuristics as defined in [AS3].
- Personalization. To what extent does the application provide the user with the opportunity for individualized content?

### 2.6.1 stedr

The stedr application was developed by students as a prototype to test some research hypothesis. Content was not the primary focus in the application and thus consists mainly of stories related to places in Trondheim. Each place in the application is composed of a main picture and some brief general info about the place plus stories, pictures and sounds. Most of the places have one or more stories related, but pictures and sounds are less common. A possible problem in the application is finding the place the user is looking for. This is not easy unless the user have prior knowledge of


the geographical area the desired place is located in. The reason for this is that the application's main view consist of a map with markers representing each available place, but in order to know which place each marker represents the user have to click on the marker. If the user doesn't know where for instance Nidarosdomen is located in Trondheim, they may have to click on all markers on the map before being able to navigate to the Nidarosdomen place view.

Our application does not use a map, so the most relevant views are the place view and the story view. The place view consist of a main picture and three tabs for different ways to explore this story as seen in **Fig 2.1**. When changing the tabs, the content below the tabs changes. To see all the content, one might have to scroll down. The main picture is static when scrolling, occupying the upper half of the screen. This is also the case when viewing a specific story in the story view. Nielsen's heuristic of aesthetic and minimalist design states that: "Every extra unit of information in a dialogue competes with the relevant units of information and diminishes their relative visibility." [AS3] It might be argued that when scrolling for content below the tabs or reading the story in the story view, the main picture's importance in the dialogue is diminished and should not compete as strongly with the other information as it does now.

Other than finding information, the application also provides the user with the opportunity to add content themselves. Unfortunately this is a rather cumbersome process, as adding stories has to be done through Digitalt fortalt, adding pictures has to be done through Instagram and adding sound has to be done through Soundcloud. According to Nielsen, it is important to avoid making the user remember information from one dialogue to another. When adding pictures and sounds, specific words and/or tags has to be added on Instagram and Soundcloud. The user doesn't have to remember these words since the application provides the opportunity to add them to the clipboard after clicking "Add picture" or "Add sound", from where it can be fetched when adding the picture or sound. However, the use of the clipboard can be problematic because it hides the content from the user. It may not be obvious to all users how to paste the content into Instagram or Soundcloud, and such users might be forced to remember the words or abandon the action altogether.

The application provides a help site which gives a thorough guide to the user on how to accomplish these tasks. This is in accordance with Nielsen's heuristic of help and documentation. The application also helps the user when errors occur, for instance by offering the user a refresh opportunity when the map does not load the places. The language used in the application is both user-centered and consistent, avoiding misunderstandings and making it easy for the user to understand what different actions entails.

The application does not provide any personalization feature, which is the main difference between stedr and our application. The customer's motivation for creating an entirely new application instead of expanding stedr was mainly because they wished to test personalization systems on users, and thus needed an application focused mainly around the personalization aspect. In addition, it became possible to access a larger number of stories than stedr currently does.

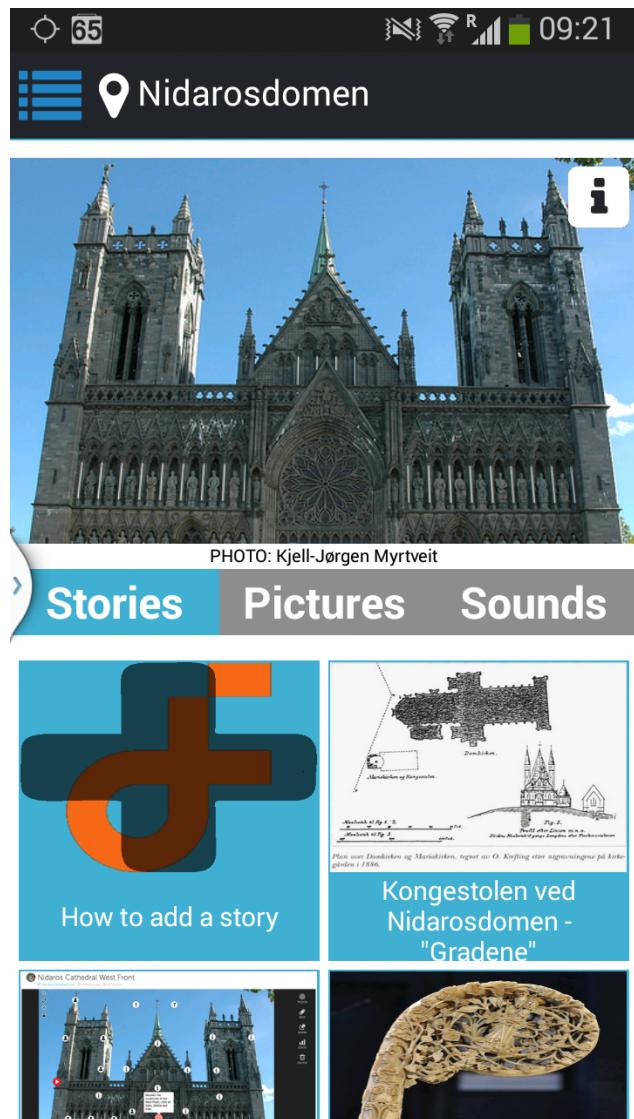


**Figure 2.1:** A screenshot from stedr showing the available options for one place

## 2.6.2 Cooltura

Cooltura is another application developed under the TagCloud umbrella. The version of Cooltura evaluated here is a demo version, so more developed version of the application may include more functionality and address some of the issues discussed here.

The content is somewhat similar to stedr, with respect to the places and the stories available. In fact, when clicking to view stories in Cooltura one is directed to the stedr app, however not to the relevant story but the main view. Because of this, the user might have to remember what place it was visiting in Cooltura to see the stories connected to the place in stedr. While it might seem trivial to remember this, the user might be interrupted somewhere in the process and to complete it later it have to either remember the place or start the process all over again. As Nielsen has pointed

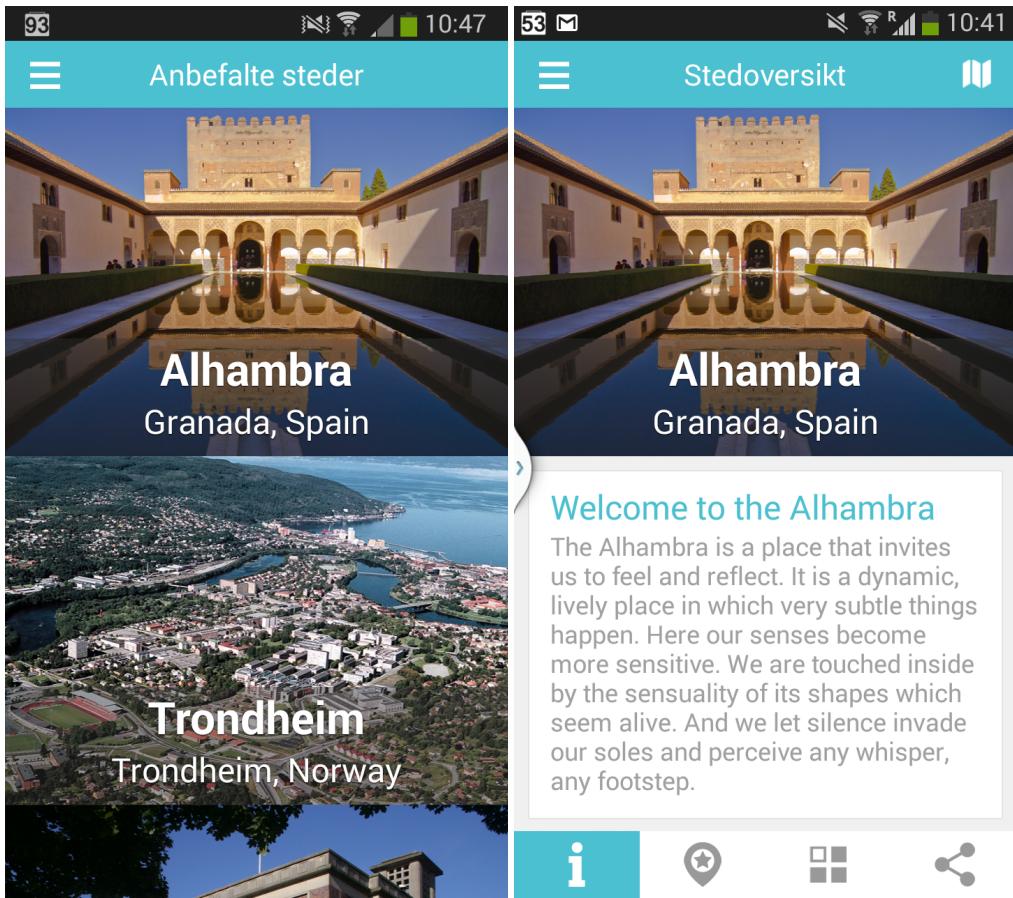

(a) A screenshot of Cooltura showing recommended places (b) A screenshot of Cooltura showing the view for one particular place

**Figure 2.2:** Cooltura

out, a system should try not to make the user remember information, but rather recognize it. A better solution would therefore be to direct the user to the relevant place view in stedr, so that when the user later opens stedr it will open on the chosen place view and the user will recognize the action it was performing. Cooltura provides a more thorough description of each place, but other than that the content is the same as in stedr. Cooltura does not use a map like stedr, but instead a list of available locations. This makes it far easier for the user to navigate to the right place, especially since the selection is quite limited.

When viewing a specific place on Cooltura the user gets a view with a main picture and some text describing the place as seen in **Fig 2.2b**. Like in stedr the user can scroll down to see more content, but unlike stedr the main picture is not static, that is, the user see less and less of it as it scrolls down. This is more in accordance with Nielsen's point of aesthetic and minimalist design, where less relevant information fills up less space in the user interface. The same is true for the view for a specific tourist attraction.

The application does not provide any help site, but the possible user actions are quite few and similar (most of them are about navigating to the desired place), so this might not be a problem.

It appears that the application intends to make use of personalization, but this is not implemented at the time of writing this report[AS4]. The “Anbefalte steder”-view in **Fig 2.2a** now list every place added in the application (which is three different places), but the heading suggests that personalization is planned for.

### 2.6.3 Magic Tate Ball

Magic Tate Ball is an application that presents the user with an artwork based on the input parameters: date, time-of-day, geographical location, live weather data and ambient noise levels [AS5]. The content in the application is the artwork, a description of the artwork and an explanation of why the artwork was chosen. It is unknown how many artworks there are, but the information given on each artwork seems adequate.

The main task in the application is to be presented with an artwork. This is done by shaking the phone or by clicking a button in the center of the magic ball, see **Fig 2.3** for a screenshot of this. Another task is to browse all artworks presented to the user, which is done by swiping or clicking on arrows. Providing these two options makes it easy to for different types of users, those accustomed to swiping and those who are not. When the application is processing to come up with an artwork to present to the user, it shows the user what the input parameters are. This is in accordance with Nielsen’s heuristics on visibility of system status.

Personalization is the main selling point of Magic Tate Ball. The application uses the five input parameters described above to give the user some control of what content is presented. The user can turn each of these parameters on and off. What the user cannot do however, is to specify preferences regarding art. To that extent, the user has no direct control over what artwork it will be presented, because it is hard to know what to expect when an input parameter for instance is “10°C sunny weather”. Even though the application provides an explanation to why an artwork was chosen, how it was chosen remains in the dark (e.g. how to know which input parameter was emphasized in the personalization).



**Figure 2.3:** A screenshot of the main view of Magic Tate Ball

# Chapter 3

## Project management

This chapter describes how the team delegated work tasks and responsibilities, and also how the work was broken down into manageable tasks. The chapter also describes time management and quality assurance for the project.

### 3.1 Scrum team and roles

The role delegation in the team is detailed in **Table 3.1**. The delegation of roles was primarily based on personal interest and motivation. The tasks were divided up into main responsibility areas for back end and front end before assigning people to each one. However, this was only a guideline for main responsibilities, and the group members had to be flexible and work on some tasks outside of their main areas.

### 3.2 Work breakdown structure

A work breakdown structure is a decomposition of the project and its goal is to break down each part of the development process into manageable parts to ease the planning and execution of the development. Each element in the diagram can be a product, data, service or a combination of the three. One of the benefits of detailing a project this way appears when doing cost estimation and scheduling the team around the project (i.e. should ease the project planning and help allocate the team's resources).

The work breakdown structure should show a hierarchical decomposition of the project phases and its components. Each main phase is at a top-level and will outline the generic parts of the software development processes. The way the WBS (Work Breakdown Structure) is developed is by starting with the end objective and subdividing each main part into manageable components in terms of size, complexity and duration. Each sub objective is to follow the 80 hour rule. This means that a subtask is not to exceed 80 hours in magnitude. The WBS for this project is shown below in **Fig 3.1**

<b>Role</b>	<b>Responsible</b>	<b>Details</b>
<b>Product Owner</b>	Jacqueline Floch (SINTEF)	
<b>Main back end staff</b>	Hanne Marie, Eivind, Kjersti, Audun	
Interaction between server modules	Hanne Marie	This involves making the different server components communicate and work together, such as the database, personalization module, Docker file, etc.
Personalization	Eivind	Involves the procedure for taking a user's context information and preferences, and based on this choose which stories to present to the user. Also involves collaborative filtering to select stories for a user based on the preferences of other users.
Test responsible	Kjersti	Involves creating a test plan for each kind of test (unit, usability, integration, etc.) and documenting the results, as well as assuring test quality and that the tests are actually conducted properly.
Database Manager	Audun	Involves setting up and managing the database. Manage which elements to save in the database and how to present the data upon request.
<b>Main Front end staff</b>	Ragnhild, Roar, Espen	
iOS responsible	Ragnhild	Involves developing and giving the app a look and design that feels intuitive and follows design conventions according to iOS systems. This is both on a technical and design level.
Android responsible	Roar	Involves developing and giving the app a look and design that feels intuitive and follows design conventions according to Android systems. This is both on a technical and design level.
Framework responsible	Espen	Involves developing various parts of the UI, and researching the framework to ensure that the front end design can be made and is made according to the team's and customer's expectations.
<b>Additional roles</b>	Roar, Kjersti, Espen	
Scrum Master	Roar	Project leader, responsible for arranging meetings, delegating work tasks, and overseeing the general progress of the project. Facilitate the communication and cooperation between the group members.
Customer relations	Kjersti	This includes all communication with the customer, as well as other authorities that are a part of the project.
Report management	Espen	This involves overseeing the report work and ensuring that all components of the report are in place. Deliver the report within deadlines and make changes as needed and in accordance with advice from supervisor.

**Table 3.1:** Role delegation

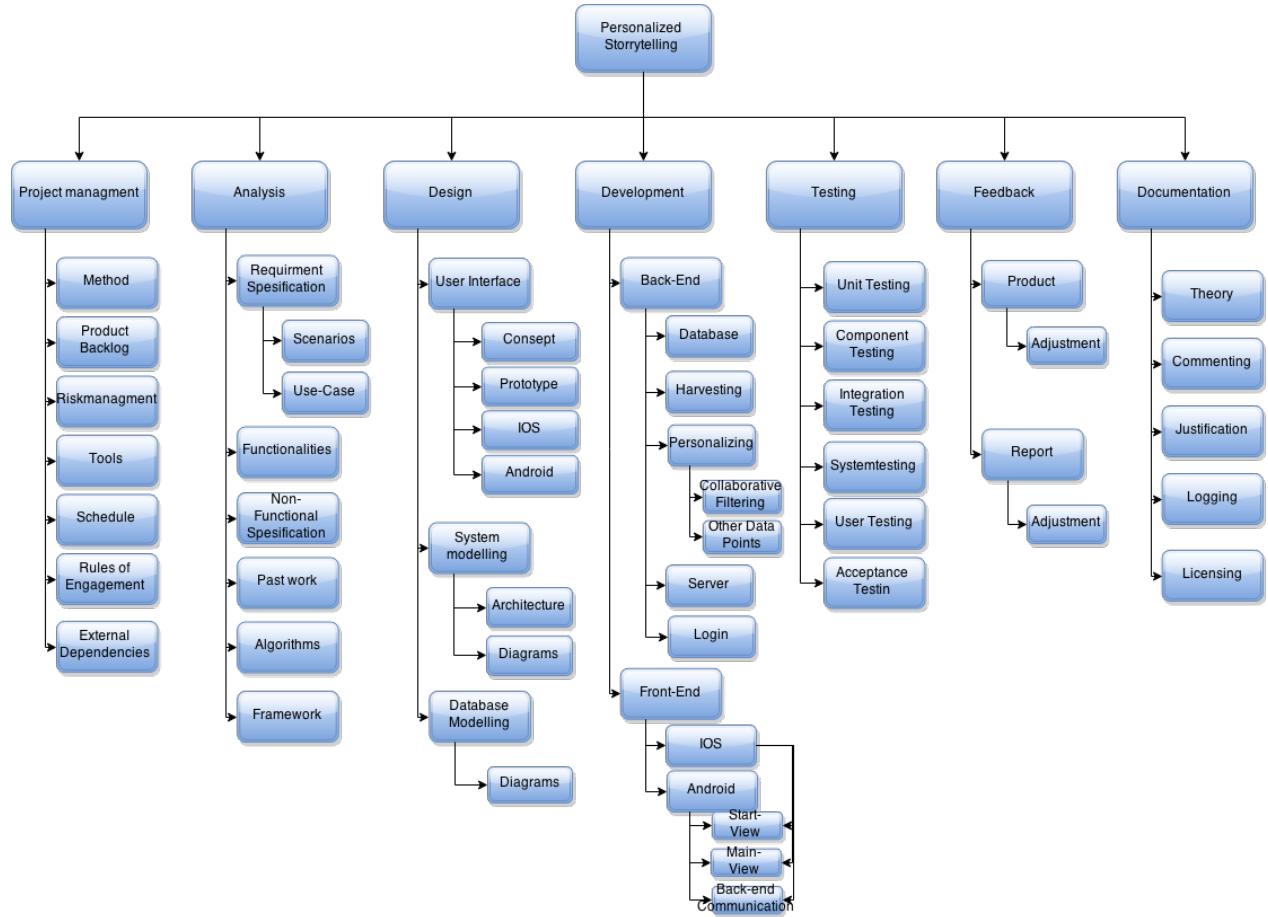


Figure 3.1: Work breakdown structure

### 3.3 Project milestone plan

TODO: put the Gantt and burndown chart here and describe the time/sprint planning.

Milestones are used as tools in project management to give the team some clear and specific goals to work towards as the project timeline moves ahead. There are several milestones throughout the project, some are large milestones like; alpha and beta versions of the software. There are also milestones related to the project report, like the midterm submitting. and final delivery. Milestones can add some value to the project scheduling when used in the right manner and when setting realistic goals. Components that are important for the milestone plan are; key dates, key deadlines and external deliveries. The team used a combined Gantt chart with milestones noted for better visualization, and to better allocate resources for meeting the milestone goals.

The planned deliveries to the customer is the following dates.

- 20.02.15 First prototype on paper
- 27.02.15 Second prototype presented in proto.io[KF2]

- 17.03.15 First working software(alpha-version)
- 10.04.15 Second working software(beta-version)
- 01.05.15 Final product

## 3.4 Quality assurance

According to Sommerville quality assurance is “the definition of processes and standards that should lead to high-quality products and the introduction of quality processes into the manufacturing process” [AS6]. In large systems, designed to be used in a long term perspective, quality documentation is important. However, in this project a small system was developed and Sommerville notes that a more informal approach can then be applied, focusing on “establishing a quality culture” [AS6] within the development team.

Therefore, this section will describe three features considered important by the group to establish such a quality culture, and thus improving the quality of the product, namely group interaction, version controlling, and interaction with the customer. Risk management and testing are also important aspects of quality assurance, and these are discussed in separate chapters(see **Chapter 4** for risk management and **Chapter ??** for testing).

### 3.4.1 Group interaction

As was noted in **Section 2.3.3** (Pre-study - Scrum) an important part of the scrum methodology is the close collaboration between the team members. Scrum provide some events to enhance this collaboration, for instance the daily scrum meetings, and some artifacts, such as the sprint backlog. These features of scrum was used by the group and created a framework for the process development. However, scrum does not define how the group should interact, and the group interaction consisted of more than the methods provided by scrum, for instance when doing sessions of collaborative work.

In order to ensure that the scrum events and the interaction external to these events would create the desired quality culture, the team discussed and agreed upon some basic rules of engagement for the project. These rules specified how the team should create a quality process in order to create a quality product, for instance by setting ground rules for communication between the group members. The tools described in **Section 7.2** (Tools-communication tools) were used to facilitate the implementation of the rules. In addition, meeting minutes from every meeting was made so that every group member would be aware of the status of the project even if they were not present at the meeting.

The division of the group described in **Section 3.1** (Project management - Scrum team and roles) meant that a member of the front end part would have more detailed information about what other front end developers were doing than what individual members of the back end part were

doing, and vice versa. However, when important decisions were to be made in one part of the project or important problems had to be solved, both parts would be involved in the discussion, even if the decision did not affect their part of the project directly. An example of such a decision was the choice of colours to use in the user interface.

### 3.4.2 Git and version controlling

The code for this project is hosted by GitHub, a tool described in **Section 7.3** (Additional tools). GitHub uses the version control system git, which makes development easier by allowing multiple local branches and thereby giving users the opportunity to try out code before committing them to the master branch. The master branch is the main branch and should only include stable code. The group chose to create two repositories, one for the back end part of the project and one for the front end part since the group also was divided in this way. Doing it this way made keeping track of branches and issues on Github clearer since these often would be at a level of detail only relevant to the developers in that part of the project.

### 3.4.3 Customer interaction

In **Section 2.3.3** (Pre-study-scrum) it was noted that the project was not clearly defined at the start. This meant that good customer interaction was critical, so that the group and the customer would be in agreement of what was expected of the end product. Communication with the customer was done by weekly meetings (some weeks were skipped in the later part of the project period because there were no issues to discuss), mail and by a shared Dropbox folder. In addition, the customer had access to the code on GitHub.

A couple of days before the weekly meetings, the group would add a meeting agenda to the Dropbox folder. This was done to improve the structure of the meeting and to give the participants time to consider the issues on the agenda, which in turn should increase the benefits of the meeting and increase the likelihood of making decisions. Making decisions and coming to an agreement with the customer on key issues was considered important to push the project forward. After the meeting the group would add a minute of the meeting to Dropbox, so that the customer would know if all the participants had a similar understanding of the issues discussed and the decisions made. Communication by mail was mainly used to rescheduling of meetings and by the customer to give additional information to the group.



# Chapter 4

## Risk management

This chapter details the risk management of the project, which includes planning and handling all the various potential risks to the project.

The risk analysis below contains a list of possible occurrences that could be harmful to the project. Provided for each risk is a short description, an estimated likelihood that the risk will happen, an estimated impact to the project if it happens, the importance of the risk, a preventive action to try to avoid the problem and a remedial action if the problem were to occur. Likelihood and impact estimates were rated on a scale from 1 to 9, with 9 being the highest, and the importance was calculated by multiplying likelihood with impact. The risk list was updated regularly and sorted by the importance value, thus the risk to be most aware of at each stage of the development process was at the top of the list.

**Table 4.1:** Risk list

Description	Likelihood (1-9)	Impact (1-9)	Importance (Likeli- hood * Impact)	Preventive action	Remedial action
Underestimate the time planned to use for assignments	8	8	64	Estimate a little higher. continuous meetings. Continuous status update on tasks	Extra work hours and help each other. Have a clear prioritization of tasks so that some less important tasks can be delayed if needed.

**Table 4.1:** Risk list

Description	Likelihood (1-9)	Impact (1-9)	Importance (Likeli- hood * Impact)	Preventive action	Remedial action
The group does not deliver updated information on the report and cannot maximize the quality of the feedback obtained from the supervisor	6	7	42	Always make sure the report meet the demands upon delivery	Ask concrete questions to the supervisor or other competent acquaintances of the group members
An issue in the code that is not understood or can not be fixed.	5	8	40	Comment on the code, and talk with each other about the work done on the code	Get help from the supervisor or other people involved.
The group does not receive quality feedback from supervisor	6	6	36	Be prepared for supervisor meetings. Prepare concrete questions and discuss issues with supervisor	Ask qualified acquaintances to read and give feedback on the report.
Project complexity / Project too difficult	5	5	25	Do not plan many complicated tasks	Downgrade demands
Poor communication with the customer leading to misunderstandings and doubts about the progress of the project	4	6	24	Be well prepared for meetings by establishing an agenda for the meeting and sharing it with the customer beforehand. Establish a good customer relationship. Send email to the customer for clarification	Send email to the customer for clarification. Cooperate with customer to reprioritize tasks

**Table 4.1:** Risk list

Description	Likelihood (1-9)	Impact (1-9)	Importance (Likeli-hood * Impact)	Preventive action	Remedial action
Poor communication within the group leading to misunderstandings and doubts about the progress of the project	4	6	24	Write meeting minutes to document decisions. Have frequent meetings where every team member explains what they have done and what they are planning to do.	Make a group decision to solve the misunderstanding
Wrong choice of development tools	4	6	24	Do thorough research before deciding which tools to work with	If early in project, consider changing tools
Absence of group member(s) over a period of time	6	4	24	Every member of the group should be aware of what all members are working on, so that they can step in and take over the absent person's tasks	When the progress is halted by a person's absence, other group members should take over the tasks needed for further progress
The workload is distorted. Some members of the group work too much, while others work too little.	5	4	20	Continuous meetings, after every meeting the team members delegate assignments. The leader of the meeting also have to make sure that everyone gets approximately the same amount of work.	Redelegate work tasks within the group.

**Table 4.1:** Risk list

Description	Likelihood (1-9)	Impact (1-9)	Importance (Likeli-hood * Impact)	Preventive action	Remedial action
Poor choice of programming language. It becomes difficult to produce the product before deadline	2	9	18	Good research and discussion in the group. Do not choose a language that some people in the group do not have experience with	Reevaluate non-functional requirements with the customer
Customer changes requirements	6	3	18	Constant communication with customer	Use an agile development process to better adapt to changes
Data loss	2	8	16	Local copy and regular backups	Restore latest available backup
Disagreement within the group on key issues in the project	3	5	15	Establish ground rules regarding how to discuss key issues and how to make decisions final. Make democratic decisions	If the disagreement cannot be solved, one may involve the supervisor
Personal conflicts between group members	2	7	14	Establish ground rules for the team so that emerging conflicts are solved as early as possible	First try to solve the conflict between the group members in question. If this doesn't work, involve the whole group. A last resort would be to involve the supervisor
Product doesn't meet requirements	2	7	14	Request product feedback from customer	Assess which changes must be made and prioritize the most important parts to change

---

**Table 4.1:** Risk list

Description	Likelihood (1-9)	Impact (1-9)	Importance (Likeli- hood * Impact)	Preventive action	Remedial action
Overestimate the time planned to use for assignments	3	4	12	Investigate the assignments so it is clear what they include, and how much effort it would take to perform them.	When the assignment is done - long before the time, use the extra time on the more time consuming assignments.
Missing deadlines	1	8	8	Have frequent meetings and plan well	Do extra work hours to finish the work as quickly as possible
Product is not user-friendly	3	2	6	Perform usability tests	Assess which changes must be made and prioritize the most important parts to change
Technical issues(server down)	2	3	6		Use the backup



# Chapter 5

## Requirements specification

This chapter describes the requirements for the application. The chapter is divided into two sections: one section describing the functional requirements, another that describes the non-functional requirements.

### 5.1 Functional requirements

The requirements document for this project can be found in appendix A. This document contains a description of the functional requirements. The requirements were elicited and agreed upon with the customer in meetings and formalized in the requirements document. In early customer meetings the functionalities of the application were discussed informally. The group wrote a requirements document which was discussed at subsequent meetings. In these meetings each proposed requirement was refined and given a priority. The priorities were assigned using a high-medium-low scale. This priority has guided the sequence of progress in the project. In addition, the group elicited its own prioritization where all the requirements were ranked, each with its own unique number ranging from 1 to the total number of requirements. The description of requirements in this chapter is less formal and more high-level than the one found in the requirements document.

#### 5.1.1 Summary of the functional requirements

This section provides an informal summary of the main requirements that were initially proposed. These requirements have been detailed and refined in the use case section, as well as the functional requirements document.

**Sign up/Sign in view:** The application should in some way be able to identify users, but keep them as anonymous as possible. For research purposes, personal data like age group and gender should be collected.

**Preferences/Settings:** The user should be able to specify some preferences regarding cultural categories and the use of location from the device.

Main view: Browse recommended stories: The application should provide the user with recommended stories based on the user's preferences. The user is provided with three choices on each story: to read it now, to reject it or to save it for later.

Story view: The application should present a chosen story in a clear way that respects the work of the author and resemble the presentation on the Digital fortalt website. Every story should also include a link to the corresponding story on Digital fortalt. The user should be given the opportunity to rate the story and to tag the story. In addition, the application should provide an explanation of why the story was recommended.

Collected story view: The application should keep a collection of stories that the user have been recommended and that have not been rejected. The user should be able to filter this list based on the status of the story (to-read, read, reviewed) or tags (predefined tags like "Favorites" or the user's own tags).

Notifications: The application should provide the user with the opportunity to set a preferred time it wants to receive a notification about a new recommended story on their device. At the set time, the application should send the notification. In addition, the application should notify the user when a story is missing a rating.

About / help site: The application should include an about site, which explains the context in which the application was created.

Personalization: When recommending stories the application should employ both content-based filtering and collaborative filtering algorithms.

Research: The application should gather information about the use. This data is to be presented to the customer at SINTEF through a simple interface.

### 5.1.2 Use cases

The use cases in this section give an overview of the interaction with the system. In the requirements document one can find references to the use cases for requirements that involve external interaction.

A use case is a simple scenario that identifies actors involved in an interaction with a system and describe this interaction[AS1]. Actors are entities outside the system interacting with it to accomplish some task. This can be a human using the system or it can be some other system. In eliciting requirements in a software development process, use cases are particularly effective in making it clear what is expected of the system in terms of user interaction. A use case diagram is usually presented with ellipses and stick figures. The ellipses represent the use case and the stick figures represent the actors (even if the actor is an external system). This simple notation is often

complemented by a textual description which provide more detail.


The use cases in this section define interactions between an actor and the application. Actors in these use cases are the user of the system, the device on which the application run, and Digital fortalt . The use cases consist of a textual description accompanied by a visual representation in the form of use case diagrams. The textual description follows a template which consists of these items:

- ID: A unique identification for the use case.
- Name: A short text describing the goal of the use case.
- Brief description: This is a more elaborate explanation of the use case than the above.
- Actors: These are the users/systems outside the application interacting with it.
- Priority: A metric describing the priority of this use case. This metric is derived from the functional requirements document, and uses a high-medium-low scale.
- Preconditions: Describe what state the system should be in before the use case can start. Typically, some of the other use cases are already performed to set up the use case.
- Basic flow: This describe the normal flow from preconditions to postconditions in a numbered list.
- Alternate flow: A description of scenarios that differ from the basic flow described above. This includes exceptions and errors. It is also presented as a list, but the numbering in this list refers to the items in the basic flow list. The items in this list do not relate to each other.
- Postconditions: Describe what state the system should be in after the use case is performed.

## 5.2 Non-functional requirements


A general requirement for the project was to use english as language in all parts related to the documentation of the application, while the language in the application would be norwegian. Other general requirements concerned the platforms the application should run on. It was decided that it should run on both Android and iOS, and that the design of the application should approach a native feel as much as possible on these platforms.

To make better decisions at a top-level design perspective, and to make better decisions on a component and implementation level, the team wanted the customer to rank each of the quality attributes below. The basis for the list and its descriptions are sourced in Software Architecture in Practice (REF). The ranked list was helpful in choosing the solutions that were most inline with the customer's needs. Normally there would be a system for measuring and quantifying each of the attributes, but this would broaden the scope and workload of the project and instead this was used

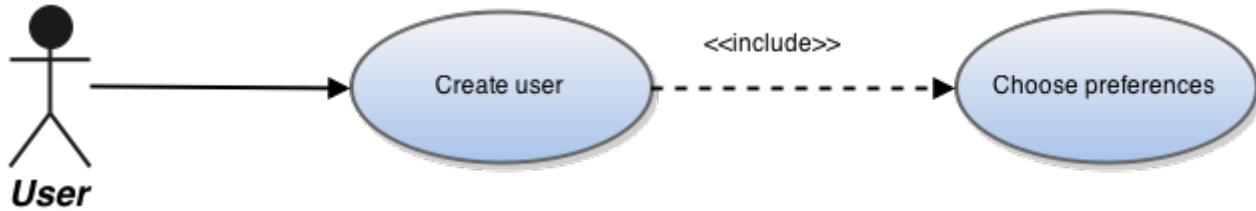


<b>ID</b>	U1
<b>Name</b>	Create recoverable profile.
<b>Brief description</b>	Enter mail to register.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	Application installed
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User clicks on register new user</li> <li>2. User fills in mail into a registration form</li> <li>3. Input validated</li> <li>4. User finishes the registration and the system saves the user ID</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. User skips registration and starts using the system</li> <li>2. The system stores the new user by an ID internally</li> </ol>
<b>Postconditions</b>	User is created and saved by the system

**Table 5.1:** U1. Create profile

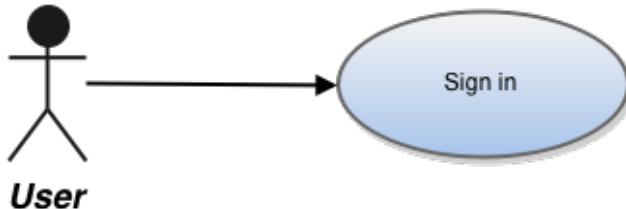


<b>ID</b>	U2
<b>Name</b>	Sign in.
<b>Brief description</b>	Enter email address to sign in.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	User has already registered
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User clicks on sign in</li> <li>2. User fills in mail into form</li> <li>3. System checks email address. User id returned</li> <li>4. Main view displayed</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. User not found</li> <li>2. Error message displayed, go to 2.</li> </ol>
<b>Postconditions</b>	User is logged in to the system

**Table 5.2:** U2. Sign in

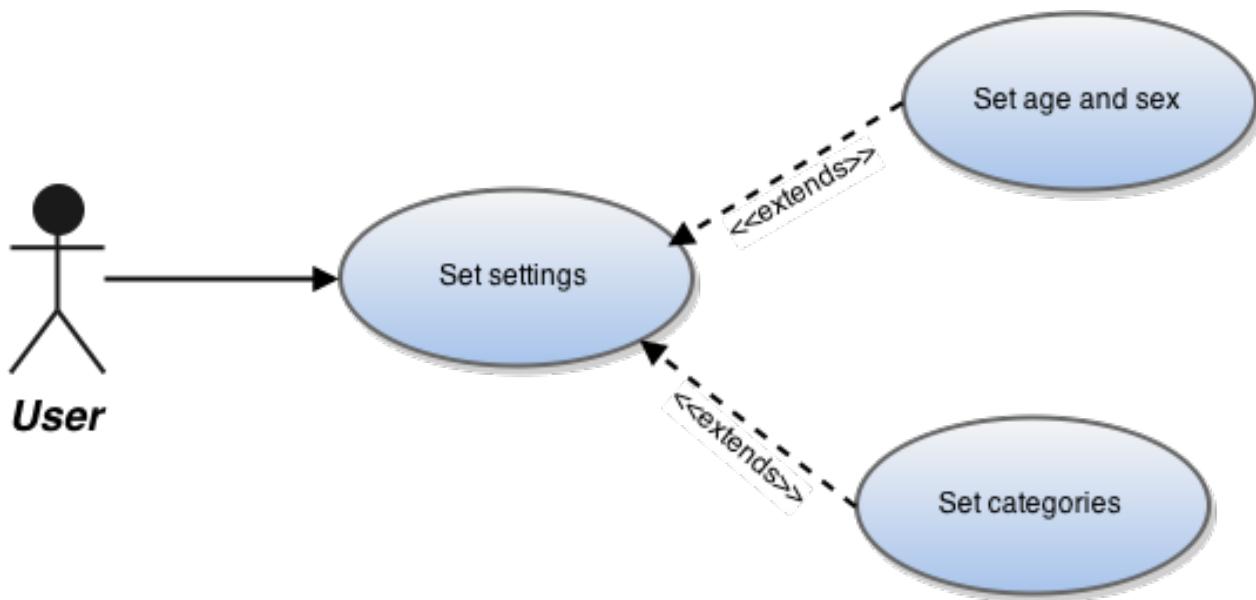


<b>ID</b>	U3
<b>Name</b>	Set initial settings.
<b>Brief description</b>	Specify user information to be used for receiving stories.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	Application installed
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User is initially asked to fill a form about preferences by the system             <ol style="list-style-type: none"> <li>(a) Personal info: age group and sex</li> <li>(b) Cultural category preferences</li> </ol> </li> <li>2. The system saves information about the user's preferences</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. User clicks on settings in order to change preferences</li> </ol>
<b>Postconditions</b>	The system has information about the user in order to provide personalized story recommendations.

**Table 5.3:** U3. Set initial settings

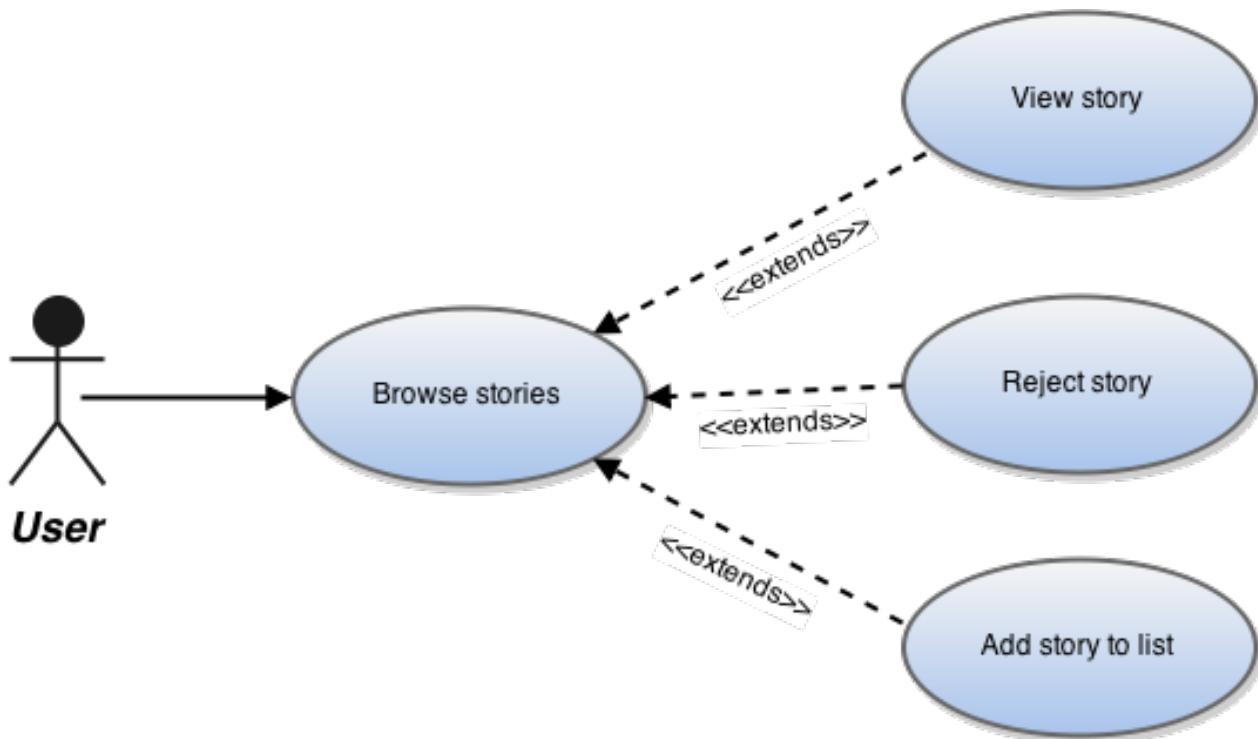


<b>ID</b>	U4
<b>Name</b>	Browse recommended stories.
<b>Brief description</b>	User is shown a list of recommended stories to choose from.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	Preferences already set
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User is shown a list of recommended stories</li> <li>2. User does one of the three following actions on a story:                     <ol style="list-style-type: none"> <li>(a) Choose to read the story now</li> <li>(b) Reject the story</li> <li>(c) Add story to list</li> </ol> </li> <li>3. If option (b) or (c) is chosen the user is shown a recommendation list without the story</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. If the user chose to read the story now, the story - and not the updated recommendation list - will be shown.</li> </ol>
<b>Postconditions</b>	The system has stored information about the choice of the user.

Table 5.4: U4. Browse recommended stories

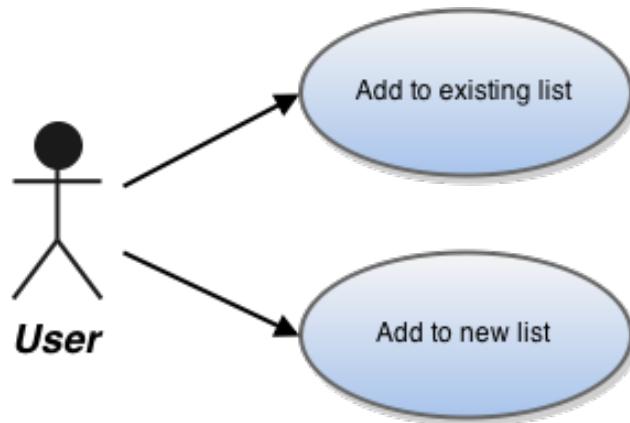


<b>ID</b>	U5
<b>Name</b>	Add story to list.
<b>Brief description</b>	Put a story in to-read list or user-defined list.
<b>Actors</b>	User
<b>Priority</b>	Medium
<b>Preconditions</b>	User is registered and signed in
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User opens a story to read</li> <li>2. User clicks the bookmark button in the story and selects the desired collections to put the story in.</li> <li>3. Story will be put in the selected list</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. The desired collection does not exist. The user clicks to add new collection.</li> </ol>
<b>Postconditions</b>	Story will be added to and/or removed from various lists according to user's actions

**Table 5.5:** U5. Add story to list

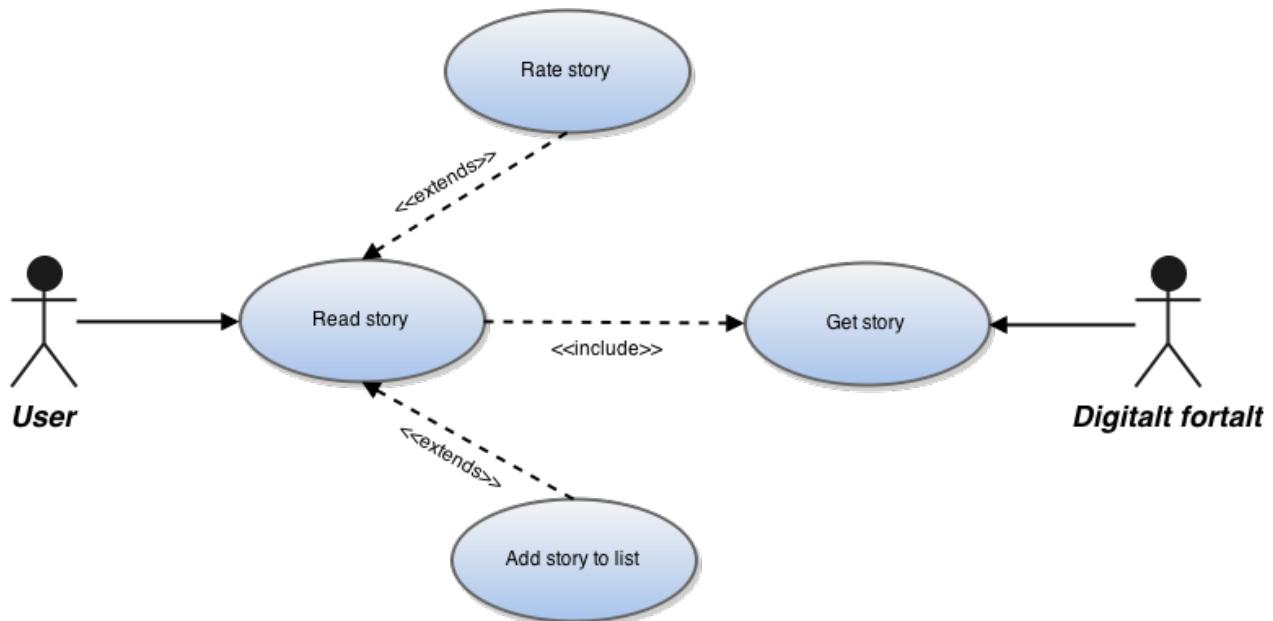


<b>ID</b>	U6
<b>Name</b>	View story.
<b>Brief description</b>	Display media (text, images, video, sound clips) related to the story selected.
<b>Actors</b>	User, Digital fortalt
<b>Priority</b>	High
<b>Preconditions</b>	The story is in the list of recommended stories or favorites
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User selects story</li> <li>2. Display:           <ol style="list-style-type: none"> <li>(a) Available media files</li> <li>(b) Link to story on Digital fortalt</li> <li>(c) Explanation of why the story was recommended</li> </ol> </li> <li>3. User selects media type (text default)</li> </ol>
<b>Alternate flow</b>	
<b>Postconditions</b>	The story is shown according to the user preferences

**Table 5.6:** U6. View story

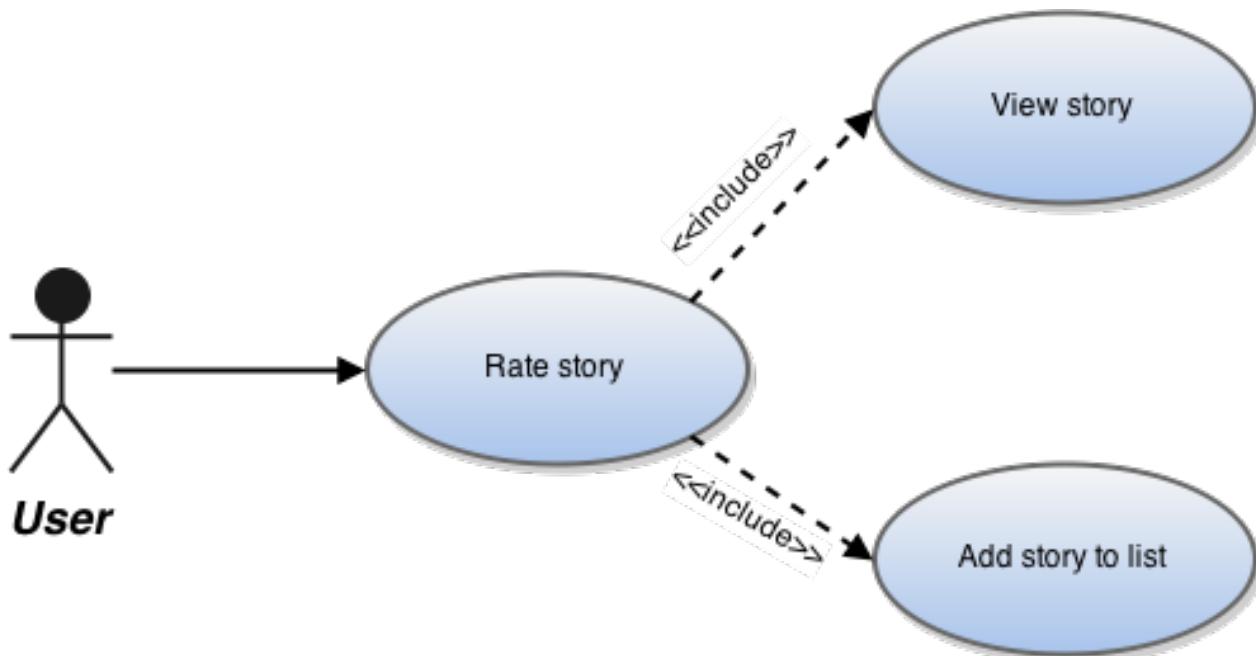


<b>ID</b>	U7
<b>Name</b>	Give feedback / rating.
<b>Brief description</b>	Give a rating on a story.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	User has opened a story for reading
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. After reading the story, the user clicks on a rating to give feedback on the story</li> <li>2. The system saves the rating</li> <li>3. Story will be put in read list</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. User does not give a rating on the story before closing it</li> <li>2. The system reminds the user to rate the story at a later time</li> </ol>
<b>Postconditions</b>	The rating of the story from the user is saved

Table 5.7: U7. Rate story

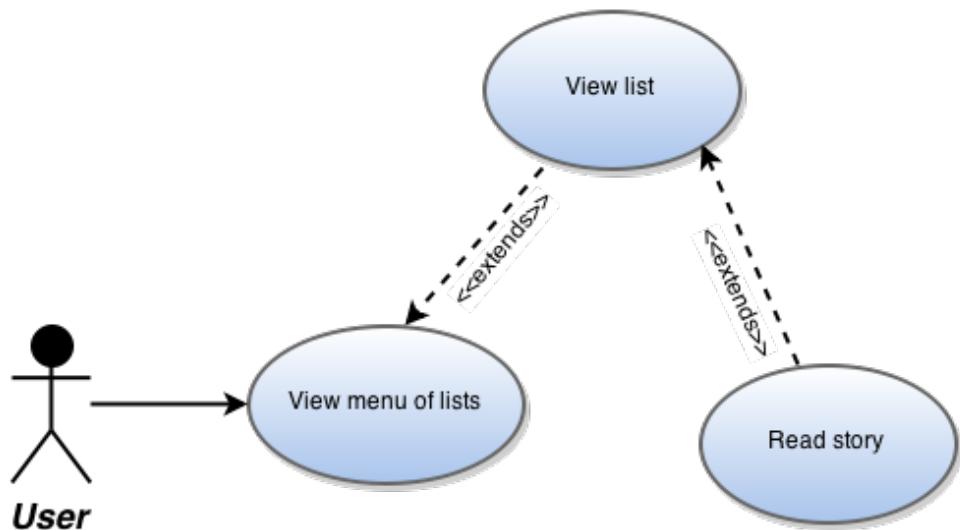


<b>ID</b>	U8
<b>Name</b>	View list.
<b>Brief description</b>	View list of collected stories (favorites,to-read,tags defined by user).
<b>Actors</b>	User
<b>Priority</b>	Medium
<b>Preconditions</b>	User is registered and signed in
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. User selects list from menu</li> <li>2. List of stories shown</li> </ol>
<b>Alternate flow</b>	<ol style="list-style-type: none"> <li>1. No stories found</li> <li>2. Display message “No stories found”</li> </ol>
<b>Postconditions</b>	User is shown all of the stories collected

**Table 5.8:** U8. View list

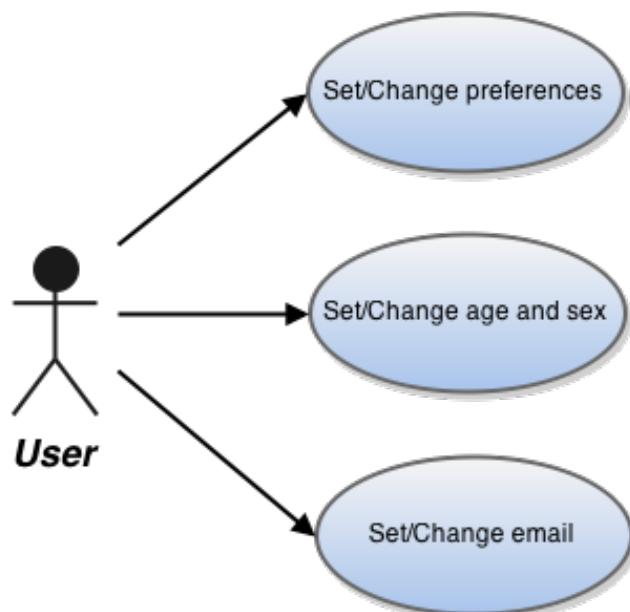

<b>ID</b>	U9
<b>Name</b>	Specify settings.
<b>Brief description</b>	Specify and change system settings.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	User is signed in
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. While logged in, user clicks on settings</li> <li>2. User edits the data in settings           <ol style="list-style-type: none"> <li>(a) Category preferences</li> <li>(b) Age group / sex</li> <li>(c) User e-mail</li> </ol> </li> <li>3. The system saves the new settings</li> </ol>
<b>Alternate flow</b>	
<b>Postconditions</b>	Settings are changed and saved

**Table 5.9:** U9. Specify settings

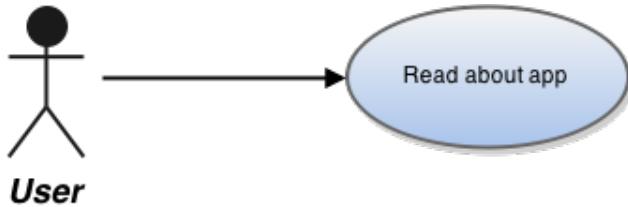

<b>ID</b>	U10
<b>Name</b>	Read about app.
<b>Brief description</b>	Basic info about the application.
<b>Actors</b>	User
<b>Priority</b>	High
<b>Preconditions</b>	User is signed in
<b>Basic flow</b>	<ol style="list-style-type: none"> <li>1. While logged in, user clicks on settings</li> <li>2. User clicks on read about app and is presented with information about the app</li> </ol>
<b>Alternate flow</b>	
<b>Postconditions</b>	

**Table 5.10:** U10. Read about app

as a prioritized list assisting the development, since this was believed by the team to be adequate in terms of the scope and length of the project.

There are many more quality attributes but this list describes the most generic ones, plus some specific attributes that the team believed might suit the project. Also, keep in mind that there are a lot of crossover attributes(e.g.. Maintainability/Testability may increase availability)

- Availability: How important is the reliability of the product. The easy representation to think of this is uptime of the service.
- Interoperability: How important is the ability for the system to work together with other systems. (e.g. making use of specific communication protocols or the use of a specified data format)
- Modifiability: How important and how easy should the product be able to be changed after it is finalized? (e.g. making changes to the UI)
- Performance: How important is time and speed of the system? (e.g. response time for retrieving stories)
- Security: How important is the system's ability to protect data and information from unauthorized access? (e.g. losing personalized data)
- Testability: How important is the ability to set up tests for the system (e.g. setting up automated test for components and parts of the system)

- Usability: How easy is it for the user to accomplish a desired task, and what kind of user support should the system focus on. (e.g. tutorials or hints)
- Monitorability: How important is the ability to monitor how the system while its executing. (e.g. statistics etc.)
- Other: These have been considered not very relevant for the project due to various reasons; variability, portability, development distributability, scalability, deployability, mobility, safety, marketability

(TODO Supplement: diagram non-functional requirement)



# Chapter 6

## Design and architecture

To get a brief overview of the complete product and its required parts the design and architecture is presented in this chapter. It is not meant to give a complete understanding, but rather an overview on how the different parts of the product work together to give a good user experience.


### 6.1 Architecture

The overall architectural design of the system was made to achieve a rough mapping of what needed to be done in terms of actual programing. The architecture focuses heavily on interactions between the different instances in the systems without going into the specific details on how this is done. To illustrate the architecture two different views were created. One showing only the components, with another showing the processes in the different components. The overall system structure can be seen in **Fig 6.1**, this shows the four different components and how they interact. In **Fig 6.2** a diagram showing the architecture with processes can be found. As seen in the legend, the square boxes represents individual components or processes. The boxes with oval corners represents compound processes or larger parts. These are mainly shown because they give an overview over which processes belong to and will be performed by which part of the system. Double lined boxes are external sources that provide an API. Lastly, arrows indicate information flow.

It is a difficult task to model a whole system in an accurate way, and while the architecture diagram shows an overview, it can not give much insight into the complexity of each process. This is further complicated by the fact that in the startup phase of the project there are a great number of unknowns. Both complexity and requirements are subject to change. As such, the diagram should only be used as a guide for understanding the composition of the complete system.

### 6.2 Database design

The database was designed with the goal of facilitating the recommendation of stories to users. The data model underpinning the database is visualized in the ER-diagram in **Fig 6.3**. User and story are the central entities in this diagram, since the goal of the application is to connect users to stories. Both of these entities has a number of attributes describing the entity. The central relationship

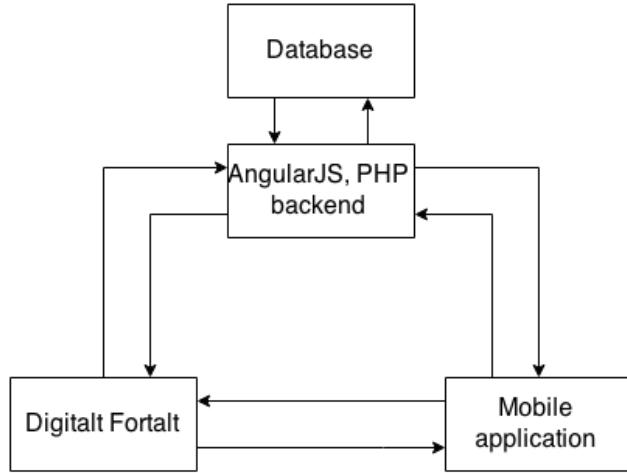

**Figure 6.1:** Diagram of the overall system structure for this project.

in the diagram is the recommendation-relationship, where a user and a story is connected. This connection is described by some additional attributes, such as rating, tag and state.

To make the right connections between user and story, some attributes describing the user and the stories are necessary to store in the database. For instance, in order to make recommendations based on nine predefined categories, every story is mapped from subcategories gathered from Digitalt fortalt to one or more of the nine categories (see **Section 6.4** category mapping). A user is connected to one or more of these categories by the setting of personal preferences. In addition, the database stores information about the changing state of recommended stories in order to make better recommendations.

Another goal of this project is to provide some research data to the customer (see requirement RXX in appendix XX). To do this, some data about the use of the application is stored. This include registering what actions are taken during a user session. The state entity records changes in the state of stories connected to a user. For research purposes the customer also wished to know the relationship between satisfaction of a story (i.e the rating) and the media format contained in the story.


In mapping the ER-diagram to a relational database the algorithm in [AS2, p.270-278] has been used. To ensure a good database design, four informal guidelines in [AS2, p. 487-497] have also been used. These guidelines are:

1. Making sure that the semantics of the attributes is clear in the schema

This means that a relation schema (table) in the database corresponds to a entity type or a relationship type. The relational database used in this project follows this guideline by making a table for each entity and each relationship in the ER-diagram. The n-ary relationship “user recommend story” is split into tables according to the mapping algorithm.

2. Reducing the redundant information in tuples

This means that the tables should contain no insertion, deletion or modification anomalies.

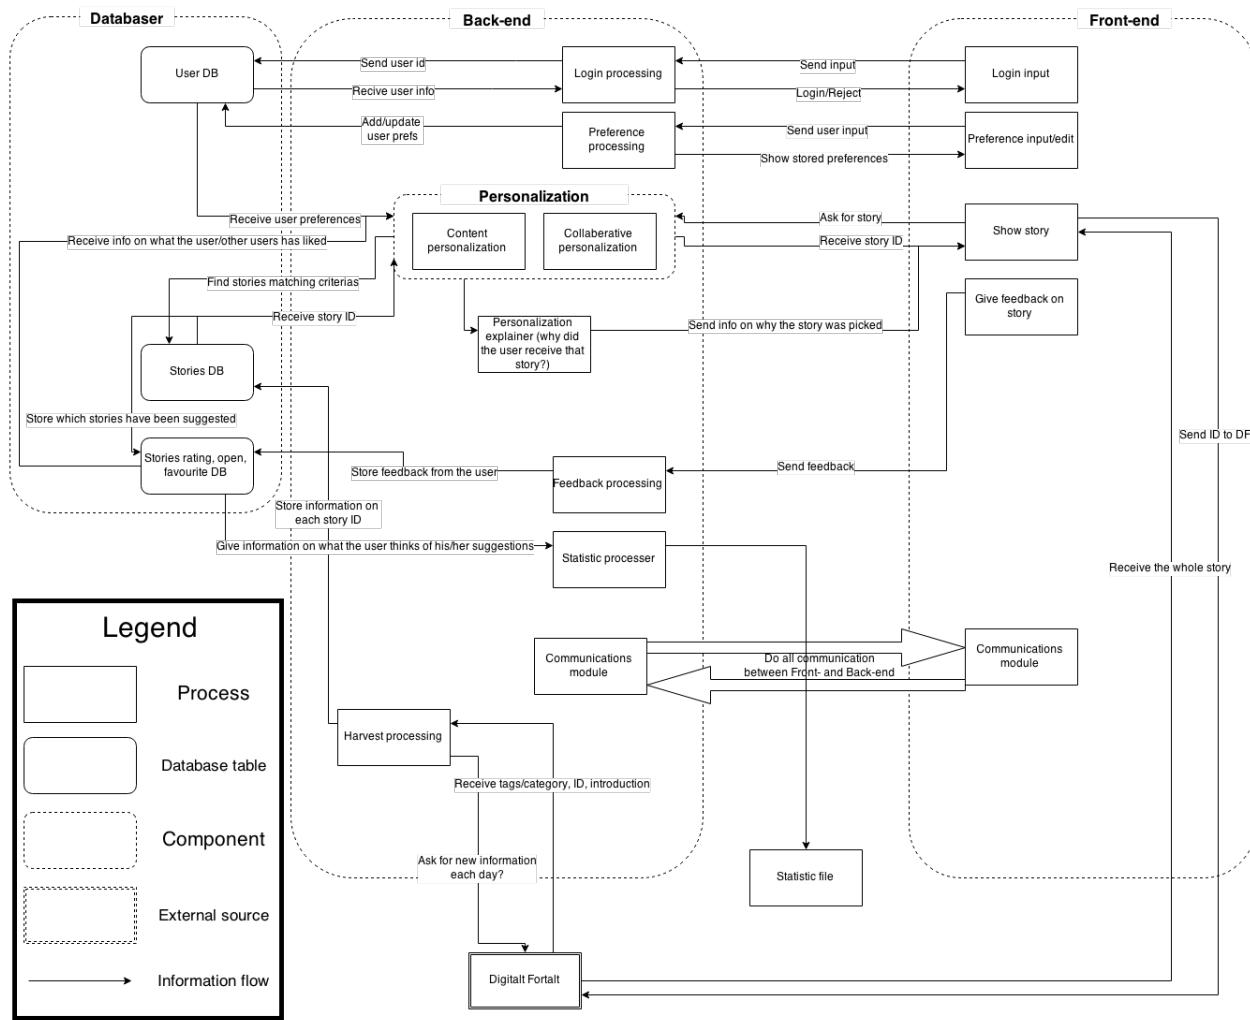


**Figure 6.2:** Diagram of the architecture for this project.

Our database is designed to avoid redundant information, so that modification of one attribute only have to be performed in one tuple in one relation schema. This results in quite a few tables, but maintains a consistent database.

### 3. Reducing the NULL values in tuples

Some of the tables in our database has the potential for NULL values. For instance, a user may access the application without entering an email address, which means that the user table could be filled with NULL values in the mail-column. An alternative solution would be to create a user-mail table, which contain only a userId and the email address for those users who actually have entered a email address. The story table also has the potential for NULL values, for instance if a story lacks a connection to an institution.

Some of the problems associated with NULL values such as the use of aggregate operations and the multiple possible interpretations of what the NULL represents does not apply to our

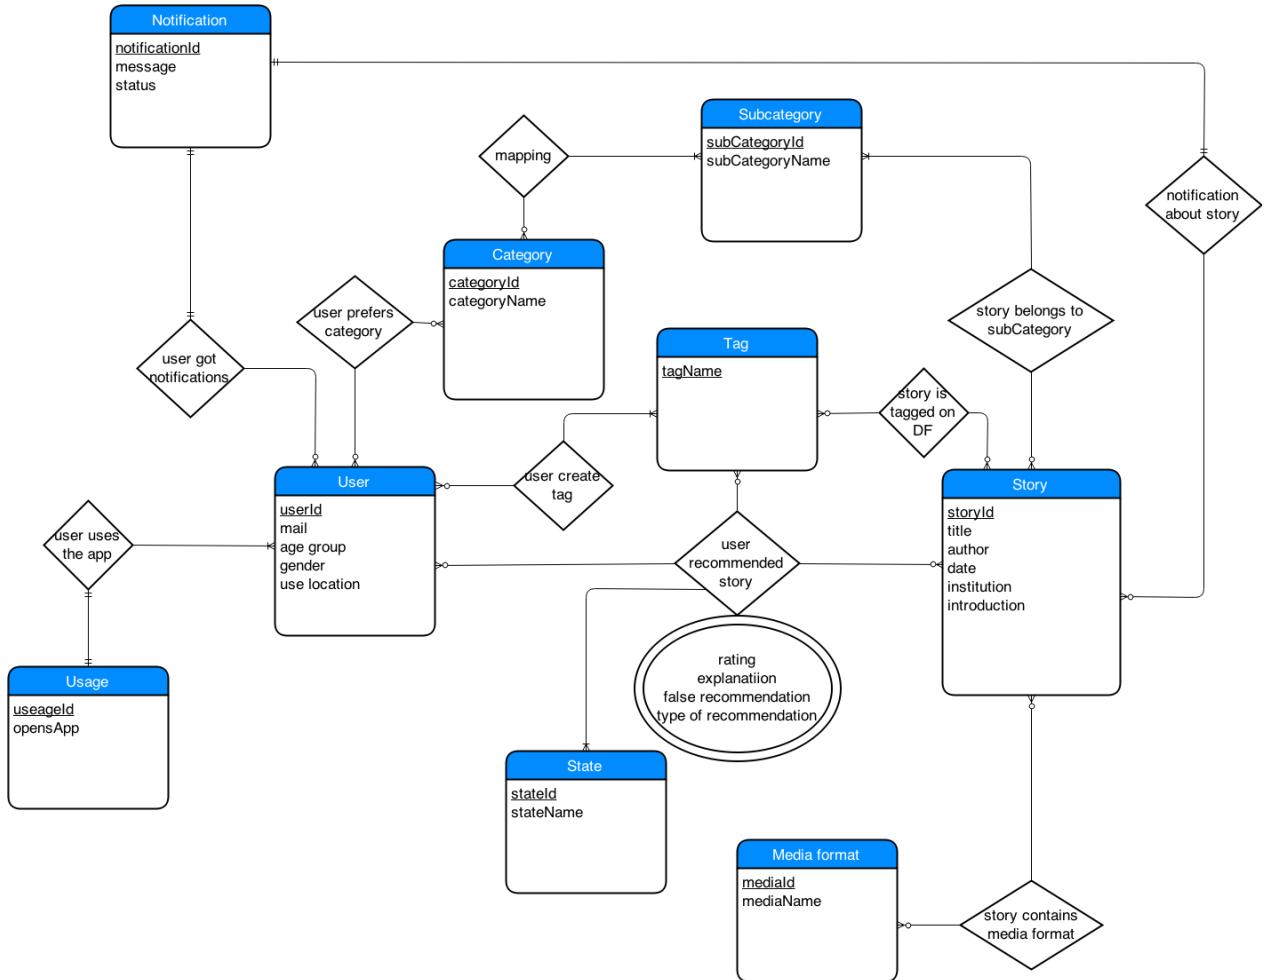

**Figure 6.3:** ER-diagram showing the data model.

tables. Alternative solutions has not been employed because guideline 1 has taken priority. Story and user are the most important entities in our data model and should not be divided among too many tables since that makes retrieving complete information about them harder.


4. Disallowing the possibility of generating spurious tuples  
Means that tables should be joined on attributes that are appropriately related, that is primary keys and foreign keys. This guideline is followed in the database design in this project.

## 6.3 User interface

The user interface design was an essential part of the project, as the customer prioritized usability over all other nonfunctional requirements. The design thus went through many iterations by working on a prototype and continually getting feedback from customer and user tests. This feedback loop was important as the customer did not have clear requirements to the application from the beginning, and making everything easy to understand for the user was also challenging. Balsamiq

was first used to create a basic wireframe, but as it's functionality was limited the next iteration of the design was made using Proto.io. This made it possible to receive better feedback on the flow of the app and not just the views individually.

The following **Fig 6.4** explains the overall flow between all the different views in the application. The blue boxes represent views, while the white ones represent modals placed on top of the view the user came from. The text of the arrows explains what the user clicked in the view the arrow comes from, and the arrow points to which view this action leads to. The functionality of the more complex views will then be explained in further detail.

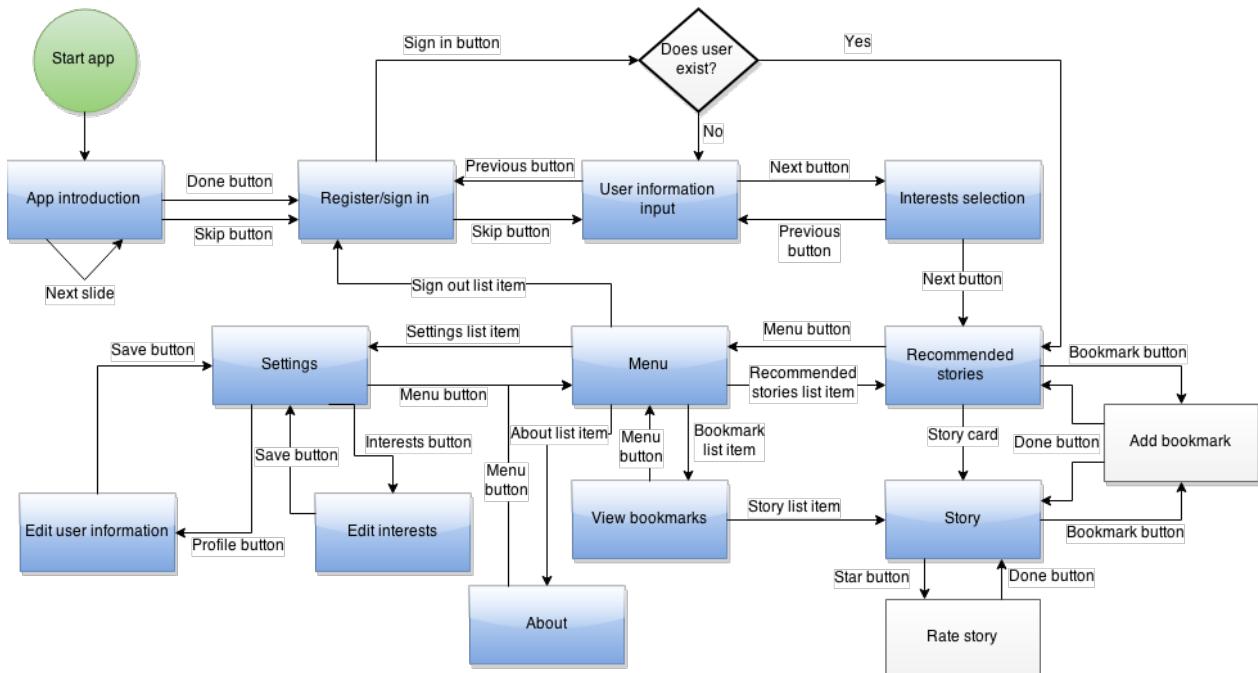

**Figure 6.4:** Diagram of the flow between views in the user interface.

## Recommendation view

This view displays the stories that should be the most relevant to the user. The user can browse them by swiping through them or by clicking the left and right arrows. When tapping on a card the detailed view of the story will be displayed. The “X” in the right corner of each card is used to reject the story, which takes it out of the list of the current recommendations and makes that kind of stories less likely to appear in the future. The bookmark icon in the top bar opens a modal for adding a bookmark.

## Story view

This view displays the chosen story in detail. There is a box which displays the media files associated with the story. The tabs above it will depend on which media types the story contains. Videos will be displayed by default if there are any, as they can be a major component of the story which should not be hidden in another tab. When tapping on a video or image it will be displayed in fullscreen mode. The user can give feedback on the story either by tapping the stars on the bottom



**Figure 6.5:** Recommendation view

part of the view, or by tapping the star icon in the top bar which will open up a modal. The modal will ask the user to rate the story, and the user can exit it by tapping “Ferdig” or by tapping outside of the modal. Tapping the bookmark icon will make the same modal as in the recommendation view appear.

TODO: Screenshots and explanations of other views

## 6.4 Category mapping

There are 31 subcategories presented at Digitalt fortalt. Each story can have 0 to 31 subcategories attached to it. To achieve a content based filtering the user has to select some interest categories. To make it easier for the user, these subcategories are divided into nine main interests categories.



**Figure 6.6:** Story view

Some of these categories of interest were already predefined in [EHW1], while the rest was changed according to discussions with the customer. The subcategories were put into the category interest field that fit them best, with some subcategories being in several category interests. In **Table 6.1** this mapping is illustrated. It is obvious that some category interests will have more stories, however, subcategories such as literature contain more stories than most others. In such a way, it was intended to create nine category interests that contain roughly the same amount of stories. Even distribution of stories into category interests was intended, however, when a subset of stories was chosen this intention did not hold true as can be seen in chapter XX. Furthermore, the category interests needed to be distinct while still encompassing all the subcategories.

<b>Archeology</b>	Arkeologi og forminne
<b>Architecture</b>	Arkitektur
<b>Art and design</b>	Bildekunst, dans, design og formgjeving, film, fotografi, media, teater
<b>History</b>	Historie, historie og geografi, kulturminne, sjøfart og kystkultur, språkhistorie
<b>Local traditions and food</b>	Bunader og folkedrakter, dans, fiske og fiskeindustri, fleirkultur og minoritetar, Hordaland, kultur og samfunn, kulturminne, musikk, Rallarvegen, samer, sjøfart og kystkultur, språk, tradisjons- mat og drikke
<b>Literature</b>	Litteratur, teikneseriar
<b>Music</b>	Musikk
<b>Nature and adventure</b>	Fiske og fiskeindustri, naturhistorie, sport og friluftsliv
<b>Science and technology</b>	Fiske og fiskeindustri, fotografi, "kjøretøy, bil og motor, veitransport", media, "natur, teknikk og næring", "teknikk, industri og bergverk", skip- og båtbygging

**Table 6.1:** Category mapping performed to facilitate, and simplify content based filtering. Each category is assigned to one or more interests.

## 6.5 Personalization

Users are recommended stories by means of content-based and collaborative filtering, described in **section 2.5**. The system gathers information about the stories and the users and feed this information into the recommender engine Mahout which produces a list of recommendations for the desired user. The details of Mahouts inner workings will not be presented here. What will be described is how the input data delivered to Mahout is gathered and produced by our application, what methods of Mahout is used and when they are used, and how the resulting list of recommendations are dealt with.

Both content-based and collaborative filtering rely on giving a numerical value that express how much a user like a story. We call this a preference value. In our application this value is computed by combining several measures representing different types of user feedback. These are: the rating a user have given to a story, the categories the user have expressed an interest in, the number of times a story has been recommended to the user, the number of times the story has been opened and the number of times a story has been put in the to-be-read list. Weights are assigned to the measures to differentiate between what impact they should have on the preference value. Rating is considered the most important user feedback, since this value is given to a story by direct user action. The other measures are either less connected to a specific story or more intangible. When computing recommendations, preference values for all stories for the user in question are calculated first.

Each time Mahout is run up to ten recommendations are inserted in the database. How these are chosen depend on a number of factors. Since a requirement from the customer was to include

false recommendations, one of the recommendations is always picked from the lower parts of the recommendation rankings. The other stories are picked from the top of the rankings. Depending on a two factors some top recommendations may be skipped for a given run. The first of these factors is that rated stories are not recommended again to the user. The other one is whether the list of recommendations should be added to the existing list of recommendations browsed by the user in the recommendation view or not. When adding to the existing list recommendations should not be repeated.

Mahout uses a data model and a similarity model to compute recommendations. The data model is a collection of triplets, where each triplet consists of a user id, a story id and a preference value. The selection of which preference values to include is different in content-based and collaborative filtering. The similarity model is also different for content-based and collaborative filtering. A description of these differences follows in the subsequent sections.

### 6.5.1 Content-based filtering

When doing content-based filtering the input data model consist of a collection of all the preference values for the user we are making recommendations for. This means that the size of the model will be equal to the number of stories harvested from Digitalt fortalt. To make recommendations Mahout also need measures describing how similar stories are. Similarities between stories are computed based on the subcategories found in the second column in **table 6.1** using the cosine similarity formula:

$$\text{similarity} = \frac{\vec{x} \cdot \vec{y}}{||\vec{x}|| \cdot ||\vec{y}||} \quad (6.1)$$

The dot product in the numerator is in our system equivalent to the number of common subcategories for two stories, while the denominator is the product of the square roots of the number of subcategories for the two stories. If two stories have exactly the same subcategories the similarity value will be 1, and if they don't share any subcategory the value will be 0.

These similarities are put in a CSV file at the time of harvesting. This file is read when the recommendation is run and the values put in the appropriate Mahout objects. Mahout then uses the data model and the similarity model with similarity values for all possible pairs of stories to produce a ranked list of recommendations using item based recommending.

### 6.5.2 Collaborative filtering

Collaborative filtering uses a data model with multiple users. Only the stories a user has rated will be included in the data model since this is the most precise user feedback. In our application collaborative filtering is done by combining two different methods provided by Mahout, namely item based recommendations and user based recommendations. The item based approach creates a similarity model based on similarity between items in the data model, while the user based approach creates a similarity model based on similarity between users in the data model. To avoid

that not similar users affect the recommendations in the user based approach a threshold value for the similarity is set. Two list of recommendations are produced and then merged to get one list of ranked recommendations.

As was noted in **2.5** collaborative filtering requires a large amount of data to make recommendations. Since only rated stories are included, collaborative filtering cannot be run when a new user starts using the application as the user will not be part of the data model. The criteria for using collaborative filtering needed to met is that the user has rated at least ten stories that at least ten other users also have rated.

## 6.6 Reuse of code

Reusing written code can be a great help to quickly have progress when programming. To investigate possibilities of this, the code from stedr was reviewed. However, since stedr used a different framework on the front end and java as the server language reusing code proved difficult. Therefore, the code written was developed without relying on previous work.

### 6.6.1 Digitalt museum's application programming interface

All content related to stories displayed in the application was collected from Digitalt fortalt. Initially, to achieve better results when testing the personalization algorithms, the stories collected are limited to the areas Nord-Trøndelag and Sør-Trøndelag. The API [HM1] used to retrieve stories belongs to Digitalt museum. This API enables search through data from Digitalt museum, displaying pictures and provides access to an XML representation of available objects.

Digitalt fortalt is established on the same technical platform as Digitalt museum [HM2]. This makes the integration better between the two and the remaining services in Norvegiana. Norvegiana is a datamodel, database and a web service with the purpose of making cultural heritage information more accessible [HM3]. Example services available in Norvegiana are Digitalt museum, Digitalt fortalt, Arkivportalen and Musikkarkiv.

# Chapter 7

## Tools

This section briefly describes all the tools used for this project, which includes development tools, communication tools and any additional tools.

### 7.1 Development tools

#### 7.1.1 Front end

- Ionic [es1] - Ionic is a front end UI framework designed to assist the development of hybrid mobile applications. By using this framework it became easy for the team to speed up the design of the interface and test the application both on computers and devices. More details about Ionic can be found in [Section 2.2.2](#)
- PhoneGap (Apache Cordova) [RA2] - PhoneGap is a framework that enables software developers to automatically wrap HTML5, CSS and Javascript code into platform-specific code that can run on devices such as iOS and Android phones and tablets. The Ionic framework is based on using PhoneGap for compiling its code. More details about PhoneGap can be found in [Section 2.2.1](#)
- Android Studio [es22] - Android Studio is the official IDE for Android application development, and it was necessary to have this installed in order to develop our application on android devices. It also provided a way to install various plugins that were useful or needed for the project.
- Node.js [es23] - Node.js is a platform built on Chrome's JavaScript runtime for easily building fast, scalable network applications. This was another tool that was necessary to install, because PhoneGap is built on it. First released in May of 2009, Node.js has been gaining much popularity as a server-side platform.
- Gulp.js [es24] - Gulp is a build tool that is used as a part of PhoneGap in order to automate many common tasks, such as build processes and plugin handling.

- Sass [es25] - Sass is an extension to CSS which adds functionality such as being able to use variables, nested rules and inline imports. Sass helps keep stylesheets organized, and is fully compatible with regular CSS syntax. Sass is the preferred tool for handling stylesheets in Ionic.
- Proto.io [es2] - This a prototyping framework aimed for mobile apps, and it allowed the team to make very quick and functional prototypes that were used for user testing, both by the team and by the customer. When discussing design solutions, it was much faster and simpler to make revisions to the prototype than it would be to redesign the application itself.
- Balsamiq [es3] - Wireframing and mock-up tool which was used to create early mock-ups of the different user interface views. This was used because it allowed the team to quickly make wireframes for the interfaces, and it gives a more professional look than by just making paper prototypes.
- Icomoon [es4] - This is an application with the purpose of generating an icon font from svg files that you upload to it. You can also resize, adjust positions, and set default pixel sizes for the icons. The application turns all the icons into crisp-looking and easy scalable icons. It also automatically generates the HTML and CSS code which you can use to integrate the code into your own application. In this project, Icomoon was used to make the category icons that show the various categories on each story
- FontForge[es5] - After creating an icon font with Icomoon, FontForge was used to make manual adjustments to the icons themselves. FontForge is an editor with many advanced options for giving icons a smoother look and symmetry.

### 7.1.2 Back end

- Docker [EHW2] - Docker is an open platform that provides the possibility for system developers to build their application and ship it to another computer or server, which can then run the same application, unchanged. The motivation for using Docker was mainly so the team could run the developed application on SINTEF's own server. More details about Docker is described in **Section 2.4.1**
- MySQL [es8] - MySQL is one of the most widely used open source databases. It has many advantages when it comes to scalability and flexibility, and it is well suited for many types of application development. More details about this project's database and its design can be found in **Section 6.2**
- Digitalt musem API [es9] - The source of the stories in the application was Digitalt Fortalt, and in order to access these it was necessary to use Digitalt museum's API. The API is documented on its website and was incorporated into the project's database. Details about the API can be found in **Section 6.6.1**
- phpunit[KF2] - Phpunit is a framework for writing and performing unit tests on php code. More details about how phpunit was used in this project can be found in **Section ??**

- Karma[KF3] - Karma is a test runner for Angularjs. Karma has it . With Karma it is possible to write javascript tests and run it in different browsers on both desktops and mobile phones. It is easy to run a test for every integration you make. More details about how Karma was used in this project can be found in **Section ??**
- JUnit[AS7] - JUnit is a framework for doing unit testing in Java.
- DBUnit [AS8] - DBUnit is an extension of JUnit that can be used to test methods accessing a database. Among its advantages is the ability to put the database in a known state before each test, which gives the tester control over what to expect as results of tests that change the contents of the database.
- Mahout [AS9] - Mahout is a project that provides scalable machine learning algorithms. Mahout is primarily focused on algorithms for collaborative filtering, clustering and classification. How Mahout has been used in this project is described in **section 6.5**.

## 7.2 Communication tools

- Google drive [es10] - Used for creating and sharing documents with the whole group, as well as editing shared documents in real-time. it also made it possible to share all files, whether it was images/diagrams/spreadsheets, or anything else. That was why the team decided to use this as a good solution for sharing all documentation.
- Dropbox [es11] - Used to share documents between the group and the customer. This tool was used upon request by the customer.
- Facebook [es13] - Used for discussions and notifications of various things such as meeting times. This was used because Facebook is something everyone was already familiar with, and something that most of the team members use on a regular basis, so messages would be quickly noticed.
- Trello [es15] - Task management application, this was a handy way to quickly see what needs to be done and what has already been completed, similar to a scrum task board . Because of this, the team found it to be a good tool to use, as it speeds up the process of managing work tasks and gave a better overview of the progress.

## 7.3 Additional tools

- Github [es12] - Used for making a code repository to be shared by the group while developing the system. The customer requested the use of Github, and it was also used because it seemed like the easiest way to share and implement code, as well as sharing the code with the customer.

- Draw.io [es14] - This tool was the primary way of making diagrams and models, such as use-cases and WBS chart. This tool was chosen for this because it provides a lot of templates for different types of graphs, and as everyone uses the same tool for all diagrams the report achieves a consistent style for every diagram.
- Ganttfify [rg1] - Converting Trello boards into Gantt Charts, makes the process of creating a gantt chart and milstone plan easier and faster.

# Chapter 8

## Implementation

This chapter discusses the details of the system implementation process, both for front end and for back end.

### 8.1 Front end

The front end of the application was designed by using Ionic and AngularJS. In this section, there will first be a description of how a system made in AngularJS is structured, and in the subsequent section will be an elaboration of some challenges and limitations during the creation of the user interface, both concerning the design and the implementation aspects of the process.

#### 8.1.1 AngularJS system structure

AngularJS is based on a Model-View-Controller architecture, but provides a variety of components to assist in easing the programming and speeding up the application. It is essentially another layer of abstraction above writing regular Javascript. These are some of the main concepts that are used to create an Angular application:

##### **Model**

The data that can be interacted with by the user.

##### **View**

The interfaces that the user can see.

##### **Controller**

The logic and behavior of the views.

##### **Directive**

Special functionality applied to the DOM elements, you can create your own directives as well as use the numerous ones provided by AngularJS itself. In "Vettu hva?", several of these were used, such as directives that call on some function when DOM elements are clicked on, or directives that show or hide parts of the DOM based on some condition.

### Module

A module encapsulates a part of the application. Instead of having a single "main" function that holds the application together, Angular applications normally have multiple modules that work together. The benefit of this is that the application is decomposed into logical parts that can be reused, loaded, and tested in any order. In "Vettu hva?", each controller is its own module. The part of the program that communicated with the back end is also encapsulated in a module. Furthermore, there is a module that starts up the application and binds together views and controller into different states.

### Scope

The scope contains all the elements that the application currently has access too. It can be viewed as a container that stores the current model, and so if a controller or directive is going to modify or access the model, this has to be done by using the scope.

### Service

A service contains "global" logic that is accessible to the entire application. In "Vettu hva?", this is used in the module that contains the communication with the back end. This module has three different services, which respectively gives the application access to User data, story data, and requests from front end to back end.

## 8.1.2 User interface

Early on in development, the team discovered several limitations of the Ionic framework. For example when using a list to display stories, it was not possible to swipe the list both left and right. The idea was to swipe one way to add a story to be read later, and swipe the other way to reject a story from the list entirely. Because this proved to be impossible, the views were redesigned into a different solution which was much less based around swiping.

As this is an application for mobile devices, it had to be adapted to work on different screen sizes. The team found that it would most likely be best to target a relatively small screen size and then simply enlarge it for bigger screens. This eliminated the issue of having to compress the components to fit smaller screen sizes and potentially be forced to redesign the whole view to fit small screens.

The applications uses many different icons in various parts of the interface, and these have been the source of much debate and redesign. The icons used to represent categories were not always understood by users, and some categories like "local tradition and food" were difficult to represent universally with just a single icon. Also the bookmark icon shown in the upper right area of figure 8.xx was confusing to many users, and there was a concern in the team that this icon might not accurately represent that it allows the user to save the story in a collection.

Adopting accurate naming conventions for the different components has also been a considerable issue. Stories can be saved in collections, but these collections have interchangeably been called lists, tags, and bookmarks in the system. Also when asking a user to input their preferred

categories to receive stories from, there has been some confusion because of interchangeably calling these categories for interests, preferences, and categories.

Implementing media, and especially video, has been a challenge in the project. An issue with this has been that playing videos is handled differently on iOS and Android, which had resulted in some bugs that only appear on one platform and not the other. These types of issues have been problematic to fix and has taken up much time to fix. In addition, the videos provided by the Digitalt fortalt website come from different sources. Some of them are Youtube videos, others are Vimeo videos, and there are also other variations. Integrating all these different formats smoothly into the application has been a challenge in itself.

### 8.1.3 Prototype

The prototype has been through multiple iterations. Early on, it was imagined to have a sort of “magic” discovery function where a user would for example rub a crystal ball and receive a recommended story. This idea was later discarded because the team decided it would be better usability to present the user with multiple recommended story that they could simply browse through instead.

Another of the early ideas was for the user to receive a “daily story” or some sort of schedule for being presented with recommended stories. However, due to workload and time constraints, this requirement was heavily down prioritized. The most important parts were the personalization and usability aspects, so receiving notifications seemed like an unnecessary extra feature.


A big issue for the interface design has been the handling of the different media elements (text, pictures, audio, video) and how these should be positioned relative to each other. For a while the team designed the application to have one tab for each of these four elements in the story view, as shown to the left in figure 8.XX. The customer had a concern that this might not be the optimal solution, as a user would for example not be able to read text and view pictures simultaneously. After some discussion, the interface was redesigned so that the text would be persistent, and instead the user could tab between pictures, audio, and video. The resulting design can be seen to the right in **Fig 8.1**.

## 8.2 Back end

This section describe the development of each part of the back end. It aims to give a timeline of the development and explain how and why important decisions were made. The different parts described here are the database, personalization and the communication between front end and back end.

### 8.2.1 Database

Based on the first version of the functional requirements for the application an initial ER-diagram was made in the middle of february. At this stage the customer and the team had not come to an

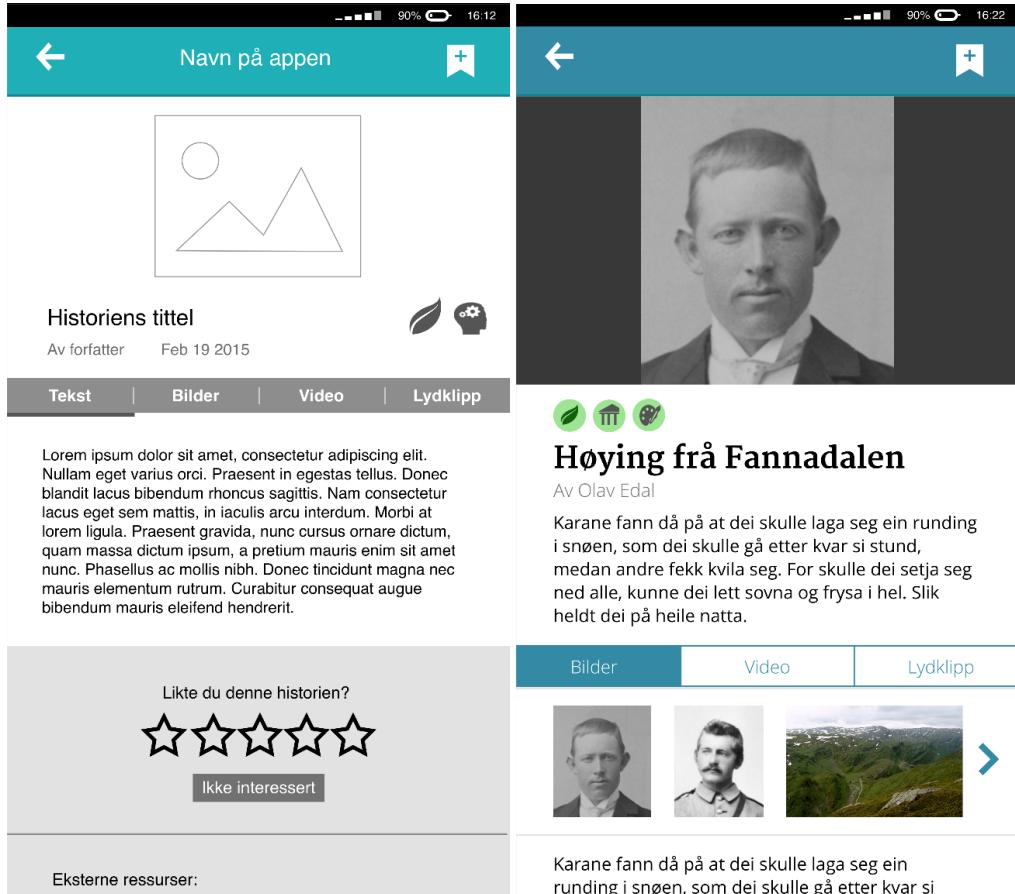

**Figure 8.1:** Comparison of the story view in the first and second version of the prototype.

agreement on a prioritization of the non-functional requirements. This meant that there for instance was not clear how important the performance of the system would be for the customer, an attribute of the system which would influence how much info should be stored for each story in the database versus have much info should be retrieved from Digitalt fortalt every time a user views a story. However, the changes to the initial diagram have been relatively minor. Some of the alterations were based on updated requirements from the customer, while others stem from the group and are optimization of the data model or changes made to facilitate the personalization.

Shortly after the first ER-diagram was made, an SQL-script for creating a database was also made. Since the ER-diagram has undergone changes for quite some time after the first version was made, these changes has also influenced the SQL-script. This means that a change in the data model have lead to more work than just updating the ER-diagram. However, the progress of the project relied on testing against an operational database, for instance regarding the harvesting of stories from Digitalt fortalt.

The customer had early on said that the retrieval of research data about the use of the application was important for them. Initially, the details of this was not properly formulated and the initial data model therefore did not reflect this. After receiving a detailed list from the customer describing the research data to be gathered, alterations - mostly additions - in the data model were made to accommodate this. This concerned storing timestamps for user actions and states of stories.

The team did not decide or understand how to do the personalization until mid March. This decision introduced changes to existing tables and the need to create additional tables and views in the database. Mahout had requirements for the input data, which meant that a view was created to store all the necessary data for collaborative filtering. Using this view made it straightforward to put the desired data from the database into Mahouts data model.

## 8.2.2 Personalization

The way personalization was implemented was by having the user give their preferences about which types of stories they enjoy, and also by harvesting circumstantial information about the user in order to provide relevant stories. Users of this system are also allowed to give feedback on the recommendation of stories from the database to achieve further personalization. Users receive story recommendations based on other users' preferences and recommendations, i.e. collaborative filtering. The system was developed as a client/server architecture, while the database containing the stories was provided by Digitalt fortalt [es19]. The stories are found in a variety of formats such as text, images, audio and video.

## 8.2.3 Front end - back end communication

Communication between front end and back end was handled using http post requests. AngularJs \$http is a core service for reading data from remote servers, which is called every time the application needs to add, retrieve, update or delete data. When an http request is made four fields are set:

method, headers, url and data. The method field determines the http request method, which in this application is set to post, and the headers field sets the content type to JSON. The url is the location of the remote server script that handles http requests. In the data field the action to be executed is specified, in addition to any data needed to perform the desired action.

Each http request is managed by the same back end php script. This script decodes the http request, determines which action to perform and executes it. When the script has finished executing, a json response is returned to front end with the desired data.

# Chapter 9

## Testing

The following subsections will describe the strategies for the testing levels usability test, unit test, integration test and system test.

### 9.1 Unit testing

The purpose of unit testing is to ensure that every component that are implemented in the system are functional and correct. The group performed unit tests on new components or units of code that was implemented in the system. It was necessary to prioritize what components that should be tested, considering the amount of time given for the project. Testing of the user interface is required to ensure that the user get the right user experience. The recommendation module is a module that produce a result that is vital for the quality for the app. Therefore the unit testing in back end will focus on the recommendation module. Most of the code in back end is communicating with database, front end and Digitalt fortalt. Because of this we will focus on testing this code in the integration testing([Section 9.2](#)).

**Roles & Responsibilities** To get a structured testing experience, the team had to delegate responsibility for the units. The roles correspond with the roles that were given at the start of this project (see [Section ??](#)), so the tester would have good knowledge to the code and know how it works.

PHP unit testing		
Unit ID	Unit	Responsible
U1	Database Helper	Kjersti
U2	Database Story	Kjersti
U3	Database User	Eivind
U4	Compute Preference Value	Kjersti
U5	Recommendation module	Audun

**Table 9.1:** shows the delegated responsibilities in testing the back end part of the system.

Angularjs Karma testing		
Unit ID	Unit	Responsible
U7	Log in	Roar
U8	Story View	Ragnhild
U9	Settings	Espen

**Table 9.2:** shows the delegated responsibilities for testing the user interface.

**Required before performing the tests** The developers of the user interface needed to install the Angularjs' Karma, for performing the unit testing. With this tool they could write scripts for each of the test cases.

The developers of the back end of the system needed to install phpunit, a framework for unit testing in php.

**After the tests** The tester investigated the results of the test cases and mended the issues if they appeared during the tests. When the issues in the code were fixed, the tester would run the test again and see if it approved. This was cycle repeated until the code was free of issues and runned the expected way.

**Test Cases** The testers created test cases and used these as a guide for performing the tests. The test cases has an ID and describes exactly what the test should do, what input data to use and what is expected to happen when the test is running.

**Table 9.3:** Here presented by a testId, description of how the test should be performed, what input data to use and expected results.

---

<b>Test case ID</b>	<b>Description</b>	<b>Input data</b>	<b>Expected results</b>	<b>Result</b>
Unit 1: Database Helper				
UN1.1	Update one rating value in the database	Random userId, random storyId, updateValue: 2	The function should return true when running the database request.	Pass
UN1.2	Update rating values in the database	Random userId, random storyId, update Value : 5	The function should return true when running the database request	Pass
UN1.3	Update new tag that user have created	Random userId, tagName: 'NyTestTag2'	The function should return true when running the database request	Pass
UN1.4	Update a users tag which is connected to a story	Random userId, Random storyId, tagName: 'Les senere'	The function should return true when running the database request	Pass
UN1.5	Update a users action of rejecting a story	Random userId, Random storyId	The function should return true when running the database request	Pass
UN1.6	Update a story as recommended	Random userId, Random storyId	The function should return true when running the database request	Pass
UN1.7	Get rating on a story done by a user	Random userId, Random storyId	Should return row with the rating presented as a integer	Pass
UN1.8	Get the predefined tags connected to a user	Random userId	Should return row with the tags "Les senere" and "Les" which all users in the system is connected to. If this user has self made tags, they should be included	Pass

UN1.9	Get all the tags connected to a user	Specified userId: 105	Should return row with the tags "Les senere" and "Les" which all users in the system is connected to, included the added tag 'NyTestTag'	Pass
UN1.10	Get the tags connected to a story and a user	Specified userId: 105, specified storyId: 'DF.1295'	Should return row with the tag 'NyTestTag'	Pass
UN1.11	Get stories with timestamp	-	Should return rows with 167 storyId and a timestamp which indicate when the story was last changed	Pass
UN1.12	Get subcategories to a specific story	Random storyId	Should return a row with an array of subcategoryIds	Pass
UN1.13	Get story information	Specified userId: 105, specified storyId: 'DF.5220'	Should return row with an array with the keys: userId, storyId, explanation, rating, false_recommend, recommended_ranking, in_frontend_array, estimated_Rating	Pass

#### Unit 2: Database Story

UN2.1	Fetch Story	Specified storyId: 'DF.1812', specified userId: 105	Should return row with an array of the categories to the story and tags and tagName that are connected to the userId	Pass
UN2.2	Get recommended stories for a user	random userId	Should return 10 rows with stories, and they should include: userId, storyId, recommended_ranking, explanation, false_recommend, title, introduction, author, categories and mediaId	Pass

UN2.3	Get list of stories which is tagged by a user	Specified userId: 103, tagName: 'NyTestTag'	Should return rows with stories, and they should include: storyId, title, author, introduction, date, tagName, categories and mediaId	Pass
UN2.4	Get subcategories per story	-	Should return 167 stories with numericalId and subcategory ids	Pass
UN2.5	Get all stories with storyId, numericalId and categories	-	Should return 167 rows with storyId, numericalId and categories	Pass
UN2.6	Get states per story	Specified userId: 258, specified storyId: 'DF.1600'	Should return a row with stateId, numTimesRecorded and latestStateTime	Pass

### Unit 3: Database User

UN3.1	Add user	example mail: example@example.com	The function should return true when running the database request	Pass
UN3.2	Get user from Id			Pass
UN3.3	Update user mail			Pass
UN3.4	Update user age			Pass
UN3.5	Update user categories			Pass
UN3.6	Get user from email			Pass
UN3.7	Get user categories			Pass
UN3.8	Get user mail from Id			Pass

### Unit 3: User Model

### Unit 3: Story Model

Unit 4: Compute Preference Value				
UN4.1	Compute preference value for all stories for a user	Random userId	Should return 167 rows from the database, and every row should include: storyId, userId, numericalId and preferenceValue	Pass
UN4.2	Compute preference value of a story for a user	Random userId , specific 'DF.1098'	Should return an array with userId, storyId, numericalId and the preference value	Pass
UN4.3	Compute preference value	Specific storyId	Should return the preference value which is the type double	Pass
Unit 5: Run Recommender				
UN5.1	Run recommender	Random userId		Pass
Unit 6: Recommendation				
UN6.1	New content based recommendation			Pass
UN6.2	Add content based recommendation			Pass
UN6.3				Pass
Unit 6: Database connection with Java				
UN6.3				Pass
UN6.3				Pass
UN6.3				Pass
Unit 7: Log in				
UN7.1	- Log in with an already existing user - Check if response is correct	existinguser@mail.no	The user should get access and be directed to the recommendation view(main view)	Pass

UN7.2	Log in with a non-existing user - Check if response is correct	“newemail@gmail.com”	The user should get access and be directed to the setup view.	Pass
UN7.3	Login a user with the wrong email format - Check if response message is correct	“newemail”	The user should not get access and get a textual response from the system that the format of the input is wrong.	Pass

## Unit 8: Story View

UN8.1	If story contains sound clip or video, check if these are presented properly	- story with video -story with sound clip	Should show the presence sound clip and video in the tabs. Should be able to handle the different video types, and be able to play them.	Pass
UN8.2	Give a rating - Check if the stars change color and response message are visible to the user.		Stars should change color when user performs rating, and the user should get a response message from the system which says that this story has been rated.	Pass
UN8.3	Give the story a new bookmark with a name -add this -Check if response message is visible to the user	“new bookmark”	When a new bookmark is made and the story is stored here, the user should get response message about this.	Pass

## Unit 9: Update profile

UN9.1	Update profile with the wrong email format	updateemail	The user should get a response message from the system that the input was not valid and that the user should try again.	Pass
UN9.2	Update profile with a email that already exists in the system	“alreadyexistingemail@email.com”	The user should get a response message from the system that the input was not valid and that the user should try again.	Pass
UN9.3				Pass

**Issues detected****Summary**

## 9.2 Integration test

Integration testing is usually executed after unit testing and before system testing. This test was performed after every individual component was tested and integrated with the rest of the system. This is to ensure that the different modules of the system were communicating correctly and that data was moving properly from one module to another.

**How to perform the integration test** The testing was performed at modules as soon as they were developed and completed, a so-called incremental testing. This approach made it easier to detect issues in the code early and therefore avoid issues to come up at a later stage in the development process - which could be cost-ineffective. Because of the time limitations and the difficulty with learning a new interface to perform integration testing, the developers decided to perform the integration testing with unit test cases. The unit testing framework was already known to the developers and therefore easier and less time consuming to use. It was possible to run unit tests across the modules and get the wanted results.

**Test cases** The test cases were made by first having a closer look at the different modules and the data flows between them. The modules in question are shown in **Fig ??** of the architecture. for this project. The modules that the integration testing was performed on were front end(User Interface), back end with a general processing module and a personalization module, and the database. Because of the personalization module of our system is considered to be a crucial one, the most important data flows was the users input in the form of preferences and ratings. Also the communication with the database was crucial because the users information about ratings and preferences should be stored properly to get a beneficial recommendation. The test cases are described in **Table 9.4**.

**Table 9.4:** Integration Test Cases

Test case ID	Description	Input data	Expected results	Result

I.1	Simulate a http request which will log in a user for the first time with an email address. Call getUserFromEmail to the database.	email: 'testnr16@example.com', requestType: addUser	The http request should return a successfull message included the newly created userId. The database function should return a row with the userId, mail, age_group, gender and use_of_location.	Pass
I.2	Simulate a http request which will log in a user for the first time without an email address. /newline Call getUserFromId to the database	email:null, request type:addUser	The http request should return a successful message included the newly created userId. The database function should return the.usermodel containing userId, mail, age_group, gender and user_of_location.	Pass
I.3	Simulate a http request which will update a users profile. Call getUserFromId to the database. Check if the updates where correct	email: 'test-Mail23@example.com', request type: updateUser,	The http request should return a successfull message. The database function should return a.usermodel where the email match the input.	Pass
I.4	Simulate a http request that will create a new test user without an email. Simulate another http request which will update email to this test user, with an email that already exists in the system. Call the getUserFromId function to the database. Check if the user is not updated	email: 'test-Mail23@example.com', request type: updateUser,	The http request should return a failure message. The database function should return an.usermodel where the email is null.	Pass

I.5	<p>Simulate a http request that will create a new test user without an email,</p> <p>Simulate another http request which will update email to this test user</p> <p>Call the getUserFromId function to the database.</p> <p>Check if the user is updated</p>		<p>The http request should return a successfull message. The database function should return an.usermodel where the email matches the input.</p>	Pass
I.6	<p>Simulate a http request that will create a new test user with an email</p> <p>Simulate another http request that will return the user model from the users email</p> <p>Check if the returned data has all attributes required, and that the data match with the input data</p>	email: 'getUserFromEmail-Test@example.com' request type: addUser/getUserFromEmail	<p>The http request should return a.usermodel with the attributes 'userId, email, age_group, gender, use_of_location and with the data which match the input data.</p>	Pass
I.7	<p>Simulate a http request that will create a new test user without an email</p> <p>Simulate another http request that will return the user model from the users id</p> <p>Check if the returned data has all attributes required, and that the data match with the input data</p>	email: null, request type: addUser/getUserFromUserId	<p>The http request should return a.usermodel with the attributes 'userId, email, age_group, gender, use_of_location and with the data which match the input data.</p>	Pass

I.8	<p>Simulate a http request that will create a new test user without an email.</p> <p>Call the getNumberOfRatings-DoneByThisUser to the database</p> <p>Simulate another http request which will connect a rating to a story for this user.</p> <p>Call the getNumberOfRatings-DoneByThisUser to the database again</p> <p>Check if another rating is registered</p>	email: null, request type: rating, storyId: 'DF.52201, random userId	The http request should return a.usermodel with the attributes userId, email, age_group, gender, use_of_location and with the data which match the input data.	Pass
I.9	<p>Simulate a http request that will create a new test user without an email.</p> <p>Simulate another http request where the user rejects a story.</p> <p>Check if the rejection is stored</p>	email: null, request type: re- jectStory		Pass
I.10	<p>Simulate a http request that will create a new test user without an email.</p> <p>Simulate a http request that will create a new tag for this user</p> <p>Simulate a http request that will return the list of tags for this user</p> <p>Check if the new tag has been added</p>	request type: ad- dUser/addNewTag/ tagName: 'new- Tag1'	The returned list should only in- clude the one tag that where cre- ated.	Pass

I.11	<p>Simulate a http request that will create a new test user without an email.</p> <p>Simulate a http request that will create a new tag for this user</p> <p>Simulate a http request that will return the list of stories contained in this taglist</p> <p>Check if the new tag has been added</p>	<p>request type: addUser, tagStory, getList</p> <p>tagName: 'new-Tag1',</p> <p>storyId: 'DF.5223'</p>	<p>The returned list should have the recently added story in the top of the list. The list should have the following attributes connected to every story: id, title, description, false_recommend, explanation, picture, thumbnail, categories, mediaType, author, date</p>	Pass
I.11	<p>Simulate a http request that will create a new tag for a user.</p> <p>Simulate a http request that will return all the tags connected to this user</p> <p>Check if the tag was stored</p> <p>Simulate a http request that will remove the new tag that were created earlier</p> <p>Simulate another http request that will return all the tags connected to this user</p> <p>Check if the new tag has been removed</p>	<p>Specified userId: 105,</p> <p>request type: addnewTag, getAllLists, removeTag,</p> <p>tagName: 'tagToBeRemoved',</p> <p>storyId: 'DF.6081'</p>	<p>The returned list should have the recently added story in the top of the list. The list should have the following attributes connected to every story: id, title, description, false_recommend, explanation, picture, thumbnail, categories, mediaType, author, date</p>	Pass
I.12	Simulate a http request that will return the list connected to a tag for an user	Specified userId: 105, request type: getList, tagName: 'Les senere'	Should return a list of the stories connected to this tag. The stories should have the following attributes: id, title, description, false_recommend, explanation, picture, thumbnail, categories, mediaType, author, date	Pass
I.13	Simulate a http request that will return all the tags connected to a user	Specified userId: 105, request type: getList, tagName: 'Les senere'	Should return a list of the tags. The tags should have the attributes text and checked.	Pass

## Issues detected

### Summary

## 9.3 System testing

The system testing is executed after the unit test and integration tests. It was to give developers a measure of whether the system met all the goals set for the project. The system test included performing a black box testing of the system, where the test cases were based on the use cases(Section ??) and the specified requirements(Section ??) defined earlier in this report.

**Required before performing the system tests** The unit tests and integration test were required to be executed and approved before the system test could be executed. To execute the tester also needed the final product in the way it was intended to the end users. Therefore the application in question should be accessible on a mobile device before performing the test.

**The main areas to be tested** The test cases were to cover all the use cases and requirements specified for this project. The main areas are as follows:

- Create user
- Log in
- Set initial settings
- Browse recommended stories
- Add stories to collection
- Rate story
- Specify settings

**How are the test performed?** In this test one of the developers were executing the test. Because it is a black box test, the tester would do the test cases with no access to the code. the tester went through all of the test cases one by one and performed the test cases manually. Due to the time limits of this project the team were not able to write scripts to perform the test cases.

**After the tests** After the system test suit is performed and the results are documented, the testers should mend the issues in the system if they appeared during the test. After the mending the test suit was executed again. This cycle was repeated until there was no issues left in the system and all test cases got the expected result.

When the system test is performed and finished, the testers evaluated the tests results and then decided if the system as a whole fulfilled all goals for the project.(See **Section ??**). The test results should, if done in the expected manner, help the developers of this project to verify and validate if the application meets all the requirements.

**Test cases** Each test case has a test identifier and an approach for the tester, and a description of what was intended to happen when the test case was performed. The tester will be referred to as “the user”. Some of the test cases have a dependability of other tests. If an issue is detected in one test case, it might cause issues in its dependent test cases. table **Table ??** and **Table ??** are presenting two of the test cases that were used. The whole test case document are in Appendix C in tables C1.-C.9.

### Issues detected

### Summary

## 9.4 Customer acceptance test

Customer acceptance test (CAT) will be executed during the whole software development life cycle. After a sprint, the customer will test the product, evaluate and bring feedback. In the early stages of the project process this contains testing of the prototypes. When working software is delivered to the customer after a sprint, the customer use their own real input data to test the behaviour of the system. This kind of testing might reveal a different result than from a regular unit or system testing, when the data could be more realistic when the customer defines it. The customer brings feedback either in meetings or through email. The planned delivery dates are presented in **Section ??** Project milestone plan.

**Table 9.5:** Customer Acceptance Test

<b>Delivery</b>	First paper prototype
<b>Date</b>	20.02.15
<b>Comments</b>	Intuitive interface. The selection of categories is good and fast. Category icon in the listview looks very good.

<b>Issues</b>	<ul style="list-style-type: none"> <li>• It should have a description of why the user have to sign in by email and give the user the option to choose age group and gender,</li> <li>• The customer thinks it is easier to click something than to drag a icon from one place to another.</li> <li>• The customer prefer one story per view when the user browse recommended stories, the swiping from one story to another should be explained.</li> <li>• Customer want a to-be-rated list and a to-read list. To have a trash is confusing. It is okay to not prioritize the notifications in the app.</li> </ul>
---------------	--

**Table 9.6:** Customer Acceptance Test

<b>Delivery</b>	Second prototype presented in prototyping tool
<b>Date</b>	27.02.15
<b>Comments</b>	The customer is overall pleased with the prototype, but they have some constructive comments. There are some confusing icons, some lack of consistent terminology, missing introduction for the app, suggestions for other text for buttons and headlines.
<b>Issues</b>	<ul style="list-style-type: none"> <li>• Overlap between not interested and one star. Remove the not interested.</li> <li>• The author of a story expects that the story is presented the way he/her made it. It would be more correct to have the elements of the story together, in accordance with the authors intention. The elements of every story is now separated with the tabs in the storyview.</li> </ul>

<b>Suggestions</b>	<ul style="list-style-type: none"> <li>• Have a number connected to the rating stars.</li> <li>• It is interesting for the customer to know if the user prefer picture, video or sound. The system should log this for every user.</li> <li>• It is important to collect the information about the user of the system(age, gender, preferences), want to make it hard for the user to skip this step. Profile information such as age and gender can not be changed after the specification is once set by the user.</li> <li>• Have a little text that appear when you hover the category icons, or apply a function where you can press a button and reveal the descriptions of the categories.</li> <li>• Have the option to share the saved stories on social media. The customer have given this a low priority.</li> </ul>
--------------------	--

**Table 9.7:** Customer Acceptance Test

<b>Delivery</b>	First working software
<b>Date</b>	17.03.15
<b>Comments</b>	The customer likes the user interface of this version and says that it is not necessary to add more functionality, except for the concept view that are not yet implemented. The customer thinks that fetching the stories from Digitalt Fortalt is working fast enough.
<b>Issues</b>	<ul style="list-style-type: none"> <li>• Missing a concept description for the application</li> <li>• There are some stories that do not have categories connected to them.</li> <li>• These stories should be included in the collaborative filtering.</li> </ul>

**Table 9.8:** Customer Acceptance Test

<b>Delivery</b>	Second working software
-----------------	-------------------------

<b>Date</b>	20.04.15
<b>Comments</b>	The customer is satisfied with the appearance and structure in the story view.
<b>Issues</b>	<ul style="list-style-type: none"> <li>• There are only 3 stories in the recommendation view When you choose interests in the setup of the application - the interests are not marked when you click on them.</li> <li>• When choosing a gender in the setup of the application, the selection is not stored in the settings view The customer discovered some stories have mismatched icons connected to them.</li> <li>• Stories that include a sound clip, does not view this immediately. The sound clip is located inside a tab, and the user would have to click on this will reveal it.</li> <li>• Some stories include video clips that are not playing.</li> <li>• A user have to sign in every time to visit the app, the user is not remembered.</li> <li>• A story that are read are not automatically stored in the ‘Read List’ .</li> <li>• Uncertain about the cross in the corner of a story in ‘recommended stories view’. The use of this button could mean two things. Either that the user is not interested in this story, or that the user have read this story and just want to close it for now.</li> <li>• The application does not at any time give the user new recommended stories. Missing some kind of feedback when a user has changed the interests in settings. The system should let the user know that it is trying to get new recommended stories based on the new interests.</li> <li>• Some stories do not have a picture attached to it. The customer is suggesting a default picture for these stories.</li> </ul>

**Table 9.9:** Customer Acceptance Test

<b>Delivery</b>	Final product
<b>Date</b>	01.05.15
<b>Comments</b>	
<b>Issues</b>	

## 9.5 Usability testing

The user testing was performed by the front end developers. The preliminary work for the user test also included doing an analysis of the requirements, and used these as a base for making a list of scenarios. The scenarios set the grounds for the test cases. IEEE standard 610 defines a test case as; “A set of test inputs, execution conditions, and expected results developed for a particular objective, such as to exercise a particular program path or to verify compliance with a specific requirement.” [KF1] The test case included several test steps that the user followed, and the testers observed how the user reacted in every test case. After each test finished there was a discussion with follow-up questions the user had to answer to get a better insight into what was problematic and what was easily understandable. For further information on this see the framework for the usability testing in Appendix XX(Usability test template).

# Chapter 10

## Evaluation

**10.1 Product quality**

**10.2 Development process**

**10.3 Project management**

**10.4 Team**

**10.5 Customer interaction**



Chapter **11**

## Conclusion and future outlook



# Chapter 12

## Bibliography

- [es20] <http://www.ntnu.edu/studies/courses/IT2901#tab=omEmnet> (30.01.2014)
- [es21] <http://www.tagcloudproject.eu/>
- [es19] <http://digitaltfortalt.no/>
- [RA1] <http://ionicframework.com/blog/where-does-the-ionic-framework-fit-in/>
- [RA2] <http://phonegap.com/about/faq/>
- [RA3] <http://forumone.com/insights/what-titanium-appcelerator-really-and-how-it-works/>
- [RA4] <http://www.sencha.com/products/touch/features/>
- [AS3] <http://www.nngroup.com/articles/ten-usability-heuristics/> (11.03.2015)
- [AS4] <http://www.tagcloudproject.eu/?p=1390>
- [AS5] <http://www.tate.org.uk/context-comment/apps/magic-tate-ball>
- [es16] [es17] [es18] Sommerville, Software Engineering, 9th ed.
- [AS1] Sommerville, Software Engineering, 9th ed. 106-107, 124-125.
- [AS2] Elmasri, Ramez & Shamkant B. Navathe, Database Systems: Models, languages, design, and application programming 6th ed..270-278, 487-497
- [es1] <http://ionicframework.com/>
- [es2] <https://proto.io/>
- [es3] <https://balsamiq.com/>
- [es4] <https://icomoon.io/>
- [es5] <http://fontforge.sourceforge.net/>
- [es8] <http://www.mysql.com/>
- [es9] <http://api.digitaltmuseum.no/>
- [es10] <https://www.google.com/drive/>
- [es11] <https://www.dropbox.com/>
- [es12] <https://github.com/>
- [es13] <https://www.facebook.com/>
- [es14] <https://www.draw.io/>
- [es15] <https://trello.com/>
- [es22] <http://developer.android.com/tools/studio/index.html>
- [es23] <https://nodejs.org/>
- [es24] <https://github.com/gulpjs/gulp/tree/master/docs>

## Chapter 12. Bibliography

---

- [es25] <http://sass-lang.com/>
- [AS6] Sommerville, Software Engineering, 9th ed., 652-654
- [EHW1] TAG CLOUD dokument
- [EHW2] <https://www.docker.com/>
- [HM1] <http://api.digitalmuseum.no>
- [HM2] <http://digitaltfortalt.no/info/about>
- [HM3] <http://data.norge.no/data/norsk-kulturr%C3%A5d/norvegiana-api>
- [HM4] <http://www.inf.unibz.it/ricci/papers/intro-rec-sys-handbook.pdf>
- [HM5] <http://www.prem-melville.com/publications/recommender-systems-eml2010.pdf>
- [HM6] <http://files.grouplens.org/papers/FnT%20CF%20Recsys%20Survey.pdf>
- [HM7] <http://www.apache.org/licenses/LICENSE-2.0>
- RG1 <http://www.gantt-chart.com/>
- [KF1] 2003. “What is a good test case?” : Cem Kaner, J.D., Ph.D, Florida Institute of Technology. Department of Computer Sciences
- [KF2] phpunit framweork : <https://phpunit.de/> (18.03.2015)
- [KF3] <http://karma-runner.github.io/0.12/index.html> (18.03.2015)
- [KF4] <https://proto.io/> (18.03.2015)

# Bibliography

- [1] Ian Sommerville. *Software Engineering*. Pearson, 9th edition.



---

# Appendix

## 12.1 Appendix A: Functional requirements

**Table 12.1:** The functional requirements listed up and prioritized by the customers wishes

ID	Name	Description	Priority	Use Case Ref.	Comments
General					
R1	Language	The documentation should be written in english. The application will be written in norwegian and the stories from Digitalt fortalt will appear as they are, most of them in norwegian.	H		
R2	Cross-platform design	The application should run on both Android and iOS.	H		
R3	Cross-platform design	The application design should appear similar on both Android and iOS.	H		
Sign up /Sign in view					
R4	User recovery	The application should provide the opportunity for the user to enter email address, which then becomes the user identifier in the system from the user's point of view.	H	U1,U2	This means that the user can access the profile from different devices.

R5	Anonymous sign in	The application should provide the option to enter the application without registering a user by mail address.	H	U1	Device remembers user. User got id in database, but not mail
R6	Demo view	It should be possible to run the application mode in a demo view where the system can't identify the user	L		
R7	Personal info	The application should obtain some personal info about the user, such as age group and gender.	H	U3	Only for research purposes

#### Preferences/Settings

R8	Initial specification of preferences	The user should be asked to set preferences in the startup process. Preferences include: (a) selection of categories (b) permission to use location, (c) notifications preferences.	M	U3	a) is the most important preference, b) and c) are low prioritized
R9	Changing preferences	The application should provide a settings view where the user can change the preferences.	H	U9	

#### Preferences/Settings

---

R10	Show list of recommended stories	The application should provide the user with a list of recommended stories based on the set preferences. The stories is presented by a picture and a short text harvested from Digitalt fortalt.	H	U4	
R11	Recommend story outside user's preferences	The application should once in a while recommend a story outside the user comfort zone, i.e. a story that the recommender algorithm does not pick out.	M		Purpose: To broaden the user's horizon. The purpose is not to test the algorithm
R12	Make decision about story	The application should provide the user with three options regarding each recommended story: to choose to read the story now, to reject the story or to save the story for later	H	U4	

#### Preferences/Settings

R13	Present story	The application should present the chosen story in a specific story view. The presentation of the story should be in accordance with the presentation on Digitalt fortalt.	H	U6	
R14	Give feedback/rating on story	The application should provide the user with the opportunity to rate the story. The rating is in the form of a star system with 5 stars.	H	U7	

---

R15	Tag story	The user should be given the opportunity to connect a story to tags. The tags could be predefined by the system, like "Favorites" or defined by the user	M	U5	
R16	Link to Digitalt fortalt	Every story should include a link to the corresponding story on Digitalt fortalt.	H		
R17	Explain why a story was recommended	The application should provide an explanation why a given story was recommended.	H		Could just be a general statement like: "Other users who liked similar stories to you, also liked this one"
Preferences/Settings					
R18	Show list	The application should show a list of collected stories. The stories is presented by a picture and a short text.	M	U8	
R19	Filter list	The application should provide the user with the opportunity to filter the list. Filters include: favorites, user-defined tags, to-read, reviewed.	M	U8	
Notifications					
R20	Notifications outside the application	The application should send a notification to the user's device at the time specified in the preferences	L		

R21	Notifications inside the application	The application should create a notification after a defined amount time to remind the user of stories that have been read but not rated	L		
About app					
R22	About site information	The application should include an about app, which should include basic info about the project. This include references to TAG-CLOUD.	H	U10	
Help site					
R23	Help site information	The application should include some service to the user. This will include:  (a) A quick tour when user opens app for the first time  (b) A help site located in the menu, which should explain the user interface and courses of action.	M		a) has high priority, b) has low priority
Personalization					
R24	Use content-based filtering	The application should use content-based filtering to recommend stories to user initially. This should in particular be based on category preferences.	H		Implement this before R25.

---

R25	Use collaborative filtering	The application should collaborative filtering to recommend stories when the user base is large enough for the algorithm to be effective.	H		
Research					
R26	Gather data to SINTEF for research	The application should gather and store in a file information about the use. This include frequency of use, success rate of recommendations and perhaps other things.			Log files are sufficient

---

## 12.2 Appendix B: Status report example

### 12.2.1 Status report example

Status report week 6

#### **Introduction**

This week has mostly been spent organising and making decisions that will impact the whole project.

#### **Progress summary**

The decisions that have been made will decide how the work is distributed in the coming weeks. Work has been made on defining goals and milestones. Furthermore, some of the tools to complete the given tasks have been found.

#### **Open / closed problems**

Closed problems:

- A cross-platform framework have been chosen.
- A rough estimate of what needs doing, how long it will take and when it is due has been performed in the form of a product backlog.
- A list of functional requirements have been compiled after a discussion with the customer. Use case diagrams and scenarios have been made.
- Justification on some of the choices made so far have been written for the report:
  - Scrum
  - Framework
- Complete a WBS chart.
- A rules of engagement have been signed, this helps solidify what is expected of every member in the group.

#### **Open problems:**

No specific ongoing problem at the end of this week.

Choosing a cross-platform framework was a difficult process for various reasons. There is not much experience in the group using such tools. Additionally there was an internal debate about what is expected from the customer and what does the team expect the end product to look like. This was discussed in light of the the constraints imposed from various aspects. However, the team members now feel confident that an appropriate tool have been chosen and are aware of some limitations this leads to.

---

Understanding properly what the customer wants and prioritizes has also been a focus this week. While this sounds easy enough, the technical details are often lost in communication. This is something that will require constant feedback and monitoring so that the project stays on track in regards to what is desired by the customer.

### **Planned work for next period**

- Familiarization with the chosen framework.
- Familiarization with digitalfortalt.no API.
- Creating a design prototype is a goal, this will unify the group and make sure all members are working towards the same goal. Furthermore, this will explore what options there are and highlight any basic flaws in design.

---

## 12.3 Appendix C: System test cases

<b>Test ID</b>	T1
<b>Test Item</b>	Create recoverable profile
<b>Approach</b>	The user locate and press the “register user” button in the app. Applies the email in the correct format.. The response is valid and the user gets feedback.
<b>Input data</b>	“newuser@example.com”
<b>Expected results</b>	The user writes the correct email address and get the correct feedback from the system: ”Kontakter server” and will be directed to the startup page.
<b>Testing task</b>	<ol style="list-style-type: none"><li>1. Click “create user”-button.</li><li>2. Apply email address to the email input field</li><li>3. Receive feedback feedback from the system</li><li>4. Check email inbox to se if the correct mail from the system was received</li></ol>
<b>Any dependability between this and other tests</b>	NaN
<b>Pass/Fail</b>	Passed

**Table 12.2:** System test case for creating a recoverable profile.

<b>Test ID</b>	T2
<b>Test Item</b>	Log in with email registration
<b>Approach</b>	The user locate the login-button and applies the registered email and obtain access to the system and the profile connected to this email address .
<b>Input data</b>	valid email: "user@example.com", example invalid email: "mail@example"
<b>Expected results</b>	<ul style="list-style-type: none"> <li>• The first time the user have logged in System Response: Choose preferences-view should appear.</li> <li>• The user have done this process before System Response: "Vennligst vent mens vi finner historier vi tror du vil like" and direct the user to the view with the recommended stories.</li> <li>• The user types an email with wrong email format System Response: "Ikke en gyldig adresse"</li> </ul>
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Navigate to the login view</li> <li>2. Apply email address to the email input field</li> <li>3. Receive response from system</li> </ol>
<b>Any dependency between this and other tests</b>	T1
<b>Pass/Fail</b>	Passed

**Table 12.3:** System test case for login with email registration

<b>Test ID</b>	T3
<b>Test Item</b>	Set initial settings
<b>Approach</b>	The user is logged in to the system for the first time. The user will choose age group and gender in the initial settings that will appear the first time the user is logged on to the system. After this the user will be asked to choose cultural category preferences.
<b>Item pass/Fail criteria</b>	
<b>Input data</b>	User action: click the buttons for the age group, gender and interests, and next buttons
<b>Expected results</b>	The user will click the buttons for age group, gender, and interests. The buttons will change color when clicked on. The user navigates to next view by clicking the next button and will obtain access to the system. If the user does not select interests the user will get a response from the system that it is necessary.
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Start app</li> <li>2. Click the correct age group and gender.</li> <li>3. Navigate to the next page</li> <li>4. Navigate to the next page without selecting interests</li> <li>5. Receive feedback from system</li> <li>6. Select two interests</li> <li>7. Navigate to the next page</li> </ol>
<b>Any dependency between this and other tests</b>	NaN
<b>Pass/Fail</b>	Passed

**Table 12.4:** System test case of performing the initial settings

<b>Test ID</b>	T4
<b>Test Item</b>	Browse recommended stories
<b>Approach</b>	The user is shown a list of recommended stories. The user will click on the first story. The story will be viewed and the user closes it.
<b>Item pass/Fail criteria</b>	
<b>Input data</b>	User action: click arrow
<b>Expected results</b>	The view should show a list with recommended stories. The view of the stories will include a title, story picture or default picture, an introduction, category icons, media icons and a explanation of why this story is recommended to the user. The view should show 10 more recommendations when the user have browses through the 10 first stories in the list. When the user clicks a story the full story should appear in a full screen, including text and potential pictures, videos and sound clips.
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Click on a recommended story</li> <li>2. Locate back-button and close the story</li> <li>3. Click on the next recommended story</li> <li>4. Navigate</li> </ol>
<b>Any dependency between this and other tests</b>	T1,T2
<b>Pass/Fail</b>	Passed

**Table 12.5**

<b>Test ID</b>	T5
<b>Test Item</b>	Add story to list
<b>Approach</b>	The user navigate to a story and gives the story a rating. The user clicks the bookmark button in the story, and gives a name to a new collection of stories.
<b>Input data</b>	User action: Click on a star, Give name to a new collection of stories: ex. "My Favorite Stories"
<b>Expected results</b>	The story that was rated with stars are automatically put in the "read" collection. The story should be stored in the new collection of "My Favorite Stories" and the user have access to this by navigating to the menu, and then to "Bokmerker".
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Click on a story in the recommendation view</li> <li>2. Click on the star icon to in the right upper corner</li> <li>3. Click on one of the stars in the rating view to give rate.</li> <li>4. Click out from the view.</li> <li>5. Click the bookmark button in the story</li> <li>6. Click the plus icon</li> <li>7. Type in a "My Favorite Stories" and click out of the view.</li> <li>8. Navigate to the collections via the menu</li> <li>9. Click on "My Favorite Stories"</li> <li>10. Click on the first story in the collection</li> <li>11. Navigates to the "read" collection</li> <li>12. Click on the first story in the collection</li> </ol>
<b>Any dependency between this and other tests</b>	NaN
<b>Pass/Fail</b>	Passed

**Table 12.6**

---

<b>Test ID</b>	T6
<b>Test Item</b>	Give a rating
<b>Approach</b>	The user gives a story a rating by clicking the stars. The user goes to collections and checks if the story was stored in the “read” list
<b>Input data</b>	User action: clicks on story, navigated to rating view, clicks on a star.
<b>Expected results</b>	The star buttons that were pressed will change color. The system should store the rating for that story. The next time the user clicks on this story - the yellow stars will show the users rating.
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Click on a story in the recommendation view</li> <li>2. Click on the star icon to in the right upper corner</li> <li>3. Click on one of the stars in the rating view to give rate.</li> <li>4. Click out from the view.</li> <li>5. Click on the star icon again</li> <li>6. Close rating view</li> </ol>
<b>Any dependency between this and other tests</b>	T1,T2
<b>Pass/Fail</b>	Passed

**Table 12.7:** System test case for giving rating

---

<b>Test ID</b>	T7
<b>Test Item</b>	Specify settings
<b>Approach</b>	The user navigates to Settings via the sidebar menu. The user then adds preferences and change the permission to use location.
<b>Input data</b>	User action: click the buttons for the age group, gender and interests.
<b>Expected results</b>	The user will click the buttons for age group, gender, and interests. The buttons will change color when clicked on. The user navigates to next view by clicking the next button and the system will give the response: "Vennligst vent mens vi finner historier vi tror du vil like". The system saves the users preferences and updates the recommended stories list. The list of stories should now be updated.
<b>Testing task</b>	<ol style="list-style-type: none"> <li>1. Navigate to settings</li> <li>2. Navigate to preferences</li> <li>3. Add another preferences</li> <li>4. Check the recommended stories list to see if it is updated</li> </ol>
<b>Any dependability between this and other tests</b>	NaN
<b>Pass/Fail</b>	Passed

**Table 12.8**

