



Magnesium und Diabetes: Wie passt das zusammen?



Wanderer rief nach seinem Kind. Eine seltsame Antwo...



Neue nahtlose Socken verbessern die Durchblutu...



Neu 2021: Diese revolutionäre Klimaanlage...

2021-07-11 rv1126 sdk compilation package correction



Wow: "Bauer sucht Frau"-Star Iris Abel ist kaum...



Dieses einfache Mittel bekämpft Tinnitus - Vid...

Technical Label: Notes

1/env shell After setting, you need to modify the platform name to rv11xx, otherwise the compilation will not pass, and the corresponding platform will not be found.

```
1 直接修改dts文件，将rv11xx 修改成rv1126或者跟env运行后生成的名称一致就ok
2
3 说明：export RK_KERNEL_DTS=rv11xx-owl-38ipc-v10-imx307
4 不需要修改这里，直接在dts 目录添加一个自定义文档或者修改原有文档，并将里面的平台名称改成一致，即可生成对应的dtb
```

2/ Modify the serial port baud rate


http://www.qishunwang.net/news_show_39057.aspx? ivk_sa=1024320u Original text

After decompressing the SDK, if you don't make modifications and compile it directly, the debugging serial port baud rate of the firmware will be set to 150,000, and now modify the SDK to 115200.

```
1 1. 修改DDR初始化和SPL初始化波特率
2 修改rkbin/bin/rv11/rv1126_ddr_924MHz_v1.04.bin(也可能是其他bin, 要看配置文件用的哪个), 需要修改/rkbin/tools/ddr
3 2. 修改buildroot部分
4 buildroot/configs/rockchip/rv1126_rv1109_arm.config, 找到1500000参数, 改为115200.
5 3. 修改uboot部分参数
6 把u-boot/configs/rv1126_defconfig中的1500000改为115200
7 把u-boot/arch/arm/dts/rv1126.dtsi中的串口参数部分的1500000改为115200
8 4. 修改linux部分
9 找到linux/arch/arm/boot/dts/rv1126.dtsi文件中的串口参数, 修改1500000为115200
10 5. 修改spl文件
11 当编译完成u-boot后, 在u-boot/spl目录下将生成rv1126_spl_v1.05.bin, 替换/rkbin/bin/rv11/rv1126_spl_v1.05.bin文件
```

Copyright Statement: This article is an original article of weixin_44148981, which follows the CC 4.0 BY-SA Copyright Agreement. Please attach the link to the original source and this statement when reprinting.

Link to this article: https://blog.csdn.net/weixin_44148981/article/details/118649845

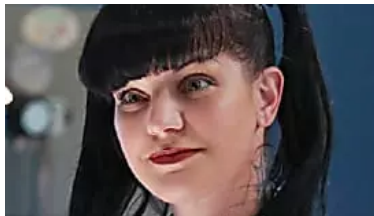

Pauley Perrette ist 51 und so sieht sie heute aus

FinancialAdvisorHeroes

Sponsored Links by Taboola

Intelligent recommendation

2.2 Request and Response

request value Get the value of the control with the same name request.getParameters("the name of the control") Get the name of all controls Get multiple data with the same name in the form New JavaBean inde x.jsp FirstServlet: Java calls set and get by PropertyDescriptor reflection...

Write first, then typesetting

Note: Before reading this article, please make sure that you have at least read the article "Good Neighborly ConTeXt Standalone". Write first, then typesetting. In other words, the content is important, and the typesetting is second. This truth goes without saying much, which is especially important when using ConTeXt to type your personal documents. Because you need to write documents in ConTeXt first, and then typeset documents in ConTeXt. That is to say, you need to divide all the macros of ConTeXt into two categories, one for writing documents and the other for document typesetting. Writing with subject...

Java implements HTML page to PDF solution

Recently, I encountered a very embarrassing thing at work. To convert HTML pages into PDF or tiff pictures and other forms, tiff is still confused at present. If you have a real and feasible idea (don't copy it from others, the quality of Baidu's recent search has seriously damaged my confidence in domestic products), I hope I can tell me. Thank you in advance. Get back to business. So, I made the form of converting HTML into PDF. At present, it can perfectly support one-to-one conversion. Here's my solution. First of all, of course, it is to find the perfect component that can parse PDF, Baidu and...

Output two small 99, up and down,

...

Python built-in module-random

random.random() Returns a random float number of 0-1 random.randrant(0, 5) Returns a random number between 0-5, including 0 and 5 random.randrange(0, 5) Returns a Random number between 0-5, excluding 5 random.randrange(0, 6, 2) Returns a random even number between 0-5, excluding 6 random.choice()&nb...

Guess you like it.

Adapter mode

2019 Unicorn Enterprise Heavy Money Recruitment Python Engineer Standard >>> 1. Expected Interface 2. Existing Interface 3. Adapter 4. Main Program 5. Running Results Reprinted at: <https://my.oschina.net/hhdys412/b Log/686934...>

Mysql constraints and modify data tables

constraint type Include; NOT NULL(non-empty constraint) PRIMARY KEY(primary key constraint, only one) UNIQUE KEY(unique constraint, can have multiple) DEFAULT(default constraint) FOREIGN KEY(outside Key constraint) where the foreign key column and reference must have a similar data type, where the number length or whether there is a symbol bit must be the same, and the character length can be different. -----CASCADE is the parent table ...

JavaSE Checking for Missing (III)

JavaSE checking for gaps (3) I. Code execution order static code block, executed when the class loads (executed from top to bottom) Instance code block, executed before constructing the method (executed from top to bottom) The result is that it should be axyczb II. This is a variable, a reference that keeps the memory address of the current object stored in the heap memory, the interior of the object can only appear in the instance method, because it is object-related. It cannot be omitted when distinguishing instance variables from local variables: For example: other constructors can also be called in the constructor or method (can only appear in the ...

[LeetCode] Intersection of two arrays

The intersection of two arrays 349. Intersection of two arrays 1 Difficulty: Easy Title Description: Given two arrays, write a function to calculate their intersection. Example 1: Input: nums1 = [1,2,2,1], nums2 = [2,2] Output: [2] Example 2: Input: nums1 = [4,9,5], nums2 = [9,4,9,8,4] Output: [9,4] Description: Each element in the output result must be unique. We can ignore the order of output results. ...

Webservice XML entity injection vulnerability solution

Vulnerability Description The target has a webservice XML entity injection vulnerability. XML is an extensible markup language, a subset of the standard universal markup language, which is a markup language used to mark electronic files to make them structural. An XML document structure includes an XML declaration, a DTD document type definition (optional), and a document element. When it is allowed to refer to external entities, by constructing malicious content, it can lead to reading any files, executing system commands, detecting intranet ports, attacking intranet websites and other hazards. Solution (1) Close the external entity of the XML parsing function. In generating xml...

Related articles

- rv1126 Firmware Compilation Rules
- 2021-06-31 rockchip rv1126 Compilation instruction s
- Basic Analysis of SDK Code by Ruixin Micro rv1126 - Flow::StartStream() Analysis
- Ruixin Micro rv1126 SDK code basic analysis -- Flow::StartStream() analysis (2)
- Basic Analysis of Ruixin Micro rv1126 SDK Code--rk media Framework Analysis
- RV1126 Notes
- rv1126 camera debugging common commands
- rv1126 Debain rknnlite pyinstaller packaging tutorial
- rv1126 View the frequency of npu and cpu
- [RV1109/RV1126 Series]-1. Install and deploy RKNN _ToolKit for algorithm NPU porting



Döner meets Lunch-Break: Die besten Tipps und schnelle Hilfe...

Bravo.de

Sponsored Links by Taboola

Popular articles

- [Python] Find the longest public prefix of multiple strings
- Golang Learning Notes 3 - Constants and Operators
- Arrays class
- Python Learning Essay III: Judging Branches and Loop Statements
- Java Programming Thought Reading Notes-Universal (4)
- linux swapper_pg_dir
- firewalls open port
- Flask Learning Summary 1
- Sequential table examples
- Security HTTP request header content



Fischer taten das Udenkbare, als sie ein von seiner Mutter verlassen...

Daillybreak



Dieser Hund wurde geschlagen und misshandelt. Kann sein Zufluchtso...

Recommended articles

- Unity ToggleGroup Gets the selected toggle
- (Single stack + line segment tree) 2478 small b water connection
- Record and restore the location of ListView scrolling
- Problem code caused by ignoring the length range of numeric types
- Source code compilation OpenWRT
- Li Hongyi Machine Learning-task3
- Android Custom Dialog has black edges in four corners, solution?
- Vuex Detailed explanation Quick understanding and getting started
- Java-Anonymous Object
- vsCode Set vue Save automatic formatting code



Erinnert ihr euch noch an Nastassja Kinski? So sieht sie mit 60 aus

HashtagChatter

Sponsored Links by Taboola

Related labels

- notes
- linux
- Rock chips
- Arm
- rv1126
- c language
- Embedded hardware
- Experience sharing
- Audio and video
- # RV1126 Development Notes