



Training adds concentration beyond the narrowing architecture

Trained: 30 networks Random: 5 unique hidden networks

Distributions on identical monthly inputs

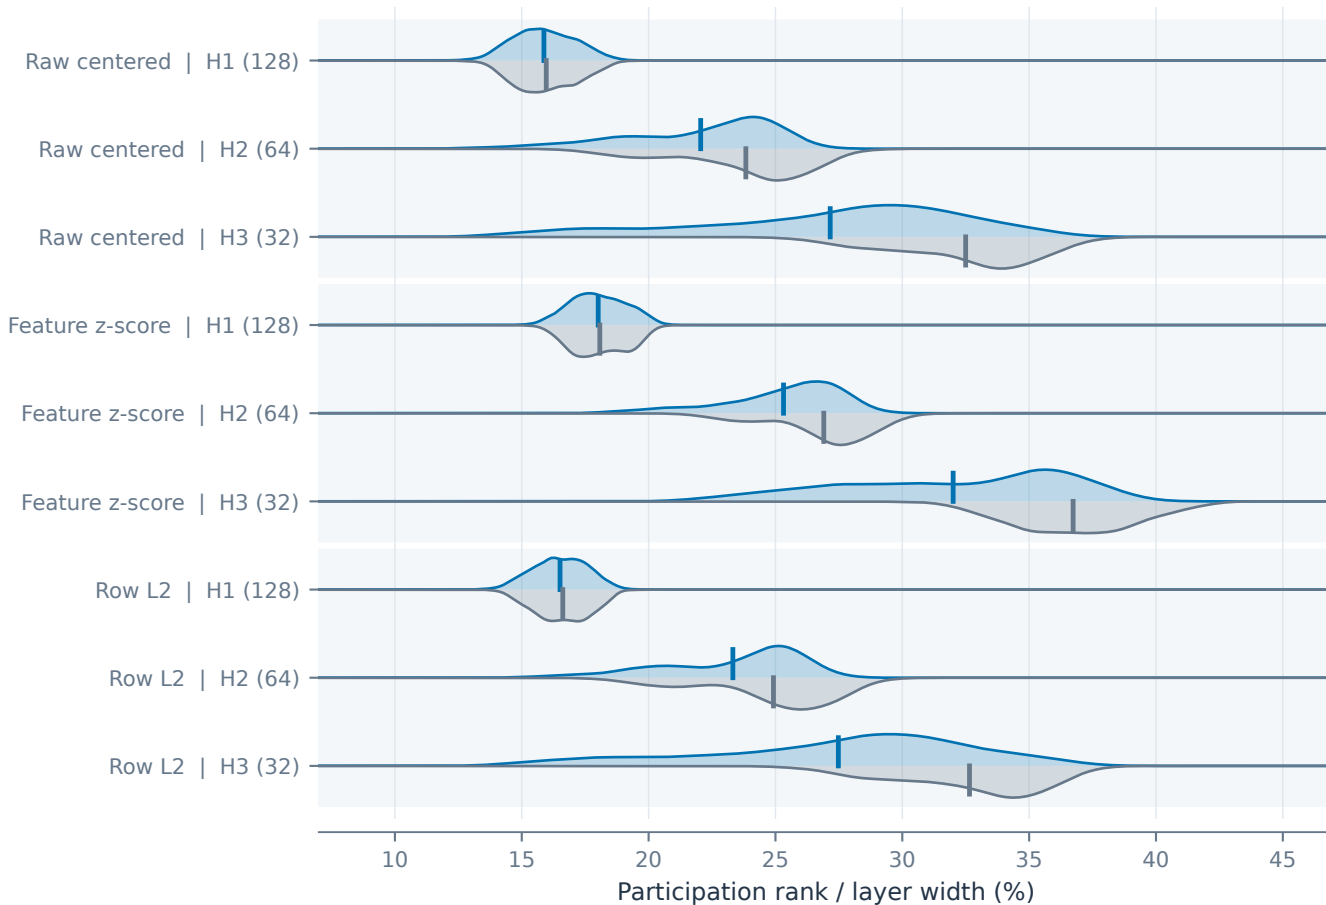

Paired mean gap and 95% interval

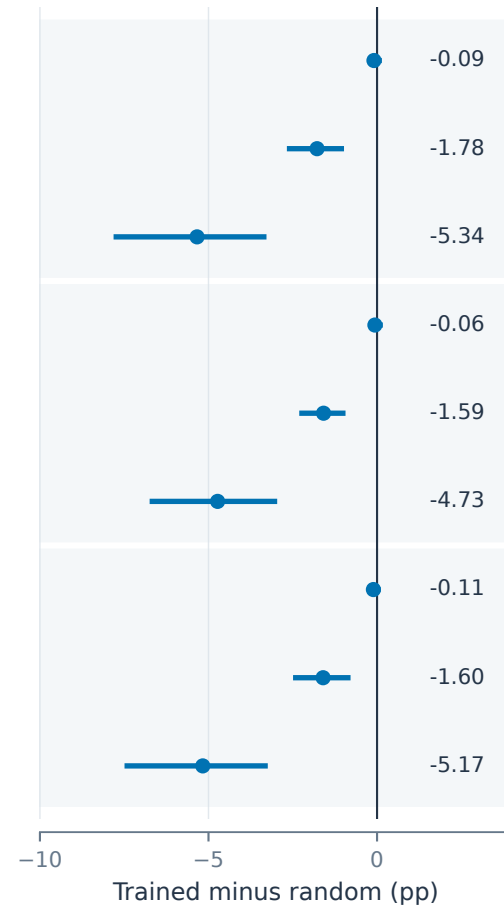

H1/H2/H3 widths: 128/64/32. Each row: 3,600 trained and 600 random model-months. Intervals resample common 12-month blocks and paired seeds; all K stay paired. Pointwise, conditional inference.