! Support Snippets Template

|product-name| TextExpander

win.screenshot To take a screen shot on Windows 10 or 8:

1. Press the Windows + Print Screen keys at the same time.
The image will be saved to the Screenshot folder inside of the Pictures library.

For Windows 7:

1. Choose the Start button > All Programs > Accessories, and select the Snipping tool.
2. Once open, select New
3. Select the area of the screen you would like to capture, and click Save.

tags // place tags below, one per line
`
([optional] bug report (])
([optional] feature request (])
([optional] customer education (])
`.split("\n").slice(1,-1).join(",");

review So glad you're happy with (snippet:|product-name|)! Please help out other users by sharing your experience in a rev

refund Sorry to hear (snippet:|product-name|) didn't work out for you.

I've issued a refund, you should see your account updated in 7-10 business days.

Please let me know what didn't work for you. Even if I can't help you, your assistance will help the next person with the

mac.screenshot To take a screen shot
1. Hold down the Command + Shift + 4 keys
2. Drag the resulting cross-hair cursor over the intended picture area

To take a fullscreen shot
1. Hold down the Command + Shift + 3 keys.

You will find a "Screen Shot…date…" file on your Desktop.

featurereq That's a great idea for a new feature in (snippet:|product-name|)! Thank you for sending it along. I will send this alo

chr.screenshot To take a screenshot on a Pixelbook, follow the instructions here:

https://support.google.com/pixelbook/answer/9177667?hl=en

bugreport I'm so sorry to hear of the problem but I'm able to reproduce this bug in (snippet:|product-name|). I've alerted our

.Email Templates

work fname.lname@textexpander.com

subject (Subject line) Thanks for getting back to me! Tab Hi (firstname),

Thanks for responding.

simple Dear (Sir/Ma'am),

sig Cheers,

Firstname

Firstname Lastname
Support Lead, TextExpander
(snippet:emwork)
(Image)

personal firstname@personalemail.com

full (Subject line) Tab Hi (firstname),

(Write or copy/paste the body of your email here.)

(snippet:emsig)

.Team Snippets - Shared Snippets

co.tagline TextExpander: Communicate Better

co.salesig Cheers,

(snippet:myfname)

(snippet:myfname) (snippet:mylname)
(snippet:mytitle) | (snippet:co.name)
PH: (snippet:myphone)
Meet with me! (snippet:mymeetinglink)

(snippet:co.tagline)
(snippet:co.logo)

prod.name TextExpander

co.logo (Image)

co.supsig Cheers,

(snippet:myfname)

(snippet:prod.name) Support | (snippet:co.name)
(snippet://contact)

(snippet:co.tagline)
(snippet:co.logo)

//home https://textexpander.com

co.name TextExpander

//contact (snippet://home)/contact

//download https://textexpander.com/download

Cliché Consequences

at this point in time presently

plain as day obvious

tell application "Safari"

activate

open location "https://davidblue.wtf/styleguide"

end tell

beg to differ disagree

last but not least finally

neither here nor there not important

there	
in a nutshell	in short
needless to say	of course
on cloud nine	elated
it’s only a matter of time	eventually
throw in the towel	give up
steer away from	avoid
tip of the iceberg	small, more noticeable part of the problem
time and time again	repeatedly
keep an eye on	monitor
Really struck me	tell application "Safari" activate open location "https://davidblue.wtf/styleguide" end tell
when push comes to shove	when needed
in this day and age	at the present time
	(White Space)
kiss and make up	reconcile
When it's all said and done	tell application "Safari" activate open location "https://davidblue.wtf/styleguide" end tell
a far cry	a long distance
bump in the road	setback
Trump	Tump

JavaScript Clipboard Snippets copy

camel

```
// h/t: https://www.geeksforgeeks.org/how-to-convert-string-to-camel-case-in-javascript/
function toCamelCase(str) {
return str.replace(/(?:^\w|[A-Z]|\b\w)/g, function(word, index) {
return index == 0 ? word.toLowerCase() : word.toUpperCase();
}).replace(/\s+/g, '');
}

toCamelCase(TextExpander.pasteboardText);
```

reverse

```
TextExpander.pasteboardText.split("").reverse().join("");
```

all

(Convert clipboard to camel case) (snippet:camel) (])
(Convert clipboard to title case) (snippet:title) (])
(Trim whitespace from clipboard text) (snippet:trimws) (])
(Copy 10-digit phone number to clipboard | expands as (123) 456-7890) (snippet:ph2) (])

(Copy 10-digit phone number to clipboard | expands as 123.456.7890) (snippet:ph1) ([])
(Quote text) (snippet:quotereply) ([])
(Get URL path from clipboard) (snippet:geturlpath) ([])
(Renumber list) (snippet:renumber) ([])
(Alphabetize list) (snippet:alpha) ([])
(Reverse) (snippet:clip.reverse) ([])

makepopup

```
// This snippet expects one option per line

var options = TextExpander.pasteboardText.split(/\r\n|\n|\r/);

TextExpander.pasteboardText = "%" + "fillpopup:name=My Popup:" + options.join(":") + "%";

`The popup menu macro code is now on your clipboard. Please do the following:

1. Create a new snippet.
2. Set the content to AppleScript via the dropdown menu above the content.
3. Paste your clipboard into the content area.
4. Set the content to Plain text via the dropdown menu above the content.

Here is a brief video demonstration:

https://share.getcloudapp.com/2NuwB5yp
`
```

alpha

```
/************
Description: This snippet will alphabetize a list

Instructions:

1. Copy a list to your clipboard
2. Expand snippet.

Sample Input:

Banana
Orange
Apple


Output:

Apple
Banana
Orange
*************/

TextExpander.pasteboardText.split("\n").sort().join("\n");
```

renumber

```
/************
Description: This snippet will renumber a list that is copied to your clipboard.

Instructions:

1. Copy an incorrectly numbered list to your clipboard.
2. Expand snippet.

Sample Input

1. item 1
3. item 2
2. item 3

Output:

1. item 1
2. item 2
3. item 3
*************/

inputString = "Line 0\n" + TextExpander.pasteboardText;
```

```
// attempt to remove zero width space
inputString = inputString.replace(/[\u200B-\u200D\uFEFF]/g, '');

var regExp = /\d+(.)/;
var matches = regExp.exec(inputString);
listDelimiter = matches[1];

var items = inputString.split(/[\r\n][0-9]+./);

var output = "";

for(var i = 1; i < items.length; i++){
output = output + i + listDelimiter + items[i];
if(i != items.length-1) output = output + "\n";
}

output;
```

toCSV

```
// Lines to CSV: Turns a regular list of elements to a list of comma separated elements (CSV)
// Courtesy of Guillermo Ermel
TextExpander.pasteboardText.replace(/(\n|\r)+\b/ig, ", ")
```

quotereply

```
/************
Description: This snippet will use >> to quote reply text copied to your clipboard.

Instructions:

1. Copy the text you'd like to quote to your clipboard.
2. Expand snippet.

Sample Input:

Dictumst imperdiet porta lacinia. Blandit nec pellentesque himenaeos fames elementum leo sagittis. Dictum conubia viv

Output:

>>Dictumst imperdiet porta lacinia. Blandit nec pellentesque himenaeos fames elementum leo sagittis. Dictum conubia
>>at nullam orci vivamus. Torquent accumsan etiam. Tempor accumsan suscipit. Integer nostra himenaeos praesent
>>fermentum.
*************/

var theString = TextExpander.pasteboardText;

var theLines = theString.split("\n");

var output = "";

for(aLine of theLines){
var theWords = aLine.split(" ");
var ct = 0;
if(theWords.length > 1) output = output + ">>";
for(aWord of theWords){
if(ct < 15) output = output + " " + aWord;
else{
output = output + "\n>>" + aWord;
ct = 1;
}
ct++;
}
output = output + "\n";
}

output;
```

toLines

```
// CSV to Newline: Turns a list of comma separated elements (CSV) to a list with each element on its own line
// Courtesy of Guillermo Ermel
TextExpander.pasteboardText.replace(/\s*\,\s*/gim, "\n")
```

geturlpath

```
/************
Description: This snippet will paste the path of the url on the clipboard.


Instructions:
```

Instructions:

1. Copy a full url to the clipboard.
2. Expand snippet.

Sample Input:

https://stackoverflow.com/questions/6941533/get-protocol-domain-and-port-from-url

Output:

/questions/6941533/get-protocol-domain-and-port-from-url
**********/
// ht: https://stackoverflow.com/questions/6941533/get-protocol-domain-and-port-from-url
const url = new URL(TextExpander.pasteboardText);

url.pathname;

ph1
```
var s2 = (""+TextExpander.pasteboardText).replace(/\D/g, '');
var m = s2.match(/^(\d{3})(\d{3})(\d{4})$/);
if(m) m[1] + "." + m[2] + "." + m[3];
else "";
```

ph2
```
var s2 = (""+TextExpander.pasteboardText).replace(/\D/g, '');
var m = s2.match(/^(\d{3})(\d{3})(\d{4})$/);
if(m) `(${m[1]}) ${m[2]}-${m[3]}`;
else "";
```

trimws
```
var input = TextExpander.pasteboardText;

input.trim();
```

title
```
function capitalizeFirstLetter(input){
return input.charAt(0).toUpperCase() + input.substring(1);
}

var lowerCaseWords = [
"a",
"an",
"the",
"for",
"and",
"nor",
"but",
"or",
"yet",
"so",
"such",
"as",
"at",
"around",
"by",
"after",
"along",
"for",
"from",
"of",
"on",
"to",
"with",
"without"
];

var words = TextExpander.pasteboardText.toLowerCase().split(" ");

for(var i = 0; i < words.length; i++){
if(!lowerCaseWords.includes(words[i]) || i == 0 || i == words.length-1) words[i] = capitalizeFirstLetter(words[i]);
}

words.join(" ");
```

phx (123.456.7890) (snippet:ph1) ([])

((123) 456-7890) (snippet:ph2) ([])

case (Title Case) (snippet:titlecase) ([])
(camelCase) (snippet:case-camel) ([])

fandr //
TextExpander.pasteboardText.replace(/(Find)/g,"(Replace)")

Test

wtfuck

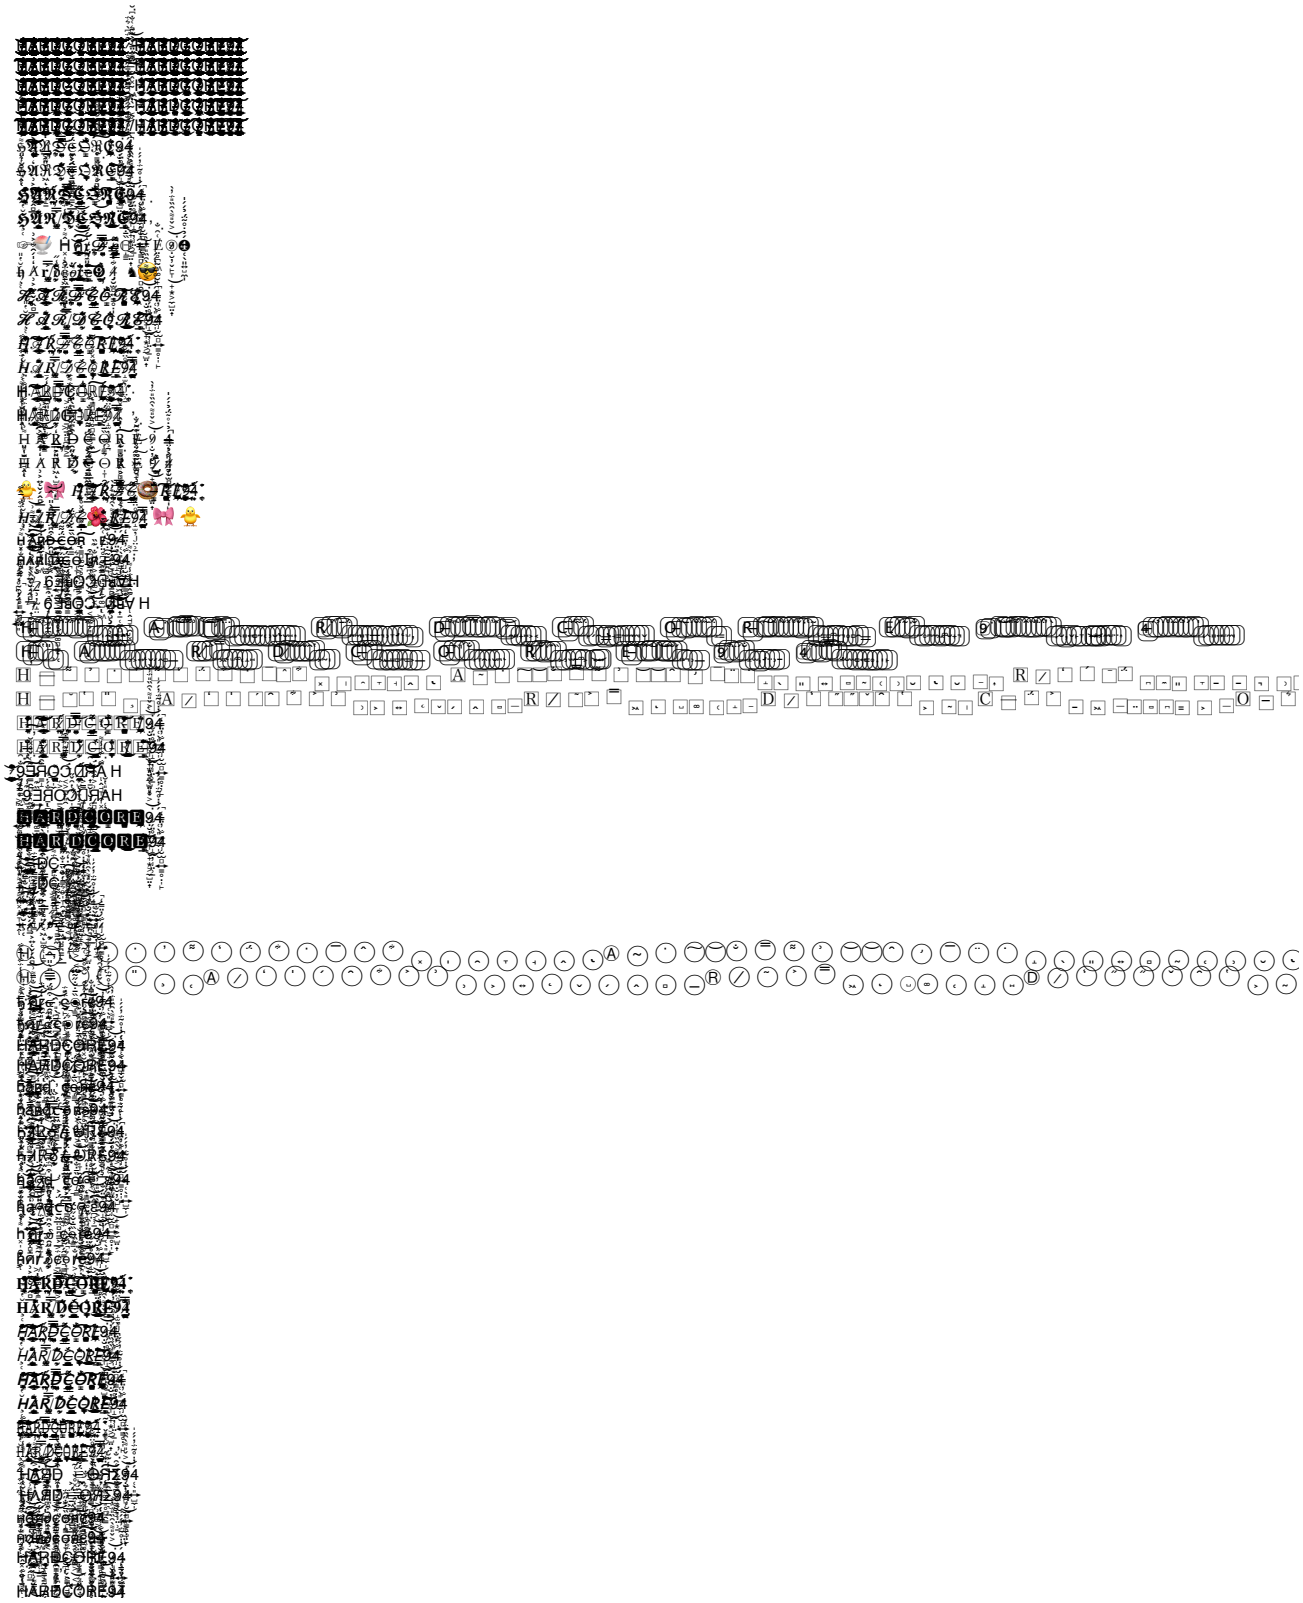

HARDCORE94

HARDCORE94

HARDCORE94

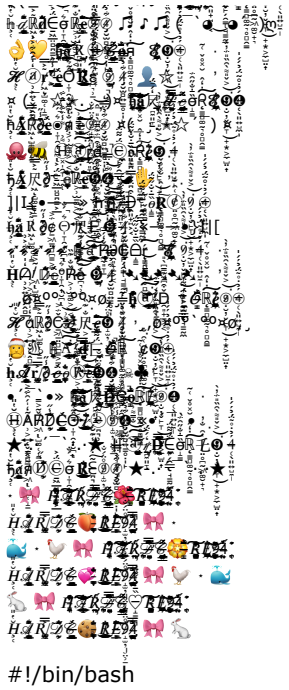

kbdt

```
#!/bin/bash
# Converts "cmd shift d" or "@$d" to "Shift-Command-D"
# Uses <https://github.com/kotfu/ksc> which requires manual install. Save the script to /usr/local/bin/ksc (or modifiy
INPUT=' (Key Combination) '

printf '%s' $(/usr/local/bin/ksc -k -c "$INPUT")
```

bf

```
https://github.com/blinksh/fonts/blob/master/ (Clipboard) .css

-- The base folder where you want to backup the TextExpander snippets
set strBaseFolder to "/Users/blue/Library/Mobile Documents/com~apple~CloudDocs/Expansion"
-- Set bTimebased to true to save to a new sub directory on each run
set bTimebased to false
-- Set bZip to archive exported snippet groups
set bZip to false

-- ++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++

-- If any time based processing is to be used append a timestamp to the directory
if (bTimebased or bZip) then
set strBaseFolder to strBaseFolder & "/" & pyTimestamp(current date)
end if

-- Create any required directory structure
do shell script "mkdir -p \"" & strBaseFolder & "/\""

-- Export all TextExpander snippet groups
tell application "TextExpander"
repeat with objGroup in groups
set strFilename to strBaseFolder & "/" & (name of objGroup) & ".textexpander"
save objGroup in strFilename
end repeat


-- If the option is set ZIP the resulting folder of files
if bZip then
-- Create the ZIP file
do shell script "zip -jr \"" & strBaseFolder & ".zip\" \"" & strBaseFolder & "/\""
-- Remove the intermediate directory of files
do shell script "rm -rf \"" & strBaseFolder & "/\""
display notification (((count groups) as string) & " snippet groups backed up to
" & strBaseFolder & ".zip") with title "TextExpander Snippet Backup"
else
display notification (((count groups) as string) & " snippet groups backed up to

" & strBaseFolder) with title "TextExpander Snippet Backup"
end if
```

```
end if
end tell

-- Timestamp generation script based on script published by MacDrifter
-- http://www.macdrifter.com/2011/12/timestamps-in-applescript.html
on pyTimestamp(AS_Date)
set timeFormat to quoted form of "(Year: 2001)-(Month: 01)-(Day: 01)-(Hour: 01 (00-23)).(Minute: 01).(S
return (do shell script "/usr/bin/python -c \"import time, dateutil.parser; print dateutil.parser.parse('" & AS_Date & "').s
end pyTimestamp
```

```
#!/bin/sh

basename=`basename $0`

if [ -z "$*" ]; then
echo "usage: ${basename} <dot> [ -o | -r | <file> | - ]"
echo ""
echo "options:"
echo " -o open dot in window with keyboard focus"
echo " -r read contents of dot"
echo " -c clear contents of dot"
echo " <file> append contents of regular file to dot"
echo " - append standard input to dot"
echo ""
echo "examples:"
echo " $ cal -h | tot 1 - # put a calendar in first dot"
echo " $ tot 2 MyApp.crash # put a crash report in second dot"
echo ""
exit 1
fi

dot="$1"
if [ -z "$2" ]; then
echo "error: no dot action specified"
exit 1
else
if [ "$2" = "-o" ]; then
# open dot
osascript -e "tell application \"Tot\" to open location \"tot://${dot}\""
osascript -e "tell application \"Tot\" to activate"
elif [ "$2" = "-r" ]; then
# get contents of dot
osascript -e "tell application \"Tot\" to open location \"tot://${dot}/content\""
elif [ "$2" = "-c" ]; then
# clear contents of dot
osascript -e "tell application \"Tot\" to open location \"tot://${dot}/replace?text=\""
else
# append file or stdin to dot
if [ "$2" = "-" ]; then
FILE=`mktemp -t ${basename}` || exit 1
cat /dev/stdin > $FILE
else
if [ -f "$2" ]; then
FILE="$2"
else
echo "error: not a regular file"
exit 1
fi
fi

text=`cat $FILE | python -c 'import urllib; import sys; print urllib.quote(sys.stdin.read())'`
osascript -e "tell application \"Tot\" to open location \"tot://${dot}/append?text=${text}\""
fi
fi
```

Thought Asylum - Dates

dslastsat (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_SAT);

dslastsun (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_SUN);

dslastwed (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_WED);

dsnextsun (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_SUN);

dsnextwed (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_WED);

dslastthu (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_THU);

dowuk (snippet:lib_ta_dates)

GetWeekDayUK("(Convert Date (dd/mm/yyyy))");

dsnextfri (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_FRI);

dowdmy (snippet:lib_ta_dates)

GetWeekDayUK("(Convert Date (dd/mm/yyyy))");

dsnextthu (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_THU);

dowmdy (snippet:lib_ta_dates)

GetWeekDay("(Convert Date (mm/dd/yyyy))");

dsnextsat (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_SAT);

dtlastmon (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_MON);

dsnexttue (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_TUE);

dowus (snippet:lib_ta_dates)

GetWeekDay("(Convert Date (mm/dd/yyyy))");

dsnextmon (snippet:lib_ta_dates)

GetNextDayDateStamp(CON_DAY_MON);

dtlastfri (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_FRI);

dtnextwed (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_WED);

dslasttue (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_TUE);

dtlasttue (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_TUE);

dtnextmon (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_MON);

ds+week (snippet:lib_ta_dates)

CurrentDateStampAddWeeks((2));

ds+day (snippet:lib_ta_dates)

CurrentDateStampAddDays((7));

dt+week (snippet:lib_ta_dates)

CurrentDateAddWeeks((2));

lib_ta_dates

```
function CurrentDateObjectAddDays(p_intDays){
var objDate = new Date();
var intDay = 1000 * 60 * 60 * 24;
objDate.setDate(objDate.getDate() + p_intDays);
return objDate;
}

function CurrentDateAddDays(p_intDays){
var objDate = CurrentDateObjectAddDays(p_intDays);
return PrePadZero(objDate.getDate()) + "/" + PrePadZero(objDate.getMonth()+1) + "/" + objDate.getFullYear();
}

function CurrentDateStampAddDays(p_intDays){
var objDate = CurrentDateObjectAddDays(p_intDays);
return objDate.getFullYear() + "-" + PrePadZero(objDate.getMonth()+1) + "-" + PrePadZero(objDate.getDate());
}

function CurrentDateAddWeeks(p_intWeeks){
return CurrentDateAddDays(7 * p_intWeeks);
}

function CurrentDateStampAddWeeks(p_intWeeks){
return CurrentDateStampAddDays(7 * p_intWeeks);
}

function PrePadZero(p_intInput) {
return (p_intInput < 10) ? '0' + p_intInput : p_intInput;
}

//Constants for JavaScript days of the week IDs
var CON_DAY_SUN = 0;
var CON_DAY_MON = 1;
var CON_DAY_TUE = 2;
var CON_DAY_WED = 3;
var CON_DAY_THU = 4;
var CON_DAY_FRI = 5;
var CON_DAY_SAT = 6;


//Return the next Monday/Tuesday/Wednesday/etc. after today
function NextDay(p_dtStartDate, p_intDay) {
var dtFinalDate = new Date(p_dtStartDate||new Date());
dtFinalDate.setDate(dtFinalDate.getDate() + (p_intDay - 1 - dtFinalDate.getDay() + 7) % 7 + 1);
return dtFinalDate;
}
```

```
//Return the last Monday/Tuesday/Wednesday/etc. before today
function PrevDay(p_dtStartDate, p_intDay) {
//Move us just over a week back
var dtModifiedDate = new Date();
dtModifiedDate.setDate(p_dtStartDate.getDate() - 8);

//Now add forward
return NextDay(dtModifiedDate, p_intDay);
}


function GetNextDay(p_intDay){
var objDate = new Date();
return NextDay(objDate, p_intDay);
}


function GetPrevDay(p_intDay){
var objDate = new Date();
return PrevDay(objDate, p_intDay);
}

function GetNextDayDate(p_intDay){
return FormatDate_ddmmyyyy(GetNextDay(p_intDay));
}


function GetPrevDayDate(p_intDay){
return FormatDate_ddmmyyyy(GetPrevDay(p_intDay));
}

function GetNextDayDateStamp(p_intDay){
return FormatDate_yyyymmdd(GetNextDay(p_intDay));
}


function GetPrevDayDateStamp(p_intDay){
return FormatDate_yyyymmdd(GetPrevDay(p_intDay));
}

function FormatDate_ddmmyyyy(objDate){
return PrePadZero(objDate.getDate()) + "/" + PrePadZero(objDate.getMonth() + 1) + "/" + objDate.getFullYear();
}

function FormatDate_yyyymmdd(objDate){
return objDate.getFullYear() + "-" + PrePadZero(objDate.getMonth() + 1) + "-" + PrePadZero(objDate.getDate());
}

function GetWeekDay(p_strDate) {
//Return day of week from a date string formatted mm/dd/yyyy
var dtInput = new Date(p_strDate);

//Hold the days of the week in an array
var astrWeekDay = new Array(7);
astrWeekDay[0]= "Sunday";
astrWeekDay[1] = "Monday";
astrWeekDay[2] = "Tuesday";
astrWeekDay[3] = "Wednesday";
astrWeekDay[4] = "Thursday";
astrWeekDay[5] = "Friday";
astrWeekDay[6] = "Saturday";

//Read back the day of the week from the array
return astrWeekDay[dtInput.getDay()];
}

function GetWeekDayUK(p_strDate) {
//Return day of week from a date string formatted dd/mm/yyyy
return GetWeekDay(ConvertUKtoUSDateFormat(p_strDate));
}
```

```
function ConvertUKtoUSDateFormat(p_strUKDate){
//Convert "dd/mm/yyyy" to "mm/dd/yyyy" - e.g. to use as input to a JavaScript date object
return p_strUKDate.replace(/^(\d{1,2}\/)(\d{1,2}\/)(\d{4})$/,"$2$1$3");
}
```

dt+day (snippet:lib_ta_dates)

CurrentDateAddDays((7));

dstamp (snippet:dsnow+)

tstamp (snippet:tsnow)

dtnextsat (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_SAT);

tsnow+ (Year: 2001) - (Month: 01) - (Day: 01) - (Hour: 01 (00-23)) . (Minute: 01) . (Second: 01)

dtnextsun (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_SUN);

dsyest (Subtract 1 day) (Year: 2001) - (Month: 01) - (Day: 01)

dtnexttue (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_TUE);

dstom (Add 1 day) (Year: 2001) - (Month: 01) - (Day: 01)

dtnextthu (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_THU);

dtyest (Subtract 1 day) (Day: 01) / (Month: 01) / (Year: 2001)

dtlastsat (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_SAT);

dsnow+ (Year: 2001) - (Month: 01) - (Day: 01)

dtnextfri (snippet:lib_ta_dates)

GetNextDayDate(CON_DAY_FRI);

dttom (Add 1 day) (Day: 01) / (Month: 01) / (Year: 2001)

dtlastthu (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_THU);

dtnow+ (Day: 01) / (Month: 01) / (Year: 2001)

dtlastsun (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_SUN);

dslastfri (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_FRI);

dslastmon (snippet:lib_ta_dates)

GetPrevDayDateStamp(CON_DAY_MON);

dtlastwed (snippet:lib_ta_dates)

GetPrevDayDate(CON_DAY_WED);

Thought Asylum - Markdown

Thought Asylum - Markdown

mdtabler+

```
(snippet:lib_ta_markdown)
generateMarkdownTable( (3) , (2) ,"foobar","",":");
//
```

mdtable-

```
(snippet:lib_ta_markdown)
generateMarkdownTable( (3) , (2) ,"","","");
//
```

lib_ta_markdown

```
//Build a table using function
function generateMarkdownTable(p_intRows, p_intColumns, p_strPopulation, p_strLeft, p_strRight)
{
    var strLine = "";
    var strBreak = "";

    //Build a line
    for (intCounter = 0; intCounter < p_intColumns; intCounter++){
        strLine += "|" + p_strPopulation;
        strBreak += "|" + p_strLeft + "---" + p_strRight;
    }

//For neatness let's add end markers on
    strLine += "|";
strBreak += "|";

    //Initialise the output with the header rows
    var strOutput = strLine + "\n" + strBreak + "\n";

    //Add the data rows
    for (intCounter = 1; intCounter < p_intRows; intCounter++){
        strOutput += strLine + "\n";
    }

    return strOutput;
}
```

mdtable+

```
(snippet:lib_ta_markdown)
generateMarkdownTable( (3) , (2) ,"foobar","","");
//
```

mdbold **BoldText**

mdcbbold ** (Clipboard) **

mdcode CodeBlock

mdcbcode (Clipboard)

mdcbitalic * (Clipboard) *

mdimage ![ImageAltText](ImageURL)

mdcbinline ` (Clipboard) `

mdinline `CodeGoesHere`

mdcbimage ![ImageAltText]((Clipboard))

mditalic *ItalicText*

mdcburl [TextOfLink]((Clipboard))

mdurl [TextOfLink](URLOfLink)

mdtablec+

```
(snippet:lib_ta_markdown)
generateMarkdownTable( (3) , (2) ,"foobar",":",":");
```

//

mdtablec- (snippet:lib_ta_markdown)
generateMarkdownTable((3) , (2) ,"",":",":");
//

Thought Asylum - Miscellaneous

ptjs2js var strOutput = TextExpander.pasteboardText;
strOutput = strOutput.replace(RegExp('TextExpander.appendOutput\\(", 'g'), '');
strOutput = strOutput.replace(RegExp('\\\\n"\\);', 'g'), '');

Thought Asylum - Shell Commands

.runcommand #!/bin/ (bash)
(Command)

.runcat #!/bin/bash
cat (FilePath)

.runcblist #!/bin/bash
ls -al (Clipboard)

.runcbcat #!/bin/bash
cat (Clipboard)

$#! (#!/bin/bash)

calc+
(Calculation) ;

.runipx #!/bin/bash
curl ipecho.net/plain; echo

.runipe #!/bin/bash
ipconfig getifaddr en0

.runipa Ethernet: (snippet:.runipe)
External: (snippet:.runipx)
WiFi: (snippet:.runipw)
External: (snippet:.runipx)

.runipw #!/bin/bash
ipconfig getifaddr en1

.defineword #!/bin/bash

curl dict://dict.org/d: (Lookup) :foldoc
curl dict://dict.org/d: (Lookup)

.runwhois #!/bin/bash

#The hackertarget API is designed to be used in an ad-hoc fashion not for bulk queries and is limited to 50 (total) requ

curl http://api.hackertarget.com/whois/?q= (Domain)

.runcbwhois #!/bin/bash

#The hackertarget API is designed to be used in an ad-hoc fashion not for bulk queries and is limited to 50 (total) requ

curl http://api.hackertarget.com/whois/?q= (Clipboard)

.runtrace #!/bin/bash
traceroute (Address)

bccc

```
#!/bin/bash

#Enter calculation
tecalc=$(echo "(Calculation)" | bc -l)

#Format for 12 characters & decimals and remove spaces
tecalc=$(printf %12.12f $tecalc | tr -d ' ')

#Remove trailing zeros after the decimal point
tecalc=$(echo $tecalc | sed 's/\(\.[0-9]*[1-9]\)0*$/\1/;s/\.0*$//')

#Output without a newline
echo -n $tecalc
```

.runping

```
#!/bin/bash
PingAddress=(Address)
NumberOfPings=(5)
ping -c $NumberOfPings PingAddress
```

.runsysinfo

```
#!/bin/bash

#Software Version
sw_vers

#Software
echo
system_profiler SPSoftwareDataType

#Hardware
echo
system_profiler SPHardwareDataType

#Memory
echo
system_profiler SPMemoryDataType

#Disk Utilisation
echo
df -h -l

#Network
echo
system_profiler SPNetworkDataType

#Displays
echo
system_profiler SPDisplaysDataType
```

.runlist

```
#!/bin/bash
ls -al (DirectoryPath)
```

Thought Asylum - Symbols

rdchev »

+or- ±

smiddot ·

ddegree °

mmiddot (snippet:middot)

ldchev «

key-opt (snippet:key-alt)

bmiddot ·

bmiddot	•
key-ent	(snippet:key-ret)
key-ret	↵
key-bksp	⌫
key-ej	⏏
key-alt	⎇
cross-	×
key-del	⌦
tick+	✔
key-cmd	⌘
degreesf	°F
5star	★
TM..	™
mapprox	≅
cross+	✖
loveheart	❤
tick-	✓
applelogo	
(C)	©
m>=	≥
middot	•
minf	∞
degreesc	°C
m<=	≤
(R)	®
key-shift	⇧
2thirds	⅔
mimp	⇒
ttab	(White Space)
there4	∴
1half	½
mdiv	÷
1quarter	¼
mdelta	Δ
3quarters	¾
not=	≠
1third	⅓
mmult	×

Thought Asylum - Text

$cbtab4 TextExpander.pasteboardText.replace(/\t/g, ' ');

$cbul_ (snippet:lib_ta_underline)

Underline('_');

$cbul. (snippet:lib_ta_underline)

Underline('.');

$cbul# (snippet:lib_ta_underline)

Underline('#');

$cburlenc encodeURI(TextExpander.pasteboardText);

$cbul+ (snippet:lib_ta_underline)

Underline('+');

$cbwrapw //Derived from answer on http://stackoverflow.com/questions/11675397/javascript-only-wordwrap-function-on-whites

TextExpander.pasteboardText.replace(/(\S(.{0, (80) }\S)?)\s+/g, '$1\n');

$cbulx (snippet:lib_ta_underline)

Underline(' (Underline Character) ');

$cb2pt (Clipboard)

$cbul~ (snippet:lib_ta_underline)

Underline('~');

$cburldec decodeURI(TextExpander.pasteboardText);

$cbul= (snippet:lib_ta_underline)

Underline('=');

FromASCII

String.fromCharCode((Character));

$cbsortalpha TextExpander.pasteboardText.split("\n").sort( ).join("\n");

**$cbwrapc** TextExpander.pasteboardText.replace(/(.{ (80) })/g, "$1\n")

$cblow TextExpander.pasteboardText.toLowerCase( );

$cbpadr (snippet:lib_ta_trimandpad)

PadRight(' (Clipboard) ', ' (Pad With) ', (80));

$cbul* (snippet:lib_ta_underline)

Underline('*');

ToASCII

' (Character) '.charCodeAt(0)

$cbtitle String.prototype.toProperCase = function( ) {

return this.replace(/([^\W_]+[^\s-]*) */g, function(strInput){return strInput.charAt(0).toUpperCase( ) + strInput.sub
};

TextExpander.pasteboardText.toProperCase( );

$cbpadl (snippet:lib_ta_trimandpad)

$cbpadl (snippet:lib_ta_trimandpad)

PadLeft('(Clipboard)', '(Pad With)', (80));

$cbsortrevalpha TextExpander.pasteboardText.split("\n").sort( ).reverse( ).join("\n");

$padr (snippet:lib_ta_trimandpad)

PadRight('(Base text)', '(Pad With)', (80));

$cbul- (snippet:lib_ta_underline)

Underline('-');

$cbpadc (snippet:lib_ta_trimandpad)

PadCentre('(Clipboard)', '(Pad With)', (80));

$cbsent
```
String.prototype.toProperCase = function( ) {
return this.replace(/((?:\S[^\.\?\!]*)[\.\?\!]*)/g, function(strInput){return strInput.charAt(0).toUpperCase( ) + strInp
};

TextExpander.pasteboardText.toProperCase( );
```

$padl (snippet:lib_ta_trimandpad)

PadLeft('(Base text)', '(Pad With)', (80));

$cbup TextExpander.pasteboardText.toUpperCase( );

$cbproper (snippet:$cbtitle)

$padc (snippet:lib_ta_trimandpad)

PadCentre('(Base text)', '(Pad With)', (80));

$cb1ssent (snippet:$cbsssent)

lib_ta_trimandpad
```
function PadLeft(p_strInput,p_strPadChar, p_intLen)
{
return PadString(p_strPadChar, p_intLen, p_strInput.length) + p_strInput;
}

function PadRight(p_strInput, p_strPadChar, p_intLen)
{
return p_strInput + PadString(p_strPadChar, p_intLen, p_strInput.length);
}

function PadString(p_strPadChar, p_intLen, p_strLength)
{
/* Calculate the length of the prefix string*/
var intPadLength = p_intLen - p_strLength;

/* Generate the padding string based on array element joins then slice to actual size in case more than one character p
var strPad = new Array(intPadLength + 1).join(p_strPadChar).slice(0, intPadLength);


/* Return the padding string */
return strPad
}

function PadCentre(p_strInput, p_strPadChar, p_intLen)
```

```
function PadCentre(p_strInput, p_strPadChar, p_intLen)
{
return (PadString(p_strPadChar, Math.floor((p_intLen - p_strInput.length) / 2), 0) + p_strInput + PadString(p_strPadC
}
```

$cb2ssent (snippet:$cbdssent)

lib_ta_underline

```
//This snippet is called by other snippets and should not be used on its own.
function Underline(p_strUnderlineWith)
{
//Start with the clipboard
var strOutput = TextExpander.pasteboardText;

//Get the length of the clipboard content
var intClipboardLength = strOutput.length;

//Set-up an underlining string
var strUnderline = "";

//Now the underlining string for each character of the original clipboard content
for (intCounter = 0; intCounter < intClipboardLength; intCounter++) {
strUnderline += p_strUnderlineWith;
}

//If we didn't have a single character underline string, we'll need to trim the underline string
//Append a new line and the underlining string to the original clipboard content and return it
return strOutput + "\n" + strUnderline.substring(0, intClipboardLength);
}
```

$cb2tab

```
TextExpander.pasteboardText.replace(/ /g, '\t');
```

$cbmdol

```
TextExpander.pasteboardText.replace(/(^.*)/gm, "1\. $1");
```

$cbdssent

```
var strOutput = TextExpander.pasteboardText;
//First replace all double spaces to single so we don't end up with triples
strOutput = strOutput.replace(/\. /g, '. ');
strOutput = strOutput.replace(/\! /g, '! ');
strOutput = strOutput.replace(/\? /g, '? ');
//Now replace all single spaces to doubles
strOutput = strOutput.replace(/\. /g, '. ');
strOutput = strOutput.replace(/\! /g, '! ');
strOutput = strOutput.replace(/\? /g, '? ');
strOutput;
```

$cbmdul

```
TextExpander.pasteboardText.replace(/(^.*)/gm, "\* $1");
```

$cbsubst

```
var strFind = '(FindText)';
var strReplace = '(ReplaceText)';
var objRegEx = new RegExp(strFind, 'g');
TextExpander.pasteboardText.replace(objRegEx, strReplace);
```

$cb3tab

```
TextExpander.pasteboardText.replace(/ /g, '\t');
```

$cbsssent

```
var strOutput = TextExpander.pasteboardText;
strOutput = strOutput.replace(/\. /g, '. ');
strOutput = strOutput.replace(/\! /g, '! ');
strOutput = strOutput.replace(/\? /g, '? ');
strOutput;
```

$cb4tab

```
TextExpander.pasteboardText.replace(/ /g, '\t');
```

$cbtab3

```
TextExpander.pasteboardText.replace(/\t/g, ' ');
```

$cbtab2

```
TextExpander.pasteboardText.replace(/\t/g, ' ');
```

Thought Asylum - TextExpander

tesc+

```
on textexpander()
-- Set text to filter the snippet group names by. Blank will return all groups.
set strFilterText to "(Filter snippet group name content for (optional))"


-- Set-up some special constants
```

```
-- New line
set EOL to ASCII character 10
-- Tab
set SEP to ASCII character 9


tell application "TextExpander"
-- Initialise
set strClipboard to ""
set intTotal to 0

-- Enumerate all the TextExpander snippet groups
set colGroups to groups
repeat with objGroup in colGroups
-- Optional restriction of group name

if strFilterText = "" then
set bFilter to false
else
if strFilterText is in name of objGroup then
set bFilter to false
else
set bFilter to true
end if
end if

if bFilter is false then
-- Enumerate all the TextExpander snippets in a group
set intGroupCount to 0
set intGroupCount to intGroupCount + (count of snippets of objGroup)
set intTotal to intTotal + (count of snippets of objGroup)

-- If the clipboard variable is not still empty, add a new line on the end
if strClipboard ≠ "" then
set strClipboard to strClipboard & EOL
end if
log intGroupCount
set strClipboard to (strClipboard & name of objGroup & " (" & intGroupCount as rich text) & ")"
end if
end repeat
end tell

-- Output the snippet information
set strClipboard to strClipboard & EOL & "TOTAL = " & intTotal
return strClipboard

end textexpander
```

tegi+

```
on textexpander()
-- Set text to filter the snippet group names by. Blank will return all groups.
set strFilterText to "(Filter snippet group name content for (optional))"

-- New line
set EOL to ASCII character 10



tell application "TextExpander"
-- Initialise
set strClipboard to ""

-- Enumerate all the TextExpander snippet groups
set colGroups to groups
repeat with objGroup in colGroups
-- Optional restriction of group name

If strFilterText = "" then
set bFilter to false
else
if strFilterText is in name of objGroup then
set bFilter to false
else
```

```
else
set bFilter to true
end if
end if
if bFilter is false then
-- If the clipboard variable is not still empty, add a new line on the end
if strClipboard ≠ "" then
set strClipboard to strClipboard & EOL
end if

-- Append the snippet group, snippet abbreviation and snippet name (tab separated)
set strClipboard to strClipboard & name of objGroup
end if
end repeat
end tell

— Output the snippet information
return strClipboard

end textexpander
```

tesi+

```
on textexpander()
-- Set text to filter the snippet group names by. Blank will return all groups.
set strFilterText to "(Filter snippet group name content for (optional))"


-- Set-up some special constants
-- New line
set EOL to ASCII character 10
-- Tab
set SEP to ASCII character 9


tell application "TextExpander"
-- Initialise
set strClipboard to ""

-- Enumerate all the TextExpander snippet groups
set colGroups to groups
repeat with objGroup in colGroups
-- Optional restriction of group name
If strFilterText = "" then
set bFilter to false
else
if strFilterText is in name of objGroup then
set bFilter to false
else
set bFilter to true
end if
end if
if bFilter is false then
-- Enumerate all the TextExpander snippets in a group
set colSnippets to snippets of objGroup
repeat with objSnippet in colSnippets
-- If the clipboard variable is not still empty, add a new line on the end
if strClipboard ≠ "" then
set strClipboard to strClipboard & EOL
end if

-- Append the snippet group, snippet abbreviation and snippet name (tab separated)
set strClipboard to strClipboard & name of objGroup & SEP
set strClipboard to strClipboard & name of objSnippet & SEP
set strClipboard to strClipboard & abbreviation of objSnippet
end repeat
end if
end repeat
end tell

— Output the snippet information
return strClipboard
```

end textexpander

Thought Asylum - Web

$cbhtmldec (snippet:lib_ta_htmlencode)

he.decode(' (Clipboard) ');

lib_ta_htmlencode //Include the HE.JS library
(snippet:lib_htmlencode)

//See https://github.com/mathiasbynens/he/blob/master/README.md for details of the effects changing these settings

//Encoding settings
he.encode.options.useNamedReferences = true;
he.encode.options.encodeEverything = false;
he.encode.options.allowUnsafeSymbols = false;
he.encode.options.strict = false;

//Decoding settings
he.decode.options.isAttributeValue = false;
he.decode.options.strict = false;

$htmlenc var strEncode = ' (Text to encode) ';

(snippet:lib_ta_htmlencode)

he.encode(strEncode);

$htmldec (snippet:lib_ta_htmlencode)

he.decode(' (Text to decode) ');

lib_htmlencode /*
Copyright Mathias Bynens <https://mathiasbynens.be/>

Permission is hereby granted, free of charge, to any person obtaining
a copy of this software and associated documentation files (the
"Software"), to deal in the Software without restriction, including
without limitation the rights to use, copy, modify, merge, publish,
distribute, sublicense, and/or sell copies of the Software, and to
permit persons to whom the Software is furnished to do so, subject to
the following conditions:

The above copyright notice and this permission notice shall be
included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,
EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND
NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE
LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION
OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION
WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
*/

/*! https://mths.be/he v0.5.0 by @mathias | MIT license */
;(function(root) {

// Detect free variables `exports`.

var freeExports = typeof exports == 'object' && exports;

// Detect free variable `module`.
var freeModule = typeof module == 'object' && module &&
module.exports == freeExports && module;

```
// Detect free variable `global`, from Node.js or Browserified code,
// and use it as `root`.
var freeGlobal = typeof global == 'object' && global;
if (freeGlobal.global === freeGlobal || freeGlobal.window === freeGlobal) {
root = freeGlobal;
}

/*--------------------------------------------------------------------------*/

// All astral symbols.
var regexAstralSymbols = /[\uD800-\uDBFF][\uDC00-\uDFFF]/g;
// All ASCII symbols (not just printable ASCII) except those listed in the
// first column of the overrides table.
// https://html.spec.whatwg.org/multipage/syntax.html#table-charref-overrides
var regexAsciiWhitelist = /[\x01-\x7F]/g;
// All BMP symbols that are not ASCII newlines, printable ASCII symbols, or
// code points listed in the first column of the overrides table on
// https://html.spec.whatwg.org/multipage/syntax.html#table-charref-overrides.
var regexBmpWhitelist = /[\x01-\t\x0B\f\x0E-\x1F\x7F\x81\x8D\x8F\x90\x9D\xA0-\uFFFF]/g;

var regexEncodeNonAscii = /<\u20D2|=\u20E5|>\u20D2|\u205F\u200A|\u219D\u0338|\u2202\u0338|\u2220\u20D2
var encodeMap = {'\xC1':'Aacute','\xE1':'aacute','\u0102':'Abreve','\u0103':'abreve','\u223E':'ac','\u223F':'acd','\u223

var regexEscape = /["&'<>`]/g;
var escapeMap = {
'"': '&quot;',
'&': '&amp;',
'\'': '&#x27;',
'<': '&lt;',
// See https://mathiasbynens.be/notes/ambiguous-ampersands: in HTML, the
// following is not strictly necessary unless it’s part of a tag or an
// unquoted attribute value. We’re only escaping it to support those
// situations, and for XML support.
'>': '&gt;',
// In Internet Explorer ≤ 8, the backtick character can be used
// to break out of (un)quoted attribute values or HTML comments.
// See http://html5sec.org/#102, http://html5sec.org/#108, and
// http://html5sec.org/#133.
'`': '&#x60;'
};

var regexInvalidEntity = /&#(?:[xX][^a-fA-F0-9]|[^0-9xX])/;
var regexInvalidRawCodePoint = /[\0-\x08\x0B\x0E-\x1F\x7F-\x9F\uFDD0-\uFDEF\uFFFE\uFFFF]|[\uD83F\uD87F\uD8
var regexDecode = /&#([0-9]+)(;?)|&#[xX]([a-fA-F0-9]+)(;?)|&([0-9a-zA-Z]+);|&(Aacute|iacute|Uacute|plusmn|otilc
var decodeMap =
{'Aacute':'\xC1','aacute':'\xE1','Abreve':'\u0102','abreve':'\u0103','ac':'\u223E','acd':'\u223F','acE':'\u223E\u0333','Aci
var decodeMapLegacy = {'Aacute':'\xC1','aacute':'\xE1','Acirc':'\xC2','acirc':'\xE2','acute':'\xB4','AElig':'\xC6','aelig':'\x
var decodeMapNumeric = {'0':'\uFFFD','128':'\u20AC','130':'\u201A','131':'\u0192','132':'\u201E','133':'\u2026','134':
var invalidReferenceCodePoints = [1,2,3,4,5,6,7,8,11,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,127

/*--------------------------------------------------------------------------*/

var stringFromCharCode = String.fromCharCode;

var object = {};
var hasOwnProperty = object.hasOwnProperty;
var has = function(object, propertyName) {
return hasOwnProperty.call(object, propertyName);
};

var contains = function(array, value) {
var index = -1;
var length = array.length;
while (++index < length) {
if (array[index] == value) {
return true;
}
}
return false;
};

var merge = function(options, defaults) {
```

```
if (!options) {
return defaults;
}
var result = {};
var key;
for (key in defaults) {
// A `hasOwnProperty` check is not needed here, since only recognized
// option names are used anyway. Any others are ignored.
result[key] = has(options, key) ? options[key] : defaults[key];
}
return result;
};

// Modified version of `ucs2encode`; see https://mths.be/punycode.
var codePointToSymbol = function(codePoint, strict) {
var output = '';
if ((codePoint >= 0xD800 && codePoint <= 0xDFFF) || codePoint > 0x10FFFF) {
// See issue #4:
// “Otherwise, if the number is in the range 0xD800 to 0xDFFF or is
// greater than 0x10FFFF, then this is a parse error. Return a U+FFFD
// REPLACEMENT CHARACTER.”
if (strict) {
parseError('character reference outside the permissible Unicode range');
}
return '\uFFFD';
}
if (has(decodeMapNumeric, codePoint)) {
if (strict) {
parseError('disallowed character reference');
}
return decodeMapNumeric[codePoint];
}
if (strict && contains(invalidReferenceCodePoints, codePoint)) {
parseError('disallowed character reference');
}
if (codePoint > 0xFFFF) {
codePoint -= 0x10000;
output += stringFromCharCode(codePoint >>> 10 & 0x3FF | 0xD800);
codePoint = 0xDC00 | codePoint & 0x3FF;
}
output += stringFromCharCode(codePoint);
return output;
};

var hexEscape = function(symbol) {
return '&#x' + symbol.charCodeAt(0).toString(16).toUpperCase() + ';';
};

var parseError = function(message) {
throw Error('Parse error: ' + message);
};

/*--------------------------------------------------------------------------*/

var encode = function(string, options) {
options = merge(options, encode.options);
var strict = options.strict;
if (strict && regexInvalidRawCodePoint.test(string)) {
parseError('forbidden code point');
}
var encodeEverything = options.encodeEverything;
var useNamedReferences = options.useNamedReferences;
var allowUnsafeSymbols = options.allowUnsafeSymbols;
if (encodeEverything) {
// Encode ASCII symbols.
string = string.replace(regexAsciiWhitelist, function(symbol) {
// Use named references if requested & possible.
if (useNamedReferences && has(encodeMap, symbol)) {
return '&' + encodeMap[symbol] + ';';
}
return hexEscape(symbol);
});
```

```
// Shorten a few escapes that represent two symbols, of which at least one
// is within the ASCII range.
if (useNamedReferences) {
string = string
.replace(/&gt;\u20D2/g, '&nvgt;')
.replace(/&lt;\u20D2/g, '&nvlt;')
.replace(/&#x66;&#x6A;/g, '&fjlig;');
}
// Encode non-ASCII symbols.
if (useNamedReferences) {
// Encode non-ASCII symbols that can be replaced with a named reference.
string = string.replace(regexEncodeNonAscii, function(string) {
// Note: there is no need to check `has(encodeMap, string)` here.
return '&' + encodeMap[string] + ';';
});
}
// Note: any remaining non-ASCII symbols are handled outside of the `if`.
} else if (useNamedReferences) {
// Apply named character references.
// Encode `<>"'&` using named character references.
if (!allowUnsafeSymbols) {
string = string.replace(regexEscape, function(string) {
return '&' + encodeMap[string] + ';'; // no need to check `has()` here
});
}
// Shorten escapes that represent two symbols, of which at least one is
// `<>"'&`.
string = string
.replace(/&gt;\u20D2/g, '&nvgt;')
.replace(/&lt;\u20D2/g, '&nvlt;');
// Encode non-ASCII symbols that can be replaced with a named reference.
string = string.replace(regexEncodeNonAscii, function(string) {
// Note: there is no need to check `has(encodeMap, string)` here.
return '&' + encodeMap[string] + ';';
});
} else if (!allowUnsafeSymbols) {
// Encode `<>"'&` using hexadecimal escapes, now that they're not handled
// using named character references.
string = string.replace(regexEscape, hexEscape);
}
return string
// Encode astral symbols.
.replace(regexAstralSymbols, function($0) {
// https://mathiasbynens.be/notes/javascript-encoding#surrogate-formulae
var high = $0.charCodeAt(0);
var low = $0.charCodeAt(1);
var codePoint = (high - 0xD800) * 0x400 + low - 0xDC00 + 0x10000;
return '&#x' + codePoint.toString(16).toUpperCase() + ';';
})
// Encode any remaining BMP symbols that are not printable ASCII symbols
// using a hexadecimal escape.
.replace(regexBmpWhitelist, hexEscape);
};
// Expose default options (so they can be overridden globally).
encode.options = {
'allowUnsafeSymbols': false,
'encodeEverything': false,
'strict': false,
'useNamedReferences': false
};

var decode = function(html, options) {
options = merge(options, decode.options);
var strict = options.strict;
if (strict && regexInvalidEntity.test(html)) {
parseError('malformed character reference');
}
return html.replace(regexDecode, function($0, $1, $2, $3, $4, $5, $6, $7) {
var codePoint;
var semicolon;
var hexDigits;
var reference;
```

```
var next;
if ($1) {
// Decode decimal escapes, e.g. `&#119558;`.
codePoint = $1;
semicolon = $2;
if (strict && !semicolon) {
parseError('character reference was not terminated by a semicolon');
}
return codePointToSymbol(codePoint, strict);
}
if ($3) {
// Decode hexadecimal escapes, e.g. `&#x1D306;`.
hexDigits = $3;
semicolon = $4;
if (strict && !semicolon) {
parseError('character reference was not terminated by a semicolon');
}
codePoint = parseInt(hexDigits, 16);
return codePointToSymbol(codePoint, strict);
}
if ($5) {
// Decode named character references with trailing `;`, e.g. `&copy;`.
reference = $5;
if (has(decodeMap, reference)) {
return decodeMap[reference];
} else {
// Ambiguous ampersand. https://mths.be/notes/ambiguous-ampersands
if (strict) {
parseError(
'named character reference was not terminated by a semicolon'
);
}
return $0;
}
}
// If we're still here, it's a legacy reference for sure. No need for an
// extra `if` check.
// Decode named character references without trailing `;`, e.g. `&amp`
// This is only a parse error if it gets converted to `&`, or if it is
// followed by `=` in an attribute context.
reference = $6;
next = $7;
if (next && options.isAttributeValue) {
if (strict && next == '=') {
parseError('`&` did not start a character reference');
}
return $0;
} else {
if (strict) {
parseError(
'named character reference was not terminated by a semicolon'
);
}
// Note: there is no need to check `has(decodeMapLegacy, reference)`.
return decodeMapLegacy[reference] + (next || '');
}
});
};
// Expose default options (so they can be overridden globally).
decode.options = {
'isAttributeValue': false,
'strict': false
};

var escape = function(string) {
return string.replace(regexEscape, function($0) {
// Note: there is no need to check `has(escapeMap, $0)` here.
return escapeMap[$0];
});
};

/*--------------------------------------------------------------------------*/
```

```
var he = {
'version': '0.5.0',
'encode': encode,
'decode': decode,
'escape': escape,
'unescape': decode
};

// Some AMD build optimizers, like r.js, check for specific condition patterns
// like the following:
if (
typeof define == 'function' &&
typeof define.amd == 'object' &&
define.amd
) {
define(function() {
return he;
});
} else if (freeExports && !freeExports.nodeType) {
if (freeModule) { // in Node.js, io.js, or RingoJS v0.8.0+
freeModule.exports = he;
} else { // in Narwhal or RingoJS v0.7.0-
for (var key in he) {
has(he, key) && (freeExports[key] = he[key]);
}
}
} else { // in Rhino or a web browser
root.he = he;
}

}(this));
```

htmllink

```
#!/usr/bin/perl -w

#Initialise
use strict;
use LWP::Simple;

#Get the URL from the clipboard
my $text =`pbpaste`;

#Get the page content
my $url = $text || die "";
my $html = get ($url);

#Get the page title
$html =~ m{<TITLE>(.*?)</TITLE>}gism;
my $title = $1;

#Remove any leading or trailing white space
$title=~ s/^\s+|\s+$//g;

#Output the HTML link
print "<a href='$url'>$title</a>";
```

hex2rgb

```
var strHex = '(Hex Colour)';

if (strHex.substring(0,1) == '#')
{
strHex = strHex.substring(1);
}

// ——————————————————————————
//Functions cloned from:
// http://stackoverflow.com/questions/5623838/rgb-to-hex-and-hex-to-rgb

function hexToRgb(hex) {
var bigint = parseInt(hex, 16);
var r = (bigint >> 16) & 255;
var g = (bigint >> 8) & 255;
var b = bigint & 255;
```

```
return r + "," + g + "," + b;
}

// ——————————————————————————

hexToRgb(strHex);
```

CTMDUL

```
-- Initialise the script settings
-- Set the browser.
-- Valid options are [ "Chrome" | "Safari" ]
set strBrowser to "Chrome"
-- Set the output style.
-- Valid options are [ "Text" | "HTML-P" | "HTML-BR" | "HTML-UL" | "HTML-OL" | "MD" | "MD-UL" | "MD-OL" ]
-- Text = Title on one line, URL on next line, blank line.
-- HTML-P = Title as HTML hyperlink with one link per paragraph.
-- HTML-BR = Title as HTML hyperlink with one link per line.
-- HTML-UL = Title as HTML hyperlink with one link per entry in a bulleted list.
-- HTML-OL = Title as HTML hyperlink with one link per entry in a numbered list.
-- MD = Title as Markdown hyperlink with one link per line.
-- MD-UL = Title as Markdown hyperlink with one link per entry in a bulleted list.
-- MD-OL = Title as Markdown hyperlink with one link per entry in a numbered list.
set strStyle to "MD-UL"
-- Set the line end.
-- This is added to the end of each line of output (but will not be included in the hyperlink
set strLineEnd to "."


-- Initialise the output string
set strOutput to ""

if strBrowser = "Chrome" then
tell application "Google Chrome"
-- Get all the Chrome Windows
set listChromeWindows to every window
-- Loop through every Chrome window
repeat with objChromeWindow in listChromeWindows
-- Get all the Chrome Tabs
set listChromeTabs to every tab in objChromeWindow
-- Loop through every Chrome tab
repeat with objTab in listChromeTabs
-- Retrieve the tab properties
set strTitle to the title of objTab
set strURL to the URL of objTab
-- Change double to single quotes in the title as these are used in
-- specifying hyperlink attributes
set strTitle to my Substitute(strTitle, "\"", "'")
-- Call the top level handler to format the properties
set strOutput to strOutput & my formatOutput(strTitle, strURL)
end repeat
end repeat
end tell
else if strBrowser = "Safari" then
tell application "Safari"
-- Get all the Safari Windows
set listSafariWindows to every window
-- Loop through every Safari window
repeat with objWindow in listSafariWindows
set listSafariTabs to every tab in objWindow
-- Get all the Safari Tabs
repeat with objTab in listSafariTabs
-- Retrieve the tab properties
set strTitle to the name of objTab
set strURL to the URL of objTab

-- Change double to single quotes in the title as these are used in
-- specifying hyperlink attributes
set strTitle to my Substitute(strTitle, "\"", "'")
-- Call the top level handler to format the properties
set strOutput to strOutput & my formatOutput(strTitle, strURL)
end repeat
end repeat
```

```
end tell
else
set strOutput to "ERROR: Unknown Browser"
end if


-- Wrap the output in the HTML for bulleted lists
if strStyle = "HTML-UL" then
-- Remove the last return
set strOutput to (characters 1 thru ((count of characters of strOutput) - 1) of text of strOutput) as text
set strOutput to "<ul>" & return & strOutput & return & "</ul>"
end if


-- Wrap the output in the HTML for ordered lists
if strStyle = "HTML-OL" then
-- Remove the last return
set strOutput to (characters 1 thru ((count of characters of strOutput) - 1) of text of strOutput) as text
set strOutput to "<ol>" & return & strOutput & return & "</ol>"
end if


-- Finally return the output
return strOutput
— display dialog strOutput buttons {"Ok"}


-- HELPERS
-- Format the tab properties
on formatOutput(p_strTitle, p_strURL)
if my strStyle = "Text" then
return p_strTitle & my strLineEnd & return & p_strURL & return & return
else if my strStyle = "HTML-P" then
return "<p><a href=\"" & p_strURL & "\">" & p_strTitle & "</a>" & my strLineEnd & "</p>" & return
else if my strStyle = "HTML-BR" then
return "<a href=\"" & p_strURL & "\">" & p_strTitle & "</a>" & my strLineEnd & "<br/>" & return
else if my strStyle = "HTML-UL" then
return tab & "<li><a href=\"" & p_strURL & "\">" & p_strTitle & "</a>" & my strLineEnd & "</li>" & return
else if my strStyle = "HTML-OL" then
return tab & "<li><a href=\"" & p_strURL & "\">" & p_strTitle & "</a>" & my strLineEnd & "</li>" & return
else if my strStyle = "MD" then
return "[" & p_strTitle & "](" & p_strURL & " \"" & p_strTitle & "\")" & my strLineEnd & return
else if my strStyle = "MD-UL" then
return "* [" & p_strTitle & "](" & p_strURL & " \"" & p_strTitle & "\")" & my strLineEnd & return
else if my strStyle = "MD-OL" then
return "1. [" & p_strTitle & "](" & p_strURL & " \"" & p_strTitle & "\")" & my strLineEnd & return
else
return "ERROR: Unknown Style"
end if
end formatOutput

-- Replace one set of characters in a string with another set
on Substitute(p_strSource, p_strFind, p_strReplace)
-- Save the initial delimiter
set strInitialDelimiter to text item delimiters of AppleScript

-- Carry out the substitution by delimiting using the find string and then
-- converting back to a string using the new replacement text as the delimiter
set AppleScript's text item delimiters to the p_strFind
set the listTextItems to every text item of p_strSource
set AppleScript's text item delimiters to the p_strReplace
set strOutput to the listTextItems as string

-- Restore the initial delimiter
set AppleScript's text item delimiters to strInitialDelimiter

-- Return the new string
return strOutput
end Substitute
```

urlenc+ decodeURI('(Decode)');

urldec+
```
encodeURI('(Encode)');
```

$bitly
```
#!/usr/bin/env python
(snippet:lib_bitly)

PrintShortURL('(URL)')
```

$cb2hp
```
var strOutput = '<p>\n' + TextExpander.pasteboardText.replace(/(?:\r\n|\r|\n)/g, '</p>\n<p>') + '</p>\n';
strOutput.replace(/\<p\>\<\/p\>/g, '');
```

lib_bitly
```
# - - - - - - - - - - -
# Use insert snippet to include this into a shell script snippet
# Python script first line would be "#!/usr/bin/env python"
#
# A snippet with abbreviation "bitlyusername" must be created and contain a Bitly account user name.
# A snippet with abbreviation "bitlyapikey" must be created and contain a Bitly account API key associated with the spe
# - - - - - - - - - - -

# Set Bitly account constants
c_strUser = '(snippet:bitlyusername)'
c_strAPIKey = '(snippet:bitlyapikey)'

# Import libraries
import urllib2
import urllib
import json
import sys

# Define function to get Bitly shortened URL for a URL (and account)
def ShortURL_Call(p_strURL, p_strUser, p_strAPIKey):
# Set-up request string
strBitlyRequest = "http://api.bit.ly/v3/shorten?"
strBitlyRequest += "login=" + p_strUser
strBitlyRequest += "&apiKey=" + p_strAPIKey
strBitlyRequest += "&longUrl=" + urllib.quote_plus(p_strURL)

# Make the call out to Bitly to shorten the URL
objBitly = json.loads(urllib2.build_opener().open(urllib2.Request(strBitlyRequest)).read())

# Return the shortened URL
return objBitly['data']['url']


# Define function to shorten a URL and print the result
def PrintShortURL(p_strURL):
# Get a shortened Bitly URL
strBitlyURL = ShortURL_Call(p_strURL, c_strUser, c_strAPIKey)

# Display the shortened URL on the standard output (no new line like print can give)
sys.stdout.write(strBitlyURL)
return
```

$urlunenc
```
(snippet:$urldec)
```

htmldot
```
&#183;
```

$cbbitly
```
#!/usr/bin/env python

(snippet:lib_bitly)

PrintShortURL('(Clipboard)')
```

$cbtabtohtmltable
```
var strOutput = TextExpander.pasteboardText;
strOutput = strOutput.replace(/\t/g, '</td><td>');
strOutput = strOutput.replace(/(^.*)/gm, "\t<td>$1</td>");
strOutput = '<table>\n' + strOutput + '\n</table>';
```

$cbhtmlul
```
'<ul>\n' + TextExpander.pasteboardText.replace(/(^.*)/gm, "\t<li>$1<\/li>") + '\n<\/ul>';
```

$cburlenc
```
encodeURIComponent(TextExpander.pasteboardText.toLowerCase( ));
```

$cburldec
```
decodeURIComponent(TextExpander.pasteboardText.toLowerCase( ));
```

$cburldec decodeURIComponent(TextExpander.pasteboardText.toLowerCase());

**$cbhtmlol** '<ol>\n' + TextExpander.pasteboardText.replace(/(^.*)/gm, "\t<li>$1<\/li>") + '\n<\/ol>';

$cbhtmlenc (snippet:lib_ta_htmlencode)

he.encode('(Clipboard)');

Extratext

masto https://mastodon.social/@DavidBlue

speedy https://bilge.world/speedy-frames

backtap https://support.apple.com/en-us/HT211781

legacybio // 420 smoke propane // adderall hotbox // origin of the good morning and wednesday memes // pizza slave // gas hou

shortcc My contact information:

Email: davidblue@extratone.com
Contact card: bit.ly/whoisdavidblue
RoutineHub Profile: https://routinehub.co/user/blue
GitHub: https://github.com/extratone/i
Telegram: t.me/extratone
Twitter: twitter.com/NeoYokel
Reddit: reddit.com/u/asphaltapostle
Mastodon: mastodon.social/@DavidBlue
EVERYWHERE: bit.ly/dbrolodex

twt https://twitter.com/NeoYokel

highlights https://gist.github.com/6e0f5fef1156baaeeb4483170c76b4da

reddit https://www.reddit.com/user/AsphaltApostle

bilge https://bilge.world/(Clipboard)

iphonemastodon https://apps.apple.com/us/app/mastodon-for-iphone/id1571998974

action https://www.matthewcassinelli.com/actions/

moyai 🗿

telenum +15738234380

mdtel [@(Clipboard) on Telegram](https://t.me/(Clipboard))

teapp https://apps.apple.com/us/app/textexpander-keyboard/id1075927186

warning ⓦ ⓐ ⓡ ⓝ ⓘ ⓝ ⓖ

richcontact

- Contact Card
- Telegram
- Email
- Twitter
- Mastodon
- Discord
- *Everywhere*...

e davidblue@extratone.com

piss https://github.com/extratone/piss

tel@ https://t.me/(Clipboard)

ncode encodeURI(TextExpander.pasteboardText);

rawscrubs https://gist.githubusercontent.com/extratone/3f3748f2ee1cd0820ba099cb05809054/raw/4aa707e00d826835aefe7a7f

kill #! killall Shortcuts

contactmd * [Contact Card](https://davidblue.wtf/db.vcf)

* [Telegram](https://t.me/extratone)
* [Email](mailto:davidblue@extratone.com)
* [Twitter](https://twitter.com/NeoYokel)
* [Mastodon](https://mastodon.social/@DavidBlue)
* [Discord](https://discord.gg/0b9KQUKP858b0iZF)
* [*Everywhere*](https://raindrop.io/davidblue/social-directory-21059174)...

wget wget --recursive --page-requisites --adjust-extension --span-hosts --convert-links --restrict-file-names=windows --don

indie https://indiecatalog.app/platform/iphone

dbe1 extratone Enter David Enter Blue Enter davidblue@extratone.com

katie KⒶTIE KEURIG

scrubs https://gist.github.com/extratone/3f3748f2ee1cd0820ba099cb05809054

sleepnow #! pmset displaysleepnow

followwiki https://github.com/extratone/bilge/wiki/Why-I-Didn’t-Follow-You-Back

ts (Month: 01) (Day: 01) (Year: 2001) - (Hour: 01 (00-23)) (Minute: 01) (Second: 01)

rgb2hex

```
var intRed = (Red);
var intGreen = (Green);
var intBlue = (Blue);

// ——————————————————————————
//Functions cloned from:
// http://stackoverflow.com/questions/5623838/rgb-to-hex-and-hex-to-rgb

function componentToHex(c) {
var hex = c.toString(16);
return hex.length == 1 ? "0" + hex : hex;
}

function rgbToHex(r, g, b) {
return "#" + componentToHex(r) + componentToHex(g) + componentToHex(b);
}
// ——————————————————————————

rgbToHex(intRed, intGreen, intBlue);
```

wilw https://twitter.com/neoyokel/status/675501693421793280

invite https://mastodon.social/invite/hca7L5sY

.neocities https:// (uikeycommand) .neocities.org

chuck https://bilge.world/chuck-klosterman-x

test #! shortcuts run “test”

followgist https://gist.github.com/extratone/8b762de50de414f8a4be05f9b0407fd8

zsig David Blue
davidblue@extratone.com

webdav https://neocities.org/webdav

wikite https://github.com/extratone/bilge/wiki/TextExpander-Snippet-Groups

minecraft https://youtu.be/C4td17BTiio

followmd ![Twitter Follow Limits](https://i.snap.as/hKqfPWNd.png)

There is a limit to how many accounts you can follow on Twitter. It was finally documented in this [official help doc

Here's what happens when I try to follow a new account from [@NeoYokel](https://twitter.com/NeoYokel):

![Follow Limit Notice](https://i.snap.as/qWuogwAX.jpeg)

I was only able to verify that this has been the case since October 20th, 2017 - naturally, I didn't bother to note the act

If you're a recent follower of mine and you've found this document, please know that I have seen your expressed

I also want you to know that I am available to speak directly about this if you have questions - whether that be on [Twi

For whatever it's worth, *thanks for the follow*. I hope to hear from you but if I don't, thanks okay, too.

tweetbot https://apps.apple.com/us/app/tweetbot-6-for-twitter/id1527500834

public Thanks for the heads up! I appreciate the sentiment behind the warning, but my (email address) 's actually been pub

totshare https://app.textexpander.com/public/4cef7d32b411c6686d50c7eaff75a7a7

#! imessage --text "hi" --contacts "asphaltapostle@icloud.com"

bandcamp https://bilge.world/bandcamp-streaming-music

unichar http://bilge.world/unichar-for-ios-app-review

ddpsalms https://actions.getdrafts.com/t/1km

igit https://github.com/extratone/i/issues

winvite https://write.as/join/4bqc8482

share https://app.textexpander.com/public/14093096578d4f40eeea15649f5cefbb

notes https://github.com/extratone/bilge/tree/main/notes/

table

```
var rows = Number( (2) ); //body of table rows
var cols = Number( (4) ); //columns of table
var rows = rows + 2; //add a rows to account for header and seperator
var text = ''; //variable to store the output

for (rCount = 1; rCount <= rows; rCount++) {
for (cCount = 1; cCount <= cols; cCount++) {
if (rCount == 1) { // Header Row Output
if (cCount == 1) {
text += '** | ** |';
}
else if (cCount == cols) {
text += ' **Header**';
}
else {
text += ' **Header** |';
}
}
else if (rCount == 2) { // seperator row output
if (cCount == 1) {
text += '-- |';
}
else if (cCount == cols) {
text += ' --';
}
else {
text += ' -- |';
}
}
else { //content row outputs
if (cCount == 1) {
text += (rCount-2).toString() + 'x' + cCount.toString() + ' |';
}
else if (cCount == cols) {
text += ' ' + (rCount-2).toString() + 'x' + cCount.toString();
}
else {
text += ' ' + (rCount-2).toString() + 'x' + cCount.toString() + ' |';

}
}
}
text += '\n';
}

TextExpander.appendOutput(text);
```

colophon http://bilge.world/colophon

as https://write.as/bilge/ (Clipboard) /edit

dractions https://davidblue.wtf/drafts/actionsindex

sys https://github.com/extratone/iOSSystemSounds/blob/main/base64/ (Clipboard) .txt

docx pandoc -s (Clipboard) .docx -t markdown -o (Clipboard) .md

drafts https://github.com/extratone/bilge/tree/main/drafts/

.wgetall wget -e robots=off -R --recursive --page-requisites --adjust-extension --span-hosts --convert-links --restrict-file-names

fft ffmpeg -i xperia.ts -c:v libx264 -c:a aac xperia.mp4

zalgo http://bilge.world/zalgo-generator-ios-app-review

wcli https://github.com/writeas/writeas-cli

fb https://www.facebook.com/AsphaltApostle

vid
```
<video controls>
  <source src="(Clipboard)">
</video>
```

tb6 http://bilge.world/tweetbot-6-ios-review

remark https://remark.as/extratone

valid
```
set the ClipURL to (the clipboard as string)
try
set scriptCmd to "curl -I -L -s \"" & ClipURL & "\" | grep -c \"^HTTP/[^ ]* 200\""
set scriptResult to do shell script scriptCmd
on error
set scriptResult to ""
end try
if scriptResult is equal to "1" then
return escapedURL(ClipURL)
else
beep
return "XX " & escapedURL (ClipURL)
end if

on escapedURL(theURL)
set resultURL to ""
repeat with eachChar in characters of theURL
set eachCharNum to ASCII number of eachChar
if eachCharNum = 37 then
set resultURL to resultURL & "%"
else
set resultURL to resultURL & eachChar
end
end
return resultURL
end
```

pixelfed https://pixelfed.social/DavidBlue

cpq *COMPAQ*

1line TextExpander.pasteboardText.replace(/\r?\n|\r/g, " ").replace(" ", " ").trim()

macdrafts https://apps.apple.com/us/app/drafts/id1435957248

desc ※ ※ ※ ※ ※ ※ ※ ※ ※ ※
World Wide Web: https://bilge.world
Contact Card: https://davidblue.wtf/db.vcf
Twitter: https://twitter.com/NeoYokel
Mastodon: https://mastodon.social/@DavidBlue
Instagram: https://instagram.com/asphaltapostle
davidblue@extratone.com

【※】【※】【※】【※】【※】【※】【※】【※】【※】【※】

【※】 【※】 【※】 【※】 【※】 【※】 【※】 【※】 【※】 【※】

『※』 『※』 『※』 『※』 『※』 『※』 『※』 『※』 『※』 『※』

≈※≈※≈※≈※≈※≈※≈※≈※≈※≈※≈

□※□※□※□※□※□※□※□※□※□

wikidd https://github.com/extratone/bilge/wiki/Drafts-Directory-Contributions

dbmasto https://mastodon.social/@DavidBlue

aud
```
<audio controls>
  <source src="(Clipboard)">
</audio>
```

macver
```
#!/bin/zsh
pver=$(sw_vers -productVersion)
bver=$(sw_vers -buildVersion)
lic=$(awk '/SOFTWARE LICENSE AGREEMENT FOR/' '/System/Library/CoreServices/Setup Assistant.app/Contents/Reso

if [ `echo $lic | grep -oc 'macOS'` -eq 1 ]
then
name='macOS'
elif [ `echo $lic | grep -oc 'OS X'` -eq 1 ]
then
name='OS X'
else
name='unspecified'
fi

codename=$(echo $lic | sed "s/$name //")

echo $name $pver, $codename '('$bver')'
```

wshort https://routinehub.co/shortcut/10981/

gauto (i) - Tab https://github.com/extratone/ (i) /issues/<num> Tab Enter

writeas writeas (help) --help > (help) .txt

wikirh https://github.com/extratone/bilge/wiki/RoutineHub-Links

ishort https://github.com/extratone/i/tree/main/shortcuts/

macos (Empty)

comment <!--comment-->

imasto https://apps.apple.com/us/app/mastodon-for-iphone/id1571998974

\ieeg
```
tell application "Safari"

activate

open location "https://davidblue.wtf/ieeg"

end tell
```

wikiindex https://github.com/extratone/bilge/wiki

telegraph https://telegra.ph/Telegraph-Links-to-Date-02-02

left ⇦

magic https://extratone.github.io/table/

\shortieeg #! shortcuts run "i.e.-e.g."

issue https://github.com/extratone/ | /issues/ (Clipboard)

int ???

odette https://github.com/extratone/odette

import https://app.raindrop.io/settings/import

dine WHEN IM COMIN DINE IN MY FOREIGN AND IM ROLLIN ONE DEEP THAT SHOULD TELL YA BOUT ME

psalmstr https://bilge.world/text-replacement

dfrtsts [[date|%m%d%Y-%H%M%S]]

num TextExpander.pasteboardText.replace(/(^.*)/gm, "1\. $1");

snap https://www.snapchat.com/add/mommilitia

ffmerge ffmpeg -f concat -i [saidfile].txt -c copy output.mp4

$htmlpage
```
<!DOCTYPE html>
<html>
<head>
(Include a page title?)
<title>(Page Title)</title>(])
</head>
<body>

</body>
</html>
```

neoad https://actions.getdrafts.com/g/1uF

showcuts https://showcuts.app

ytmp3 youtube-dl -i --extract-audio --audio-format mp3 --audio-quality 0 (Clipboard)

date (Month: 01) (Day: 01) (Year: 2001)

tr https://gist.github.com/extratone/3c7788e41d32958a04a2ab693fe0512c

cms https://whatcms.org/API/Tech?key=w64w67om47g3xfcudiiakqrm0zxej81mg7k95r4fj4y3b81lrizol7l0gnn2x8z2mn6lah&

mute2 ⒶⓊⒹⒾⓄ ⒾⓃⓉⒺⓇⓇⓊⓅⓉⓈ

reading https://raindrop.io/davidblue/reading-list-13380406

bigsig
David Blue
davidblue@extratone.com
https://bilge.world

15 https://bilge.world/ios-15-family-review

license https://gist.github.com/extratone/140a11428b5dd1dda500b3928e0438b1

keys https://uikeycommand.com

davodtime MMDDYYYY-HHmmss

neocities https://davidblue.wtf

right ⇨

friends https://twitter.com/i/lists/36971117

pocket https://lists.pocketcasts.com/5f61c88e-b3cf-4be9-afc9-7fe38cbd90bf

rh https://routinehub.co/user/blue

case
```
function capitalizeFirstLetter(input){
return input.charAt(0).toUpperCase() + input.substring(1);
}

var lowerCaseWords = [
"a",

"an",
"the",
"for",
"and",
"nor",
"but",
"or"
```

```
"of",
"yet",
"so",
"such",
"as",
"at",
"around",
"by",
"after",
"along",
"for",
"from",
"of",
"on",
"to",
"with",
"without"
];

var words = TextExpander.pasteboardText.toLowerCase().split(" ");

for(var i = 0; i < words.length; i++){
if(!lowerCaseWords.includes(words[i]) || i == 0 || i == words.length-1) words[i] = capitalizeFirstLetter(words[i]);
}

words.join(" ");
```

3ts (Add 3 hours) (Month: 01) (Day: 01) (Year: 2001) - (Hour: 01 (00-23)) (Minute: 01) (Second: 01)

down ⇩

txt+ pandoc -s *.txt -o (Clipboard) .txt

thenew https://twitter.com/i/lists/185793031

podcasts https://github.com/extratone/bilge/blob/main/curation/podcasts.opml

opt ⌥

up ⇧

cut [(Clipboard) |](shortcuts://run-shortcut?name= (Clipboard))

nomd Email: davidblue@extratone.com
Contact card: bit.ly/whoisdavidblue
Telegram: t.me/extratone
Twitter: twitter.com/NeoYokel
Reddit: reddit.com/u/asphaltapostle
Mastodon: mastodon.social/@DavidBlue
EVERYWHERE: bit.ly/dbrolodex

drybirt http://bit.ly/drybirt

more <!--more-->

shorttwt https://twitter.com/i/communities/1471151406451085313

redacted REDACTED

dmvid howdy! so I'm working on a public contacts list to link folks whenever/if I next find myself randomly in a Twitter Space

I'll add your name and Twitter link to it.

I'd be remiss remisss???

mute1 sɟdnɹɹǝʇuɪ ɔɪpnǝ

pfwtl https://github.com/extratone/fuckme

dforum https://forums.getdrafts.com/u/blue/preferences/profile

io https://extratone.github.io/ (Clipboard)

xjr (ŌŌ(xxxÍxxx)ŌŌ)

greyhound https://actions.getdrafts.com/t/1uk

Donald Trump *T U M P*

wtf https://davidblue.wtf/ (Clipboard)

isub defaults write com.apple.MobileSMS MMSShowSubject 1

vcf https://davidblue.wtf/db.vcf

color https://colorhound.net

hex https://colornames.org/color/ (Clipboard)

mon I have pulled a lot of stupid stunts in bars, though I've yet to be physically struck in one, despite some very persistent

Of course, one would do best not to allow himself and his own designed influence over his outward image and subsequ

ul

```
#!/usr/bin/ruby

# ruby script to make an unordered list from indented data.

data = %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip

result = "<ul>\n"
last_marker = []
last_marker[0] = ""

last_leading_space = ""
g_tab_width = 4
g_list_level = 0
last_list_level = 0

marker = item = leading_space = ''

data.split("\n").each {|line|
next if line =~ /^[\s\t]*$/
parts = line.match(/^([\t ]*)(\d+\. |[\*\+\-] )?\s*(.*)/)
leading_space = parts[1]
marker = parts[2]
item = parts[3]
leading_space.gsub!(/\t/,' ')

if leading_space.length > last_leading_space.length + 3
last_list_level = g_list_level
g_list_level += 1
last_leading_space = leading_space
last_list_level = g_list_level
result += "<ul>\n"
elsif leading_space.length + 3 < last_leading_space.length
g_list_level = leading_space.length / 4
last_leading_space = leading_space
g_list_level-last_list_level.times do
result += "</ul>\n"
end
last_list_level = g_list_level
end
indent = ""

result += "<li>#{item}</li>\n"
}

puts result + "</ul>"
```

docs https://davidblue.wtf/extratext/

koder https://apps.apple.com/us/app/koder-code-editor/id1447489375

pith In the right hour, the woodland springtime metamorphic processes of the neighboring Lake Geneva suburb's in-betwee

Theodore Pith's big old house was now burrowed between two mismatched neighborhoods – the bleaker Easterly, which

In the right hour, the roads were completely and totally abandoned – for the New Yorker, an unfathomable absolute – a

The latest favorite pastime of *Nice, Big*'s Master necessitated a willing, capable driver, and – as keeping a single Butl

The latest favorite pastime of "Nice, Big" s Master necessitated a willing, capable driver, and – as keeping a single Butl

"Hope you're not busy," he'd said quite loudly to the lolling Lather, leaning and tilting his head into the lamp light, which

…

"You're not *busy*, are ya?!" he'd shouted, tapping the shiny brass lion's head of his shiny black cane against the vanit

…

"SHOOT, LENNY," he'd screamed in his companion's ear, having traversed the room to his bedside.

"I SURE HOPE YOU'RE NOT BUSY RIGHT NOW!"

…

Finally, he'd resorted to tickling Lenny's nose with the ornament, which had reeked with the urinal smell of metal polish

"I need a favor. The Duesie's warming up. We're going for a ride."

Unable to form a linguistic response, Lenny Lather had obeyed Theo's frenzied, repeating instructions and stumbled int

…

"Just wait… you have no idea… you have no idea how much fun this is going to be."

Lenny Lather had not… *could not* have made a sound through the confusing nonsense of his waking pre-Great Depre

"Jesus *Christ!*" he'd screamed as they'd hobbled to the stable, where a devilishly dark red Model J Duesenberg had s

As he had spewed – expertly sparing the swoop of the gleaming waxy fender – Lenny had found a pair of deep black, b

"Where to, Sire?" Lenny had asked, nose lifted to an untenable altitude in a pitiful approximation of an accent that'd ne

"Left at the gates, Barnsward, old chap," Theodore had replied in a contrasting fashion after again sitting upright from l

"Now to star-board, Budleigh, my good fellow!"

…

"Right-o, as you say, sir!"

…

"Down to the *pu-hb* for a *spaht* of *brahn*-dee with me *mae-its*!"

…

"*Oncemo-ar* right, pip pip!"

…

"By *jah-lee*, there we are!"

…

After the entirety of Northern European history had been decimated and subsequently forgotten, the Duesenberg name

"*Jesus Christ*," had said the shortest.

"*Holy fuck,*" had said the youngest.

"*Gee whiz*," had said the oldest.

And the Sucking tallest, having realized he'd lost his audience, had been the last to turn and follow their eyes *BLOOD*

The Sucking's *FUCK* and the splitting shatter of his Suck against the glass of their smoking table had reached the two

"Stay here and wait at the ready, my good… my *best* Bagsy! I shan't be a twinkle," he had declared, clicking it lightly

"Tally-*ho*, my boys!" he had shouted, sending Lenny Lather's wide open face toward the floor of the idling car as he c

Perhaps the least expected sight that could have possibly greeted this Apostle of Appraisal on the far side of Aisle 1 – a

"Sir! Excuse me!"

…

"*Excuse me!* Sir!"

…

Theodore Pith – having reevaluated the girth of his intended booty – had propped his shiny black cane against the sill c

…

"Sir! You need to put out that cigar… the cigar – put it out immediately!"

Keys & Leather had the odd inability to both shout and shuffle at the same time, so he'd only made it to the pomegrana

…

"Sir! I'm going to have to ask you to put that down… That is a four thousand dollar item… If you want to buy it, we nee

"…now, see here!" Pith had replied with great effort, in the midst of weighing in his mind the worth of the cane as a cas

"Now, see here, chum!" Pith had forced from the furthest possible extremis of his best mob mouth as he transferred his

"Man, *come on*," the defeated Leather had yelled halfheartedly from his pile of sweets, struggling against the awkwa

After he had regained control of his diaphragm, Lenny Lather had been amused, outside, by the varying velocities in wh

"Haste, Don Lenny!" he'd yelled, re-opening his closest cabin door to chuck his cane in first. He'd then straddled the gre

"Make haste, make haste, my boy!" he'd shouted, diving theatrically into the covered back seat, head-first, to which his

Though the Lake Geneva Police Department was shown the security footage of that first theft by management, the thea

linking https://linkingmanifesto.org

ORCID 0000-0002-9307-2251

ytags technology,media,software,ios,smartphones,tech blog,tech vlog,tech,siri shortcut,personal automation,macos,desktop a

feebles https://bit.ly/Feebles

winter https://youtu.be/WTLDOxvvHJ8

gero https://raindrop.io/davidblue/-13387737

rs shortcuts run "|"

bg https://bit.ly/dbiosbg

repo https://github.com/extratone/bilge

biotxt Self-Described Software Historian, Writing In Public and H e r e 2 H e l p. (Here's my contact card.)

- Telegram
- Email
- Twitter
- Mastodon
- Discord
- *Everywhere…*

life https://write.as/community/chat-with-david-blue

wpget wget --mirror -p --html-extension --convert-links -e robots=off -P . (Clipboard)

tauto (columbia) - Tab https://t.me/s/ (ColumbiaMO) /<num> Tab Enter

~ https://tilde.town/~extratone/

colossus Not like the brazen giant of Greek fame,
With conquering limbs astride from land to land;
Here at our sea-washed, sunset gates shall stand

A mighty woman with a torch, whose flame
Is the imprisoned lightning, and her name
Mother of Exiles. From her beacon-hand
Glows world-wide welcome; her mild eyes command
The air-bridged harbor that twin cities frame.
“Keep, ancient lands, your storied pomp!” cries she
With silent lips. “Give me your tired, your poor,
Your huddled masses yearning to breathe free,
The wretched refuse of your teeming shore.
Send these, the homeless, tempest-tost to me,
I lift my lamp beside the golden door!”

mdbio Self-Described [Software Historian](https://bilge.world/why), [Writing In Public](https://github.com/extratone/bilge) a

jorts https://github.com/extratone/jorts

tblstart | **Action** | **Command** |
|:------:|:-------:|
| (|) | |

avalon https://youtu.be/vC2-RAhBqu0

Practice

kareoshare https://provider.kareo.com/eileen-long

bio As a licensed clinical social worker I will provide therapy and partner with individuals and families helping them achieve

I have life experience as a former military wife for 22 years and know personally the unique challenges faced by servic

psych https://www.psychologytoday.com/us/therapists/eileen-odette-long-jefferson-city-mo/388633

morn This is a reminder you have an appointment with Eileen today at (9:00AM). Please respond by texting back yes or no

Telegram

welcome /setwelcome
Ꞓ⍰ ⍰ Δ ㎜@ⓡⓝⅠN g !⩲⩲ {mention}{first}{last}{id}{username}{fullname}!
%%%
{mention}{first}{last}{id}{username}{fullname} ARRIVAL
%%%
Good mor ning! {mention}{first}{last}{id}{username}{fullname}

{rules}

urlco https://t.me/columbiamo

teshare https://app.textexpander.com/public/de52c54ef169a96393d50cb4752706ce

tid https://t.me/(extratone)/(9941)

num+ I left my own phone number - +15738234380 - in the `Default Number` field of the Ask for Input action very much or

scheme tg://msg?text=[[draft]]&to=+15738234380

repo https://github.com/extratone/t

db https://t.me/davidblue

app https://apps.apple.com/us/app/telegram-messenger/id686449807

trust https://bilge.world/telegram

hi Hello. Are you reaching out about @columbiamo?

extras https://bilge.world/telegram-extras

tbutton [(|)](buttonurl://(Clipboard))

idco -1001227145846

rules https://github.com/extratone/columbia/blob/main/rules.md

idbreak -1001140240303

fill {mention}{first}{last}{id}{username}{fullname}

Text Fuck

fuckshare https://app.textexpander.com/public/12c50fb2360617d3cc66d757cf26383b

wli1 LIΣ└IVΣ'IΠ'Λ'TEM'Σ

fuckissue https://github.com/extratone/bilge/issues/222

wli2 LIΣ└IVΣ'IΠ'Λ'TEM'Σ

gm3 Good morning!

gm2 ⓖⓞⓞⓓ ⓜⓞⓡⓝⓘⓝⓖ

gm1 g o o d m@rnIng !

aech n

gm6 🅖 🅞 🅞 🅓 🅜 🅞 🅡 🅝 🅘 🅝 🅖

gm5 *g o o d m o r n i n g*

gm4 g o o d m o r n i n g

Tot

tot7 tell application "Tot" to open location "tot://7/content"

tot6 tell application "Tot" to open location "tot://6/content"

tot5 tell application "Tot" to open location "tot://5/content"

tot4 tell application "Tot" to open location "tot://4/content"

tot3 tell application "Tot" to open location "tot://3/content"

tot2 tell application "Tot" to open location "tot://2/content"

tot1 tell application "Tot" to open location "tot://1/content"

tot# tell application "Tot" to open location "tot:// (field 1) /content"

Accented Words

fete fête

Cote du Rhone Côte du Rhône

facade façade

materiel matériel

expose' exposé

voila voilà

epee épée

touche' touché

entree entrée

soupcon soupçon

emigre émigré

souffle' soufflé

eclat éclat

soiree soirée

eclair éclair

smorgasbord	smörgåsbord
doppelganger	doppelgänger
senor	señor
divorcee	divorcée
seance	séance
detente	détente
saute	sauté
debutante	débutante
rose'	rosé
debacle	débâcle
resume'	résumé
crepe	crêpe
Quebec	Québec
creme	crème
protege	protégé
cliche	cliché
ole'	olé
chateau	château
nee'	née
Champs-Elysees	Champs-Élysées
naive	naïve
cafe'	café
moire	moiré
brulee	brûlée
Metis	Métis
angstrom	ångström
melee	mêlée
melange	mélange
matinee	matinée
manana	mañana
jalapeno	jalapeño
ingenue	ingénue
habitue	habitué
Francois	François
francais	français
flambe	flambé
fiance	fiancé

Advanced Webinar: JavaScript

signoff	switch(TextExpander.adjustedDate.getDay()){
	case 0: // Sunday
	TextExpander.appendOutput("Have a relaxing weekend!")

```
TextExpander.appendOutput("Have a relaxing weekend!")
break;
case 1: // Monday
TextExpander.appendOutput("Have a great week!")
break;
case 2: // Tuesday
TextExpander.appendOutput("Have a great week!")
break;
case 3: // Wednesday
TextExpander.appendOutput("Happy Wednesday! We're halfway home!")
break;
case 4: // Thursday
TextExpander.appendOutput("Happy Thursday")
break;
case 5: // Friday
TextExpander.appendOutput("Enjoy your Friday!")
break;
case 6: // Saturday
TextExpander.appendOutput("Have a great weekend!")
break;
default:
TextExpander.appendOutput("Have a great day!")
}
```

reformat

```
// replace dashes with periods in a phone number

var input = TextExpander.pasteboardText;

// add the g to make this a global replacement
var input.replace(/-/g,".");
```

welcome

```
Hello (Name)!

Your new email address is: (snippet:js.username)@(textexpander.com)
```

strike

```
if(TextExpander.expansionContext == "com.tinyspeck.slackmacgap"){
TextExpander.appendOutput("~" + TextExpander.pasteboardText + "~")
}
else{
TextExpander.appendOutput("~~" + TextExpander.pasteboardText + "~~")
}
```

crash

```
if(TextExpander.platform == "Windows") TextExpander.appendOutput("\"%LOCALAPPDATA%\Smile\TextExpander\"");
if(TextExpander.platform == "macOS") TextExpander.appendOutput("~/Library/Logs/DiagnosticReports/");
if(TextExpander.platform == "Chrome") TextExpander.appendOutput("chrome://extensions/?errors=mmfhhfjhpadoefoa
```

setclip

```
var username = "(Name)";

username = username.toLowerCase();

username = username.replace(/\s/g,"_")

TextExpander.pasteboardText = username;

// use a string literal
`Your new username is: ${username}.`;
```

set-to-payday

```
var date = new Date(TextExpander.adjustedDate);

// set to the 15th of the month
date.setDate(15);

if(date.getDay() == 1){
// no bookkeeper on Monday

date.setDate(date.getDate() - 3)
}
if(date.getDay() == 6){
// no bookkeeper on Saturday
date.setDate(date.getDate() - 1)
}
if(date.getDay() == 0){
// no bookkeeper on Sunday
date.setDate(date.getDate() - 2)
```

```
date.setDate(date.getDate() - 2)
}

// set the adjusted date to the new value
TextExpander.adjustedDate = date;

// ignore output for this snippet
TextExpander.ignoreOutput = true;
```

helloworld2

```
// The TextExpander.appendOutput method will append the string to the output

TextExpander.appendOutput("Hello, ")
TextExpander.appendOutput("World!");
```

getam

```
var companyName = "(Company Name)";

TextExpander.appendOutput("We're so excited to have " + companyName + "'s business! ");

if(companyName.toLowerCase() <= "m"){
// beginning of alphabet
TextExpander.appendOutput("Alice is your account manager. Please email her at alice@smilesoftware.com.");
}
else{
// end of alphabet
TextExpander.appendOutput("Zelda is your account manager. Please email her at zelda@smilesoftware.com.");
}
```

username

```
var username = TextExpander.filledValues["Name"];

username = username.toLowerCase();

// replace all whitespace with underscores
username = username.replace(/\s/g,"_");

username;
```

calc

```
var numberOfWidgets = (Number of Widgets);

var cost = numberOfWidgets*5;

"Your order of " + numberOfWidgets + " widgets will cost $" + cost + "."
```

helloworld1

```
var hello = "Hello, ";
var world = "World!";

// TextExpander will just output the result of the last line of the snippet

hello + world;
```

Bash Snippets

gitclean

```
git branch --merged | egrep -v "(^\*|master|dev|main)" | xargs git branch -d
```

gitfix

```
git add . && git commit --amend --no-edit && git push origin $(git rev-parse --abbrev-ref HEAD) --force
```

portrun

```
lsof -i tcp:(8080)
```

dateemail

```
pixel+(Year: 2001)(Month: 01)(Day: 01)(Hour: 01 (00-23))(Minute: 01)(Second: 01)@gmail.com
```

randemail

```
#!/bin/bash

echo -n "pixel+$RANDOM@gmail.com"
```

Brett's Tools

mdr

```
#!/usr/bin/ruby

# Parses the clipboard for urls
# if it finds 1 or more, paste them as a list of markdown references
# if the links in the clipboard are already in markdown reference format,
# it preserves their names and sorts the references
```

```
clipboard = %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
links = clipboard.scan /(?:\[([^\]]+)\]\: )?(https?:\/\/[^ \n\r"]+)/m

norepeat = []
output = []
exit if links.nil?

links.each {|url|
fresh = true
output.each {|a|
fresh = false if a['link'] == url[1]
}
next unless fresh

if url[0].nil?
domain = url[1].match(/https?:\/\/([^\/]+)/)
parts = domain[1].split('.')
name = case parts.length
when 1,2
parts[0]
else
parts[1]
end
else
name = url[0]
end

name = "itunes" if url[1] =~ /(itunes|phobos).apple.com/

while norepeat.include? name
name = name =~ / ?[0-9]$/ ? name.next! : name = name + " 2"
end
output << {'title' => name, 'link' => url[1] }
norepeat.push name
}

output.sort {|a,b| a['title'] <=> b['title']}.each { |x| puts "[#{x['title']}]: #{x['link']}" }
```

kittyg

```
<img src="http://placekitten.com/g/ (width) / (height) " alt="KITTEH (width) x (height) " width=" (width) " heigh
```

kittyc

```
<img src="http://placekitten.com/ (width) / (height) " alt="KITTEH (width) x (height) " width=" (width) " height=
```

href

```
#!/usr/bin/env ruby

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\A(mailto:)?(.*?@.*\..*)\z}
"mailto:#{$2.gsub(/./) {sprintf("&#x%02X;", $&.unpack("U")[0])}}"
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"https://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"https://#{entity_escape text}"
when %r{^@\w+$}
"https://twitter.com/#{text.sub(/^@/, '')}"
else
nil
end

end

url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
print %Q{<a href="#{url}"> (Link Text) </a>}
```

fp

```
-- credit to Dr. Drang <http://www.leancrew.com/all-this/2013/01/textexpander-posix-paths-and-forgetfulness/>
tell application "Finder" to get quoted form of POSIX path of (target of front Finder window as text)
```

snapmail

```
#!/usr/bin/env ruby
```

encemail
```
#!/usr/bin/env ruby

clipboard = %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
print "mailto:#{$2.gsub(/./) {sprintf("&#x%02X;", $&.unpack("U")[0])}}" if clipboard =~ /\A(mailto:)?(.*?@.*\..*)\z/
```

dummy
```
<img src="http://placehold.it/ (width) x (height) /333333/dddddd&text= (title) " alt=" (title) " width=" (width) " h
```

curl
```
tell application "Google Chrome" to return URL of active tab of window 1
```

curb
```
#!/usr/bin/ruby
# Bit.ly shortener TextExpander Snippet by Brett Terpstra
# Working as of Feb, 2021 but APIs are a'changin
# Create snippets for username (shortcut: #btlyu) and API key (shortcut: #btlya)
# Find your API key at http://bit.ly/a/your_api_key

require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else
nil
end
end

def get_chrome_url
%x{osascript -e 'tell application "Google Chrome" to return URL of active tab of window 1'}.strip
end

USER_NAME = ' (snippet:#btlyu) ' # Your login name
API_KEY = ' (snippet:#btlya) '

url = get_chrome_url

res = open("https://api-ssl.bit.ly/v3/shorten?login=#{USER_NAME}&apiKey=#{API_KEY}&longUrl=#{CGI.escape(url)

begin
print res.strip unless res.nil?
rescue
exit
end
```

cul
```
#!/usr/bin/ruby

# ruby script to make an unordered list from indented data.

data = %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip

result = "<ul>\n"
last_marker = []
last_marker[0] = ""

last_leading_space = ""
g_tab_width = 4
g_list_level = 0
last_list_level = 0

marker = item = leading_space = ''

data.split("\n").each {|line|
next if line =~ /^[\s\t]*$/
parts = line.match(/^([\t ]*)(\d+\. |[\*\+\-] )?\s*(.*)/)
leading_space = parts[1]
```

```
leading_space = parts[1]
marker = parts[2]
item = parts[3]
leading_space.gsub!(/\t/,' ')

if leading_space.length > last_leading_space.length + 3
last_list_level = g_list_level
g_list_level += 1
last_leading_space = leading_space
last_list_level = g_list_level
result += "<ul>\n"
elsif leading_space.length + 3 < last_leading_space.length
g_list_level = leading_space.length / 4
last_leading_space = leading_space
g_list_level-last_list_level.times do
result += "</ul>\n"
end
last_list_level = g_list_level
end
indent = ""

result += "<li>#{item}</li>\n"
}

puts result + "</ul>"
```

cl

```
#!/usr/bin/ruby
require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else
nil
end
end

input = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip

open(input,"Accept" => "application/json") {|f|
res = f.read.match(/"remote_url":"(.*?)"/)[1]
print res unless res.nil?
}
```

-

```
#!/usr/bin/ruby

clip = %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}

print clip.downcase.gsub(/[^a-z0-9 \-_\.]/i, '').gsub(/\s+/,'-').gsub(/-+/,'-')
```

avg

```
#!/usr/bin/env ruby

def ts( number )
number.to_s.reverse.scan(/(?:\d*\.)?\d{1,3}-?/).join(',').reverse

end

def do_average(text)
arr = text.scan(/\.?\d[\d,]+(?:\.\d+)?/).map{|line|
line.gsub(/[^\d\.]/,'').to_f
}.sort

return ts(arr.inject(0.0) { |sum,el| sum + el } / arr.size ) unless arr.empty?
```

```
return ts(arr.inject(0.0) { |sum,el| sum + el } / arr.size ) unless arr.empty?
end


print do_average %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
```

kbd

```
#!/bin/bash
# Converts "cmd shift d" or "@$d" to "⇧+⌘+D"
# Uses <https://github.com/kotfu/ksc> which requires manual install. Save the script to /usr/local/bin/ksc (or modifiy
INPUT=' (Key Combination) '
PLUS=""

# add -p to include plus signs
printf '%s' $(/usr/local/bin/ksc -ms$PLUS "$INPUT")
```

kbdt

```
#!/bin/bash
# Converts "cmd shift d" or "@$d" to "Shift-Command-D"
# Uses <https://github.com/kotfu/ksc> which requires manual install. Save the script to /usr/local/bin/ksc (or modifiy
INPUT=' (Key Combination) '

printf '%s' $(/usr/local/bin/ksc -k -c "$INPUT")
```

mad

```
#!/usr/bin/ruby

datestring=" (now) "
format=" (iso) "

### Convert Date action
### Copyright 2021 Brett Terpstra <https://brettterpstra.com>
### Freely distribute and edit, but please maintain attribution
require 'Time'

class DateUtils

def initialize(time_zone = 'America/Chicago')
@time_zone = time_zone
end

def parsedate(date,format,unpad=false)
date = Time.parse(%x{php -r "date_default_timezone_set('#{@time_zone}');echo strftime('%c',strtotime('#{date}'))
parsed = date.strftime(format).gsub(/%o/,"#{ordinal(date.strftime(' (Day: 1) ').to_i)}")
parsed.gsub!(/(^|-|\/|\s)0/,"\\1") if unpad
# if there's no space between time and meridiem, downcase it
parsed.gsub!(/(\d)(AM|PM)/) {|m| $1 + $2.downcase }
return parsed =~ /1969/ ? false : parsed
end

# Returns an ordinal number. 13 -> 13th, 21 -> 21st etc.
def ordinal(number)
if (11..13).include?(number.to_i % 100)
"#{number}th"
else
case number.to_i % 10
when 1; "#{number}st"
when 2; "#{number}nd"
when 3; "#{number}rd"
else "#{number}th"
end
end
end

def timeize(time_string,format)
# Uses standard strftime format, but %0I will pad single-digit hours
if time_string =~ /(\d{1,2})(?::(\d\d))?(?:\s*(a|p)m?)?/i
hour = $1.to_i
minute = $2.nil? ? "00" : $2.to_i
meridiem = $3
meridiem = hour > 12 ? "p" : "a" if meridiem.nil?
format.gsub!(/ (Hour: 01 (00-23)) /) {|m|
hour = hour < 12 && meridiem == "p" ? hour + 12 : hour
hour = 0 if hour == 12 && meridiem == "a"
hour < 10 ? "0" + hour.to_s : hour
```

```
}
format.gsub!(/%(0)?I/) {|m|
hour = hour > 12 ? hour - 12 : hour
$1 == "0" && hour < 10 ? "0" + hour.to_s : hour
}
format.gsub!(/ (Minute: 01) /, '%02d' % minute.to_i)
format.gsub!(/ (AM/PM) /,meridiem.downcase + "m")
format.gsub!(/%P/,meridiem.upcase + "M")
end
format
end
end

original = format + " " + datestring

# split input and handle thursday@3 format
input = original.gsub(/(\S)@(\S)/,"\\1 at \\2").split(" ")
unpad = true
du = DateUtils.new

# %o is replaced with ordinal day
format = case input[0]
when 'date' then ' (Month: 01) / (Day: 01) / (Year: 01) ' # slashed date
when 'local' then '%F' # localized date
when 'short' then ' (Day: Mo) , (Month: Jan) %o, (Year: 2001) ' # abbreviated full date
when 'long' then ' (Day: Monday) , (Month: January) %o, (Year: 2001) ' # long full date
when 'iso' then ' (Year: 2001) - (Month: 01) - (Day: 01) '
else false
end

# turn off leading zero removal for certain types
unpad = false if input[0] =~ /(date|local|iso)/

# handle +# to advance # days
input.map! {|part|
part.gsub(/^\+(\d+)$/,"\\1 days").gsub(/^at$/,'')
}

# time formatting
time_format = ""
time_string = ""
if datestring.strip =~ /^now$/
time_string = Time.now.strftime(' (Hour: 01 (00-23)) : (Minute: 01) ')
elsif original.gsub(/\+\d+/,'') =~ /(?mi)((?:at|@) *(\d{1,2}(?::\d\d)?(?:am|pm)?)|(\d{1,2}(?::\d\d)?(?:am|pm))|(\d
m = Regexp.last_match
time_string = if m[2]
m[2]
elsif m[3]
m[3]
elsif m[4]
m[4]
end

time_format = case input[0]
when 'iso' then du.timeize(time_string, ' (Hour: 01 (00-23)) : (Minute: 01) ')
when 'long' then du.timeize(time_string, ' at (Hour: 01 (01-12)) : (Minute: 01) (AM/PM) ')
else du.timeize(time_string, ' (Hour: 01 (01-12)) : (Minute: 01) %P')
end

# input.delete_if { |item|
# item =~ /^(@|at|@?\d{1,2}(:\d\d)?((a|p)m?)?|((a|p)m?))$/i
# }

end

date_string = ""
if format
if input.length > 1
if original.sub(/((@|at)\s*)?#{time_string}/,'') =~ /^\s*$/m || original.strip =~ /^now$/
date_string = "today #{time_format}"
```

```
else
date_string = input[1..input.length].delete_if(&:empty?).join(" ")
end
else
date_string = "today"
end
else
if original.gsub(/((@|at)\s*)?#{time_string}/,'') =~ /^\s*$/m
date_string = "today #{time_format}"
else
date_string = input.join(" ")
end
unpad = false
format = '%F'
end

output = du.parsedate(date_string, format + time_format, unpad)

if output
print output
else
print original
end
```

@d

```
@done( (Year: 2001) - (Month: 01) - (Day: 01)  (Hour: 01 (00-23)) : (Minute: 01) )
```

url

```
#!/usr/bin/env ruby

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\A(mailto:)?(.*?@.*\..*)\z}
"mailto:#{$2.gsub(/./) {sprintf("&#x%02X;", $&.unpack("U")[0])}}"
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"https://#{entity_escape(text)}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"https://#{entity_escape(text)}"
when %r{^@\w+$}
"https://twitter.com/#{text.sub(/^@/, '')}"
else
nil
end
end

url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
print url unless url.nil?
```

swear

```
// add a new snippet and set it to Content: JavaScript
// paste this code
// set the abbreviation to the word you want censored when typed

function censor (input) {
var badWord = input.replace(/((er)?s?|ing)?$/, '');
return input.replace(badWord, censored(badWord));
}

function shuffleArray(inputArr) {
var array = inputArr.slice(0);
for (var i = array.length - 1; i > 0; i--) {

var j = Math.floor(Math.random() * (i + 1));
var temp = array[i];
array[i] = array[j];
array[j] = temp;
}
return array;
}
```

```
function censored (word) {
var chars = '#@!$%*&^iø'.split(''),
output = word.substr(0,1);

while (output.length < word.length - 1) {
output += shuffleArray(chars).join('');
}
return output.substr(0,word.length).replace('$&', '$$$&');
}

TextExpander.appendOutput(censor('(word)'));
```

sut

```
#!/usr/bin/ruby
# tinyurl shortener TextExpander Snippet by Brett Terpstra
# Working as of Feb, 2021 but APIs are a'changin

require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else
nil
end
end

url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip

print open("http://tinyurl.com/api-create.php?url=#{CGI.escape(url)}").read.strip unless url.nil?
```

surl

```
tell application "Safari" to return URL of current tab of window 1
```

surb

```
#!/usr/bin/ruby
# Bit.ly shortener TextExpander Snippet by Brett Terpstra
# Working as of June, 2012 but APIs are a'changin
# Create snippets for username (shortcut: #btlyu) and API key (shortcut: #btlya)
# Find your API key at http://bit.ly/a/your_api_key

require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else
nil
end
end

def get_chrome_url
%x{osascript -e 'tell application "Safari" to return URL of current tab of window 1'}.strip
```

```
end

USER_NAME = '(snippet:#btlyu)' # Your login name
API_KEY = '(snippet:#btlya)'

url = get_chrome_url

res = open("https://api-ssl.bit.ly/v3/shorten?login=#{USER_NAME}&apiKey=#{API_KEY}&longUrl=#{CGI.escape(url)

begin
print res.strip unless res.nil?
rescue
exit
end
```

sui

```
#!/usr/bin/ruby
# is.gd shortener TextExpander Snippet by Brett Terpstra
# Working as of Feb, 2021 but APIs are a'changin

require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else
nil
end
end

url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
print open("http://is.gd/api.php?longurl=#{CGI.escape(url)}").read.strip unless url.nil?
```

sub

```
#!/usr/bin/ruby
# Bit.ly shortener TextExpander Snippet by Brett Terpstra
# Working as of June, 2012 but APIs are a'changin
# Create snippets for username (shortcut: #btlyu) and API key (shortcut: #btlya)
# Find your API key at http://bit.ly/a/your_api_key

require 'open-uri'
require 'cgi'

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"http://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"http://#{entity_escape text}"
else

nil
end
end

USER_NAME = '(snippet:#btlyu)'
API_KEY = '(snippet:#btlya)'
```

```
url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
bitly_url = "https://api-ssl.bit.ly/v3/shorten?login=#{USER_NAME}&apiKey=#{API_KEY}&longUrl=#{CGI.escape(url)

res = open(bitly_url).read unless url.nil?

begin
print res.strip unless res.nil?
rescue
exit
end
```

mt

```
#!/usr/bin/env ruby

email = "(Email Address)"
linktext = "(Link Text)"
subject = "(Subject)"

email = 'mailto:' + email
email += "?subject=#{subject}" if subject.length > 0

print %(<a href="javascript:location='#{email.unpack('U*').map{ |i| "\\u" + i.to_s(16).rjust(4, '0') }.join}';void 0">#
```

mlink

```
#!/usr/bin/env ruby

def entity_escape(text)
text.gsub(/&(?!([a-zA-Z0-9]+|#[0-9]+|#x[0-9a-fA-F]+);)/, '&amp;')
end

def make_link(text)
case text
when %r{\A(mailto:)?(.*?@.*\..*)\z}
"mailto:#{$2.gsub(/./) {sprintf("&#x%02X;", $&.unpack("U")[0])}}"
when %r{\Ahttps?://.*?\.\w{2,4}.*?\z}
entity_escape(text)
when %r{\A(www\..*|.*\.\w{2,4})\z}
"https://#{entity_escape text}"
when %r{\A.*?\.\w{2,4}\/?.*\z}
"https://#{entity_escape text}"
when %r{^@\w+$}
"https://twitter.com/#{text.sub(/^@/, '')}"
else
nil
end
end

url = make_link %x{__CF_USER_TEXT_ENCODING=$UID:0x8000100:0x8000100 pbpaste}.strip
print %Q{[(Link Text)](#{url})}
```

Characters

home ↖

fatright ➜

comm ⌘

eject ⏏

line ————————————————

pgdown ⇟

nuke ☣

opt ⌥

clear ⌧

pgup ⇞

reg ®

return ↩

right →

shift ⇧

shrug ¯_(ツ)_/¯

check ✓

skull ☠

del ⌫

smil ☺

ctrl ^

!? ‽

box
```
┌──────────────────┐
│                  │
│                  │
└──────────────────┘
```

down ↓

end ↘

space ␣

boxd
```
╔══════════════════╗
║  ╒               ╕
│  │               │
╘  ╛               ╜
╚══════════════════╝
```

starb ★

starc ✪

1star ★☆☆☆☆

starw ☆

5stars ★★★★★

tab ⇥

apple ⌘

enter ⏎

trade ™

beta β

zspace

tune ♫

esc ⎋

up ↑

caps ⇪

fwddel ⌦

gear ⚙

heart ♥

left ←

Cliché Corrections

in a nutshell	in short
neither here nor there	not important
last but not least	finally
beg to differ	disagree
at the end of the day	ultimately
plain as day	obvious
at this point in time	presently
bump in the road	setback
a far cry	a long distance
kiss and make up	reconcile
in this day and age	at the present time
when push comes to shove	when needed
keep an eye on	monitor
time and time again	repeatedly
tip of the iceberg	small, more noticeable part of the problem
steer away from	avoid
throw in the towel	give up
it’s only a matter of time	eventually
on cloud nine	elated
needless to say	of course

Contractions - English (US)

theyre	they're
aint	ain't
theyll	they'll
theyd	they'd
thats	that's
thatll	that'll
youve	you've
thatd	that'd
youre	you're
shouldve	should've
youll	you'll
shes	she's

youd	you'd
oclock	o'clock
yall	y'all
mustve	must've
mustnt	mustn't
wouldve	would've
mightve	might've
wouldnt	wouldn't
mightnt	mightn't
wont	won't
maam	ma'am
whys	why's
itll	it'll
whyll	why'll
itd	it'd
whyd	why'd
isnt	isn't
wholl	who'll
im	I'm
whod	who'd
hows	how's
wheres	where's
howll	how'll
wherell	where'll
howd	how'd
whens	when's
hes	he's
whenll	when'll
hed	he'd
whend	when'd
havent	haven't
whats	what's
hadnt	hadn't
whatre	what're
dont	don't
whatll	what'll
doesnt	doesn't
whatd	what'd
didnt	didn't
weve	we've
couldve	could've

couldve could've

werent weren't

couldnt couldn't

wasnt wasn't

cant can't

theyve they've

arent aren't

Creative Writing

e.rw REWRITE

e.rn RESEARCH NEEDED

cw.ra Technique: (Technique used)
Writer's Example: (Writer's technique example)
My Example: (My technique example)

cw.ss It must have been (a few hours past midnight). It was (unbearably humid) outside. (Character name) wanted (

cw.limerick The dominant metre in a Limerick is anapestic, with two metrical feet in the third and fourth lines and three feet in the

A:
A:
B:
B:
A:

cw.acrostic An Acrostic poem uses each letter of a word or phrase as the first letter of each line.

(M)
(Y)

(P)
(H)
(R)
(A)
(S)
(E)

cw.haiku A Haiku is a 3 line poem where first and last lines have 5 syllables, and the middle has seven syllables.

Line 1 (5 syllables):
Line 2 (7 syllables):
Line 3 (5 syllables):

cw.sonnet The Shakespearean or English sonnet is a 14 line poem written in iambic pentameter that ends in a rhyming couplet.

Line 1 (Iambic pentameter):
Line 2 (Iambic pentameter):
Line 3 (Iambic pentameter):
Line 4 (Iambic pentameter):
Line 5 (Iambic pentameter):
Line 6 (Iambic pentameter):
Line 7 (Iambic pentameter):
Line 8 (Iambic pentameter):
Line 9 (Iambic pentameter):
Line 10 (Iambic pentameter):

Line 11 (Iambic pentameter):
Line 12 (Iambic pentameter):
Line 13 (Iambic pentameter + rhyming couplet):
Line 14 (Iambic pentameter + rhyming couplet):

cw.pr Hi (Name),

Thanks for sending over your piece, '(Piece Name)'.

Please see below my thoughts:

What worked: (What worked)
Areas for improvement: (Areas for improvement)
Overall thoughts: (What I took away from this)

e.cr CONSIDER REMOVING

e.et EXPAND THIS

e.as ADD SPEECH

HTML & CSS

.nd –

,video
```
<video width="(width)" height="(height)" controls="controls">

<source src="(ogg)" type="video/ogg" />
<source src="(mp4)" type="video/mp4" />

Your browser does not support the HTML5 video tag.

</video>

|
```

,dl
```
<dl>
<dt>(term 01)</dt>
<dd>(definition 01)</dd>
<dt>(term 02)</dt>
<dd>(definition 02)</dd>
</dl>

|
```

.nb

,ul
```
<ul>

<li>(item 1)</li>
<li>(item 2)</li>
<li>(item 3)</li>
<li>(item 4)</li>

</ul>

|
```

,div
```
<div class="|">

</div>
```

.md —

,tr <tr>|</tr>

,dd <dd>|</dd>

.lt <

,title <title>|</title>

,csslink <link rel="stylesheet" href="|" type="text/css" media="screen" />

.icir î

,textfield <input type="text" name="(name)" value="(value)" size="(size)" />

,contenttype <meta http-equiv="content-type" content="text/html; charset=UTF-8" />

.guil « | »

,textarea <textarea name="(name)" rows="(rows)" cols="(columns)"></textarea>

|

,comment <!-- | -->

.gt >

,td <td>|</td>

,code <code>|</code>

.eu €

,table
```
<table border="0">
<tr>
<th>|</th>
<th></th>
</tr>
<tr>
<td></td>
<td></td>
</tr>
</table>
```

,cite <cite>|</cite>

.egra è

,submit <button type="submit" name="(name)" id="(name)" >(button text)</button>

,checkbox <input type="checkbox" name="(name)" id="(name)" />

.ecir ê

,style <style type="text/css">

|

</style>

,br
|

.eacu é

,strong |

,bq <blockquote>|</blockquote>

.dq “ | ”

,span

,body <body>

|

</body>

.copy ©

,sidebar <sidebar id="|">

</sidebar>

,aurl
```
<a href="http://(url)">(link text)</a>

|
```

.bu
```
&bull;
```

,select
```
<select name=(name)" id=(name)">
<option value="(option1)">(option1)</option>
<option value="(option2)">(option2)</option>
<option value="(option3)">(option3)</option>
</select>

|
```

,amail
```
<a href="mailto:(email)?subject=(subject)">(link text)</a>
```

.amp
```
&amp;
```

,script
```
<script type="text/javascript" language="Javascript" src="|">


</script>
```

,noscript
```
<noscript>|</noscript>
```

.agra
```
&agrave;
```

,reset
```
<button type="reset" name="(name)" id="(name)">(button text)</button>
```

.acir
```
&acirc;
```

,radio
```
<input type="radio" name="(name)" value="(value)" />
|
```

;text
```
text-align: (align) ;
text-decoration: (decoration) ;
text-indent: (indent) ;
text-transform: (transform) ;
text-shadow: (shadow);

|
```

,p
```
<p class="|"></p>
```

;spacing
```
line-height: (line height) ;
word-spacing: (word spacing) ;
letter-spacing: (letter spacing) ;

|
```

,ol
```
<ol>

<li>(item 1)</li>
<li>(item 2)</li>
<li>(item 3)</li>
<li>(item 4)</li>

</ol>

|
```

;sel
```
| {

}
```

,nav
```
<nav id="|">
```

```
</nav>
```

;padding
```
padding: (top) (right) (bottom) (left);
|
```

,li
```
<li>|</li>
```

;margin
```
margin: (top) (right) (bottom) (left);
|
```

,label
```
<label for="(id)">(Label)</label>
|
```

;id
```
#| {

}
```

,jslink
```
<script src="|" type="text/javascript" language="javascript"></script>
```

;font
```
font-family: (family) ;
font-size: (size) ;
font-style: (style) ;
font-weight: (weight) ;
font-variant: (variant) ;

|
```

,img
```
<img src="(url)" alt="(image description)" width="(width)" height="(height)" border="(border)" align="(a
```

.y
```
&yen;
```

;comment
```
/*|*/
```

,html
```
<html xmlns="http://www.w3.org/1999/xhtml">

|

</html>
```

.uuml
```
&uuml;
```

;class
```
.| {

}
```

,hr
```
<hr />
```

.ucir
```
&ucirc;
```

;bwidth
```
border-width: |;
```

,head
```
<head>

<title>(title of the page)</title>

<meta name="robots" content="noindex,follow">

<meta name="description" content="(describe the contents of the page)">

<meta name="keywords" content="(keywords list)">

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

</head>

|
```

.tm
```
&trade;
```

;bstyle border-style: | ;

,h1 <h (level) class="(class)">(title)</h (level)>

.sq ‘ | ’

;border border: (top) (right) (bottom) (left) ;
|

,form <form action="(action)" method="(method)">

|

</form>

.reg ®

;bcolor border-color: | ;

,em |

.po £

;background background: (color) (image) (repeat) (attachment) (position) ;
|

,dt <dt>(term)</dt>
<dd>(definition)</dd>
|

.ntil ñ

;a
```
a:link {
color: (lcolor) ;
text-decoration: (ldec) ;
}

a:visited {
color: (vcolor) ;
text-decoration: (vdecoration) ;
}

a:hover a:focus {
color: (hcolor) ;
text-decoration: (hdecoration) ;
}

a:active {
color: (acolor) ;
text-decoration: (adecoration) ;
}

|
```

,doctype <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

Internet Productivity

/bitly
```
-- updated for v4: https://dev.bitly.com/v4/#operation/createBitlink (v3 end of life on March 1st, 2020)

set my_access_token to "(snippet:my_bitly_access_token)"

if (my_access_token is equal to "%snippet:my_bitly_access_token%") then
return "bit.ly now requires you to have an account and an access token. Please create a snippet with abbreviation my_
```

```
If you don't have an access token, here are instructions how to find yours: https://support.bitly.com/hc/en-us/articles/
else
set my_access_token to first paragraph of my_access_token
end if

set the ClipURL to (the clipboard as string)

ignoring case
if ((characters 1 through 4 of ClipURL as string) is not "http") then
return "Malformed URL."
else
set curlCMD to ¬
"curl -X POST \\
-H \"Authorization: Bearer " & my_access_token & "\" \\
-H \"Content-Type: application/json\" \\
-d '{\"long_url\": \"" & ClipURL & "\"}' \\
https://api-ssl.bitly.com/v4/shorten"

-- Run the script and get the result:
set response to (do shell script curlCMD)

-- Process JSON
set tinyURL to do shell script "python -c 'import json,sys
try:
obj=json.load(sys.stdin)
print obj[\"link\"]
except:
print obj[\"message\"]
' <<<" & quoted form of response

return tinyURL
end if
end ignoring
```

/isgd

```
# thx to David Smalley -> https://is.gd/b8Ak
set the ClipURL to urlencode(the clipboard as string)

set curlCMD to ¬
"curl --stderr /dev/null \"https://is.gd/create.php?format=simple&longurl=" & ClipURL & "\""

-- run the script and get the result
do shell script curlCMD
set isgdURL to the result

return isgdURL

on urlencode(theText)
set theTextEnc to ""
repeat with eachChar in characters of theText
set useChar to eachChar
set eachCharNum to ASCII number of eachChar
if eachCharNum = 32 then
set useChar to "+"
else if (eachCharNum ≠ 42) and (eachCharNum ≠ 95) and (eachCharNum < 45 or eachCharNum > 46) and (eachChar
set firstDig to round (eachCharNum / 16) rounding down
set secondDig to eachCharNum mod 16
if firstDig > 9 then
set aNum to firstDig + 55
set firstDig to ASCII character aNum
end if
if secondDig > 9 then
set aNum to secondDig + 55
set secondDig to ASCII character aNum
end if
set numHex to ("%" & (firstDig as string) & (secondDig as string)) as string

set useChar to numHex
end if
set theTextEnc to theTextEnc & useChar as string
end repeat
return theTextEnc
end urlencode
```

/tinyurl
```
set the ClipURL to (the clipboard as string)

ignoring case
if ((characters 1 through 4 of ClipURL as string) is not "http") then
return "Malformed URL."
else
set curlCMD to ¬
"curl --stderr /dev/null \"http://tinyurl.com/api-create.php?url=" & ClipURL & "\""

-- Run the script and get the result:
set tinyURL to (do shell script curlCMD)

return tinyURL
end if
end ignoring
```

/testurl
```
set the ClipURL to (the clipboard as string)
try
set scriptCmd to "curl -I -L -s \"" & ClipURL & "\" | grep -c \"^HTTP/[^ ]* 200\""
set scriptResult to do shell script scriptCmd
on error
set scriptResult to ""
end try
if scriptResult is equal to "1" then
return escapedURL(ClipURL)
else
beep
return "XX " & escapedURL (ClipURL)
end if

on escapedURL(theURL)
set resultURL to ""
repeat with eachChar in characters of theURL
set eachCharNum to ASCII number of eachChar
if eachCharNum = 37 then
set resultURL to resultURL & "%"
else
set resultURL to resultURL & eachChar
end
end
return resultURL
end
```

JavaScript Clipboard Snippets

toLines
```
// CSV to Newline: Turns a list of comma separated elements (CSV) to a list with each element on its own line
// Courtesy of Guillermo Ermel
TextExpander.pasteboardText.replace(/\s*\,\s*/gim, "\n")
```

ph2
```
var s2 = (""+TextExpander.pasteboardText).replace(/\D/g, '');
var m = s2.match(/^(\d{3})(\d{3})(\d{4})$/);
if(m) `(${m[1]}) ${m[2]}-${m[3]}`;
else "";
```

quotereply
```
/************
Description: This snippet will use >> to quote reply text copied to your clipboard.

Instructions:

1. Copy the text you'd like to quote to your clipboard.
2. Expand snippet.

Sample Input:


Dictumst imperdiet porta lacinia. Blandit nec pellentesque himenaeos fames elementum leo sagittis. Dictum conubia viv

Output:

>>Dictumst imperdiet porta lacinia. Blandit nec pellentesque himenaeos fames elementum leo sagittis. Dictum conubia
>>at nullam orci vivamus. Torquent accumsan etiam. Tempor accumsan suscipit. Integer nostra himenaeos praesent
>>fermentum.
*************/
```

```
var theString = TextExpander.pasteboardText;

var theLines = theString.split("\n");

var output = "";

for(aLine of theLines){
var theWords = aLine.split(" ");
var ct = 0;
if(theWords.length > 1) output = output + ">>";
for(aWord of theWords){
if(ct < 15) output = output + " " + aWord;
else{
output = output + "\n>>" + aWord;
ct = 1;
}
ct++;
}
output = output + "\n";
}

output;
```

toCSV

```
// Lines to CSV: Turns a regular list of elements to a list of comma separated elements (CSV)
// Courtesy of Guillermo Ermel
TextExpander.pasteboardText.replace(/(\n|\r)+\b/ig, ", ")
```

ph1

```
var s2 = (""+TextExpander.pasteboardText).replace(/\D/g, '');
var m = s2.match(/^(\d{3})(\d{3})(\d{4})$/);
if(m) m[1] + "." + m[2] + "." + m[3];
else "";
```

renumber

```
/************
Description: This snippet will renumber a list that is copied to your clipboard.

Instructions:

1. Copy an incorrectly numbered list to your clipboard.
2. Expand snippet.

Sample Input

1. item 1
3. item 2
2. item 3

Output:

1. item 1
2. item 3
3. item 3
*************/

inputString = "Line 0\n" + TextExpander.pasteboardText;

// attempt to remove zero width space
inputString = inputString.replace(/[\u200B-\u200D\uFEFF]/g, '');

var regExp = /\d+(.)/;
var matches = regExp.exec(inputString);
listDelimiter = matches[1];

var items = inputString.split(/[\r\n][0-9]+./);

var output = "";

for(var i = 1; i < items.length; i++){
output = output + i + listDelimiter + items[i];
if(i != items.length-1) output = output + "\n";
}
```

output;

geturlpath

```
/************
Description: This snippet will paste the path of the url on the clipboard.

Instructions:

1. Copy a full url to the clipboard.
2. Expand snippet.

Sample Input:

https://stackoverflow.com/questions/6941533/get-protocol-domain-and-port-from-url

Output:

/questions/6941533/get-protocol-domain-and-port-from-url
*************/
// ht: https://stackoverflow.com/questions/6941533/get-protocol-domain-and-port-from-url
const url = new URL(TextExpander.pasteboardText);

url.pathname;
```

alpha

```
/************
Description: This snippet will alphabetize a list

Instructions:

1. Copy a list to your clipboard
2. Expand snippet.

Sample Input:

Banana
Orange
Apple


Output:

Apple
Banana
Orange
*************/

TextExpander.pasteboardText.split("\n").sort().join("\n");
```

makepopup

```
// This snippet expects one option per line

var options = TextExpander.pasteboardText.split(/\r\n|\n|\r/);

TextExpander.pasteboardText = "%" + "fillpopup:name=My Popup:" + options.join(":") + "%";

`The popup menu macro code is now on your clipboard. Please do the following:

1. Create a new snippet.
2. Set the content to AppleScript via the dropdown menu above the content.
3. Paste your clipboard into the content area.
4. Set the content to Plain text via the dropdown menu above the content.

Here is a brief video demonstration:

https://share.getcloudapp.com/2NuwB5yp
`
```

all

(Convert clipboard to camel case) (snippet:camel) ([])
(Convert clipboard to title case) (snippet:title) ([])
(Trim whitespace from clipboard text) (snippet:trimws) ([])
(Copy 10-digit phone number to clipboard | expands as (123) 456-7890) (snippet:ph2) ([])
(Copy 10-digit phone number to clipboard | expands as 123.456.7890) (snippet:ph1) ([])
(Quote text) (snippet:quotereply) ([])
(Get URL path from clipboard) (snippet:geturlpath) ([])

(Renumber list) (snippet:renumber) (])
(Alphabetize list) (snippet:alpha) (])
(Reverse) (snippet:clip.reverse) (])

reverse
```
TextExpander.pasteboardText.split("").reverse().join("");
```

camel
```
// h/t: https://www.geeksforgeeks.org/how-to-convert-string-to-camel-case-in-javascript/
function toCamelCase(str) {
return str.replace(/(?:^\w|[A-Z]|\b\w)/g, function(word, index) {
return index == 0 ? word.toLowerCase() : word.toUpperCase();
}).replace(/\s+/g, '');
}

toCamelCase(TextExpander.pasteboardText);
```

fandr
```
//
TextExpander.pasteboardText.replace(/ (Find) /g," (Replace) ")
```

case
(Title Case) (snippet:titlecase) (])
(camelCase) (snippet:case-camel) (])

phx
(123.456.7890) (snippet:ph1) (])
((123) 456-7890) (snippet:ph2) (])

title
```
function capitalizeFirstLetter(input){
return input.charAt(0).toUpperCase() + input.substring(1);
}

var lowerCaseWords = [
"a",
"an",
"the",
"for",
"and",
"nor",
"but",
"or",
"yet",
"so",
"such",
"as",
"at",
"around",
"by",
"after",
"along",
"for",
"from",
"of",
"on",
"to",
"with",
"without"
];

var words = TextExpander.pasteboardText.toLowerCase().split(" ");

for(var i = 0; i < words.length; i++){
if(!lowerCaseWords.includes(words[i]) || i == 0 || i == words.length-1) words[i] = capitalizeFirstLetter(words[i]);
}

words.join(" ");
```

trimws
```
var input = TextExpander.pasteboardText;

input.trim();
```

Keyboard Maestro Clipboard History

;v1
```
tell application "Keyboard Maestro Engine"
set result to process tokens "%PastClipboard%1%"
```

```
end tell
return result
```

;v4
```
tell application "Keyboard Maestro Engine"
set result to process tokens "%PastClipboard%4%"
end tell
return result
```

;v2
```
tell application "Keyboard Maestro Engine"
set result to process tokens "%PastClipboard%2%"
end tell
return result
```

;v3
```
tell application "Keyboard Maestro Engine"
set result to process tokens "%PastClipboard%3%"
end tell
return result
```

Mac keyboard symbols

;kbhome	↖
;kbspace	␣
;kbctrl	^
;kbdelete	⌫
;kbshift	⇧
;kbcaps	⇪
;kbenter	⌅
;kbpower	⏻
;kbleft	←
;kbright	→
;kbcmd	⌘
;kbend	↘
;kbdown	↓
;kbup	↑
;kbeject	⏏
;kbreturn	↵
;kbdelforward	⌦
;kboption	⌥
;kbtbleft	⇤
;kbtbright	⇥
;kbtab	⇆
;kbpageup	⇞
;kbpagedown	⇟

Medical Abbreviations

tspi	thoracic spine
mvc	motor vehicle crash
gre	greater than
cva	cerebrovascular accident (stroke)
cc	chief compliant

sz	seizure
mso4	morphine
les	less than
cts	cat scan
ceph	cephalic
sx	symptom
msc	mental status change
eq	equal
csf	cerebrospinal fluid
chf	congestive heart failure
svt	supraventricular tachycardia
mss	mental status
;up	↑
cpr	cardiopulmonary resuscitation
cns	central nervous system
mm	male
st	sinus tachycardia
min	minimum / minute
;low	↓
copd	chronic obstructive pulmonary disease
aaa	abdominal aortic aneurysm
;mm	♂
sq	subcutaneous
mii	myocardial infarction (heart attack)
;chg	Δ
etoh	ethanol (alcohol)
bls	basic life support
lsspine	lumbarsacral spine
sob	shortness of breath
mg	milligram(s)
;pri	1°
ett	endotracheal tube
ams	altered mental status
lspine	lumbar spine
sp	status post
med	medicine
up	upper (increased)
chp	chest pain
llq	left lower quadrant
rxn	reaction

mcg microgram(s)
a- before
abc airway, breathing, circulation
ld labor and delivery
rxx medicine
mast military anti-shock trousers
p- after
abd abdoment (abdominal)
lb pound
ruq right upper quadrant
luq left upper quadrant
c- with
acls advanced cardiac life support
lat lateral
rlq right lower quadrant
lr lactated ringers
ss without
aka above the knee amputation
kvo keep vein open
pvc premature ventricular contraction
loc level of consciousness (loss of consciousness)
chg change
als advanced life support
kg kilogram
pt patient
lmp last mestrual period
lf left
ama against medical advice
jvd jugular vein distension
prn as needed
tko to keep open
rt right
amt amount
iv intravenous
prb partial rebreather
tx treatment
;sec 2°
approx approximately
im intramuscular
poo orally
upon our arrival

uoa upon our arrival
low lower (decreased)
asa aspirin
icu intensive care unit
pmhx past medical history
uri upper respiratory infection
pri primary
assoc associated
icp intracranial pressure
pearl pupils equal and reactive to light
uti urinary tract infection
sec secondary
bg blood glucose
hx history
pee pulmonary embolus
vf ventricular fibrillation
ext external (extension)
bilat bilateral
htn hypertension
pac premature atrial contraction
vs vital signs
fb foreign body
bka below the knee amputation
hr heart rate (hour)
palp palpation
vt ventricular tachycardia
flex flexion
bm bowel movement
heent head, eyes, ears, nose, throat
obgyn obstetrics/gynecology
wap wandering atrial pacemaker
fx fracture
bp blood pressure
ha headache
nsr normal sinus rhythm
wnl within normal limits
eet endotracheal
bs breath sounds
gyn gynecology (gynecological)
nss normal saline
yo years old (years of age)

eeg electroencephelogram

bvm bag-valve-mask

gu gastrourinary

nrb non-rebreather

fe female

ecg electrocardiogram

csec caesarean section

gtts drops

nkda no known drug allergies

;fe ♀

dx diagnosis

cspi cervical spine

gsw gunshot wound

neb nebulizer

pos positive

dt delirium tremens

c/o complaint of (complains of)

gi gastrointestinal

nc nasal cannula

neg negative

doa dead on arrival

ca cancer

gg gram(s)

nad no apparant distress

qu questionable

dnr do not resuscitate

cbg coronary artery bypass graft

tia transient ischemic attack

nvd nausea/vomiting/diarrhea

;psy Ψ

dka diabetic ketoacidosis

cd coronary artery disease

tt temperature

nvv nausea/vomiting

psy psychiatric

d5w 5% dextrose in water

cth catheter

NATO Phonetic Alphabet

,,d Delta

k Kilo

,,k Kilo

,,c Charlie

,,j Juliet

,,b Bravo

,,i India

,,a Alpha

,,h Hotel

,,z Zulu

,,y Yankee

,,x X-ray

,,w Whiskey

,,v Victor

,,u Uniform

,,t Tango

,,s Sierra

,,r Romeo

,,q Quebec

,,p Papa

,,o Oscar

,,l Lima

,,n November

,,m Mike

,,g Golf

,,f Foxtrot

,,e Echo

Power User Productivity Tips Webinar

xhi Hi (snippet:xnm),

xhats Dear (name)

Thank you for your email inquiry. We at Hats, Hats, Hats, Hats, Hats, Ltd. are obsessed with just one thing and that's h

(In Stock) We are pleased to report we have your hat in stock and set aside just for you. (])

(Out of Stock) Unfortunately, we are currently out of stock. We have placed you on a waiting list and we expect to ha

(optional part 6) We accept payment in all of the usual forms. You can send cash, check, or charge card. We also acce

(Paid) Our records reflect you have sufficient credit on your account already for this purchase. A short-tailed Albatros

(Additional Comments)

Thank you. Hats, Hats, Hats, Hats, Hats, Ltd. appreciates your business.

With warm regards,

Nigel Baldman

xmse (Year: 2001) - (Month: 01) - (Day: 01) (Hour: 01 (00-23)) - (Minute: 01) - (Description) - macsparky expens

;sdatemath (Month: January) (Day: 1), (Year: 2001)

Hi (name),

It was great meeting with you today! Let's schedule our follow up for (snippet:;4days) (Day: Monday), (Month: Ja

Thanks,
Jeff

;datemath (Month: January) (Day: 1), (Year: 2001)

Hi (name),

It was great meeting with you today! Let's schedule our follow up for (Add 4 days) (Day: Monday) at (Hour: 1 (1-

Thanks,
Jeff

;form Jeff Tab Gamet Tab (snippet:jtext) Tab Tab (Inquiry)

xrog Special Interrogatory Number
State every FACT which supports, directly or indirectly, the allegations in paragraph (Number) of the complaint that "

Special Interrogatory Number
Identify every WRITING that supports, reflects, mentions or refers to any fact which supports, directly or indirectly, the

Special Interrogatory Number
State the name, address and phone number or every PERSON who you believe has knowledge of any fact which suppo

xnm
```
tell application "System Events"
tell process "Mail"
tell text field "To:" of window 1
if UI element 1 exists then
set theToRecipient to (value of UI element 1)
if ((count words of theToRecipient) is greater than 0) and (theToRecipient does not contain ",") then
return word 1 of theToRecipient
else if ((count words of theToRecipient) is greater than 0) and (theToRecipient contains ",") then
return word 2 of theToRecipient
end if
end if
end tell
end tell
end tell
```

;4days
```
// Find the first non-weekend day four days from now
var p4bd = new Date();
p4bd.setDate(TextExpander.baseDate.getDate() + 4); // add 4 days to current
// skip Saturdays and Sundays
while (p4bd.getDay() == 6 || p4bd.getDay() == 0) {
p4bd.setDate(p4bd.getDate() + 1);
}
TextExpander.adjustedDate = p4bd; // adjust for all snippets in this expansion
TextExpander.ignoreOutput = true;
```

;strip
```
// Start with the clipboard content
var result = TextExpander.pasteboardText;

// Strip the HTML query; everything after the ? up to
// any closing quotation mark
result = result.replace(/\?[^\"]+/, "");


// If we've got HTML (<a href…), strip that too
var hrefRegex = /<\s*a\s+href\s*=\s*\"([^\"]+)\"\s*>[^<]+<\s*\/a\s*>/i;
var matches = hrefRegex.exec(result);
if (matches && matches.length > 0) {
result = matches[1];
}

// Return the result
```

```
TextExpander.appendOutput(result);
```

;dark

```
tell application "System Events"
tell appearance preferences
get properties
set currentValue to dark mode
if currentValue is false then
set properties to {dark mode:true}
else if currentValue is true then
set properties to {dark mode:false}
end if
end tell
end tell
```

Punctuation

" '|'

sc ‘|’

cc “|”

ss "|"

((|)

{} {{|}}

{{ {|}

[[[|]

<< <|>

Social Media Post Outlines

bp (Stop what you're doing!) New blog post on (premise of blog post). Check it out here: (blog URL)

cs Did you catch this (podcast) (text) on (subject of content)? It has some great insights. Take a look: (content UR

ev Thanks to everyone who came to (company event). We had an (unforgettable) time and (comment on event).

as (Fantastic) article on (article subject) by (author). Check it out: (URL)

cp Are you following us on (platform)? You can find us here: (URL to platform) See you there!

nu We're (thrilled) to announce (fantastic news about your company)! (Additional comment)

mi We did it! (Company achievement here). We couldn't have done it without you!

ci Did you know (interesting fact about your company)? Read more here: (URL to relevant content)

Software/Web Testing

lor

```
const length = 0 (Enter # of characters) ;
const sentences = [
'Lorem ipsum dolor sit amet, consectetur adipiscing elit.',
'Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos himenaeos.',
'Sed convallis tristique sem.',
'Nulla metus metus, ullamcorper vel, tincidunt sed, euismod in, nibh.',
'Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Morbi lacinia molestie dui.',
'Donec lacus nunc, viverra nec, blandit vel, egestas et, augue.',
'Curabitur sit amet mauris. Morbi in dui quis est pulvinar ullamcorper.',
'Morbi in ipsum sit amet pede facilisis laoreet.',
'Quisque cursus, metus vitae pharetra auctor, sem massa mattis sem, at interdum magna augue eget diam.',
'In scelerisque sem at dolor.'
];

var output = "";
```

```
while (output.length < length) {
const index = Math.floor(Math.random() * Math.floor(9));
output += sentences[index] + " ";
}

output = output.substring(0, length);
```

pcam
```
var text = TextExpander.pasteboardText.trim().replace(/[\r\n]/g,' ').replace(/[ ]{2,}/g,' ').toLowerCase();
text.split(' ').map(function(word) {
return word.replace(word[0], word[0].toUpperCase());
}).join('');
```

ptitle
```
var text = TextExpander.pasteboardText.toLowerCase();
text.split(' ').map(function(word) {
return word.replace(word[0], word[0].toUpperCase());
}).join(' ');
```

psen
```
var text = TextExpander.pasteboardText.toLowerCase();
text.replace(text[0], text[0].toUpperCase());
```

ptrim
```
TextExpander.pasteboardText.trim().replace(/[\r\n]/g,' ').replace(/[ ]{2,}/g,' ');
```

pup
```
TextExpander.pasteboardText.toUpperCase();
```

plow
```
TextExpander.pasteboardText.toLowerCase();
```

ruler
```
const length = (Ruler length in characters);

// Line 1: 0 through 9 repeating
var output = "";

for (i = 1; i <= length; i++) {
output += i % 10;
}

// Line 2: tens digit
output += "\n";
var segment = "";
var space = " ";

for (i = 1; i <= length / 10; i++) {
segment = space.repeat(10 - i.toString().length) + i;
output += segment;
}
```

lip
```
const length = 0 (Enter # of sentences);
const sentences = [
'Lorem ipsum dolor sit amet, consectetur adipiscing elit.',
'Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos himenaeos.',
'Sed convallis tristique sem.',
'Nulla metus metus, ullamcorper vel, tincidunt sed, euismod in, nibh.',
'Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Morbi lacinia molestie dui.',
'Donec lacus nunc, viverra nec, blandit vel, egestas et, augue.',
'Curabitur sit amet mauris. Morbi in dui quis est pulvinar ullamcorper.',
'Morbi in ipsum sit amet pede facilisis laoreet.',
'Quisque cursus, metus vitae pharetra auctor, sem massa mattis sem, at interdum magna augue eget diam.',
'In scelerisque sem at dolor.'
];

var output = '';

for (i = 0; i < length; i++) {
const index = Math.floor(Math.random() * Math.floor(9));
output += sentences[index] + " ";

}
```

Symbols

ssection §

yyen ¥

ttm	™
sstar	★
rregistered	®
rrecycle	♻
ppound	£
ooption	⌥
iinfinity	∞
hheart	♥
eeuro	€
ddivide	÷
ddelete	⌦
ccopy	©
ccontrol	^
ccmd	⌘
bbackspace	⌫
aapple	
~==	≅
>==	≥
<==	≤
+-	±
/==	≠
sshift	⇧

Text Utilities

paste-title

(snippet:text-title)
```
TextExpander.pasteboardText = text;
text;
```

paste-sentence

(snippet:text-sentence)
```
TextExpander.pasteboardText = text;
text;
```

paste-lower

(snippet:text-lower)
```
TextExpander.pasteboardText = text;
text;
```

paste-caps

(snippet:text-caps)
```
TextExpander.pasteboardText = text;
text;
```

text-no-nbsp

```
TextExpander.ignoreOutput = true;
var pattern = /[\u0026]nbsp;/ig
```
(snippet:text-spaces)
```
text = text.replace(pattern,' ');
text = text.replace(/<span>[\s]*<\/span>/ig,' ');
text = text.replace(/[ ]{2,}/g,' ');
```

text-urltrim

```
TextExpander.ignoreOutput = true;
var pattern = /(?:http|https|ftp):\/\/(.+?)\/?$/i
var text = TextExpander.pasteboardText.trim().replace(pattern,'$1');
```

text-sentence

```
TextExpander.ignoreOutput = true;
var text = TextExpander.pasteboardText.toLowerCase();
```

```
text = text.replace(/\b[i]\b/g,'I');
text = text.charAt(0).toUpperCase() + text.slice(1);
```

text-lower

```
TextExpander.ignoreOutput = true;
var text = TextExpander.pasteboardText.toLowerCase();
```

text-spaces

```
TextExpander.ignoreOutput = true;
if ( !text ) {
var text = TextExpander.pasteboardText.trim();
}
text = text.replace(/[>][ ]+/g,'>');
text = text.replace(/[ ]+(?=<)/g,'');
text = text.replace(/[ ]{2,}/g,' ');
text = text.replace(/[ ]{2,}/g,' ');
```

text-trim

```
TextExpander.ignoreOutput = true;
var text = TextExpander.pasteboardText.trim().replace(/[\r\n]/g,' ').replace(/[ ]{2,}/g,' ');
```

text-file-name

```
switch ( '(Both)' ) {
case 'Dash':
var pattern = /[-]+/g;
break;

case 'Hyphen':
var pattern = /[_]+/g;
break;

default:
var pattern = /[_-]+/g;

}
var textParts = TextExpander.pasteboardText.trim().split('.');
var text = textParts[ textParts.length-2 ].replace(pattern,' ');
TextExpander.appendOutput(text);
```

paste-plain

```
(Clipboard)
```

text-caps

```
TextExpander.ignoreOutput = true;
var text = TextExpander.pasteboardText.toUpperCase();
```

text-title

```
String.prototype.toTitleCase = function() {
var i, j, str, lowers, uppers;
str = this.replace(/([^\W_]+[^\s-]*) */g, function(txt) {
return txt.charAt(0).toUpperCase() + txt.substr(1).toLowerCase();
});

// Certain minor words should be left lowercase unless
// they are the first or last words in the string
lowers = ['A', 'An', 'The', 'And', 'But', 'Or', 'For', 'Nor', 'As', 'At',
'By', 'For', 'From', 'In', 'Into', 'Near', 'Of', 'On', 'Onto', 'To', 'With','I3','I8'];
for (i = 0, j = lowers.length; i < j; i++)
str = str.replace(new RegExp('\\s' + lowers[i] + '\\s', 'gi'),
function(txt) {
return txt.toLowerCase();
});

// Certain words such as initialisms or acronyms should be left uppercase
uppers = ['ID', 'TV', 'GMC', 'RAM', 'BMW', 'MINI', 'RX', 'LX', 'MKX', 'MKZ', 'MKC', 'MKT', 'MKS', 'GS', 'NX', 'CT', 'ES', 'GX',
for (i = 0, j = uppers.length; i < j; i++)
str = str.replace(new RegExp('\\b' + uppers[i] + '\\b', 'gi'),
uppers[i].toUpperCase());

return str;
}


TextExpander.ignoreOutput = true;

var text = TextExpander.pasteboardText.toLowerCase().toTitleCase();
```

paste-trim

```
(snippet:text-trim)
TextExpander.pasteboardText = text;
text;
```

paste-spaces (snippet:text-spaces)
TextExpander.pasteboardText = text;
TextExpander.appendOutput(text);

paste-urltrim (snippet:text-urltrim)
TextExpander.pasteboardText = text;
text;

paste-file-name (snippet:text-file-name)
TextExpander.appendOutput(text);

paste-no-nbsp (snippet:text-no-nbsp)
TextExpander.pasteboardText = text;
TextExpander.appendOutput(text);

TextExpander Advanced Webinar Snippets

;flwup (kathy@textexpander.com) Tab (CC: Email) Tab (Email Subject) Meeting Follow Up Tab Hi (name),

Thanks for meeting with me. | Here's the canned read for next month's ((Add 1 month) (Month: January) (Year:

(Clipboard)

(Reset Date Adjustment) Let's set up a meeting for (tomorrow).

Thanks (name)!

(Plain Sig) Cheers,
Christiane (]) (Friendly Sig) Yours,
Christiane (]) (Graphic sig) (snippet:;esig) (])

;esig Cheers,
Christiane

(snippet:.myphone)
Visit the TextExpander website

.myphone 303-867-5309

,msg That was so productive! I'm looking forward to seeing where this project takes us. I expect we'll get a lot of interest frc

US States

tx Texas

ne Nebraska

la Louisiana

az Arizona

tn Tennessee

mt Montana

ky Kentucky

ak Alaska

sd South Dakota

mo Missouri

ks Kansas

al Alabama

sc South Carolina

sc South Carolina
ia Iowa
ri Rhode Island
in Indiana
pa Pennsylvania
il Illinois
or Oregon
id Idaho
ok Oklahoma
hi Hawai'i
oh Ohio
ga Georgia
nd North Dakota
wy Wyoming
fl Florida
wi Wisconsin
nc North Carolina
ms Mississippi
dc District of Columbia
wv West Virginia
ny New York
mn Minnesota
de Delaware
wa Washington
nm New Mexico
mi Michigan
ct Connecticut
va Virginia
nj New Jersey
ma Massachusetts
co Colorado
vt Vermont
nh New Hampshire
md Maryland
ca California
ut Utah
nv Nevada
me Maine
ar Arkansas