


TP 1

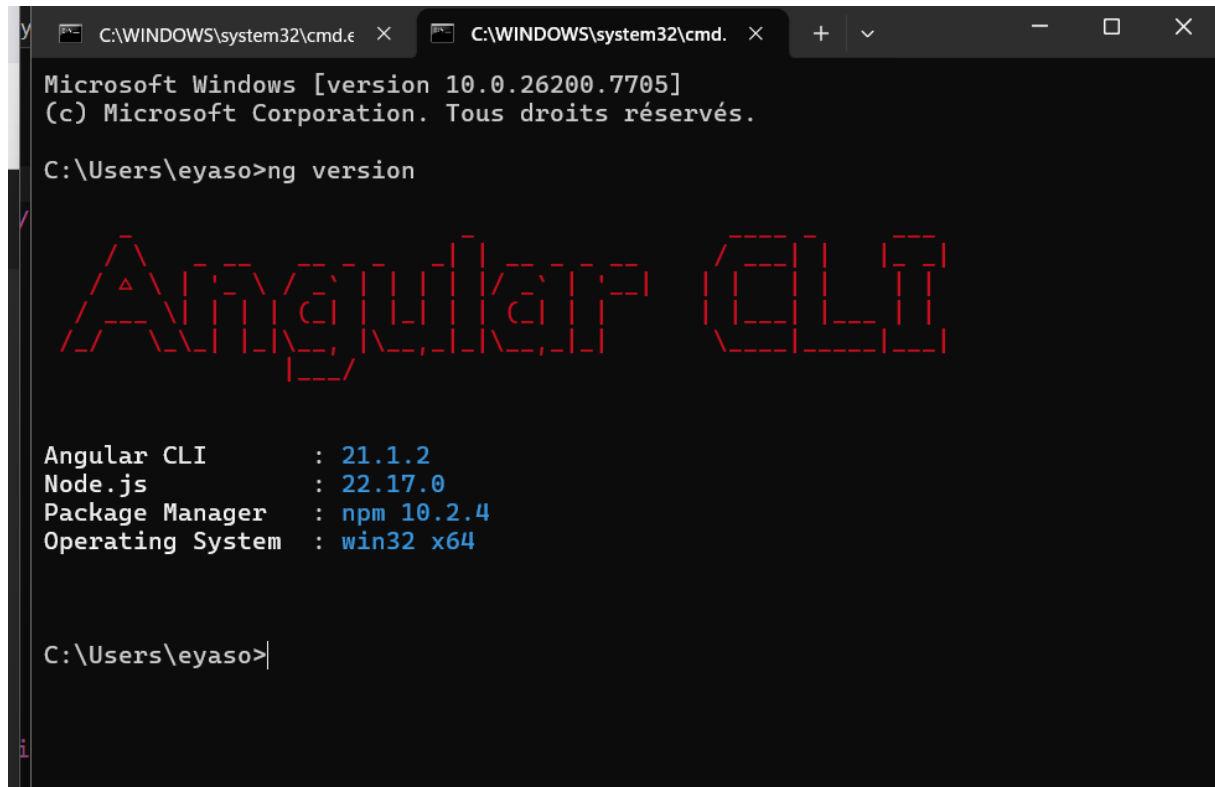

A screenshot of a Windows command prompt window. The title bar shows two tabs for 'C:\WINDOWS\system32\cmd.exe'. The window content displays the output of the 'ng version' command. At the top, it shows the Windows version and copyright information. Below that, the command 'C:\Users\eyaso>ng version' is entered. The output features the 'Angular CLI' logo in a large, red, dashed font. Underneath the logo, a list of installed versions is shown in a smaller font: Angular CLI (21.1.2), Node.js (22.17.0), Package Manager (npm 10.2.4), and Operating System (win32 x64). The prompt 'C:\Users\eyaso>' is visible at the bottom.

```
Microsoft Windows [version 10.0.26200.7705]
(c) Microsoft Corporation. Tous droits réservés.

C:\Users\eyaso>ng version

Angular CLI
Node.js
Package Manager
Operating System

Angular CLI      : 21.1.2
Node.js          : 22.17.0
Package Manager  : npm 10.2.4
Operating System : win32 x64

C:\Users\eyaso>
```

```
C:\WINDOWS\sy x C:\WINDOWS\sys x Invite de commar x + v - □ x
larTp>ng new my-first-app
✓Which stylesheet system would you like to use? Tailwind CSS [
https://tailwindcss.com ]
✓Do you want to enable Server-Side Rendering (SSR) and Static Site
Generation (SSG/Prerendering)? No
✓Which AI tools do you want to configure with Angular best practices?
https://angular.dev/ai/develop-with-ai None
CREATE my-first-app/angular.json (1994 bytes)
CREATE my-first-app/package.json (1053 bytes)
CREATE my-first-app/README.md (1522 bytes)
CREATE my-first-app/tsconfig.json (990 bytes)
CREATE my-first-app/.editorconfig (331 bytes)
CREATE my-first-app/.gitignore (666 bytes)
CREATE my-first-app/tsconfig.app.json (444 bytes)
CREATE my-first-app/tsconfig.spec.json (456 bytes)
CREATE my-first-app/.postcssrc.json (57 bytes)
CREATE my-first-app/.vscode/extensions.json (134 bytes)
CREATE my-first-app/.vscode/launch.json (490 bytes)
CREATE my-first-app/.vscode/mcp.json (188 bytes)
CREATE my-first-app/.vscode/tasks.json (1020 bytes)
CREATE my-first-app/src/main.ts (228 bytes)
CREATE my-first-app/src/index.html (309 bytes)
CREATE my-first-app/src/styles.css (105 bytes)
CREATE my-first-app/src/app/app.spec.ts (702 bytes)
CREATE my-first-app/src/app/app.ts (306 bytes)
CREATE my-first-app/src/app/app.css (0 bytes)
CREATE my-first-app/src/app/app.html (20446 bytes)
CREATE my-first-app/src/app/app.config.ts (324 bytes)
CREATE my-first-app/src/app/app.routes.ts (80 bytes)
CREATE my-first-app/public/favicon.ico (15086 bytes)
✓Packages installed successfully.
warning: in the working copy of 'package-lock.json', LF will be replaced by
CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF
the next time Git touches it
warning: in the working copy of 'src/styles.css', LF will be replaced by CRLF
the next time Git touches it
Successfully initialized git.

C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angu
larTp>n
```

Étape 1 : Installer Tailwind et ses dépendances

```
my-first-app@0.0.0 C:\Users\eyaso\OneDrive\Documents\First year Engineering\
secondSemester\angularTp\my-first-app
+-- @angular/build@21.1.3
| '-- tailwindcss@4.1.18 deduped
+-- @tailwindcss/postcss@4.1.18
| +-- @tailwindcss/node@4.1.18
| | '-- tailwindcss@4.1.18 deduped
| '-- tailwindcss@4.1.18 deduped
'-- tailwindcss@4.1.18
```

my-first-app

EXPLORER

MY-FIRST-APP

> .angular

> .dist

> .vscode

> node_modules

> public

> src

> app

index.html

main.ts

styles.css

.editorconfig

.gitignore

.postcssrc.json

angular.json

package-lock.json

package.json

README.md

tailwind.config.js

tsconfig.app.json

tsconfig.json

tsconfig.spec.json

OUTLINE

TIMELINE

VS CODE PETS

tailwind.config.js

```
1 export default {
2   content: [
3     './src/**/*.html', './src/**/*.ts'
4   ],
5   theme: {
6     extend: {},
7   },
8   plugins: [],
9 }
10
```

C Compiler Terminal

Raw size
size
styles.css | styles | 6.28
kB |

Application bundle generation complete. [0.096 seconds] - 2026-02-07T08:17:26.709Z

Page reload sent to client(s).


Build with Agent

AI responses may be inaccurate

Generate Agent Instructions to onboard AI on your codebase

tailwind.conf

Describe what to

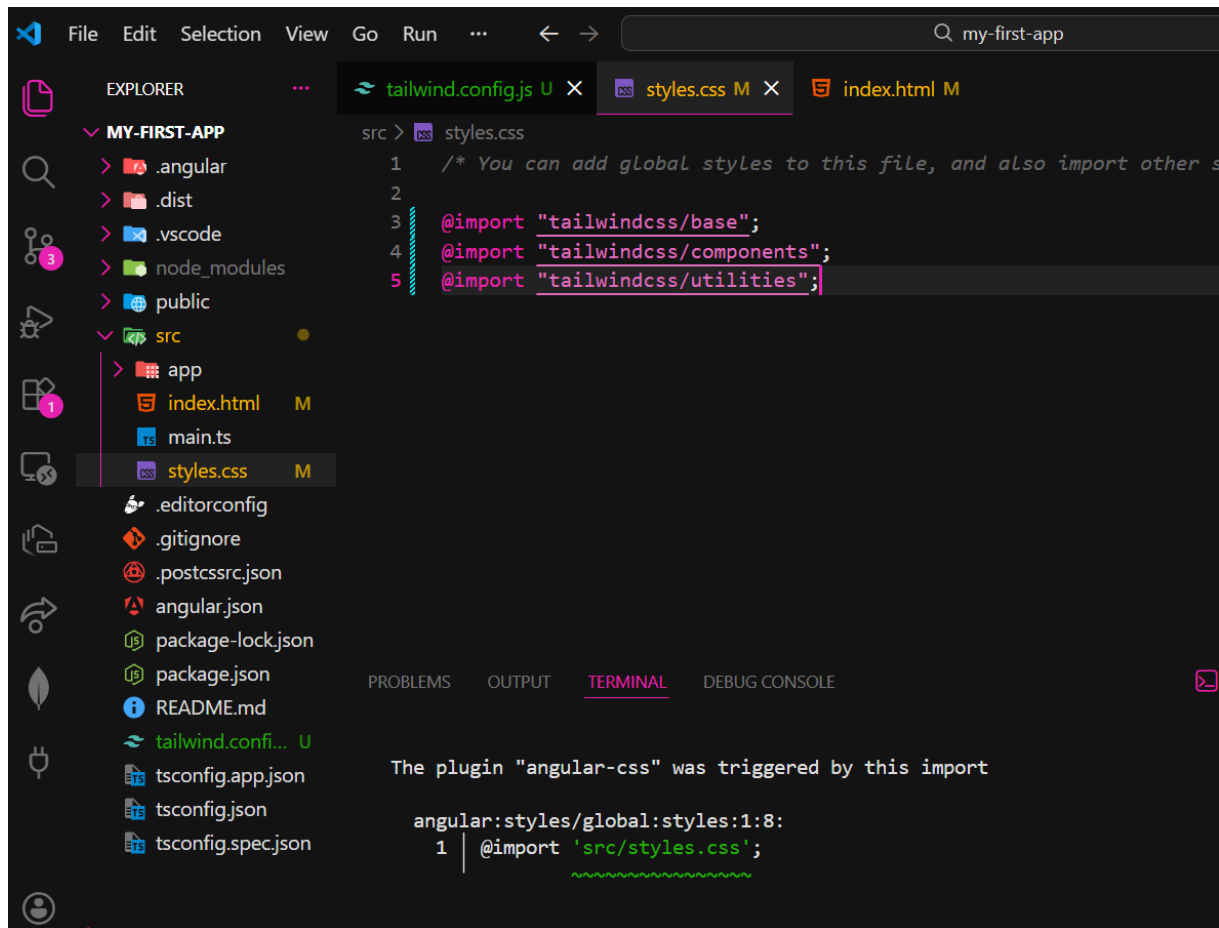

Bienvenue dans mon premier projet Angular avec Tailwind

En-tete de la carte

Titre de la carte

Ceci est un exemple de carte stylisee avec Tailwind CSS dans Angular. Vous pouvez personnaliser facilement les couleurs, marges et styles.

[En savoir plus](#)

Bienvenue dans mon premier projet Angular avec Tailwind

EN-TETE DE LA CARTE

Titre de la carte

Ceci est un exemple de carte stylisee avec Tailwind CSS dans Angular. Jâ€™expérimente un peu avec les couleurs, les marges et les effets.

[En savoir plus](#)

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner *

 eya568

Repository name *

AngularTP1

✓ AngularTP1 is available.

Great repository names are short and memorable. How about [fuzzy-octo-sniffle](#)?

Description

academic assignment

19 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository

 Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off ☐

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Page reload sent to client(s).

- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app> **git** init
Reinitialized existing Git repository in C:/Users/eyaso/OneDrive/Documents/First year Engineering/secondSemester/angularTp/my-first-app/.git/
- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app> **git** add .
warning: in the working copy of 'src/styles.css', LF will be replaced by CRLF the next time Git touches it
- PS C:\Users\eyaso\OneDrive\Documents> --global user.name
eya568
swayedaya@gmail.com
[master f47e94e] first commit
3 files changed, 38 insertions(+), 13 deletions(-)
create mode 100644 tailwind.config.js
- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app> **git** branch -M main
- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app> **git** remote add origin https://github.com/eya568/AngularTP1.git
- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app> **git** push -u origin main
Enumerating objects: 36, done.
Counting objects: 100% (36/36), done.
Delta compression using up to 8 threads
Compressing objects: 100% (34/34), done.
Writing objects: 100% (36/36), 83.66 KiB | 2.32 MiB/s, done.
Total 36 (delta 3), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (3/3), done.
To https://github.com/eya568/AngularTP1.git
* [new branch] main -> main
branch 'main' set up to track 'origin/main'.
- PS C:\Users\eyaso\OneDrive\Documents\First year Engineering\secondSemester\angularTp\my-first-app>