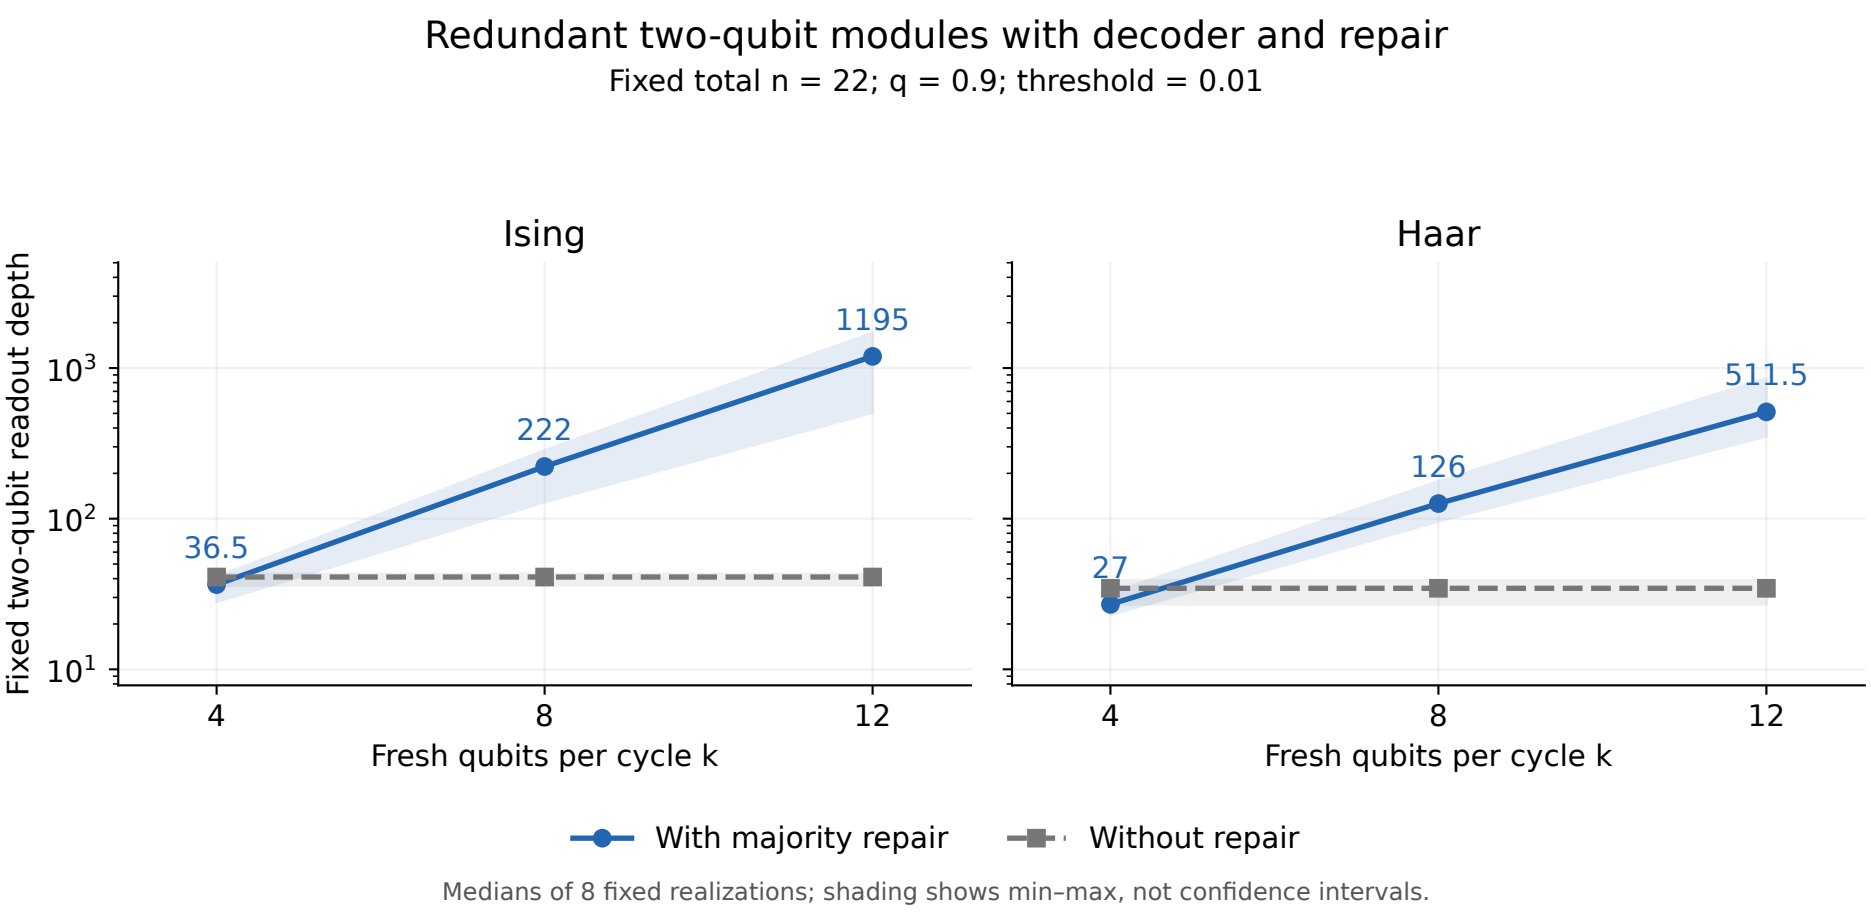

Redundant two-qubit modules with decoder and repair
Fixed total n = 22; q = 0.9; threshold = 0.01
Ising
Haar
Fixed two-qubit readout depth
10^3
10^2
10^1
36.5
222
1195
27
126
511.5
4
8
12
Fresh qubits per cycle k
With majority repair
Without repair
Medians of 8 fixed realizations; shading shows min–max, not confidence intervals.