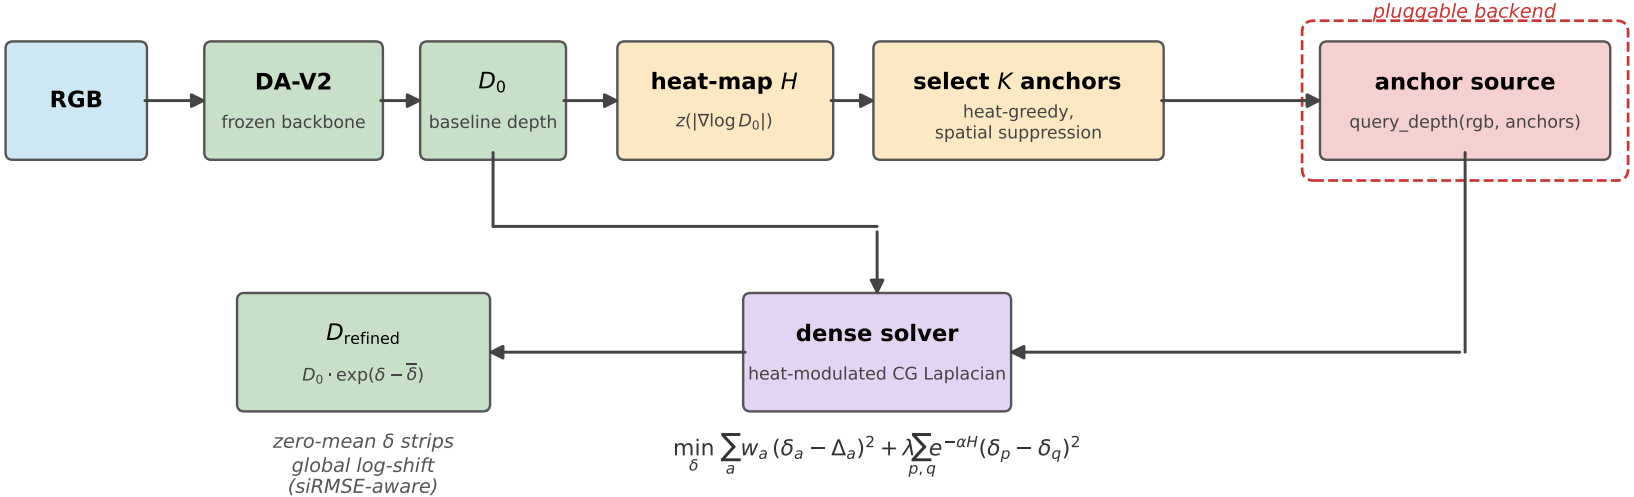
RGB
DA-V2
frozen backbone
D_0
baseline depth
heat-map H
$z(|\nabla \log D_0|)$
select K anchors
heat-greedy,
spatial suppression
pluggable backend
anchor source
query_depth(rgb, anchors)
dense solver
heat-modulated CG Laplacian
D_{refined}
$D_0 \cdot \exp(\delta - \overline{\delta})$
zero-mean δ strips
global log-shift
(siRMSE-aware)
$\min_{\delta} \sum_a w_a (\delta_a - \Delta_a)^2 + \lambda \sum_{p,q} e^{-\alpha H} (\delta_p - \delta_q)^2$