

The LaTeX report

Generated by local1 on 14 April 2015, 16:05:12

This report has been generated automatically by Madanalysis 5.

Please cite:

E. Conte, B. Fuks and G. Serret,

MadAnalysis 5, A User-Friendly Framework for Collider Phenomenology, Comput. Phys. Commun. **184** (2013) 222-256, arXiv:1206.1599 [hep-ph].

To contact us:

 $\label{lem:http://madanalysis.irmp.ucl.ac.be} $$ ma5team@iphc.cnrs.fr $$$

\mathbf{C}	ontent	ts	
1	Setu	p	2
	1.1	Command history	2
	1.2	Configuration	2
2	Data	asets	3
	2.1	defaultset	3
3	Histo	os and cuts	4
	3.1	Histogram 1	4

1 Setup

1.1 Command history

```
ma5>import ../../DarkPhotonSignalTest/Events/run_01/unweighted_events.lhe
ma5>plot dR(a e+) 100 0 5
ma5>submit DPtest2
```

1.2 Configuration

- MadAnalysis version 1.1.11 (2014/09/15).
- Histograms given for an integrated luminosity of 10fb⁻¹.

2 Datasets

2.1 defaultset

- \bullet Samples stored in the directory: /media/sf_darkphotons/madgraph/madanalysis/madanalysis5/bin .
- Sample consisting of: signal events.
- Generated events: 100000 events.
- \bullet Normalization to the luminosity: 316687+/- 107 events.
- Ratio (event weight): 3.2 warning: please generate more events (weight larger than 1)!

Path to the event file	Nr. of events	Cross section (pb)	Negative wgts (%)
/media/sf_darkphotons/- madgraph/- DarkPhotonSignalTest/- Events/run_01/- unweighted_events.lhe	100000	31.7 @ 0.034%	0.0

3 Histos and cuts

3.1 Histogram 1

* Plot: dR (a e+)

Table 1. Statistics table

Dataset	Integral	Entries / events	Mean	RMS	%Underflo	%Overflow
defaultset	0.0 +/- 0.0	0.0	0.0	0.0	0.0	0.0

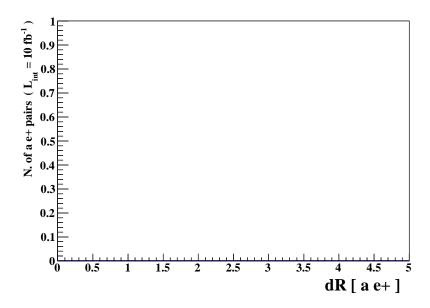


Figure 1.