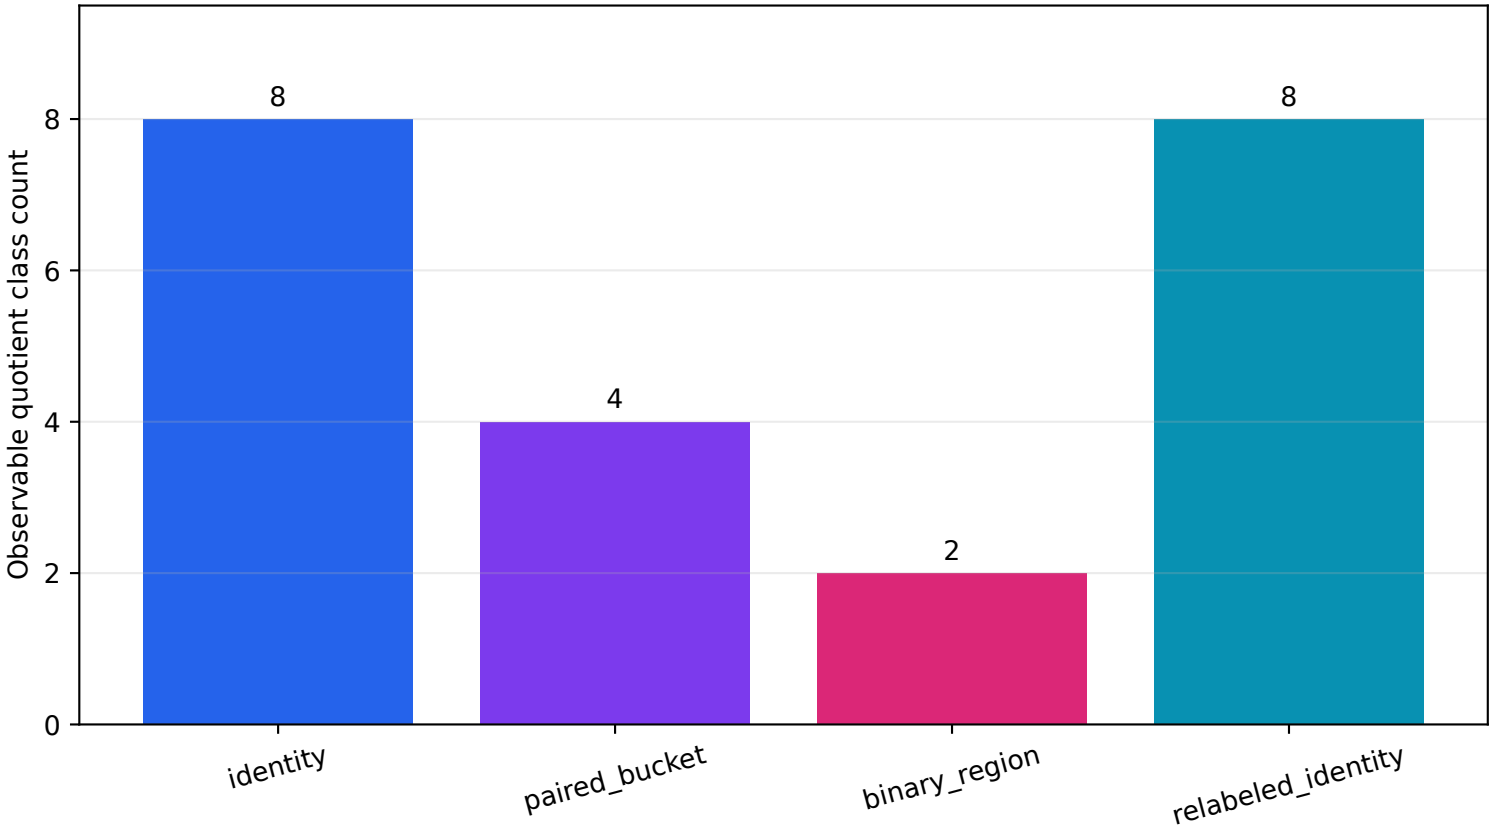
Finite interfaces retain different numbers of distinctions
Observable quotient class count
0
2
4
6
8
8
4
2
8
identity
paired_bucket
binary_region
relabeled_identity