

Eze EMS

Release Date: Aug 12, 2026
v2026.5.0

Eze EMS xAPI Java Sample Application Guide

This document contains information about getting started with Eze EMS xAPI using Java.



Confidentiality Notice: The information included in this document is confidential information of SS&C Advent and is intended only for SS&C Advent and its affiliates, Eze EMS clients, and their respective employees.

Table of Contents

What's New	4
Introduction	5
Eze EMS xAPI Basics	5
Eze EMS xAPI Use Restrictions	5
Eze EMS xAPI Version	5
Download EMS xAPI	6
Developer Support	6
Downloading and Installing Java for Eze EMS xAPI	7
Prerequisites	7
Java	7
Protoc Compiler	7
Proto-gen-grpc-java	7
Eclipse IDE	7
Compiling Protobuf Files	8
Generating .java Files	8
Generating Service Stub Files	8
Eclipse IDE	10

Setting up Eclipse IDE for Java	10
Running the Script in Eclipse IDE	14
Verify Java Version and Linking	14
Setup Credentials	14
Running the Script	15
Appendix A: Troubleshooting	16

Legal Information

Copyright and Confidentiality Notice

This document and the products or software described herein are provided under a license or subscription agreement and may be used or copied only in accordance with the terms of such agreement. This document is provided solely for the benefit of authorized licensees and contains confidential and proprietary information of SS&C Technologies, Inc. and its affiliates, including Advent Software, Inc. and Eze Castle Software LLC (collectively, "SS&C").

No part of this document may be reproduced, distributed, or transmitted, in whole or in part, in any form or by any means, electronic or mechanical, including photocopying or recording, without the prior written consent of SS&C.

The information contained in this document is subject to change without notice and may not reflect the most current product features or functionality. SS&C does not warrant that this documentation is error free.

Any names of individuals appearing in sample data or displays are fictitious. Any resemblance to actual persons, living or deceased, is purely coincidental.

U.S. Government Users: Use, duplication, or disclosure is subject to the restrictions set forth in DFARS 252.227-7013 and FAR 52.227-19, as applicable.

Product and Release Number: Eze EMS 2026.5.0

Release Date: August 12, 2026

Publication Date: August 12, 2026

SS&C, Advent, Eze, and related product names and logos are trademarks or registered trademarks of SS&C Technologies, Inc. or its affiliates: including, but not limited to: Advent, the Advent logo, Advent Corporate Actions, Advent Custodial Data, Advent Genesis, Advent Office, Advent OnDemand, Advent Portfolio Exchange, Advent Revenue Center, Advent Rules Manager, Advent Software, Advent Syncova, Advent Tamale, Advent Tamale RMS, Axys, Black Diamond, Geneva, Moxy, Portfolio Exchange, Rex, Tradex, and Syncova are registered trademarks of Advent Software, Inc. All other company or product names referenced herein are the trademarks of their respective owners.

ADVENT SOFTWARE

© Copyright 2026 SS&C Technologies, Inc. and/or its affiliates. All rights reserved.

www.advent.com

What's New

This release includes the following updates:

Version No.	Date	Summary of Update
v2026.5.0.26	Aug 12, 2026	There are no documentation updates in this EMS xAPI release.



Note: Refer to the [Revision History](#) section for detailed information on past release versions.

Introduction

The purpose of this document is to help clients get started with the EMS xAPI application using Java. This document provides a step-by-step process of generating the scripts in Java language and running them using Eclipse IDE for Java Developers, and start using the APIs.

Eze EMS xAPI is robust and easy-to-use application that allows programmers and trading businesses to complete various trading workflows, and also access key information, including:

- Automating order routing - to smart order routers, algorithms and other trading systems.
- Routing orders to multiple brokers, dark pools, ATS, and MTFs via the Eze EMS Global Routing Network - across asset classes.
- Staging or routing single or pairs orders.
- Accessing balances, positions, executions, and other order details.
- Accessing comprehensive list and basket capabilities.

Although EMS xAPI can operate with all gRPC compatible languages, only Java language references are provided in this document as an example. Refer to this [link](#) for more information on gRPC.

Eze EMS xAPI Basics

The Eze EMS xAPI operates in conjunction with your existing Eze EMS account permissioning and entitlements. **The Eze EMS xAPI is not a standalone data feed application that is provided to you independent of the Eze EMS.** Please contact Eze Client Service if you need to request or make changes to appropriate permissions for your account.

Eze EMS xAPI Use Restrictions

As an Eze EMS xAPI user, you are prohibited from retransmitting any Eze Market Data using the Eze EMS xAPI, without the express prior written consent of Eze EMS and the exchanges or other third-party data providers (referred to as **“Sources”** in your end user agreement). Any unauthorized retransmission of Eze Market Data is a breach of your end user agreement and will cause immediate termination of your use of the Eze EMS, Eze Market Data, and the Eze EMS xAPI.

Any non-display usage of Eze Market Data, such as use of real-time data in algorithmic trading or program trading, is subject to the rules, regulations, and policies of the applicable exchanges and additional exchange fees may apply. In addition, you may have a non-display usage of Eze Market Data even if a display of real-time data occurs. Please review your Eze EMS end user agreement, and the exchanges' and third-party data providers' rules, regulations, and policies that apply to your use of the Eze EMS API (which apply to Eze EMS xAPI) and/or Eze Market Data. It is the sole responsibility of the Eze EMS xAPI user and each user receiving, directly or indirectly accessing or otherwise using Eze Market Data to determine whether your receipt, access or use is reportable and/or fee liable.

Eze EMS xAPI Version

This document covers all the APIs and updates to the Eze EMS xAPI that are part of 2026.5.0.26 release. |

Download EMS xAPI

Contact your SS&C Eze client service representative for downloading Eze EMS xAPI.

Developer Support

- If you are an existing Eze EMS user, [log in](#) to access developer support documentation and sample code.
- You can [contact us](#) or [request a demo](#) if you want to explore more about EMS xAPI.
- You can send us an e-mail apisupport@ezesoft.com or call +1 312-442-8122.

Downloading and Installing Java for Eze EMS xAPI

Prerequisites

Java

Eze EMS xAPI sample application can run on Java version 1.8 or above. To download and install the latest Java version, refer <https://www.java.com/en/download>.

Protoc Compiler

Protoc compiler is needed to compile the proto files and generate .java (protobuf) files (e.g., MarketData.java). To download and install the latest protoc compiler refer <https://github.com/protocolbuffers/protobuf/releases/tag/v21.1>. For more details, refer [Generating .java Files](#).

For step-by-step procedure to download and install protobuf files, refer <https://www.geeksforgeeks.org/how-to-install-protocol-buffers-on-windows/>.

Proto-gen-grpc-java

Proto-gen-grpc-java is needed to compile the proto files and generate the stub files for Java language (e.g., MarketDataServiceGrpc.java). To download and install the latest protoc-gen-grpc-java version refer <https://repo1.maven.org/maven2/io/grpc/protoc-gen-grpc-java/>. For more details, refer [Generating Service Stub Files](#).



Note: Make sure the protoc-gen-grpc-java.exe file is stored in the protoc folder you created while downloading and installing the [Protoc compiler](#) above (e.g., C:\EzeEMSxAPI\protoc-21.1-win64\bin\).

Eclipse IDE

To download and install the latest Eclipse IDE for Java Developers version refer <https://www.eclipse.org/downloads/>. You can also refer the step-by-step procedure to download and install Eclipse IDE <https://www.eclipse.org/downloads/packages/installer>.

Compiling Protobuf Files

Generating .java Files

Protoc compiler is used to compile the market_data.proto, order.proto, and utilities.proto files and generate the MarketData.java, Order.java, and Utilities.java files accordingly.

To compile proto files and generate .java (protobuf) files:

1. Create a folder on your local machine (e.g., C:\EzeEMSxAPI) to copy and paste the files for compilation and store the generated files.
2. Copy and paste the downloaded [Protoc compiler](#) files in the folder you have created in step 1 (e.g., C:\EzeEMSxAPI\protoc-21.1-win64).
3. Create a sub-folder to store the proto files (e.g., C:\EzeEMSxAPI\Protos).



Note: Contact your SS&C Eze client service representative for latest proto files or download them from [GitHub](#).

4. Run the following command in command prompt to generate *.java files:

```
>protoc -I=$SRC_DIR --java_out=$DST_DIR $SRC_DIR\market_data.proto
```

- \$SRC_DIR — The source path to fetch the proto files
- \$DST_DIR — The destination path for storing the generated files

For example, run the below command to generate the **market_data.java** file using **market_data.proto**.

```
>protoc -I=C:\EzeEMSxAPI\Protos --java_out=C:\EzeEMSxAPI\Protos  
C:\EzeEMSxAPI\Protos\market_data.proto
```

You can generate the .java files for Order and Utilities by replacing **market_data.proto** with **order.proto** and then with **utilities.proto** in the above command. The **Order.java** and **Utilities.java** files are generated on running the command.

Generating Service Stub Files

Proto-gen-grpc-java is used to compile the market_data.proto, Order.proto, and Utilities.proto files and generate the MarketDataServiceGrpc.java, SubmitOrderServiceGrpc.java, and UtilityServicesGrpc.java files accordingly.

To compile proto files and generate service stub files:

Run the following command in command prompt to generate the service stub files:


```
>protoc --plugin=protoc-gen-grpc-java=%DIR_OF_PROTOC_FILE%\%FILENAME% --grpc-java_out=lite:%OUTPUT_FILE% --proto_path=%DIR_OF_PROTO_FILE% %PROTO_FILE%
```

- %DIR_OF_PROTOC_FILE% — The source path to fetch the protoc file
- %FILENAME% — Name of the protoc file
- %OUTPUT_FILE% — The destination path for storing the generated files
- %PROTO_FILE% — Name of the proto file

For example, run the below command to generate the **UtilityServicesGrpc.java** file using **utilities.proto**.

```
>protoc --plugin=protoc-gen-grpc-java=C:\EzeEMSxAPI\protoc-21.1-win64\bin\protoc-gen-grpc-java-1.47.0-windows-x86_64.exe --grpc-java_out=lite:C:\EzeEMSxAPI\Protos --proto_path=C:\EzeEMSxAPI\Protos Utilities.proto
```

You can generate the service stub files for Order and Market Data by replacing **utilities.proto** with **order.proto** and then with **market_data.proto** in the above command. The **SubmitOrderServiceGrpc.java** and **MarketDataServiceGrpc.java** files are generated on running the command.


Eclipse IDE

Setting up Eclipse IDE for Java


The **Eclipse IDE for Java Developers** application is required to compile the Java and stub files, and run the script files.

To setup Eclipse IDE:

1. Launch Eclipse IDE.
2. Navigate to **File > New > Project....**The New Project window opens.
3. Click **Maven > MavenProject** to create a new Maven Project. Click **Next >**.

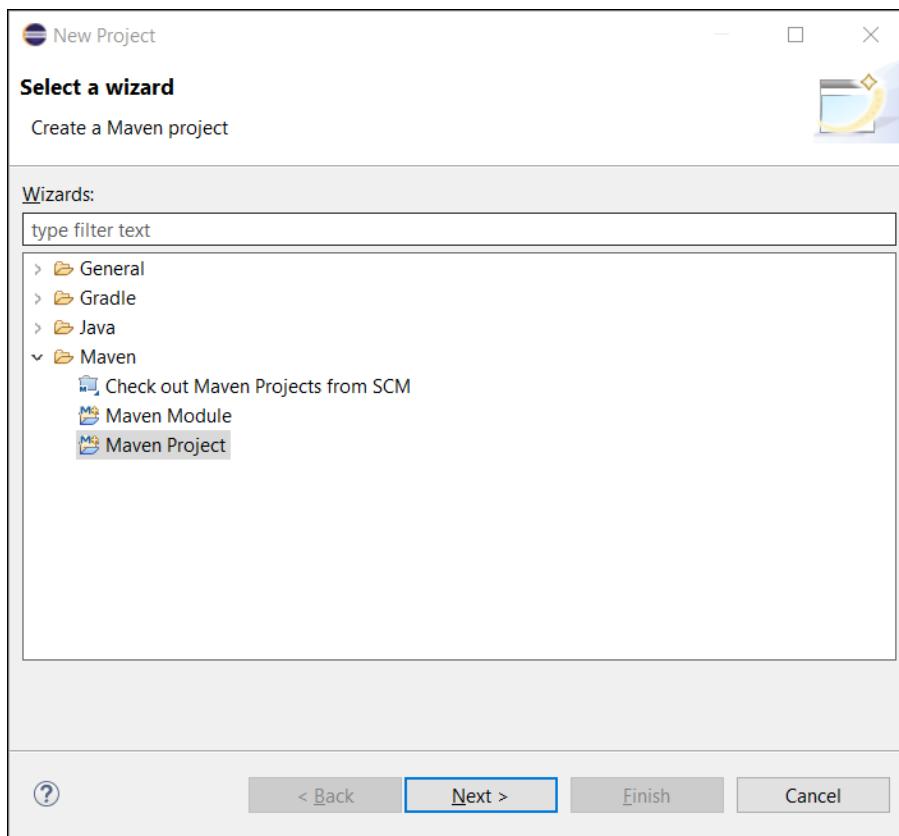


- Make sure the **Create a simple project (skip archetype selection)** and **Use default Workspace location** checkboxes are enabled, as shown below. Click **Next >**.

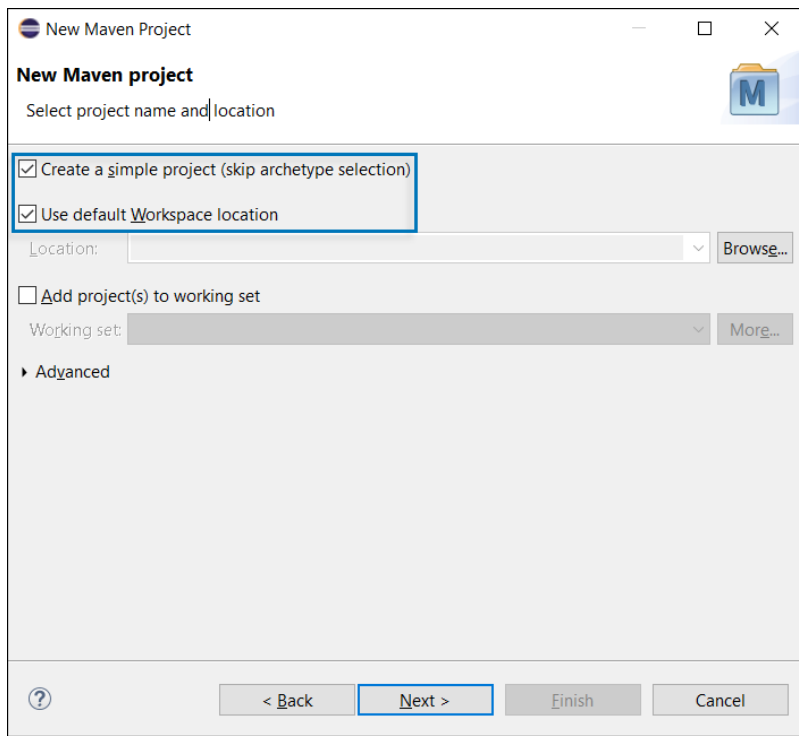

- Enter the details. Click **Finish**.

Your Maven project (e.g., test) is created successfully.

- Navigate to **Package Explorer > test > pom.xml**. Open the **pom.xml** file. Verify if the **modelVersion**, **groupId**, **artifactId**, **version**, and **name** are the same that were used in [step 5](#).

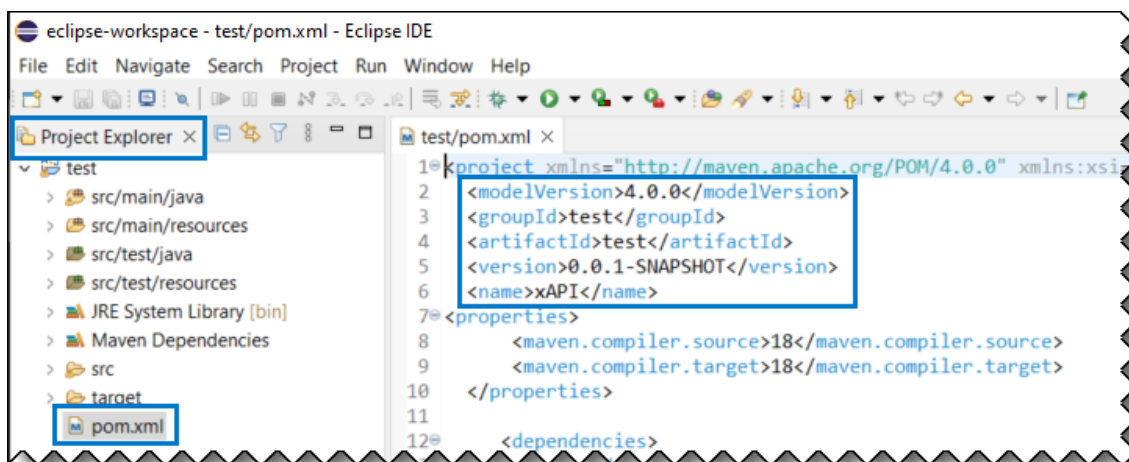

7. To add the gRPC and maven plugin dependencies to your **pom.xml** file, refer the code below. Copy and paste it into your pom.xml file.

```
-<properties>
    <maven.compiler.source>18</maven.compiler.source>
    <maven.compiler.target>18</maven.compiler.target>
</properties>
-<dependencies>
    -<dependency>
        <groupId>io.grpc</groupId>
        <artifactId>grpc-netty-shaded</artifactId>
        <version>1.46.0</version>
        <scope>compile</scope>
    </dependency>
    -<dependency>
        <groupId>io.grpc</groupId>
        <artifactId>grpc-protobuf</artifactId>
        <version>1.46.0</version>
    </dependency>
    -<dependency>
        <groupId>io.grpc</groupId>
        <artifactId>grpc-stub</artifactId>
        <version>1.46.0</version>
    </dependency>
    -<dependency>
        <!-- necessary for Java 9+ -->
        <groupId>org.apache.tomcat</groupId>
        <artifactId>annotations-api</artifactId>
        <version>6.0.53</version>
        <scope>provided</scope>
    </dependency>
    -<dependency>
        <groupId>javax.annotation</groupId>
        <artifactId>javax.annotation-api</artifactId>
        <version>1.3.2</version>
```

```
        </dependency>
    </dependencies>
    <build>
        <extensions>
            <extension>
                <groupId>kr.motd.maven</groupId>
                <artifactId>os-maven-plugin</artifactId>
                <version>1.6.2</version>
            </extension>
        </extensions>
        <plugins>
            <plugin>
                <groupId>org.xolstice.maven.plugins</groupId>
                <artifactId>protobuf-maven-plugin</artifactId>
                <version>0.6.1</version>
            </plugin>
        </plugins>
    </build>
</project>
```

8. Right-click **test** (**Package Explorer** > **test**) select **Maven** > **Update Project....** Click **OK**.
9. Create a new folder to store the Java (protobuf) files by navigating to **Package Explorer** > **test**, then right-click **src\main\java**, click **New** > **Folder**. The New Folder window appears.
 - a. Enter a name in the **Folder name** field (e.g., xapi).
 - b. Copy and paste the files that are generated after [Compiling Protobuf files](#) to this folder.
10. Create a new folder to store the scripts by navigating to **Package Explorer** > **test**, then right-click **src\main\java** > **New** > **Folder**. The New Folder window appears.
 - a. Enter a name in the **Folder name** field (e.g., scripts).
 - b. Copy and paste the script files to this folder.



Note: Contact your SS&C Eze client service representative for script files.

You have setup the Eclipse IDE project successfully for Java.

Running the Script in Eclipse IDE

Verify Java Version and Linking


To verify Java link in Eclipse IDE:

1. Launch Eclipse IDE.
2. Navigate to **Package Explorer** > right-click **test** > **Properties**. The Properties for test window opens.
3. Click **Java Build Path** in the left index, then click **Libraries** tab in the right pane. Select **JRE System Library** and click **Edit**. The Edit Library window opens.



Note: If you notice that the JRE is unbound or see build path errors, refer [Appendix A: Troubleshooting](#) section to ensure the Java version is linked properly.

4. Select the [Java version](#) you have installed in your machine.

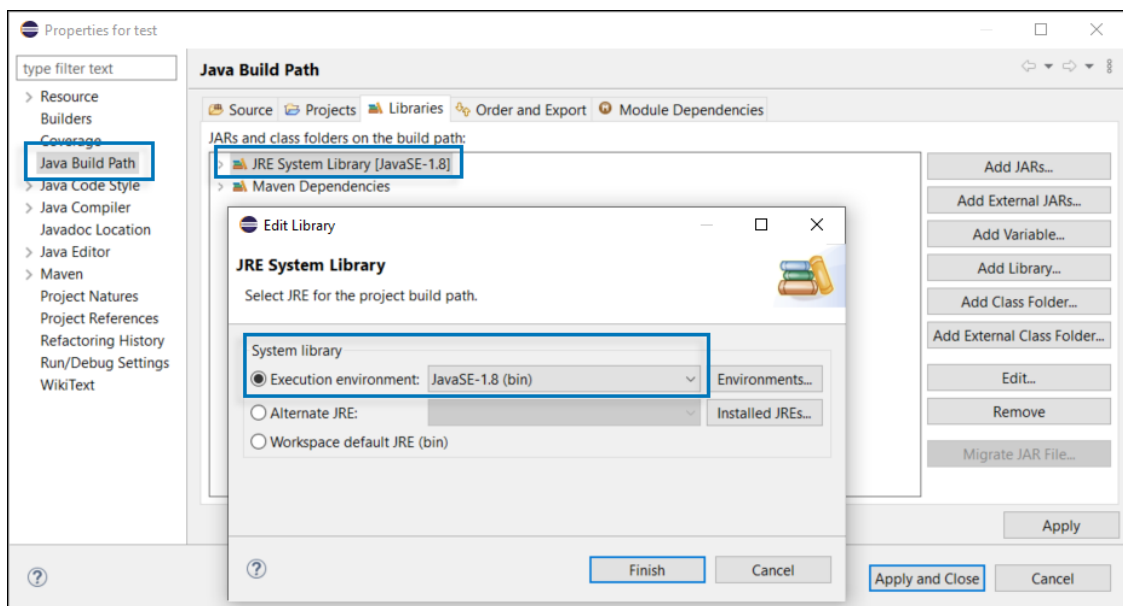

5. Click **Finish**.
6. Click **Apply and Close**.

Setup Credentials

After verifying the Java version and its proper linking in Eclipse IDE, open the scripts file and ensure that there are no errors.

To establish a connection, fill in the **user**, **domain**, **locale**, **password**, and **server** to setup your log in credentials.



Note: Your account will be temporarily locked for 3 minutes if you attempt to log in three (3) times within 60 seconds, regardless of whether the attempts are successful or unsuccessful.




Note: Contact your SS&C Eze client service representative for any issues related to login.

Running the Script

To run the script in Eclipse IDE:

1. Navigate to **Package Explorer > test > scripts > right-click *.java > Run As > 3 Maven build....** The Edit Configuration window opens, as shown below.

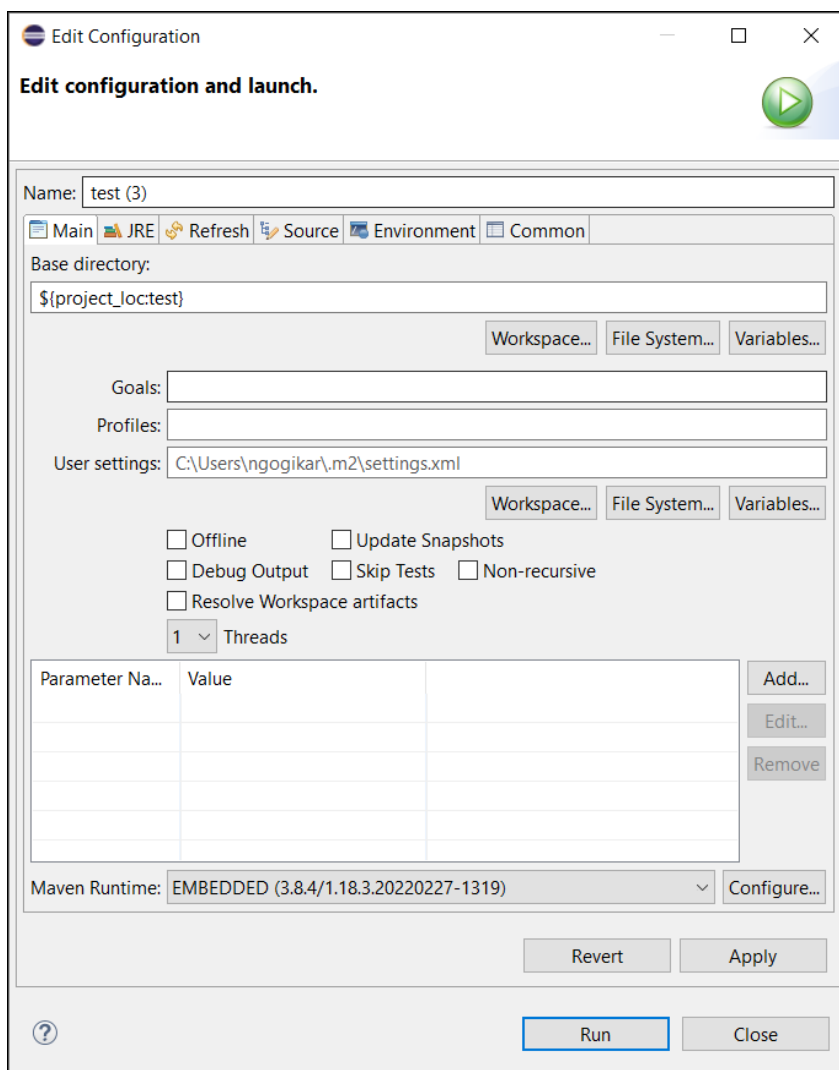


2. Enter **compile** in the **Goals** field.
3. Click **Run**.

Appendix A: Troubleshooting

Follow the steps below if you see build path errors in Eclipse IDE. This error occurs when the local Java version is not linked properly in Eclipse IDE.

To link local Java version in Eclipse IDE:

1. Launch Eclipse IDE.
2. Navigate to **Package Explorer** > right-click FOLDER > **Build Path** > **Configure Build Path....** The Properties for FOLDER window opens. Here, FOLDER refers to your locally created folder.
3. Click **Java Build Path** in the left index, then click **Libraries** tab in the right pane.
4. Select **JRE System Library [bin] (unbound)**, click **Edit**.
5. Select **Alternate JRE** > **Installed JREs**. The Preferences (Filtered) window opens.
6. Click **Add....** Select **Standard VM** in the JRE Type window. Click **Next>**. The Add JRE window opens.
7. Click **Directory...** for **JRE home:** field. The Select Folder window opens.
8. Navigate to JRE bin in your local machine. By default, the downloaded Java files are placed in **C:\Program Files\Java\jre1.8.0_333\bin** of your local machine. Click **Select Folder**.
9. Click **Finish**.
10. In Preferences (Filtered) window enable the bin path, as shown below. Click **Apply** > **Apply and Close**.

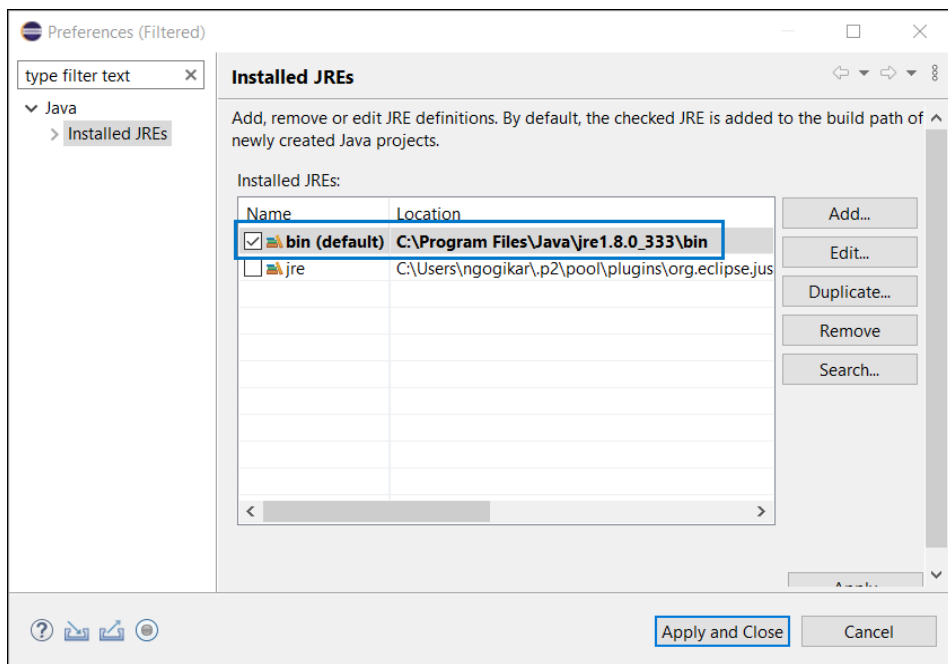

11. Click **Finish**.
12. Click **Apply** > **Apply and Close**.